:METRIC:


MIL-C-38999/22C
07 May 1990
SUPERSEDING
MIL-C-38999/22B
4 October 1985

MILITARY SPECIFICATION SHEET

© CONNECTORS, ELECTRICAL, CIRCULAR,
RECEPTACLE, DUMMY STOWAGE,
(MIL-C-38999, SERIES III), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

© The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-38999.

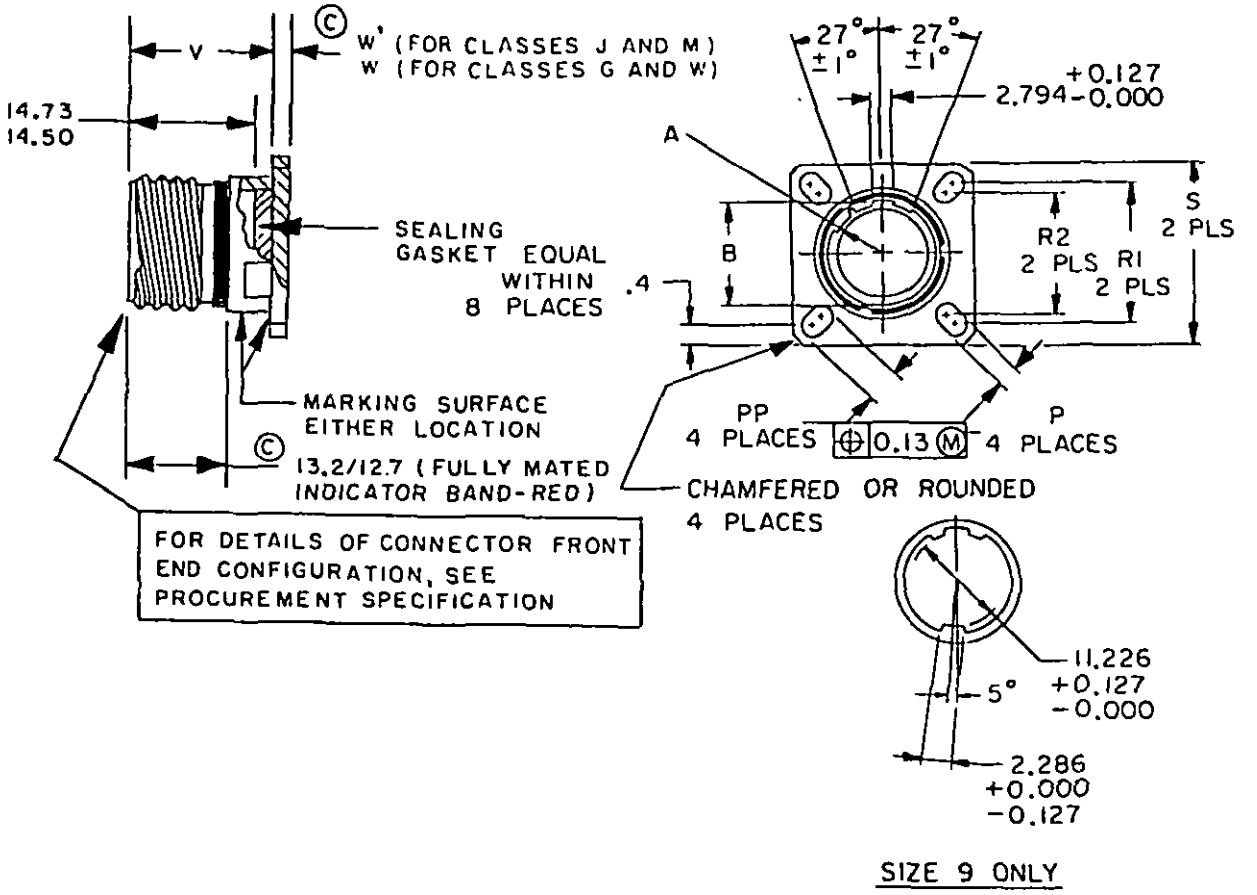

© FIGURE 1. Dummy receptacle, classes G, J, M, and W.

© denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:44Z
Check the source to verify that this is the current version before use.

Dimensions											
Shell size	Shell size code	P dia ±0.20	PP ±0.20	R1 (see note 4)	R2 (see note 5)	S ±0.3	V +0.5 −0.0	W ±0.3	A radius +.127 −.000	B +.000 −.127	© W'
9	A	3.25	5.49	18.26	15.09	23.8	20.9	2.5	---	12.497	3.65/2.2
11	B	3.25	4.93	20.62	18.26	26.2	20.9	2.5	7.239	15.748	3.65/2.2
13	C	3.25	4.93	23.01	20.62	28.6	20.9	2.5	8.661	19.533	3.65/2.2
15	D	3.25	4.39	24.61	23.01	31.0	20.9	2.5	10.236	22.708	3.65/2.2
17	E	3.25	4.93	26.97	24.61	33.3	20.9	2.5	11.836	25.882	3.65/2.2
19	F	3.25	4.93	29.36	26.97	36.5	20.9	2.5	13.157	28.550	3.65/2.2
21	G	3.25	4.93	31.75	29.36	39.7	20.1	3.2	14.757	31.725	4.35/2.9
23	H	3.91	6.15	34.93	31.75	42.9	20.1	3.2	16.332	34.900	4.35/2.9
25	J	3.91	6.15	38.10	34.93	46.0	20.1	3.2	17.932	38.075	4.35/2.9

NOTES:
1. Dimensions are in millimeters.
2. Flange is solid.
3. Dummy receptacles are used when unmated plugs must be protected.
4. Dimension required for intermountability with front or rear mounting series I.
5. Dimension required for intermountability with front mounting series II.

© FIGURE 1. Dummy receptacle, classes G, J, M, and W - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1. Interface dimensions shall conform to MIL-C-38999, except as noted.

© Qualification: Qualification shall consist of the dynamic salt spray test, altitude immersion, coupling torque, and visual and mechanical inspection as specified in MIL-C-38999, conducted on two samples of each shell size. For classes J and M also perform temperature cycling and hydrolytic stability.

This connector mates with: DOD-C-38999/26, /29, /30, and /31.

© Part or Identifying Number (PIN): Consists of the letter D, the basic number of the specification sheet, shell size code and class.

D38999/22	B	W
Specification sheet number	Shell size code	Class

© NOTE: The term Part or Identifying Number (PIN) is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
© NASA - NA

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3740-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.