METRIC

MIL-DTL-38999/22E
11 March 2005
SUPERSEDING
MIL-DTL-38999/22D
11 June 2001

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, THREADED, DUMMY STOWAGE, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.


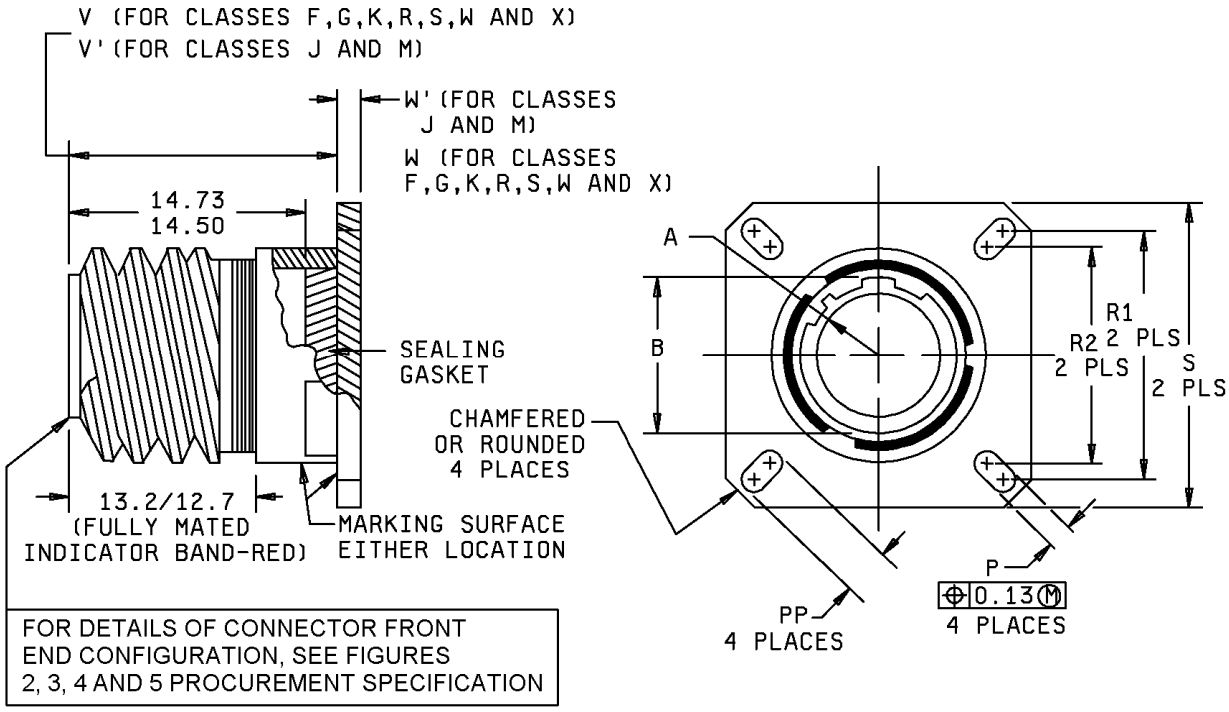


FIGURE 1. Receptacle, classes F, G, J, K, M, R, S, W and X.

AMSC N/A

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

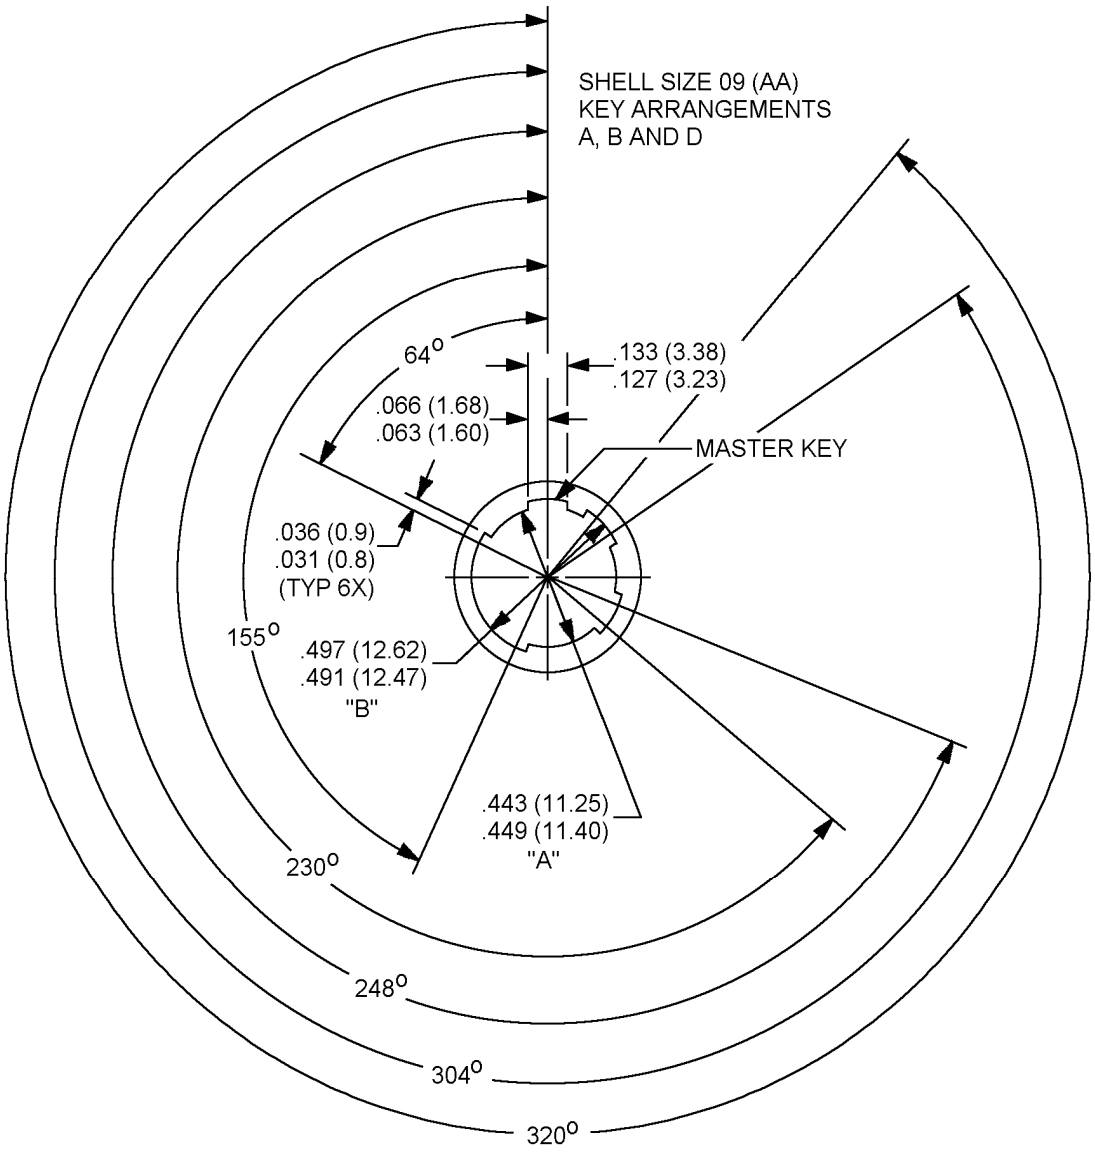

Note: Metric dimensions (mm) are indicated in parentheses.

FIGURE 2. Receptacle, classes F, G, J, K, M, R, S, W, AND X (shell size 09 (AA)).


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

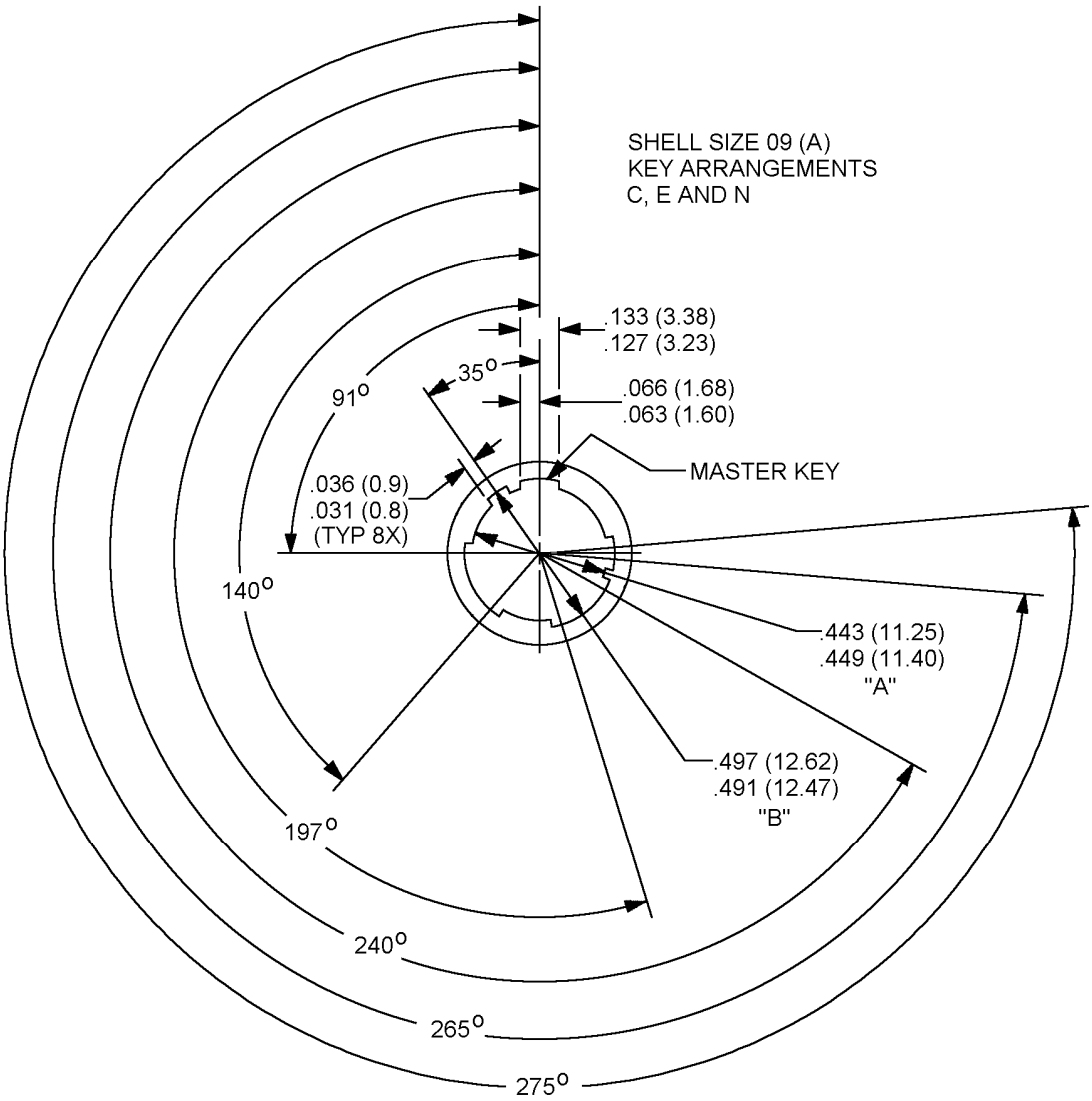

Note: Metric dimensions (mm) are indicated in parentheses.

FIGURE 3. Receptacle, classes F, G, J, K, M, R, S, W, and X (shell size 09 (A)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

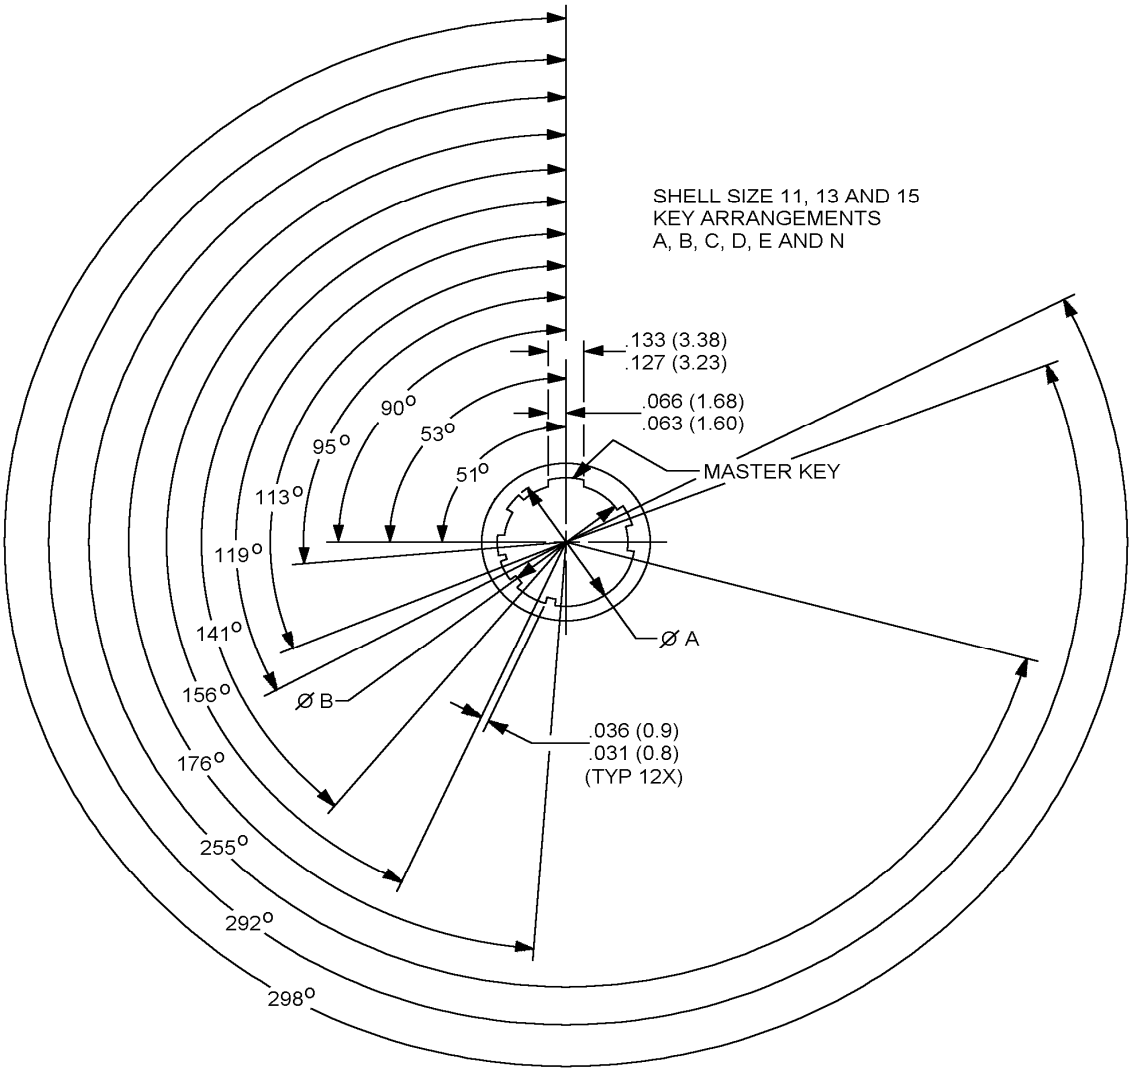


Note: Metric dimensions (mm) are indicated in parentheses.

Shell size	A DIA	B DIA
11	.625/.619 (15.88/15.73)	.577/.571 (14.66/14.51)
13	.773/.767 (18.55/19.49)	.689/.683 (17.50/17.35)
15	.899/.893 (22.84/22.69)	.813/.807 (20.65/20.50)

FIGURE 4. Receptacle, classes F,G,J, K, M, R, S, W, and X (shell size 11, 13 and 15).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

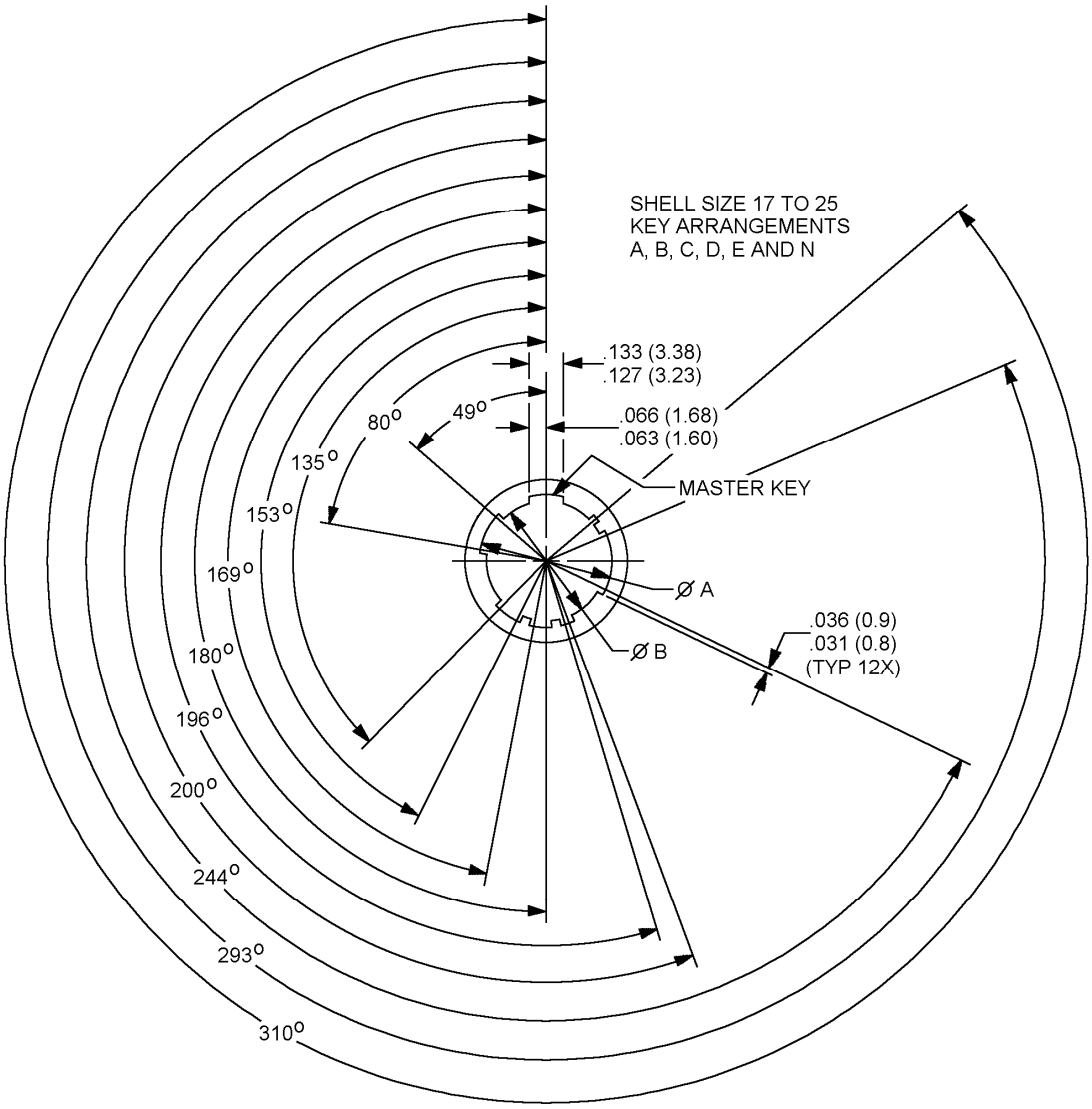

Note: Metric dimensions (mm) are indicated in parentheses.

Shell size	A DIA	B DIA
17	1.023/1.017 (25.99/25.84)	.939/.933 (23.85/23.70)
19	1.127/1.121 (28.63/28.48)	1.045/1.039 (26.55/26.39)
21	1.253/1.247 (31.83/31.68)	1.169/1.163 (29.70/29.54)
23	1.379/1.373 (35.03/34.88)	1.293/1.287 (32.85/32.69)
25	1.503/1.479 (38.18/38.03)	1.417/1.411 (36.00/35.84)

FIGURE 5. Receptacle, classes F, G, J, K, M, R, S, W, and X (shell size 17 to 25).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	P ± .20	PP ± .20	R1 (see note 4)	R2 (see note 5)
9 (See note 6)	A	3.25	5.49	18.26	15.09
9 (See note 7)	AA	3.25	5.49	18.26	15.09
11	B	3.25	4.93	20.62	18.26
13	C	3.25	4.93	23.01	20.62
15	D	3.25	4.39	24.61	23.01
17	E	3.25	4.93	26.97	24.61
19	F	3.25	4.93	29.36	26.97
21	G	3.25	4.93	31.75	29.36
23	H	3.91	6.15	34.93	31.75
25	J	3.91	6.15	38.10	34.93

Dimensions						
Shell size	Shell size code	S ± .3	V + 0.00 - 0.13	V' + 1.4 - 0.0	W ± .3	W'
9	A	23.8	20.83	19.5	2.5	3.65/2.2
9	AA	23.8	20.83	19.5	2.5	3.65/2.2
11	B	26.2	20.83	19.5	2.5	3.65/2.2
13	C	28.6	20.83	19.5	2.5	3.65/2.2
15	D	31.0	20.83	19.5	2.5	3.65/2.2
17	E	33.3	20.83	19.5	2.5	3.65/2.2
19	F	36.5	20.83	19.5	2.5	3.65/2.2
21	G	39.7	20.07	18.7	3.2	4.35/2.9
23	H	42.9	20.07	18.7	3.2	4.35/2.9
25	J	46.0	20.07	18.7	3.2	4.35/2.9

NOTES:
1. Dimensions are in millimeters.
2. Flange is solid.
3. Dummy receptacles are used when unmated plugs must be protected.
4. Dimensions required for intermountability with front or rear mounting series I.
5. Dimensions required for intermountability with front mounting series II.
6. Key arrangement C, E, N**.**
7. Key arrangement A, B, D.

FIGURE 5. Receptacle, classes F, G, J, K, M, R, S, W and X (shell size 17 to 25) - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figures 1 thru 5. Interface dimensions shall conform to MIL-DTL-38999, except as noted.

This connector mates with MIL-DTL-38999/26, MIL-DTL-38999/29, MIL-DTL-38999/30, and MIL-DTL-38999/31.

Part or Identifying Number (PIN) example:

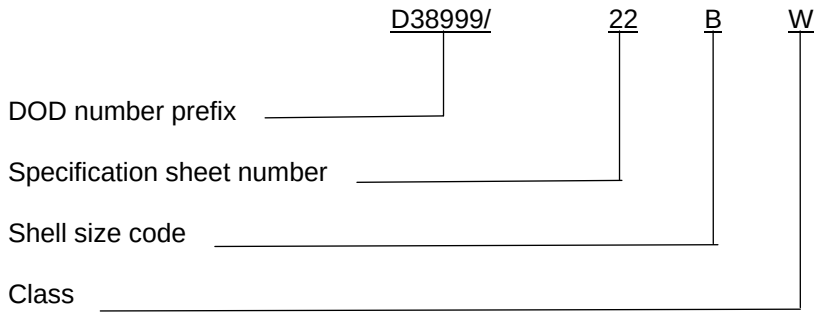

Class F is not for Navy use and is inactive for Air Force new design use.

NOTE: The term PIN is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification.

QUALIFICATION

Qualification shall consist of the dynamic salt spray test, altitude immersion, coupling torque, and visual and mechanical inspection as specified in MIL-DTL-38999, conducted on two samples of each shell size. For classes J and M also perform temperature cycling and hydrolytic stability.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Reference document: In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/26
MIL-DTL-38999/29
MIL-DTL-38999/30
MIL-DTL-38999/31

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4612-000)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.