METRIC
DOD-C-38999/23A
4 April 1983
SUPERSEDING
METRIC
DOD-C-38999/23
7 December 1977

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, JAM-NUT MOUNTING, HERMETIC, TRIPLE START THREADED COUPLING, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-38999.

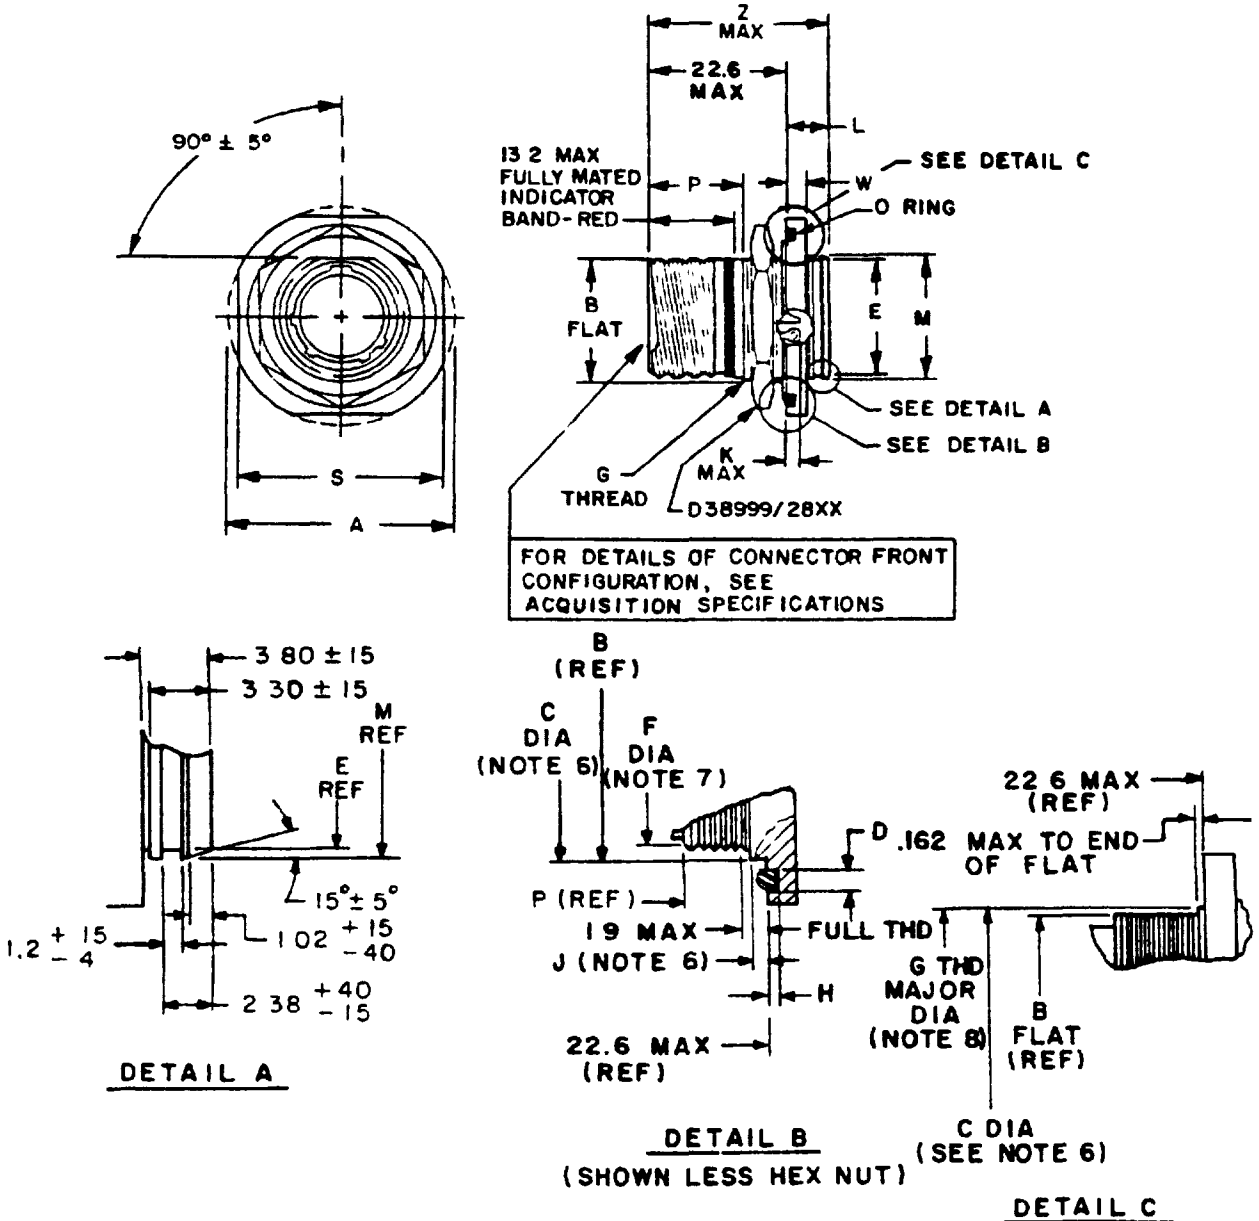


FIGURE 1. Receptacle, classes N and Y.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

SHELL SIZE	SHELL SIZE CODE	A DIA ±.3	B FLAT +.10 -.15	C DIA +.1 -.2	D +.13 -.03	E DIA ±.3	F DIA MAX	G THREAD	H ±.13	J MAX	K MAX With Pin	K MAX With Socket	L MAX	M DIA +.3 -.0	P +.4 -.1	S ±.4	W +.3 -.1	Z MAX	O Ring MS9021- (Note 5)
9	A	30.2	16.53	17.4	2.39	15.3	15.9	M17X1-6g 0.100R	1.14	1.5	5.3	5.9	9.1	16.3	14.1	27.0	2.6	29.2	019
11	B	34.9	19.07	20.6	↑	18.4	18.8	M20	↑	↓	5.3	5.9	↓	19.4	14.1	31.8	↓	29.2	022
13	C	38.1	23.82	25.4	↓	21.6	23.8	M25	↓	↓	5.1	5.7	↓	22.7	14.3	34.9	↓	29.3	024
15	D	41.3	26.97	28.5	↓	24.8	26.8	M28	↓	1.5	↓	↓	↓	25.9	↓	38.1	↓	29.3	026
17	E	44.5	30.15	NOTE 6	2.39	28.0	30.8	M32 (NOTE 2)	1.14	---	↓	↓	9.1	29.0	↓	41.3	2.6	29.3	028
19	F	49.2	33.32	NOTE 6	3.58	31.2	33.8	M35	1.91	---	↓	↓	9.7	32.2	↓	46.0	3.4	30.1	128
21	G	52.4	36.50	NOTE 6	↑	34.3	36.8	M38	↑	---	↓	↓	↓	35.4	↓	49.2	↓	↓	130
23	H	55.6	39.67	41.2	↓	37.5	39.8	M41	↓	1.5	↓	↓	↓	38.6	↓	52.4	↓	↓	132
25	J	58.7	42.85	44.4	3.58	40.7	42.8	M44X1-6g 0.100R	1.91	1.5	5.1	5.7	9.7	41.7	14.3	55.6	3.4	30.1	134

NOTES:
1. Dimensions are in millimeters.
2. Modified major diameter: 31.95 - 31.80 mm.
3. Panel thickness: 3.2 - 1.58 mm.
4. Polarizing position N is shown.
5. Alternate "O"-Ring material may be AMS 3325/3326.
6. C and J dimensions define feature required for proper fit in Type E panel. Cutout per MIL-C-38999, FIG 28 (C diameter and G diameter are the same for sizes 17, 19 and 21).
7. F diameter defines thread start.
8. This dimension applies to sizes 17, 19 and 21 only. (C diameter and G diameter are the same.)

FIGURE 1. Receptacle, classes N and Y - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1. Interface dimensions shall conform to MIL-C-38999.

This connector mates with DOD-C-38999/26.

O Ring shall be provided with jam-nut receptacles.

Eyelet contact termination available in sizes 16 and 20 only.

For insert arrangements: See MIL-STD-1560.

Part number example: D38999/ 23 Y A 35 P N

- DOD no. prefix
- Specification sheet no.
- Class
- Shell size code
- Insert arrangement
- Contact style
- Polarizing position:
  - N is required for normal position

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3326)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.