METRIC

MIL-DTL-38999/23B
11 June 2001
SUPERSEDING
DOD-C-38999/23A
4 April 1983

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, THREADED, RECEPTACLE, JAM-NUT MOUNTING, HERMETIC, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and MIL-DTL-38999.

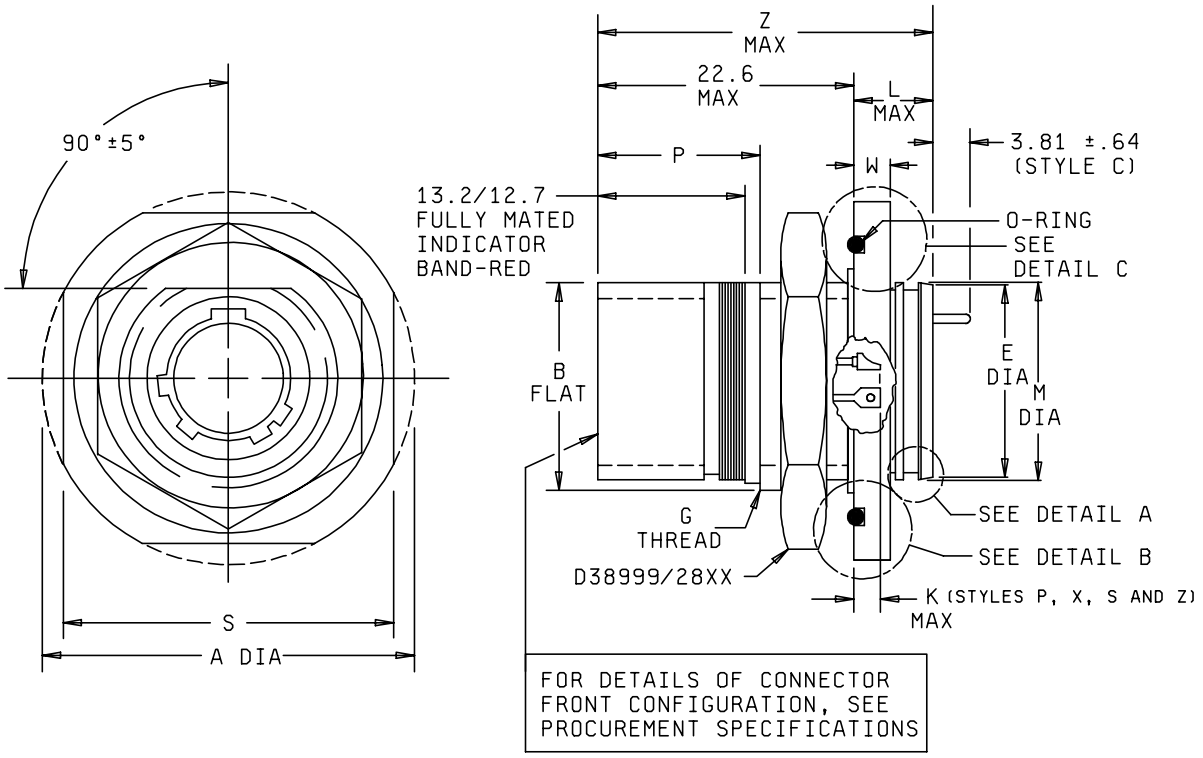

FIGURE 1. Receptacle, classes N and Y.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

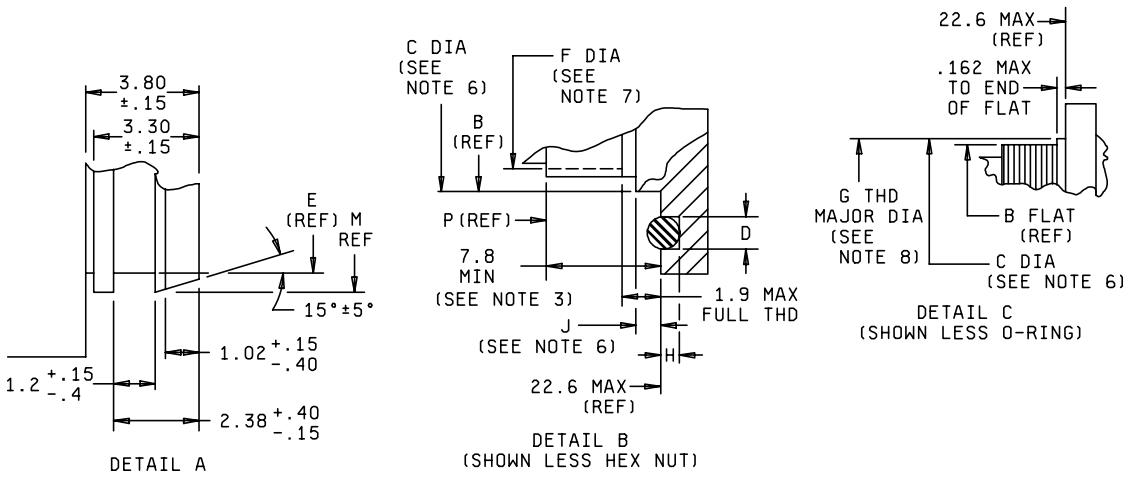

Connector dimensions

Shell size	Shell size code	A Dia ± .3	B Flat + .10 - .15	C Dia + .1 - .2	D + .13 - .03	E Dia ± .3	F Dia max	G thread
9	A	30.2	16.53	17.4	2.39	15.3	15.9	M17X1-6g 0.100R
11	B	34.9	19.07	20.6	2.39	18.4	18.8	M20X1-6g 0.100R
13	C	38.1	23.82	25.4	2.39	21.6	23.8	M25X1-6g 0.100R
15	D	41.3	26.97	28.5	2.39	24.8	26.8	M28X1-6g 0.100R
17	E	44.5	30.15	See note 6	2.39	28.0	30.8	M32X1-6g 0.100R (see note 2)
19	F	49.2	33.32	See note 6	3.58	31.2	33.8	M35X1-6g 0.100R
21	G	52.4	36.50	See note 6	3.58	34.3	36.8	M38X1-6g 0.100R
23	H	55.6	39.67	41.2	3.58	37.5	39.8	M41X1-6g 0.100R
25	J	58.7	42.85	44.4	3.58	40.7	42.8	M44X1-6g 0.100R

FIGURE 1. Receptacle, classes N and Y - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	H ± .13	J + .0 - .71	K max		L max
				With pin	With socket	
9	A	1.14	1.5	5.3	5.9	9.1
11	B	1.14	1.5	5.3	5.9	9.1
13	C	1.14	1.5	5.1	5.7	9.1
15	D	1.14	1.5	5.1	5.7	9.1
17	E	1.14	---	5.1	5.7	9.1
19	F	1.91	---	5.1	5.7	9.7
21	G	1.91	---	5.1	5.7	9.7
23	H	1.91	1.5	5.1	5.7	9.7
25	J	1.91	1.5	5.1	5.7	9.7

Shell size	Shell Size code	M Dia +.3, -.0	P +.4 -.1	S ±.4	W +.3 -.1	Z Max	Recommended O-ring AS3578- (see note 5)
9	A	16.3	14.1	27.0	2.6	29.2	019
11	B	19.4	14.1	31.8	2.6	29.2	022
13	C	22.7	14.3	34.9	2.6	29.3	024
15	D	25.9	14.3	38.1	2.6	29.3	026
17	E	29.0	14.3	41.3	2.6	29.3	028
19	F	32.2	14.3	46.0	3.4	30.1	128
21	G	35.4	14.3	49.2	3.4	30.1	130
23	H	38.6	14.3	52.4	3.4	30.1	132
25	J	41.7	14.3	55.6	3.4	30.1	134

NOTES:
1. Dimensions are in millimeters.
2. Modified major diameter: 31.95 - 31.80 mm.
3. Panel thickness: 3.2 - 1.58 mm.
4. Polarizing position N is shown.
5. Alternate "0-ring" material may be AMS 3325.
6. C and J dimensions define feature required for proper fit in type E panel.
7. F diameter defines thread start.
8. This dimension applies to sizes 17, 19, and 21 only (C diameter and G diameter are the same).

FIGURE 1. Receptacle, classes N and Y - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1. Interface dimensions shall conform to MIL-DTL-38999.

This connector mates with MIL-DTL-38999/26.

O-ring shall be provided with jam-nut receptacles.

For insert arrangements: See MIL-STD-1560.

Connectors accessories: See MIL-C-85049.

Part or Identifying Number (PIN) example:

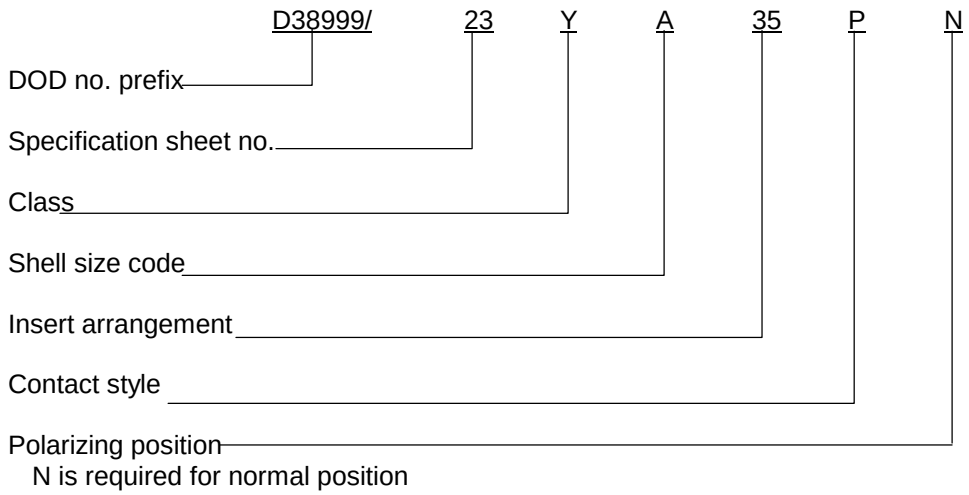

N is required for normal position

Eyelet contact termination: See MIL-DTL-38999.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force – 11
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-4301-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:44Z
Check the source to verify that this is the current version before use.