METRIC
DOD-C-38999/24B
6 August 1982
SUPERSEDING
METRIC
DOD-C-38999/24A
29 October 1979

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, JAM-NUT MOUNTING, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

This specification is approved for use by Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-38999.

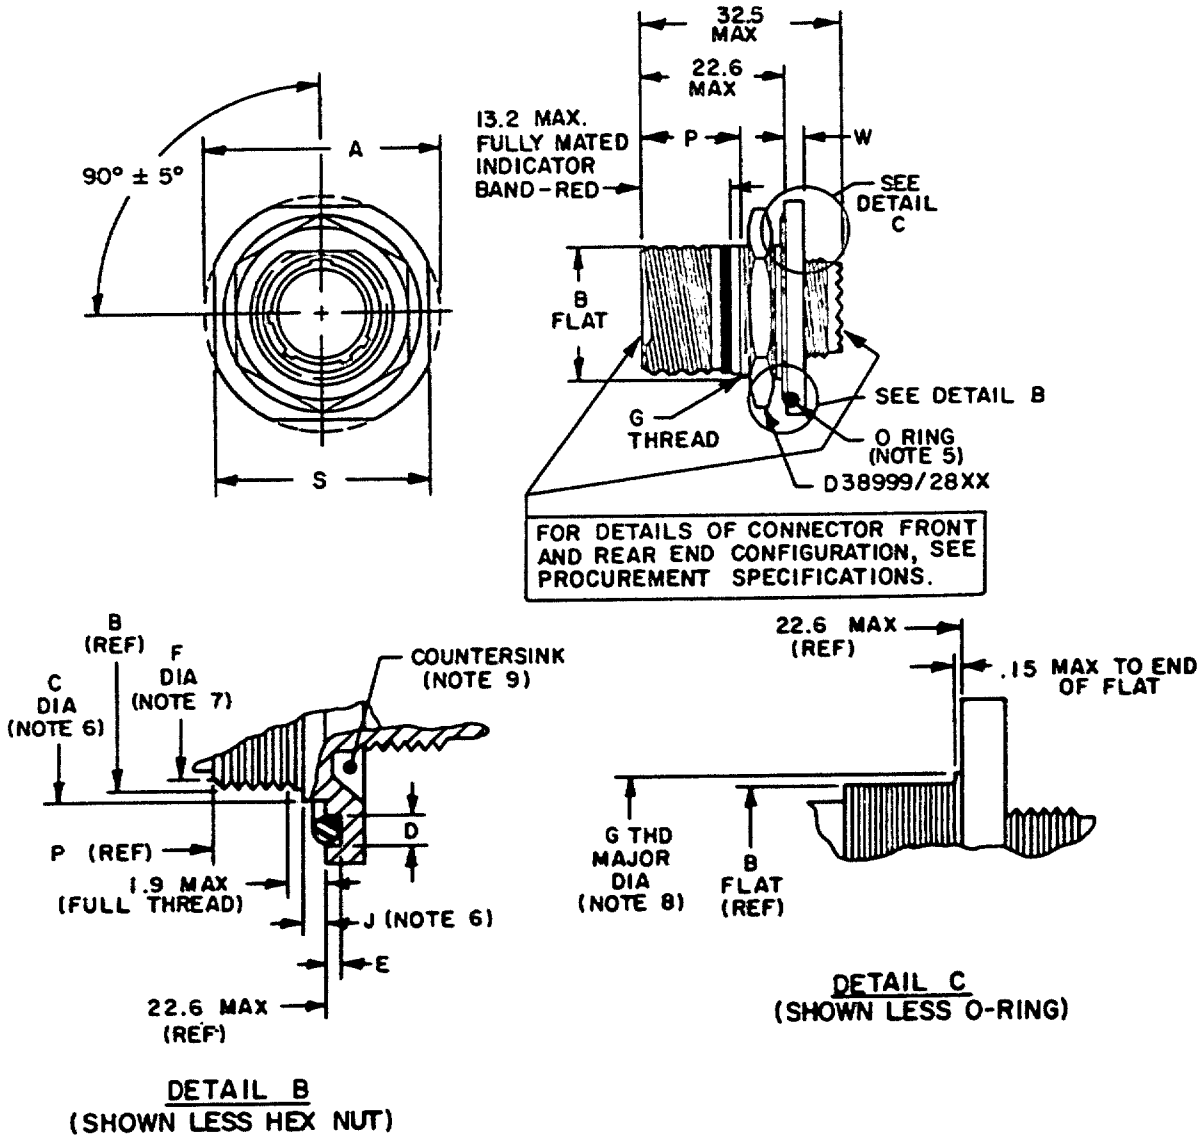


FIGURE 1. Receptacle , classes C, F, K, N, and W.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.

FSC 5935

SHELL SIZE	SHELL SIZE CODE	A DIA ±.3	B FLAT +.10 -.15	C DIA +.1 -.2	D +.13 -.03	E ±.13	F DIA MAX	G THREAD	J MAX	P +.4 -.1	S ±.4	W +.7 -.1	O-RING MS9068- NOTE 5
9	A	30.2	16.53	17.4	2.39	1.14	15.9	M17X1-6g 0.100R	1.5	14.1	27.0	2.2	019
11	B	34.9	19.07	20.6	↕	↕	18.8	M20	↕	14.1	31.8	↕	022
13	C	38.1	23.82	25.4			23.8	M25		14.3	34.9		024
15	D	41.3	26.97	28.5			26.8	M28	1.5	↕	38.1		026
17	E	44.5	30.15	---	2.39	1.14	30.8	M32 (NOTE 2)	---		41.3	2.2	028
19	F	49.2	33.32	---	3.58	1.91	33.8	M35	---		46.0	3.0	128
21	G	52.4	36.50	---	↕	↕	36.8	M38	---		49.2	↕	130
23	H	55.6	39.67	41.2			39.8	M41	1.5		52.4		132
25	J	58.7	42.85	44.4	3.58	1.91	42.8	M44X1-6g 0.100R	1.5	14.3	55.6	3.0	134

NOTES:
1. Dimensions are in millimeters.
2. Modified major diameter: 31.95 - 31.80 mm.
3. Panel thickness: 3.2 - 1.58 mm.
4. Finishes F and N not for Navy use.
5. Alternate "O"-Ring material may be AMS 3325/3326.
6. C and J dimensions define feature required for proper fit in Type E panel. Cutout per MIL-C-38999, FIG 28
7. F diameter defines thread start.
8. This dimension applies to sizes 17, 19 & 21 only. (C diameter and G diameter are the same.)
9. Countersink may be incorporated to accept accessory configuration per MIL-C-38999.

Figure 1. Receptacle, classes C, F, K, N, and W - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1. Interface dimensions shall conform to MIL-C-38999.

This connector mates with DOD-C-38999/26.

O ring and nut shall be provided with jam-nut receptacle.

For insert arrangements: See MIL-STD-1560.

Part number example: D38999/ 24 F A 35 P N

- DOD No. prefix
- Specification sheet number
- Class
- Shell size code
- Insert arrangement
- Contact style
- Polarizing position:
  - N is required for normal position

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3233)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.