

MILITARY SPECIFICATION SHEET

© CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, JAM-NUT MOUNTING, TRIPLE START THREADED, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-38999.

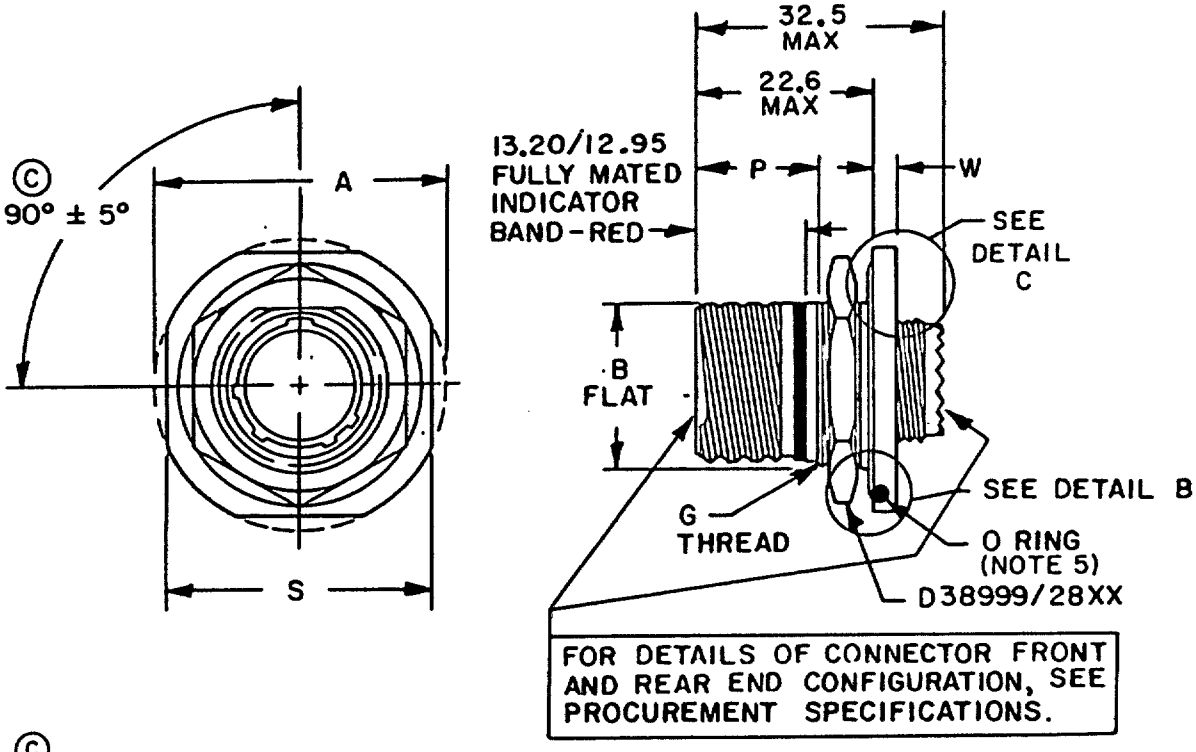

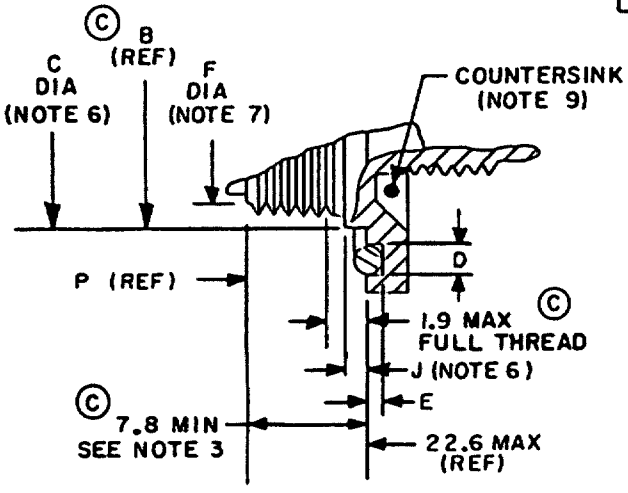

DETAIL B
(SHOWN LESS HEX NUT)

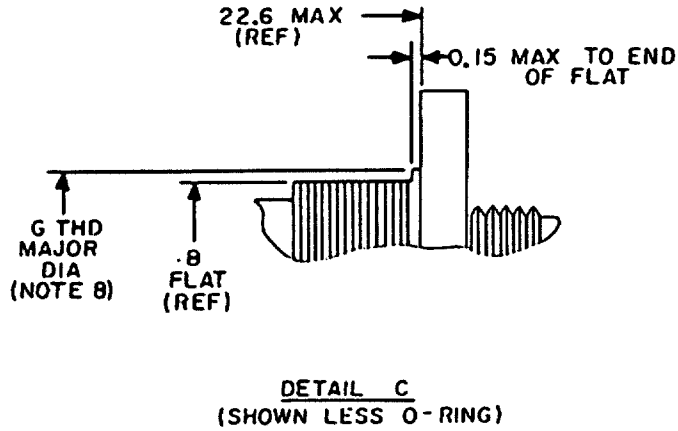

DETAIL C
(SHOWN LESS O-RING)

© FIGURE 1. Receptacle classes F, K, S, and W.

© denotes changes

Source: https://assist.dla.mil - Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Shell size	Shell size code	A dia ±0.3	B flat +0.10 -0.15	C dia +0.1 -0.2	D +0.13 -0.03	E ±0.13	F dia max	G thread		J +0.0 -0.3	P +0.4 -0.1	S ±0.4	W +0.7 -0.1	O-ring MS9068- (See note 5)
9	A	30.2	16.53	17.4	2.39	1.14	15.9	M17X1-6g	0.100R	1.5	14.1	27.0	2.2	019
11	B	34.9	19.07	20.6	2.39	1.14	18.8	M20	0.100R	1.5	14.1	31.8	2.2	022
13	C	38.1	23.82	25.4	2.39	1.14	23.8	M25	0.100R	1.5	14.3	34.9	2.2	024
15	D	41.3	26.97	28.5	2.39	1.14	26.8	M28	0.100R	1.5	14.3	38.1	2.2	026
17	E	44.5	30.15	---	2.39	1.14	30.8	M32 (See note 2)	0.100R	---	14.3	41.3	2.2	028
19	F	49.2	33.32	---	3.58	1.91	33.8	M35	0.100R	---	14.3	46.0	3.0	128
21	G	52.4	36.50	---	3.58	1.91	36.8	M38	0.100R	---	14.3	49.2	3.0	130
23	H	55.6	39.67	41.2	3.58	1.91	39.8	M41	0.100R	1.5	14.3	52.4	3.0	132
25	J	58.7	42.85	44.4	3.58	1.91	42.8	M44X1-6g	0.100R	1.5	14.3	55.6	3.0	134

NOTES:
1. Dimensions are in millimeters.
2. Modified major diameter: 31.95 - 31.80 mm.
3. Panel thickness: 3.2 - 1.58 mm.
4. Finishes F and N not for Navy use.
5. Alternate O-ring material may be AMS 3325/3326.
6. C and J dimensions define feature required for proper fit in type E panel. Cutout in accordance with MIL-C-38999. Thread marks permissible on C diameter.
7. F diameter defines thread start.
8. This dimension applies to sizes 17, 19, and 21 only. (C diameter and G diameter are the same.)
9. Countersink may be incorporated to accept accessory configuration in accordance with MIL-C-38999.

Ⓒ FIGURE 1. Receptacle, classes F, K, S, and W - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1. Interface dimensions shall conform to MIL-C-38999.

This connector mates with DOD-C-38999/26.

O-ring and nut shall be provided with jam-nut receptacle.

For insert arrangements: See MIL-STD-1560.

Ⓒ Part number example: D38999/ 24 W A 35 P N

- DOD number prefix
- Specification sheet number
- Class
- Shell size code
- Insert arrangement
- Contact style
- Polarizing position:
- N is required for normal position

Ⓒ Class F is not Navy use and is inactive for Air Force new design use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3615-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.