METRIC

MIL-C-38999/24E
07 JUNE 1995
SUPERSEDING
MIL-C-38999/24D
07 May 1990

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, JAM-NUT MOUNTING, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herin shall consist of this specification sheet and the issue of the following specification listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-38999.

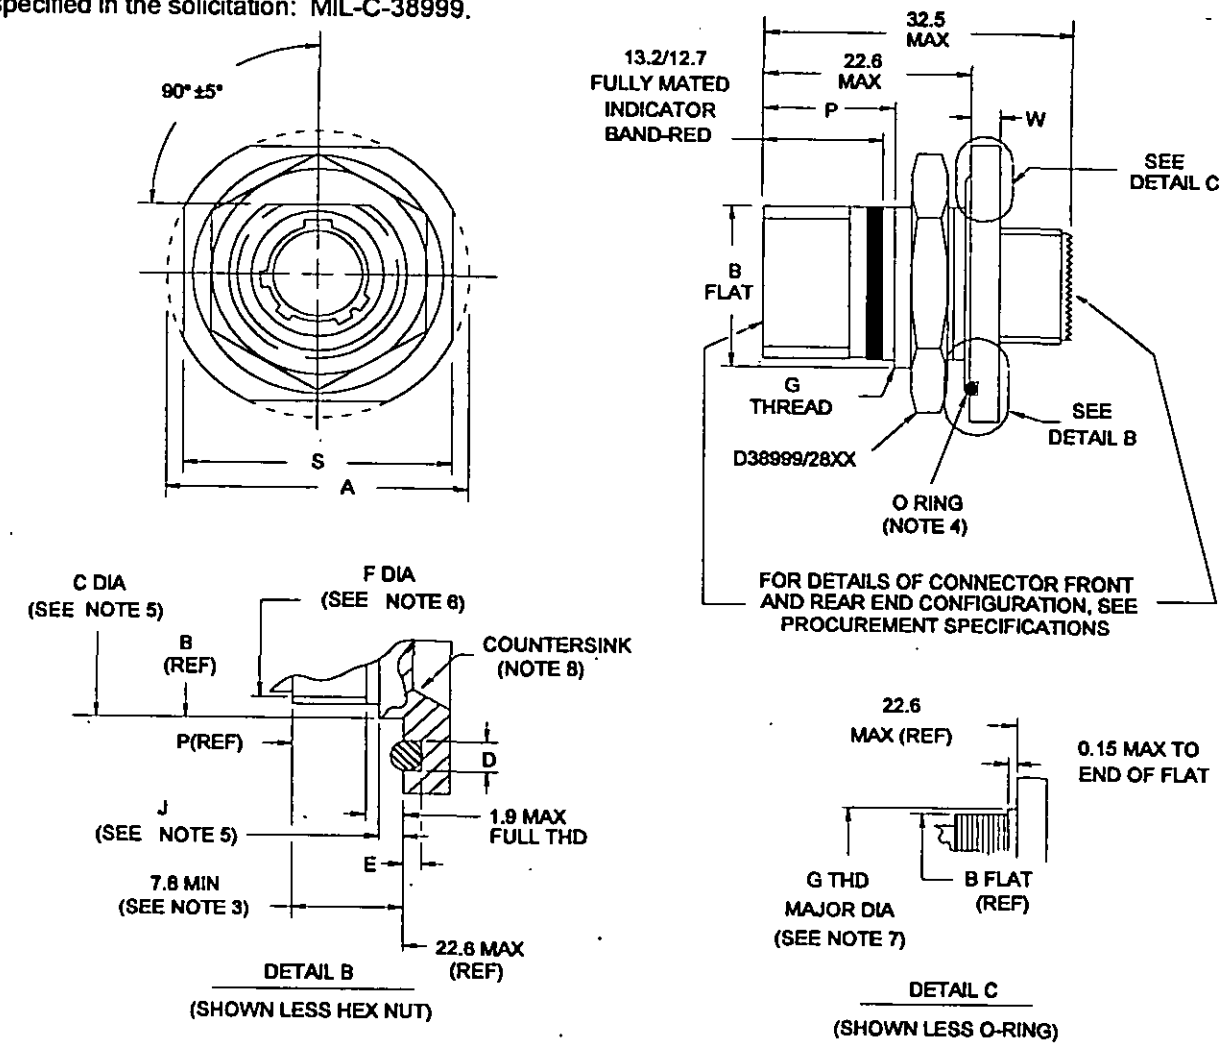


FIGURE 1. Receptacle, classes F, G, J, K, M, S, and W.

Ⓔ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release;distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.

Dimensions														
Shell size	Shell size code	A dia ±0.3	B flat +0.10 -0.15	C dia +0.1 -0.2	D +0.13 -0.03	E ±0.13	F dia max	G Thread	J +0.0 -0.5	P +0.6 -0.0	S ±0.4	W +0.7 -0.1	O-ring MS9068- (see1 note 4)	Ext Ⓔ Bending Moment class J & M Newton - Meters
9	A	30.2	16.53	17.4	2.39	1.14	15.9	M17x1-6g 0.100R	1.5	14.1	27.0	2.2	019	8.5
11	B	34.9	19.07	20.6	2.39	1.14	18.8	M20 0.100R	1.5	14.1	31.8	2.2	022	14.1
13	C	38.1	23.82	25.4	2.39	1.14	23.8	M25 0.100R	1.5	14.1	34.9	2.2	024	19.8
15	D	41.3	26.97	28.5	2.39	1.14	26.8	M28 0.100R	1.5	14.1	38.1	2.2	026	28.2
17	E	44.5	30.15	—	2.39	1.14	30.8	M32 0.100R (see note 2)	—	14.1	41.3	2.2	028	36.7
19	F	49.2	33.32	—	3.58	1.91	33.8	M35 0.100R	—	14.1	46.0	3.0	128	45.2
21	G	52.4	36.50	—	3.58	1.91	36.8	M38 0.100R	—	14.1	49.2	3.0	130	53.7
23	H	55.6	39.67	41.2	3.58	1.91	39.8	M41 0.100R	1.5	14.1	52.4	3.0	132	62.1
25	J	58.7	42.85	44.4	3.58	1.91	42.8	M44x1-6g 0.100R	1.5	14.1	55.6	3.0	134	73.4

NOTES:
1. Except where noted dimensions are in millimeters.
2. Modified major diameter: 31.5 - 31.8
3. Panel thickness: 3.2 - 1.58
4. Alternate O-ring material may be AMS 3325/3326
5. C and J dimensions define feature required for proper fit in type E panel.
6. F diameter defines thread start.
7. This dimension applies to sizes 17, 19, and 21 only. (C and G diameters are the same)
8. Countersink may be incorporated to accept accessory configurationin accordance with MIL-C-38999.

FIGURE 1. Receptacle, classes F, G, J, K, M, S and W - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T15:45Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:


Dimensions and configuration: See figure 1. Interface dimensions shall conform to MIL-C-38999.

This connector mates with MIL-C-38999/26.

O-ring and nut shall be provided with jam-nut receptacle.

For insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

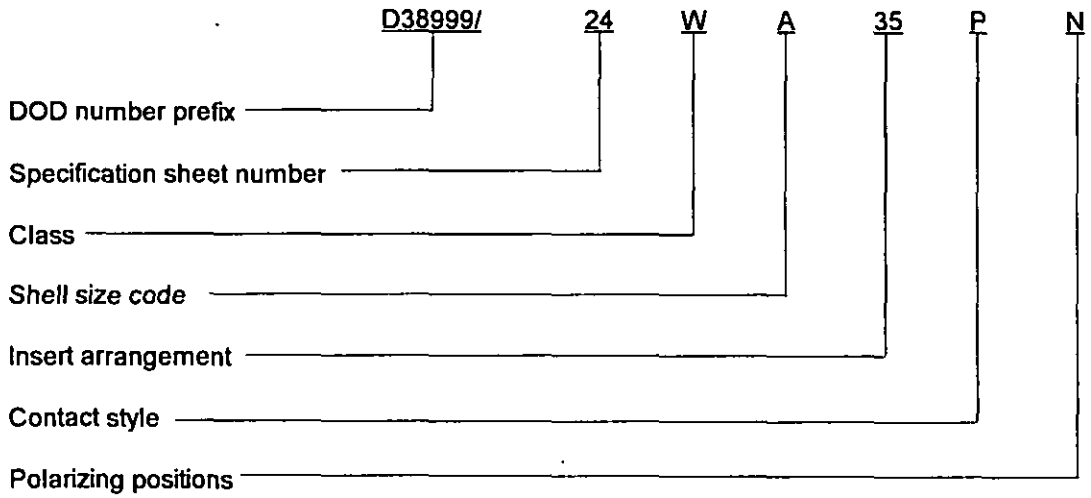

N is required for normal position

Class F is not for Navy use and is inactive for Air Force new design use.

NOTE: The term Part or Identifying Number (PIN) is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
NASA - NA

Preparing activity:
DLA - ES

(Project 5935-4009)

Review Activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.