METRIC

MIL-DTL-38999/24H
10 July 2008
SUPERSEDING
MIL-DTL-38999/24G
10 March 2006

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, THREADED, JAM-NUT MOUNTING, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

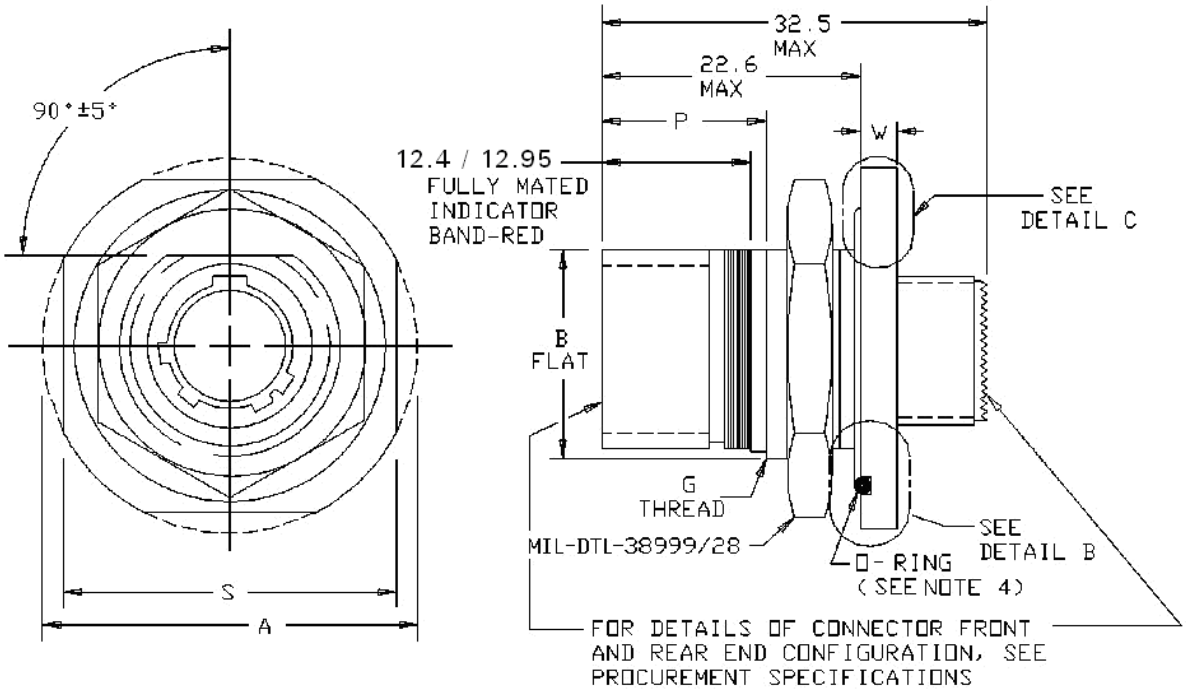


FIGURE 1. Receptacle, classes F, G, J, K, M, P, R, S, T, W, X and Z.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.

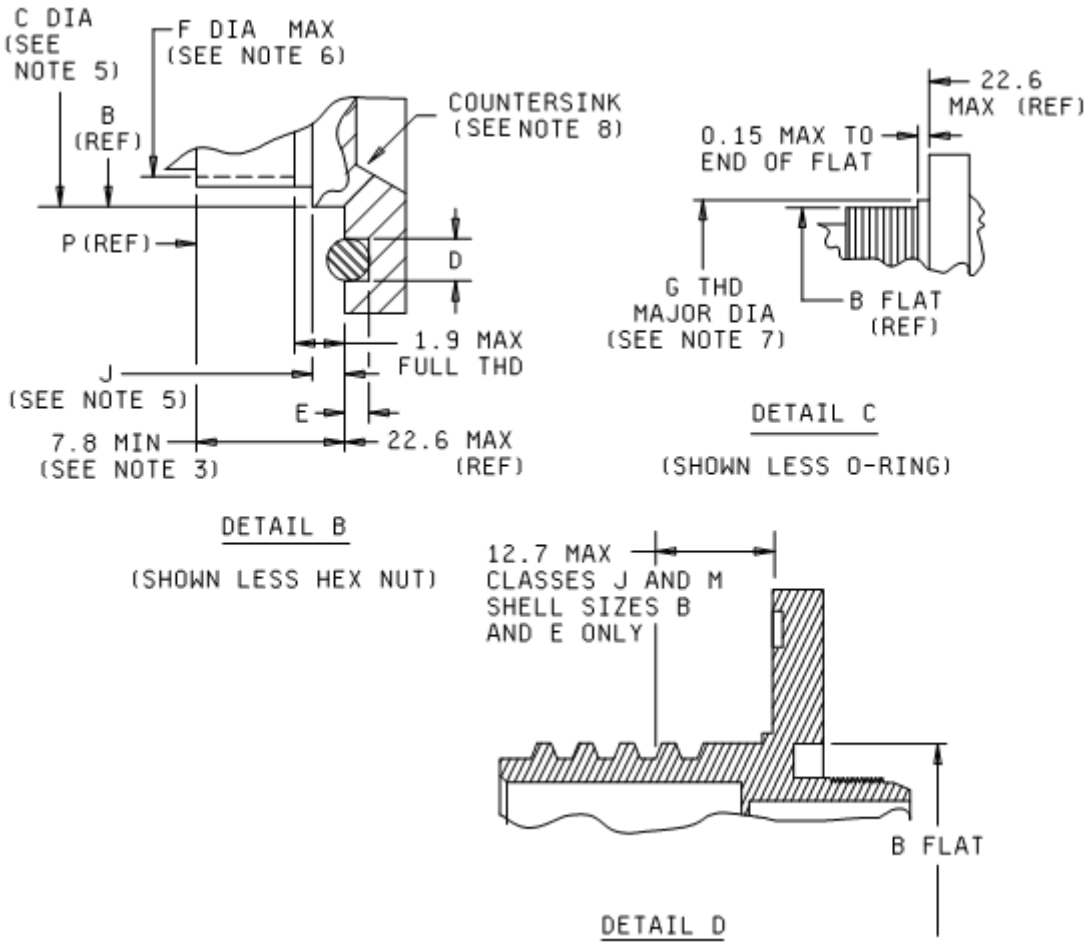


FIGURE 1. Receptacle, classes F, G, J, K, M, P, R, S, T, W, X and Z - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.

Dimensions							
Shell size	Shell size code	A dia ± .3	B flat + .10 - .15	C dia + .1 - .2	D + .13 - .03	E ± .13	F dia Max
9	A	30.2 (1.189)	16.53 (.651)	17.4 (.685)	2.39 (.094)	1.14 (.045)	15.9 (.626)
11	B	34.9 (1.374)	19.07 (.751)	20.6 (.811)	2.39 (.094)	1.14 (.045)	18.8 (.740)
13	C	38.1 (1.500)	23.82 (.938)	25.4 (1.000)	2.39 (.094)	1.14 (.045)	23.8 (.937)
15	D	41.3 (1.626)	26.97 (1.062)	28.5 (1.122)	2.39 (.094)	1.14 (.045)	26.8 (1.055)
17	E	44.5 (1.752)	30.15 (1.187)	---	2.39 (.094)	1.14 (.045)	30.8 (1.213)
19	F	49.2 (1.937)	33.32 (1.312)	---	3.58 (.141)	1.91 (.075)	33.8 (1.331)
21	G	52.4 (2.063)	36.50 (1.437)	---	3.58 (.141)	1.91 (.075)	36.8 (1.449)
23	H	55.6 (2.189)	39.67 (1.562)	41.2 (1.622)	3.58 (.141)	1.91 (.075)	39.8 (1.567)
25	J	58.7 (2.311)	42.85 (1.687)	44.4 (1.748)	3.58 (.141)	1.91 (.075)	42.8 (1.685)

FIGURE 1. Receptacle, classes F, G, J, K, M, P, R, S, T, W, X and Z - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.

Dimensions								
Shell Size	Shell size code	G Thread	J + .0 - .71	P + .6 - .0	S ± .4	W + .9 - .1	Recommended O-ring SAE-AS3582 (see note 4)	External bending moment Classes J & M Newton – Meters
9	A	M17x1-6g 0.100R	1.5 (.059)	14.1 (.555)	27.0 (1.063)	2.2 (.087)	019	8.5
11	B	M20x1-6g 0.100R	1.5 (.059)	14.1 (.555)	31.8 (1.252)	2.2 (.087)	022	14.1
13	C	M25x1-6g 0.100R	1.5 (.059)	14.1 (.555)	34.9 (1.374)	2.2 (.087)	024	19.8
15	D	M28x1-6g 0.100R	1.5 (.059)	14.1 (.555)	38.1 (1.500)	2.2 (.087)	026	28.2
17	E	M32x1-6g 0.100R (see note 2)	---	14.1 (.555)	41.3 (1.626)	2.2 (.087)	028	36.7
19	F	M35x1-6g 0.100R	---	14.1 (.555)	46.0 (1.811)	3.0 (.118)	128	45.2
21	G	M38x1-6g 0.100R	---	14.1 (.555)	49.2 (1.937)	3.0 (.118)	130	53.7
23	H	M41x1-6g 0.100R	1.5 (.059)	14.1 (.555)	52.4 (2.063)	3.0 (.118)	132	62.1
25	J	M44x1-6g 0.100R	1.5 (.059)	14.1 (.555)	55.6 (2.189)	3.0 (.118)	134	73.4

NOTES:

1. Dimensions are in millimeters. Inch equivalents are given for information only.
2. Modified major diameter: 31.95 - 31.80.
3. Panel thickness: 3.2 - 1.58.
4. Alternate O-ring material may be SAE AMS3325.
5. C and J dimensions define feature required for proper fit in type E panel.
6. F diameter defines thread start.
7. This dimension applies to sizes 17, 19, and 21 only (C and G diameters are the same).
8. Countersink may be incorporated to accept accessory configuration accordance with MIL-DTL-38999.
9. Where critical connector to panel bonding (below 10 millivolt) is required, classes J & M should not be used.

FIGURE 1. Receptacle, classes F, G, J, K, M, P, R, S, T, W, X and Z - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1. Interface dimensions shall conform to MIL-DTL-38999.


This connector mates with MIL-DTL-38999/26.

O-ring and nut shall be provided with jam-nut receptacle.

For insert arrangements: See MIL-STD-1560.

Connector accessories: See SAE-AS85049.

Part or Identifying Number (PIN) example:

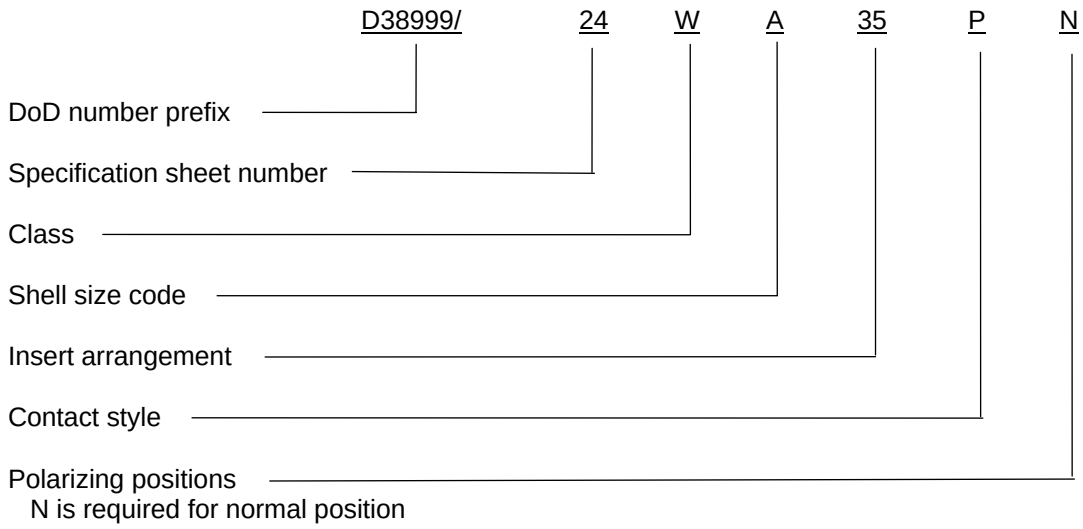

Class F is not for Navy use and is inactive for Air Force new design use.

NOTE: The term PIN is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification.

Qualification required: The activity responsible for the qualified products list for this specification sheet is the Defense supply Center Columbus, DSCC-VQ, P.O. Box 3990, Columbus, Ohio 43218-3990.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/26
MIL-DTL-38999/28
MIL-STD-1560
SAE AMS3325
SAE-AS85049
SAE-AS3582

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2008-067)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.