METRIC

MIL-DTL-38999/25A
11 June 2001
SUPERSEDING
DOD-C-38999/25
7 December 1977

DETAIL SPECIFICATION SHEET

CONNECTOR, ELECTRICAL, CIRCULAR, THREADED, RECEPTACLE, SOLDER MOUNTING, HERMETIC, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and MIL-DTL-38999.

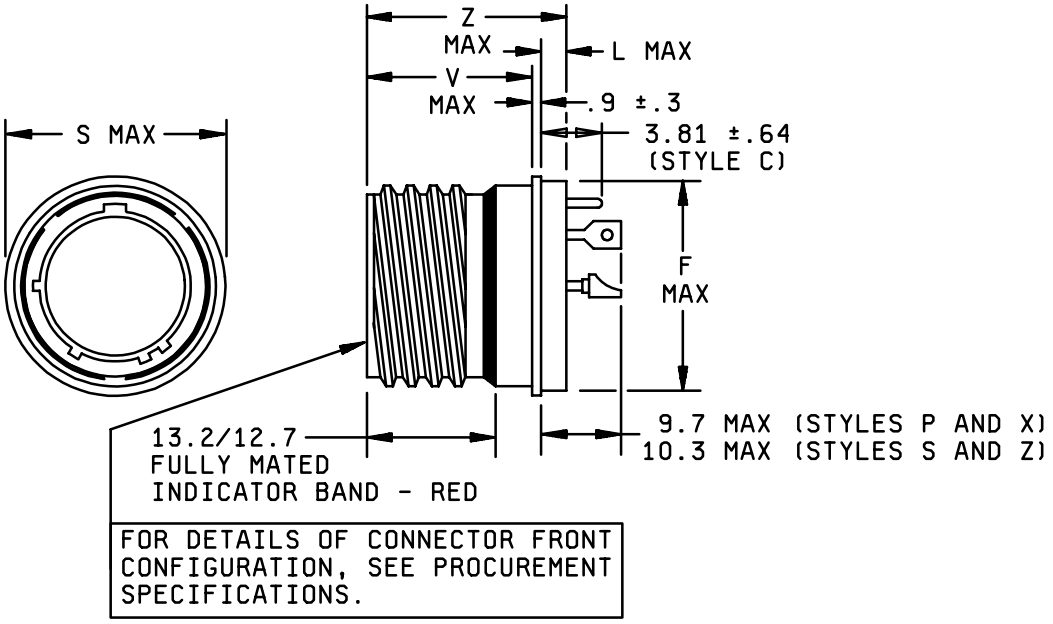

FIGURE 1. Receptacle, classes N and Y.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	F max	L max	S max	V max with pins	V max with sockets	Z max
9	A	17.1	5.1	19.4	17.2	19.4	23.8
11	B	19.9	5.1	21.8	17.2	19.4	23.8
13	C	23.1	5.1	24.9	17.2	19.4	23.8
15	D	26.2	5.1	28.1	17.2	19.4	23.8
17	E	29.4	5.1	31.3	17.2	19.4	23.8
19	F	31.8	5.1	33.6	17.2	19.4	23.8
21	G	35.0	5.1	36.8	17.2	19.4	23.8
23	H	38.2	5.9	40.0	17.2	19.4	24.6
25	J	41.3	5.9	43.2	17.2	19.4	24.6

NOTES:
1. Dimensions are in millimeters.
2. Polarizing position N is shown.

FIGURE 1. Receptacle, classes N and Y - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1. Interface dimensions shall conform to MIL-DTL-38999.

This connector mates with MIL-DTL-38999/26.

For insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

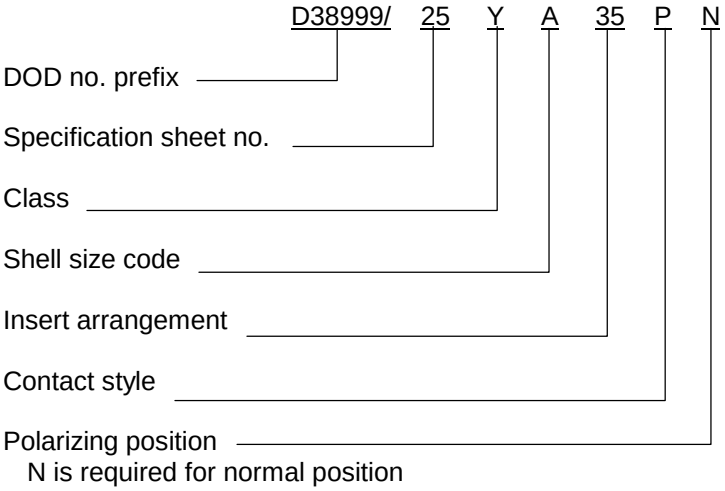

Eyelet contact termination: See MIL-DTL-38999.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force – 11
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99
DLA – IS

Preparing activity:
DLA - CC

(Project 5935-4301-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:45Z
Check the source to verify that this is the current version before use.