
MILITARY SPECIFICATION SHEET

© CONNECTORS, PLUG, ELECTRICAL, CIRCULAR, STRAIGHT, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification sheet and the latest issue of MIL-C-38999.

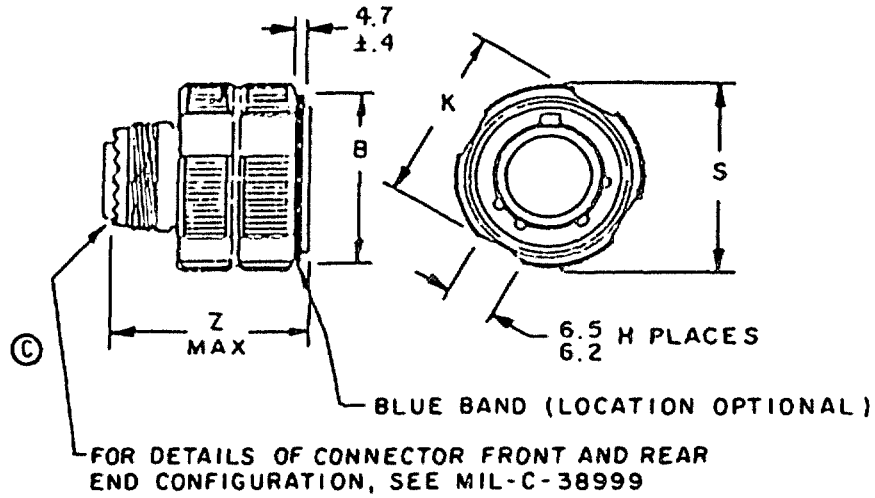

Shell size	Shell size code	B +.2 -.0	H Number of flats	K Max	S Dia Max	Z Max
9	A	18.4	4	19.0	21.8	31.0
11	B	21.1	4	21.9	25.0	31.0
13	C	25.4	4	26.1	29.4	31.0
15	D	28.7	4	29.3	32.5	31.0
17	E	32.2	4	32.8	35.7	31.0
19	F	34.9	8	35.5	38.5	31.0
21	G	38.1	8	38.7	41.7	31.0
23	H	41.1	8	41.7	44.9	31.0
25	J	44.3	8	44.9	48.0	31.0

NOTES:
1. Dimensions are in millimeters.
2. Finishes F and S not for Navy use.

FIGURE 1. Plug, classes F, K, S, and W.

© denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1. Interface dimensions shall conform to MIL-C-38999.

Mating connector: DOD-C-38999/20, /21, /23, /24, /25, and /27.

Insert arrangements: See MIL-STD-1560.

Part number example: D38999/ 26 F A 35 P N

- DOD no. prefix
- Specification sheet no.
- Class
- Shell size code
- Insert arrangement
- Contact style
- Polarizing position

N is required for normal position

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3574-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:46Z
Check the source to verify that this is the current version before use.