METRIC

MIL-DTL-38999/26F
2 June 2010
SUPERSEDING
MIL-DTL-38999/26E
11 June 2001

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, PLUG, CIRCULAR, THREADED, STRAIGHT, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

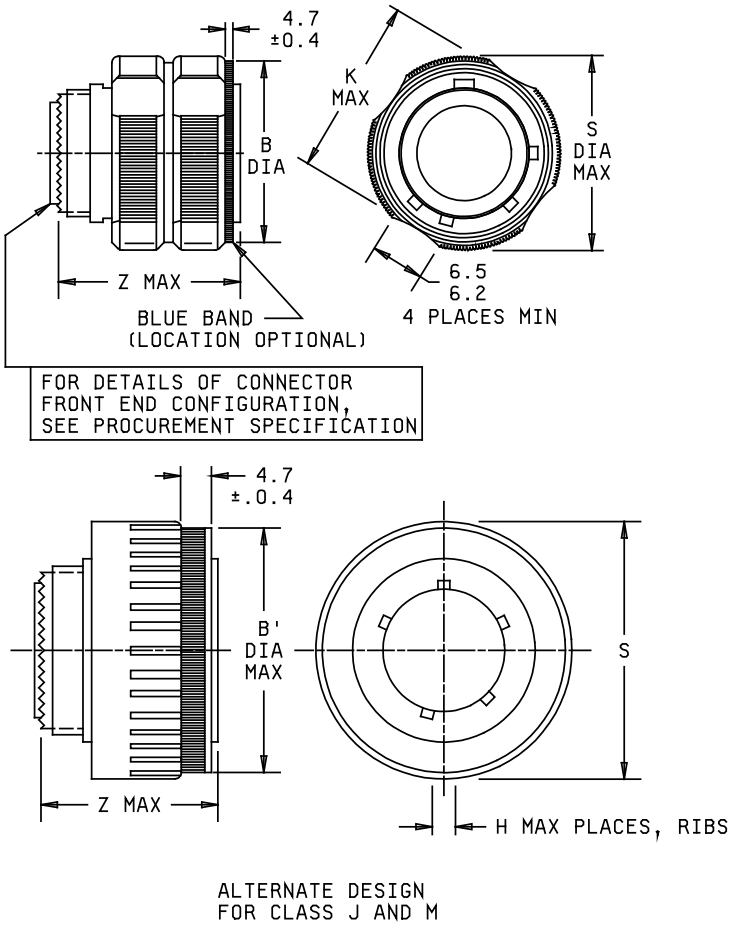


FIGURE 1. Plug, classes F, G, J, K, M, R, S, T,W, X and Z.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:46Z
Check the source to verify that this is the current version before use.

Dimensions							
Shell size	Shell size code	B dia + .2 - .0	B' dia max	H max	K max	S dia max	Z max
9	A	18.4 (.724)	20.6 (.811)	12 (.472)	19.0 (.748)	21.8 (.858)	31.0 (1.22)
11	B	21.1 (.830)	23.6 (.929)	14 (.551)	21.9 (.862)	25.0 (.984)	31.0 (1.22)
13	C	25.4 (.999)	28.2 (1.11)	16 (.629)	26.1 (.862)	29.4 (1.157)	31.0 (1.22)
15	D	28.7 (1.129)	31.3 (1.23)	18 (.708)	29.3 (1.15)	32.5 (1.27)	31.0 (1.22)
17	E	32.2 (1.26)	34.5 (1.35)	20 (.787)	32.8 (1.29)	35.7 (1.40)	31.0 (1.22)
19	F	34.9 (1.37)	37.3 (1.46)	22 (.866)	35.5 (1.39)	38.5 (1.51)	31.0 (1.22)
21	G	38.1 (1.49)	40.5 (1.59)	24 (.944)	38.7 (1.52)	41.7 (1.64)	31.0 (1.22)
23	H	41.1 (1.61)	43.7 (1.72)	26 (1.02)	41.7 (1.64)	44.9 (1.76)	31.0 (1.22)
25	J	44.3 (1.74)	46.8 (1.84)	28 (1.102)	44.9 (1.76)	48.0 (1.88)	31.0 (1.22)

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound conversion are provided in parentheses for information only.

FIGURE 1. Plug, classes F, G, J, K, M, R, S, T, W, X and Z - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: See figure 1. Interface dimensions shall conform to MIL-DTL-38999.

This connector mates with MIL-DTL-38999/20, /21, /22, /23, /24, /25, and /27

For insert arrangements: See MIL-STD-1560.

Connector accessories: SAE-AS85049.

Part or Identifying Number (PIN) example:

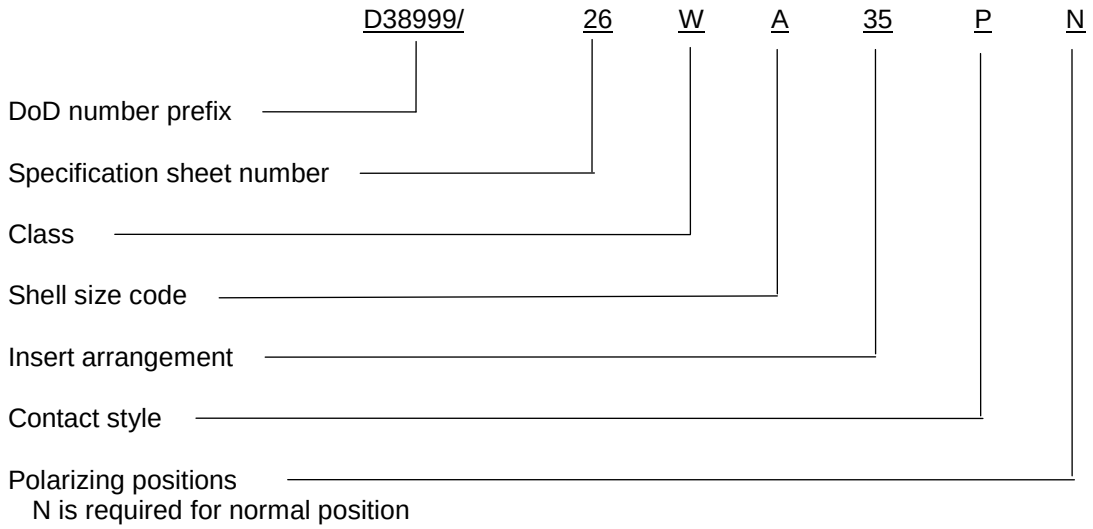

Class F is not for Navy use and is inactive for Air Force new design use.

NOTE: The term PIN is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-38999, this document references the following.

MIL-DTL-38999/20
MIL-DTL-38999/21
MIL-DTL-38999/22
MIL-DTL-38999/23
MIL-DTL-38999/24
MIL-DTL-38999/25
MIL-DTL-38999/27
MIL-STD-1560
SAE-AS85049

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:46Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2010-191)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:46Z
Check the source to verify that this is the current version before use.