MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS RECEPTACLE, DUMMY STOWAGE, BAYONET COUPLING, (MIL-C-27599, SERIES I AND MIL-C-38999, SERIES I)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification sheet and the latest issue of MIL-C-38999.

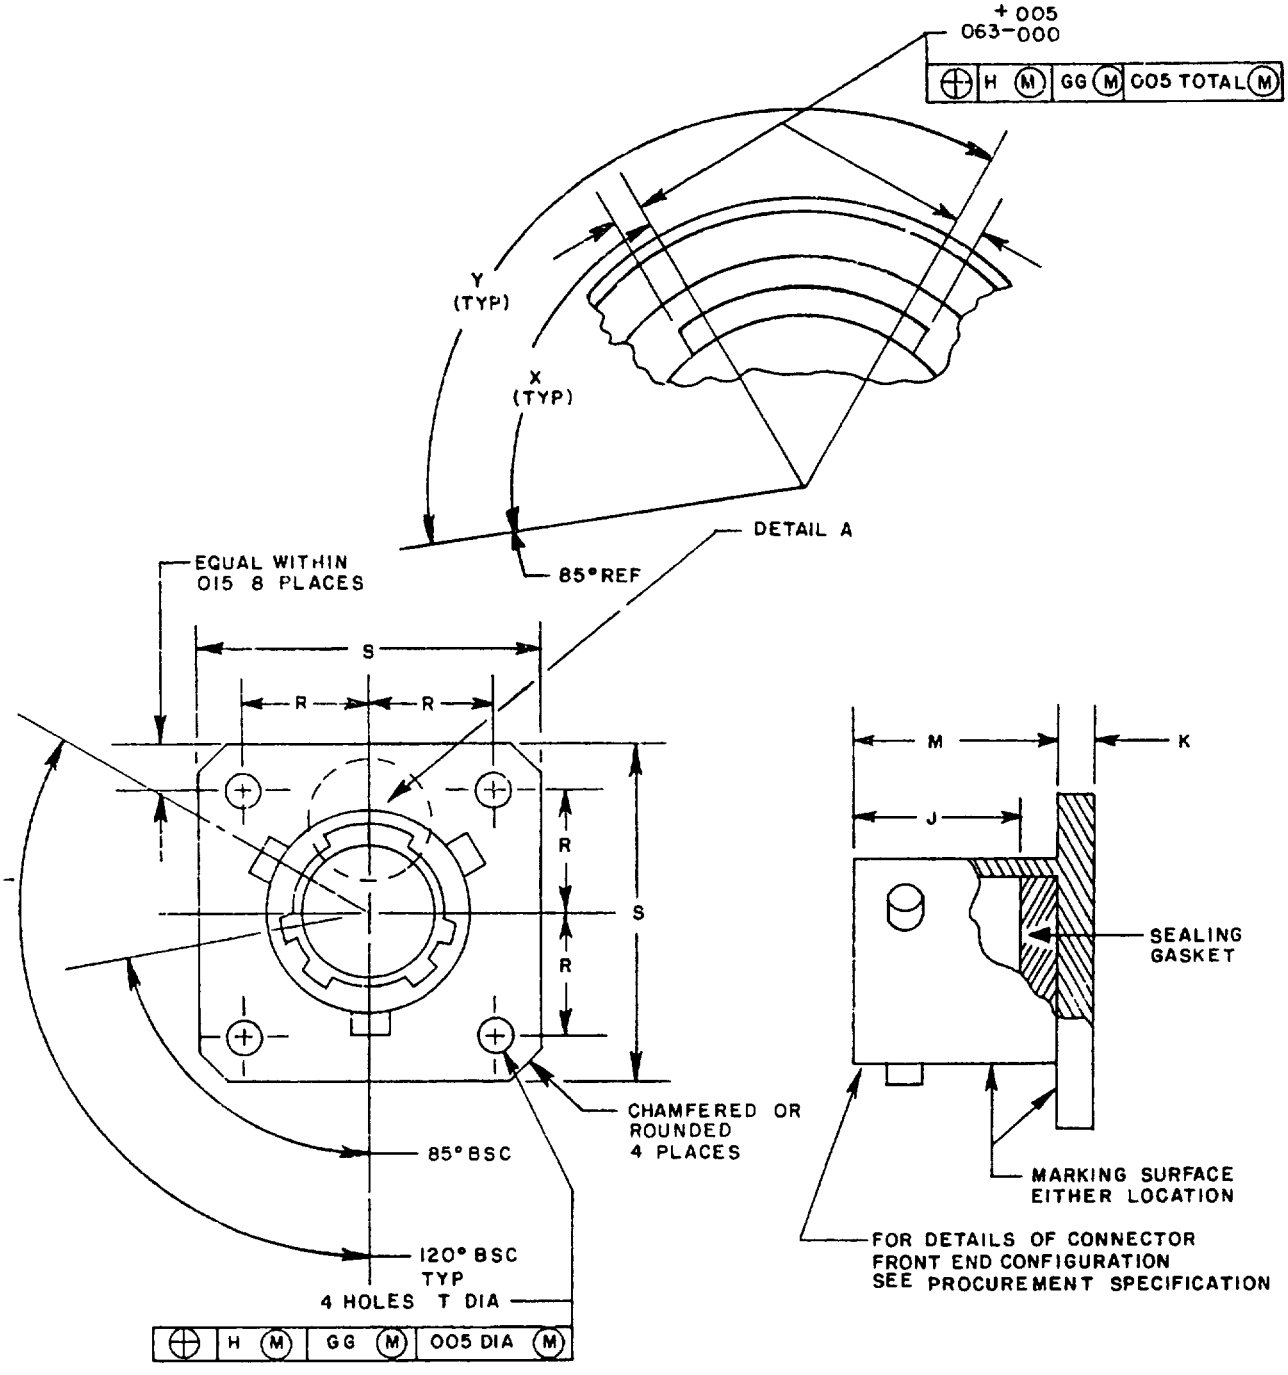


FIGURE 1. Dummy receptacle, finish B.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.

Dimensions.

SHELL SIZE	K +.015 -.000	M +.010	T DIA +.010 -.005	R BSC	S +.020	J +.010 -.015	X (TP)	Y (TP)
9				.3595	.938		77°	113°
11				.406	1.031		67°	123°
13				.453	1.125		63°	127°
15	.085	.727	.128	.4845	1.219	.567	61°	129°
17				.531	1.312		65°	125°
19				.578	1.438		65°	125°
21		.697		.625	1.562		65°	125°
23	.115	.697	.147	.6875	1.688		69°	121°
25		.697	.147	.750	1.812		69°	121°

INCH	MM	INCH	MM	INCH	MM	INCH	MM
.005	.13	.3595	9.13	.625	15.88	1.125	28.58
.010	.25	.406	10.31	.632	16.05	1.219	30.96
.015	.38	.453	11.51	.6875	17.46	1.312	33.32
.063	1.60	.4845	12.31	.697	17.70	1.438	36.53
.085	2.16	.531	13.49	.727	18.47	1.562	39.67
.115	2.92	.567	14.30	.750	19.05	1.688	42.88
.128	3.25	.578	14.68	.938	23.83	1.812	46.02
.147	3.73	.602	15.29	1.031	26.19		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. For design feature purposes, this standard takes precedence over documents referenced herein.
4. Referenced documents shall be of the issue in effect on date of invitation for bid.
5. The gage features for GG shall be .010 (.25 mm) smaller than the MMC size at basic location.
6. Flange is solid.
7. Dummy receptacles are used when unmated plugs must be protected.

FIGURE 1. Dummy receptacle, finish B. - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1. Interface dimensions shall conform to MIL-C-38999, except as noted.

Material:

Shell: Aluminum alloy as specified in MIL-C-38999 with finish B

Sealing gasket: Silicone elastomer.

Qualification: Qualification shall consist of the dynamic salt spray test, altitude immersion, coupling torque, and visual and mechanical inspection as specified in MIL-C-38999, conducted on two samples of each shell size.

This receptacle mates with MS27467, MS27498 (inactive), MS27653 (inactive) and MS27661.

Fits all polarization positions.

Part number: Consists of the letter M, the basic number of the specification sheet, a dash, shell size and finish designator

M38999/9	—	11	B
Specification sheet number		Shell size	Finish

Custodians.
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3190-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-38999/9

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE AIR FORCE

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 73236 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Directorate of Electronic Support
ATTN: AFALD/PTS
Gentile AFS OH 45444

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.