INCH-POUND

MIL-DTL-38999/9A
12 July 2002
SUPERSEDING
MIL-C-38999/9
10 March 1982

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, DUMMY STOWAGE, BAYONET COUPLING, (MIL-C-27599 SERIES I AND MIL-DTL-38999 SERIES I)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-38999.

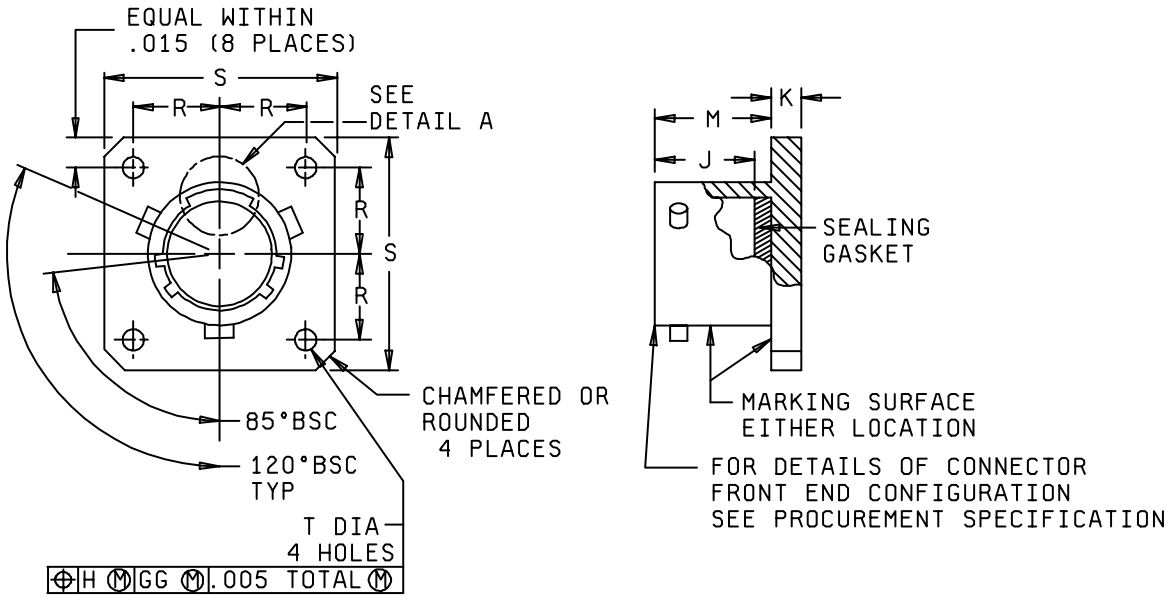

FIGURE 1. Dummy receptacle, finishes B and X.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.

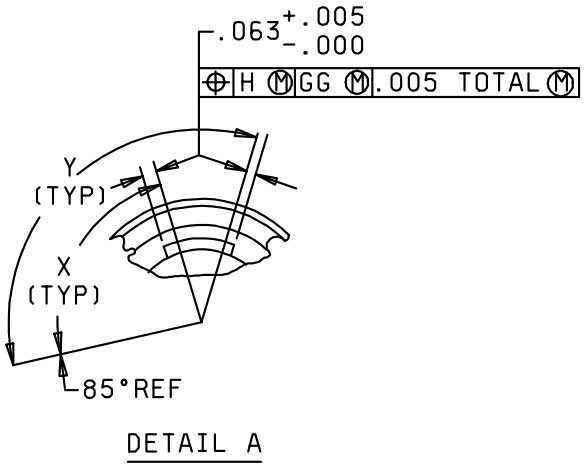

FIGURE 1. Dummy receptacle, finishes B and X - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.

Dimensions								
Shell size	K +.015 -.000	M ±.010	T dia +.010 -.005	R BSC	S ±.020	J +.010 -.015	X (TP)	Y (TP)
9	.085	.727	.128	.3595	.938	.567	77°	113°
11				.406	1.031		67°	123°
13				.453	1.125		63°	127°
15				.4845	1.219		61°	129°
17				.531	1.312		65°	125°
19				.578	1.438		65°	125°
21	.115	.697		.625	1.562		65°	125°
23			.147	.6875	1.688		69°	121°
25				.750	1.812		69°	121°

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.3539	9.13	.625	15.88	1.125	28.58
.010	0.25	.406	10.31	.632	16.05	1.219	30.96
.015	0.38	.453	11.51	.6875	17.46	1.312	33.32
.063	1.60	.4845	12.31	.697	17.70	1.438	36.53
.085	2.16	.531	13.49	.727	18.47	1.562	39.67
.115	2.92	.567	14.30	.750	19.05	1.688	42.88
.128	3.25	.578	14.68	.938	23.83	1.812	46.02
.147	3.73	.602	15.29	1.031	26.19		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The gage features for GG shall be .010 (0.25 mm) smaller than the MMC size at basic location.
4. Flange is solid.
5. Dummy receptacles are used when unmated plugs must be protected.

FIGURE 1. Dummy receptacle, finishes B and X - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999, except as noted.
This receptacle mates with MS27467, MS27653 and MS27661 connectors.
Fits all polarization positions.
Shell: Aluminum alloy as specified in MIL-DTL-38999 with finishes B or X.
Sealing gasket: Non-corrosive silicone or fluorosilicone elastomer.

Part or Identifying Number (PIN) is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification. Example:

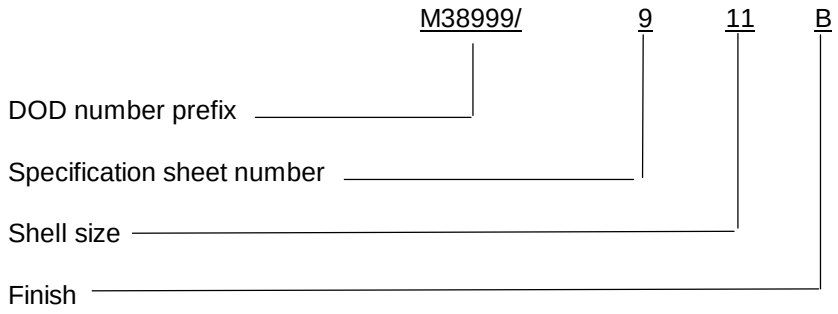

QUALIFICATION:
Qualification shall consist of the dynamic salt spray test, altitude immersion, coupling torque, coupling pin strength, and visual and mechanical inspection as specified in MIL-DTL-38999, conducted on two samples of each shell size.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 11
DLA – CC

Preparing activity:
DLA – CC

(Project 5935–4389)

Review Activities:
Army – AR, MI
Navy – EC, MC, OS
Air Force – 19, 99
DLA – IS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:42Z
Check the source to verify that this is the current version before use.