The documentation and process conversion measures necessary to comply with this document shall be completed by 9 February 2025.

INCH-POUND
MIL-PRF-19500/594C
w/AMENDMENT 2
9 September 2024
SUPERSEDING
MIL-PRF-19500/594C
w/AMENDMENT 1
28 February 2019

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER,
ULTRA FAST RECOVERY, LOW LEAKAGE, TYPES 1N6664 THROUGH 1N6666, AND
1N6664R THROUGH 1N6666R, QUALITY LEVELS JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for a silicon, fast recovery power rectifier diodes. Four levels of product assurance (JAN, JANTX, JANTXV and JANS) are provided for each device type as specified in MIL-PRF-19500.

1.2 Package outlines. The device package outline for this specification sheet is a TO-257AA in accordance with figure 1 for all encapsulated device types.

1.3 Maximum ratings (for each leg).

Types	V_R and V_{RWM}	I_O (1) T_C = +100°C	I_{FSM} T_C = +100°C t_p = 8.3 ms	t_{rr}	T_{STG} and T_{OP}
	V dc	A dc	A dc	ns	
1N6664, 1N6664R	100	10	50	35	
1N6665, 1N6665R	150	10	50	35	-65°C to +200°C
1N6666, 1N6666R	200	10	50	35	

(1) Derate linearly, 100 mA/°C from +100°C to +200°C.
Barometric pressure reduced (altitude operation): 8 mm Hg.
$R_{\theta JC}$ = 2.5°C/W maximum.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality level. The JAN certification mark and quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", "JANTXV", and "JANS".

1.5.2 Device type. The designation system for the device types of semiconductors covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The semiconductors of this specification sheet use the first number and letter symbols "1N".

1.5.2.2 Second number symbols. The second number symbols for the semiconductor devices covered by this specification sheet are as follows: "6664", "6665", and "6666".

1.5.3 Suffix symbols. The suffix letter "R" is used on devices that have a reversed polarity (see figure 1). Devices with standard polarity use no suffix (see figure 1).

1.5.4 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 – Semiconductor Devices, General Specification for.


DEPARTMENT OF DEFENSE STANDARDS


MIL-STD-750 – Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

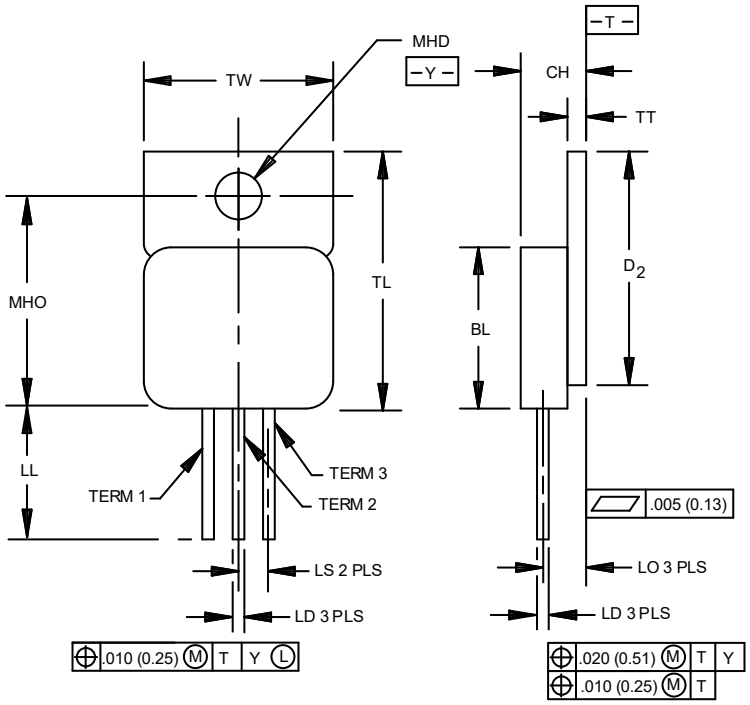

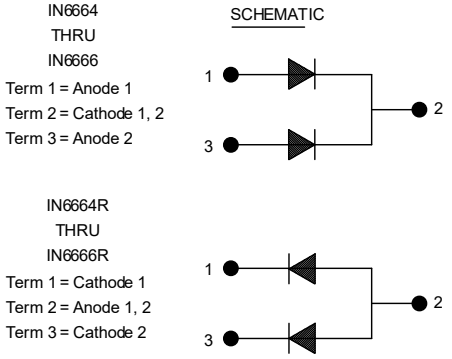

SYM	Dimensions				Notes	SYM	Dimensions				Notes
	Inch	Inch	mm	mm			Inch	Inch	mm	mm	
	Min	Max	Min	Max			Min	Max	Min	Max	
BL	.410	.430	10.41	10.92		LS					4
CH	.190	.200	4.83	5.08		MHD	.140	.150	3.56	3.81	
D_2	.593	.607	15.06	15.42		MHO	.527	.537	13.39	13.64	
LD	.025	.035	0.64	0.89		TL	.6450	.665	16.38	16.89	
LL	.505	.595	12.82	15.11		TT	.035	.045	0.89	1.14	
LO					3	TW	.410	.420	10.41	10.67	

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Terminal meniscus included in dimension TL and BL.
3. Dimension LO is .120 inch BSC (3.05 mm BSC).
4. Dimension LS is .100 inch BSC (2.54 mm BSC).

FIGURE 1. Dimensions and configuration (TO-257AA) of flange mount package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

P_{RM} Peak reverse power.

3.4 Interface and physical dimensions. Interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 herein. Methods used for electrical isolation of the terminal feedthroughs shall employ materials that contain a minimum of 90 percent AL_2O_3 (ceramic).

3.4.1 Lead finish. Lead finish shall be solderable in accordance in MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3 and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I herein.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.1 Construction verification. Cross sectional photos from three devices shall be submitted in the qualification report.

4.2.2 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANS, JANTX, and JANTXV levels only). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen	Measurements for JANS level	Measurements for JANTX and JANTXV levels
3c (1)	Thermal impedance (see 4.3.2)	Thermal impedance (see 4.3.2)
4	Y_1 at 10,000 G	Not applicable
9	Not applicable	Not applicable
11	Subgroup 2 of table I herein; V_{F2} and I_{R1}	Subgroup 2 of table I herein; V_{F2} and I_{R1}
12	See 4.3.1, method 1038 of MIL-STD-750, test condition A	See 4.3.1, method 1038 of MIL-STD-750, test condition A, t = 48 hours
13	Subgroups 2 and 3 of table I herein; ΔV_{F2} = ± .05 V (pk); ΔI_{R1} = 150 nA dc or 100 percent of the initial value, whichever is greater	Subgroup 2 of table I herein; ΔV_{F2} = ± .05 V (pk); ΔI_{R1} = 150 nA dc or 100 percent of the initial value, whichever is greater

(1) Thermal impedance shall be performed any time after sealing provided. Temperature cycling is performed in accordance with MIL-PRF-19500, screen 3 prior to this thermal impedance.

4.3.1 Burn-in conditions. Burn-in conditions are as follows: T_A = +150°C; V_R = 0.8 to 0.85 rated V_R dc (see 1.3).

4.3.2 Thermal impedance $Z_{\theta JX}$ measurements for screening. The thermal impedance measurements shall be performed in accordance with method 3101 of MIL-STD-750 as applicable, using the guidelines in that method for determining I_M, I_H, t_H, t_{MD} and K factor where appropriate. The thermal impedance limit used in screen 3c and table I, subgroup 2 shall be set statistically by the supplier.

4.3.3 Surge current. Surge current shall be performed in accordance with condition A of method 4066 of MIL-STD-750. I_{FSM} = 50 A; 6 surges; t_p = 8.3 ms or rectangular pulse of equivalent I_{rms}; 3 surges. I_O = 0 A; V_{RMS} = 0 V; duty factor 1 percent minimum T_A = +25°C.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500, and table I herein. The following test conditions shall be used for $Z_{\theta JX}$, group A inspection: $Z_{\theta JX}$ ≤ 2.5°C/W.

a. I_H = 5 A minimum.

b. t_H ≥ 100 ms.

c. I_M = 10 mA to 200 mA.

d. t_{MD} = 200 µs maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIA (JANS) and table E-VIB (JAN, JANTX and JANTXV) of MIL-PRF-19500 and herein. Delta electrical measurements shall be in accordance with the applicable steps of table III herein.

4.4.2.1 Quality level JANS (table E-VIA of MIL-PRF-19500).

Subgroup	Method	Conditions
B3	4066	Condition A, T_C = +100°C; $t_p \leq$ 8.3 ms; V_R = rated V_R (see 1.3); six 8.3 ms surges; 1 surge/minute maximum. I_F (surge) = 50 A dc; I_O = 10 A dc.
B4	1037	25 percent rated $I_O \leq I_O$ applied ≤ rated I_O (see 4.5.2).
B5	1027	$I_F \geq$ 0.5 A dc at T_A = +25°C, for 96 hours, or adjusted as required by the chosen T_A to give an average lot at T_J = +275°C. For irradiated devices, include t_{rr} as an end-point measurement.
B6	3101	See 4.4.1 except $t_H \geq$ 500 ms.

4.4.2.2 Quality levels JAN, JANTX and JANTXV (table E-VIB of MIL-PRF-19500).

Subgroup	Method	Conditions
B2	4066	Condition A, T_C = +100°C; $t_p \leq$ 8.3 ms; V_R = rated V_R (see 1.3); six 8.3 ms surges; 1 surge per minute maximum. I_F (surge) = 50 A dc; I_O = 10 A dc.
B3	1037	I_O (see 4.5.2).
B4		Not applicable.
B5	3101	See 4.4.1 except $t_H \geq$ 500 ms.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500 and herein. Delta electrical measurements shall be in accordance with the applicable steps of table III herein.

Subgroup	Method	Conditions
C2	2036	Test condition A, weight = 10 pounds (4.54 Kg), t = 15 seconds.
C6	1037	I_O (see 4.5.2).

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500. Delta electrical measurements shall be in accordance with the applicable steps and footnotes of table III herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 DC intermittent operation life. A cycle shall consist of an "on" period, when forward current is applied suddenly, not gradually, to the device for the time necessary to achieve an increase (delta) case temperature of +85°C +15°C, -5°C followed by an "off" period, when the current is suddenly removed for cooling the case through a similar delta temperature. Auxiliary (forced) cooling is permitted during the "off" period only. Either forward current or "on" time, within specific limits, and "off" time may be adjusted to achieve the delta case temperature. Heat sinks shall only be used if, and to the degree necessary, to maintain test samples with the desired delta temperature tolerance. The heating time shall be such that 30 s ≤ $t_{heating}$ ≤ 180 s. The forward current may be steady-state dc, full-wave rectified dc, or the equivalent half-sine wave dc of the specified value. The test duration shall be the specified number of cycles. Within the time interval of 50 cycles before, and 500 cycles after, the termination of the test, the sample units shall be removed from the specified test conditions and allowed to reach room ambient conditions. Specified end-point measurements for qualification and quality conformance inspections shall be completed within 96 hours after removal of sample units from the specified test conditions. Additional readings may be taken at the discretion of the manufacturer.

4.5.3 Peak reverse power characterization. The testing to characterize P_{RM} shall be conducted in accordance with method 4065 of MIL-STD-750. The following details shall apply:

a. During the test, the voltage (V_{BR}) shall be monitored to verify it has not collapsed.

b. Any collapse in V_{BR} during or after the test, or rise in leakage current (I_R) after the test that exceeds I_{R1} in table I, shall be considered a failure to that level of applied P_{RM}.

c. Progressively higher levels of P_{RM} shall be applied until failure occurs on all devices within the chosen sample size to characterize each sublot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance 2/	3101	See 4.4.1	$Z_{\theta JX}$		2.5	°C/W
Forward voltage	4011	Condition B, $t_p \leq 400$ µs, duty cycle ≤ 2 percent pulse				
		I_F = 6 A	V_{F1}		1.0	V dc
		I_F = 12 A	V_{F2}		1.5	V dc
Reverse current leakage	4016	Condition A or B; V_R = rated V_R (see 1.3)	I_{R1}		250	nA dc
Breakdown voltage	4021	I_R = 1.0 µA dc	$V_{(BR)1}$			
1N6664, 1N6664R				100		V dc
1N6665, 1N6665R				150		V dc
1N6666, 1N6666R				200		V dc
Subgroup 3						
High temperature operation:		T_A = +150°C				
Reverse current leakage	4016	Condition A or B; V_R = rated V_R (see 1.3)	I_{R2}		75	µA dc
Forward voltage	4011	Condition B, I_{FM} = 6 A, duty cycle ≤ 2 percent (pulsed); $t_p \leq 400$ µs	V_{F3}		0.95	V
Low temperature operation:		T_A = -55°C				
Forward voltage	4011	Condition B, I_{FM} = 6 A, duty cycle ≤ 2 percent (pulsed); $t_p \leq 400$ µs	V_{F4}		1.1	V
Breakdown voltage	4021	I_R = 1.0 µA dc	$V_{(BR)2}$			
1N6664,1N6664R				100		V dc
1N6665,1N6665R				150		V dc
1N6666,1N6666R				200		V dc

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 4						
Reverse recovery time	4031	I_F = 0.5 A; I_R = 1 A; $I_{(REC)}$ = 0.25 A; di/dt = 85 A/µs minimum	t_{rr}		35	ns
Junction capacitance	4001	V_R = 10 V; f = 1 MHz; V_{SIG} = 50 mV (p-p) maximum	C_J		100	pF
Subgroup 5						
Not applicable						
Subgroup 6						
Surge current	4066	Condition A, T_C = +100°C; $t_p \leq$ 8.3 ms; V_R = rated V_R (see 1.3); six 8.3 ms surges; 1 surge per minute maximum; I_O = 10 A dc.		50		A

1/ For sampling plan, see MIL-PRF-19500.
2/ This test required for the following end-point measurements only:
Group B, subgroups 3, 4 and 5 (JANS).
Group B, subgroups 2 and 3 (JAN, JANTX, JANTXV).
Group C, subgroups 2 and 6.
Group E, subgroup 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification only.

Inspection	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 1			45 devices, c = 0
Thermal shock (liquid to liquid)	1056	20 cycles, except high temperature shall be 100°C and low temperature shall be 0°C.	
Temperature cycling (air to air)	1051	500 cycles, condition C. -65°C to +175°C.	
Hermetic seal	1071		
Electrical measurement		See table I, group A, subgroup 2 and table III, steps 1 and 2.	
Subgroup 2			22 devices, c = 0
Steady-state reverse bias	1038	Test condition A, t = 1,000 hours, T_C = +150°C, V_R = 0.8 of rated V_{RWM} (see 1.3).	
Electrical measurement		See table I, group A, subgroup 2 and table III, steps 1 and 2.	
Subgroup 3			
Not applicable			
Subgroup 4			Sample size N/A
Thermal impedance curves		See MIL-PRF-19500.	
Subgroup 8			45 devices
Peak reverse power	4065	P_{RM} shall be characterized by the supplier and this data shall be available to the Government. Test shall be performed on each sublot.	
Electrical measurement		See 4.5.3.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

TABLE III. Group B, C, and E delta electrical measurements. 1/ 2/ 3/ 4/ 5/

Step	Inspection	MIL-STD-750		Symbol	Limit	Unit
		Method	Conditions			
1.	Forward voltage	4011	Condition B, Duty cycle ≤ 2 percent (pulsed see 4.5.1); t_p = 8.3 ms (max)			
	1N6664, R, 1N6665, R, 1N6666, R		I_F = 6 A	ΔV_{F1}	±50 mV dc change from initial value	
	1N6664, R, 1N6665, R, 1N6666, R		I_F = 12 A	ΔV_{F2}	±50 mV dc change from initial value	
2.	Reverse current	4016	Condition A or B	ΔI_{R1}	100 percent or ±150 nA dc change from initial reading, whichever is greater.	
	1N6664, R, 1N6665, R, 1N6666, R		V_R = 100 V dc V_R = 150 V dc V_R = 200 V dc			

1/ Devices which exceed the table I limits for this test shall not be accepted.
2/ The delta electrical measurements taken during group B inspection for quality level JANS (table E-VIA of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroups 4 and 5, the measurements of steps 1 and 2 of this table shall also be taken.
3/ The delta electrical measurements taken during group B inspection for quality levels JAN, JANTX, and JANTXV (table E-VIB of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroup 3, the measurements of steps 1 and 2 of this table shall also be taken.
4/ The delta electrical measurements taken during group C inspection for all quality levels (table E-VII of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroup 6, the measurements of steps 1 and 2 of this table shall also be taken.
5/ The delta electrical measurements taken during group E inspection for all quality levels (table E-IX of MIL-PRF-19500) shall be as follows: In addition to the measurements specified for subgroups 1 and 2, the measurements of steps 1 and 2 of this table shall also be taken.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification).

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistics support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.


b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. The complete PIN, see 1.5 and 6.5.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

6.4 PIN construction example. The PINs for encapsulated devices are constructed using the following form.

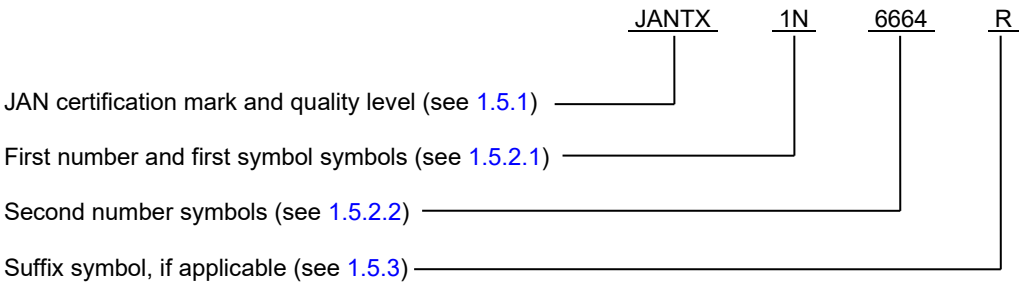

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.

6.5 List of PINs for encapsulated devices. The following is a list of possible PINs available on this specification sheet for encapsulated devices.

PINs for devices of the base quality level	PINs for devices of the "TX" quality level	PINs for devices of the "TXV" quality level	PINs for devices of the "S" quality level
JAN1N6664	JANTX1N6664	JANTXV1N6664	JANS1N6664
JAN1N6665	JANTX1N6665	JANTXV1N6665	JANS1N6665
JAN1N6666	JANTX1N6666	JANTXV1N6666	JANS1N6666
JAN1N6664R	JANTX1N6664R	JANTXV1N6664R	JANS1N6664R
JAN1N6665R	JANTX1N6665R	JANTXV1N6665R	JANS1N6665R
JAN1N6666R	JANTX1N6666R	JANTXV1N6666R	JANS1N6666R

6.6 Interchangeability information. The devices covered by this specification sheet are a TO-257 package version of the axial style package devices of MIL-PRF-19500/477.

6.7 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of marginal notations and relationship to the last previous issue.

Custodians:
Army − CR
Navy − SH
Air Force − 85
NASA − NA
DLA − CC

Review activities:
Army − AR, MI, SM
Navy − AS, MC
Air Force − 19

Preparing activity:
DLA − CC

(Project 5961−2024−062)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:49Z
Check the source to verify that this is the current version before use.