INCH-POUND

The documentation and process conversion measures necessary to comply with this revision shall be completed by 27 October 2025.

MIL-PRF-19500/617F
w/AMENDMENT 1
29 June 2025
SUPERSEDING
MIL-PRF-19500/617F
28 May 2020

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER,
ULTRAFAST RECOVERY, DUAL (COMMON CATHODE OR COMMON ANODE, CENTER TAP),
TYPES 1N6672 THROUGH 1N6674, STANDARD AND REVERSE POLARITY,
QUALITY LEVELS JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, high voltage, ultra-fast recovery, power rectifier diodes in a dual die, center-tap configuration. Four levels of product assurance (JAN, JANTX, JANTXV, and JANS) are provided for each device type as specified in MIL-PRF-19500.

1.2 Package outline. The device package is a three terminal flange mount header configuration (TO-254AA, isolated) in accordance with figure 1.

1.3 Maximum ratings. Unless otherwise specified, T_C = +25 °C (for each diode).

Types	V_{RWM} I_D = 0.2 mA dc	I_{FSM} (1) t_P = 8.3 ms	I_F (1) (2) (3) T_C = 100 °C	t_{rr} (1)	$R_{\theta JC}$ (1)	$R_{\theta JA}$ (1)	T_{STG} and T_J
	V dc	A (pk)	A dc	ns	°C/W	°C/W	°C
1N6672, 1N6672R	300	150	15	35	2.0	40	−65 to +200
1N6673, 1N6673R	400	150	15	35	2.0	40	
1N6674, 1N6674R	500	150	15	35	2.0	40	

(1) Each individual diode.
(2) Derate linearly at 150 mA/°C from +100 °C to +150 °C.
(3) Total package current is limited to 30 A dc.

1.4 Primary electrical characteristics. Primary electrical characteristics are not applicable to this specification sheet.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN brand and quality level designators for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", "JANTXV" and "JANS".

1.5.2 Device type. The designation system for the device types of diodes covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The diodes of this specification sheet are identified by the first number and letter symbols "1N".

1.5.2.2 Second number symbols. The second number symbols for the diodes covered by this specification sheet are as follows: "6672", "6673", and "6674".

1.5.3 Suffix letter. The suffix letter "R" is used on devices that are reverse polarity (see figure 1). No suffix letter is used on devices that are of standard polarity.

1.5.4 Lead finish. The lead finishes applicable to this specification sheet are listed on QML-19500.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 – Semiconductor Devices, General Specification for.


DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 – Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.

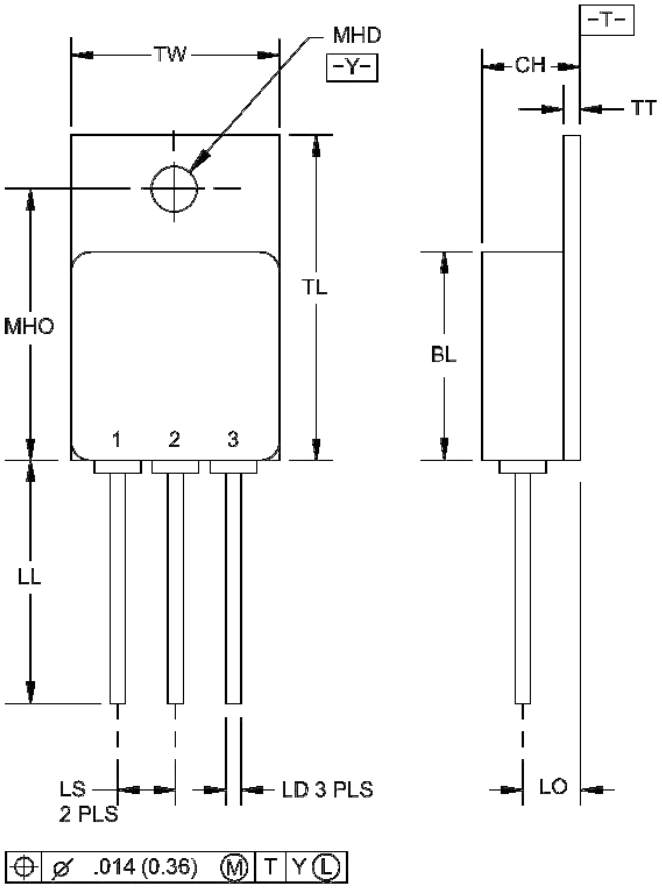

Symbol	Dimensions			
	Inch	Inch	mm	mm
	Min	Max	Min	Max
BL	.535	.545	13.59	13.84
CH	.249	.260	6.32	6.60
LD	.035	.045	0.89	1.14
LL	.510	.570	12.95	14.48
LO	.150 BSC		3.81 BSC	
LS	.150 BSC		3.81 BSC	
MHD	.139	.149	3.53	3.78
MHO	.665	.685	16.89	17.40
TL	.790	.800	20.07	20.32
TT	.040	.050	1.02	1.27
TW	.535	.545	13.59	13.84


SCHEMATICS

1N6672, 1N6673, 1N6674



TERM 1 = ANODE 1
TERM 2 = CATHODE
TERM 3 = ANODE 2

1N6672R, 1N6673R, 1N6674R



TERM 1 = CATHODE 1
TERM 2 = ANODE
TERM 3 = CATHODE 2

NOTES:
1. Dimensions are in inches. Millimeters given for general information only.
2. Protrusion of ceramic eyelets included in dimension LL.
3. All terminals are isolated from case.

FIGURE 1. Dimensions and configuration of three terminal flange mount header package (TO-254AA isolated).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 herein.

3.4.1 Lead finish. Lead finish shall be solderable as defined in MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition requirements (see 6.2).

3.4.2 Lead formation. Where a choice of lead formation is desired, it shall be specified in the acquisition document (see 6.2). When lead formation is performed, as a minimum, the vendor shall perform 100 percent hermetic seal in accordance with screen 14 of table E-IV of MIL-PRF-19500 and 100 percent dc testing in accordance with subgroup 2 of table I herein on all devices that had its leads altered.

3.4.3 Lead isolation. Methods used for electrical isolation of the terminal feed through shall employ materials that contain a minimum of 90 percent ceramic AL_2O_3 or equivalent. Examples of such construction techniques are metalized ceramic eyelets or ceramic walled packages.

3.4.4 Polarity. Polarity and terminal configuration shall be in accordance with figure 1.

3.5 Marking. Devices shall be marked as specified in MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I and II).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E inspection. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not require the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.3 Screening (quality levels JANS, JANTX, and JANTXV only). Screening shall be in accordance with table E-IV of MIL-PRF-19500 and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen	Measurement for quality level JANS	Measurements for levels JANTX and JANTXV
3b (1) 3c	Surge current (see 4.3.1) Thermal impedance (see 4.3.2)	Surge current (see 4.3.1) Thermal impedance (see 4.3.2)
9	V_{F1} and I_{R1}	Not applicable
10	Method 1038 of MIL-STD-750, test condition A; t = 48 hours, V_R = 80 percent of rated V_R	Not applicable
11	V_{F1} and I_{R1}; ΔV_{F1} = ±0.1 V (pk); ΔI_{R1} = ±10 µA dc or 100 percent from the initial value, whichever is greater	V_{F1} and I_{R1}
12	Method 1038 of MIL-STD-750, test condition B; t = 240 hours, V_R = rated V_{RWM}, (see 4.3.3)	Method 1038 of MIL-STD-750, test condition A; t = 48 hours, V_R = 80 percent of rated V_{RWM}, (see 4.3.3)
13	Subgroup 2 of table I herein; V_{F1} and I_{R1}; ΔV_{F1} = ±0.1 V (pk); ΔI_{R1} = ±10 µA dc or 100 percent from the initial value, whichever is greater	Subgroup 2 of table I herein; V_{F1} and I_{R1}; ΔV_{F1} = ±0.1 V (pk); ΔI_{R1} = ±10 µA dc or 100 percent from the initial value, whichever is greater

(1) Thermal impedance shall be performed any time after temperature cycling, screen 3a. Quality levels JANTX and JANTXV do not need to be repeated in screening requirements.

4.3.1 Surge current. The surge current test shall be performed in accordance with condition A of method 4066 of MIL-STD-750. The following details shall apply: I_O = 0; $V_{RM(w)}$ = 0; I_{FSM} = see 1.3; six surges; T_A = 25 °C, t_p = 8.3 ms, one minute minimum time between each surge.

4.3.2 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3101 or 4081, as applicable, of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, t_H, t_{SW}, (V_C and V_H where appropriate). See table II, group E, subgroup 4 herein.

4.3.3 Power burn-in conditions. The power burn-in conditions shall be as follows: T_A = room ambient as defined in the general requirements of MIL-STD-750 (see 4.5). Adjust I_O or I_F to achieve T_J = 150 °C minimum.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500 and table I herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in 4.4.2.1 for quality level JANS and 4.4.2.2 for quality levels JAN, JANTX and JANTXV. Delta measurements, when applicable, shall be in accordance with table III herein.

4.4.2.1 Quality level JANS (table E-VIA of MIL-PRF-19500).

Subgroup	Method	Condition
B4	1037	T_A = room ambient as defined in the general requirements of MIL-STD-750 (see 4.5). I_F or I_O = 1.25 to 10 A.
B5	1027	For irradiated devices, include t_{rr} as an end-point measurement.

4.4.2.2 Quality levels JAN, JANTX, and JANTXV (table E-VIB of MIL-PRF-19500).

Subgroup	Method	Condition
B3	1037	T_A = room ambient as defined in the general requirements of MIL-STD-750 (see 4.5). I_F or I_O = 1.25 to 10 A. For irradiated devices, include t_{rr} as an end-point measurement.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-VII of MIL-PRF-19500. Delta measurements, when applicable, shall be in accordance with table III herein.

Subgroup	Method	Condition
C2	2036	Test condition A, weight = 10 pounds (4.54 kg), t = 15 seconds.
C5	4081	$R_{\theta JC}$ = 2.0°C/W.
C6	1037	T_A = room ambient as defined in the general requirements of MIL-STD-750 (see 4.5). I_F or I_O = 1.25 to 10 A for 6,000 cycles. For irradiated devices, include t_{rr} as an end-point measurement.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-IX of MIL-PRF-19500, and table II herein. Delta measurements, when applicable, shall be in accordance with table III herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Scope display evaluation. The reverse characteristics shall be inspected and evaluated in accordance with condition B of method 4023 of MIL-STD-750. The reverse breakdown characteristics shall be viewed on an oscilloscope with display calibration factors of 50 to 100 µA/division and 50 to 100 V/division. Reverse current over the knee shall be at least 500 µA. Each device may exhibit a slightly rounded characteristic and any discontinuity or dynamic instability of the trace shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance	3101	See 4.3.2	$Z_{\theta JX}$			°C/W
Breakdown voltage	4022	I_R = 500 µA dc, pulsed (see 4.5.1);	V_{BR}			
		1N6672, 1N6672R		300		V dc
		1N6673, 1N6673R		400		V dc
		1N6674, 1N6674R		500		V dc
Forward voltage	4011	Condition B, pulsed (see 4.5.1);				
		I_F = 10 A (pk)	V_{F1}		1.35	V dc
		I_F = 20 A (pk)	V_{F2}		1.55	V dc
Reverse current leakage	4016	Condition A or B; pulsed (see 4.5.1); V_R = 80 percent rated V_R (see 1.3)	I_{R1}		50	µA dc
Subgroup 3						
High temperature operation:		T_C = +100 °C				
Reverse current leakage	4016	Condition A or B, pulsed (see 4.5.1); V_R = 80 percent rated V_R (see 1.3)	I_{R2}		5	mA dc
Low temperature operation:		T_A = -65 °C				
Forward voltage	4011	Condition B, pulsed (see 4.5.1); I_F = 10 A (pk)	V_{F3}		1.45	V dc
Subgroup 4						
Scope display evaluation		See 4.5.2				
Reverse recovery time	4031	Condition B; I_F = .5 A, I_R = 1 A, I_{RR} = .25 A	t_{rr}		35	ns
Junction capacitance	4001	V_R = 10 V dc, f = 1 MHz, V_{SIG} = 50 mV (p-p) (max)	C_J		150	pF

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 5 Not applicable						
Subgroup 6 Forward surge current	4066	Condition A, mounting conditions in accordance with test method 1026 of MIL-STD-750, I_{FSM} = rated (see 1.3); six surges of t_P = 8.3 ms each at 1 minute minimum time between each surge. I_O = 0; $V_{RM(W)}$ = 0; T_A = +25°C;				
Electrical measurements		See table I, subgroup 2 herein, with the exception of $Z_{\theta JX}$.				
Subgroup 7 Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification and requalification only.

Inspection	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 1			22 devices, c = 0
Temperature cycling	1051	500 cycles, -65 °C to +175 °C.	
Hermetic seal	1071	Fine and gross leak.	
Electrical measurements		See table I, subgroup 2 and table III, steps 1 and 2. For irradiated devices, include t_{rr} as an end-point measurement.	
Subgroup 2			22 devices, c = 0
Steady-state dc blocking life	1048	t = 1,000 hours; V_R = 80 percent rated V_R	
Electrical measurements		See table I, subgroup 2 and table III, steps 1 and 2. For irradiated devices, include t_{rr} as an end-point measurement.	
Subgroup 4			Sample size N/A
Thermal impedance curves		See MIL-PRF-19500.	
Subgroup 5			22 devices, c = 0
Barometric pressure, (reduced)	1001	Condition C, pressure = 33 mm Hg; t = 1 minute (minimum); V_R = rated V_R (see 1.3); $I_R = I_{R1}$; R_{ISO} = 2.0 x 10^6 ohm maximum.	
Subgroup 6			
ESD	1020		
Subgroup 8			
Forward surge current	4066	See 4.3.1.	22 devices, c = 0
Electrical measurements		See table I, subgroup 2 herein.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.

TABLE III. Delta electrical measurements for groups B, C, and E. 1/ 2/ 3/ 4/ 5/

Step	Inspection	MIL-STD-750		Symbol	Limit	Limit	Unit
		Method	Conditions		Min	Max	
1.	Forward voltage change	4011	Condition B, I_{FM} = 10A, pulsed (see 4.5.1)	ΔV_{F1}	±0.1 V (pk) from previous measured value		
2.	Reverse current change	4016	Condition A or B, pulsed (see 4.5.1); V_R = 80 percent of V_{RWM} (see 1.3)	ΔI_{R1}	±10 µA dc or 100 percent from initial value, whichever is greater.		

1/ The delta electrical measurements taken during group B inspection for quality level JANS (table E-VIA of MIL-PRF-19500) for subgroups 4 and 5 shall include the measurements of steps 1 and 2 of this table.
2/ The delta electrical measurements taken during group B inspection for quality levels JAN, JANTX, and JANTXV (table E-VIB of MIL-PRF-19500) for subgroups 3 and 6 shall include the measurements of steps 1 and 2 of this table.
3/ The delta electrical measurements taken during group C inspection for all quality levels (table E-VII of MIL-PRF-19500) for subgroup 6 shall include the measurements of steps 1 and 2 of this table.
4/ The delta electrical measurements taken during group E inspection for all quality levels (table E-IX of MIL-PRF-19500) for subgroup 1 shall include the measurements of steps 1 and 2 of this table.
5/ Devices which fail the limits of table I herein shall not be acceptable.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).


c. Lead finish (see 3.4.1) and if applicable, any needed lead formation (see 3.4.2).

d. The complete PIN, see 1.5 and 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

6.4 PIN construction example. The PINs for encapsulated devices are construction using the following form.

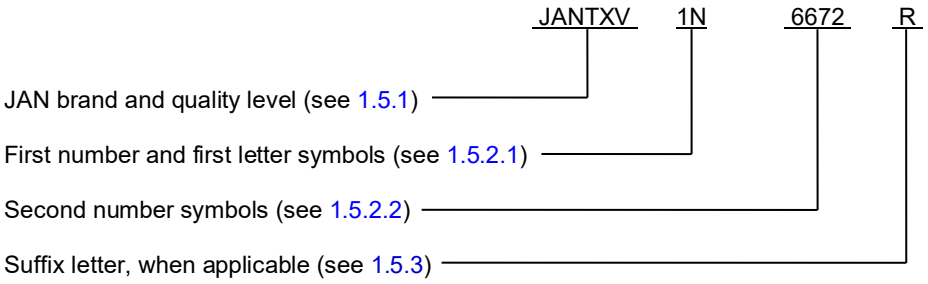

6.5 List of PINs. The following is a list of possible PINs for encapsulated devices available on this specification sheet.

Polarity	Base quality level	Quality level "TX"	Quality level "TXV"	Quality level "S"
Standard	JAN1N6672	JANTX1N6672	JANTXV1N6672	JANS1N6672
	JAN1N6673	JANTX1N6673	JANTXV1N6673	JANS1N6673
	JAN1N6674	JANTX1N6674	JANTXV1N6674	JANS1N6674
Reverse	JAN1N6672R	JANTX1N6672R	JANTXV1N6672R	JANS1N6672R
	JAN1N6673R	JANTX1N6673R	JANTXV1N6673R	JANS1N6673R
	JAN1N6674R	JANTX1N6674R	JANTXV1N6674R	JANS1N6674R

6.6 Interchangeability information. The device types covered by this specification sheet are a dual die version of the single die device types covered by MIL-PRF-19500/478. The package outline of this specification sheet is a TO-254AA package whereas the package outlines of MIL-PRF-19500/478 is a TO-204AA (formerly DO-4) stud package.

6.7 Request for new types and configurations. Requests for new device types or configurations for inclusions in this specification sheet should be submitted to: DLA Land and Maritime, ATTN: VAC, Post Office Box 3990, Columbus, OH 43218-3990 or by electronic mail at Semiconductor@dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.

6.8 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army − CR
Navy − SH
Air Force − 85
NASA − NA
DLA − CC

Review activities:
Army − AR, MI, SM
Navy − AS
Air Force − 19

Preparing activity:
DLA − CC

(Project 5961−2025−062)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:13Z
Check the source to verify that this is the current version before use.