[METRIC]

A-A-2868
January 25, 1994

# COMMERCIAL ITEM DESCRIPTION

## PAD, COLUMNAR

The General Services Administration has authorized the use of this commercial item description, for all Federal Agencies.

1. Scope. This Commercial Item Description covers single entry columnar pads used for accounting or analysis purposes.

2. Salient Characteristics.

2.1 Material. Pad paper furnished under this description shall be made from wood pulp conforming to the requirements of this document. Covers for columnar pads shall be made from flexible paperboard of the type commercially used for this purpose. Backing shall be made from chipboard or other suitable paperboard.

2.2. Regulatory Requirements. The contractor shall certify that the paper offered shall be made of a minimum of 20% postconsumer materials to be included in the overall minimum of 50% recovered paper, in accordance with Executive Order 12873, dated Oct. 20, 1993; and that the cover and backing shall include a minimum of 90% postconsumer recovered materials, in accordance with CFR 40 Part 250. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to General Services Administration Federal Supply Service, Engineering Branch, 26 Federal Plaza New York, N.Y. 10278.

Distribution Statement A:
Approved for public release;
Distribution is unlimited.

FSC 7530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

2.3 Labelling of recycled content. The following statement shall be printed on the front of the cover of each columnar pad: "The paper in this pad contains a minimum of 20% postconsumer materials included in the minimum 50% recovered paper, in compliance with Executive Order 12873, Federal Acquisition, Recycling, and Waste Prevention, dated Oct. 20, 1993. The cover and backing contain 90% postconsumer recovered materials, in compliance with the EPA Guideline for Federal Procurement of Paper and Paper Products Containing Recovered Materials."

3. Requirements

3.1 Physical Requirements.

The paper and backing shall meet the physical requirements of Table I.

TABLE I

| CHARACTERISTIC | REQUIREMENTS | | | TEST METHOD |
|---|---|---|---|---|
| PAPER | | | | |
| Basis Weight, g/m2 (24 X 36-500),+/- 5% | 26 (16#) | 32 (20#) | 39 (24#) | T 410 |
| Tear,grams,min. | | | | T414 |
| MD | 30 | 35 | 40 | |
| CD | 35 | 40 | 45 | |
| BACKING | | | | |
| Thickness, min. | 0.5mm (0.020 inch) | 0.5mm (0.020 inch) | 0.5mm (0.020 inch) | T 411 |

3.2 Color. The cover shall be tan, buff or green. The sheets shall be white, green or buff, as specified in the ordering data, paragraph 8. Rulings shall be brown and green, or red and blue.

3.3 Writing quality. When written on with a ball point pen or ink pen, the lines or characters shall be clear-cut and legible and shall not exhibit feathering, spreading, skipping, beading, visible discontinuities, fading of ink or penetration of ink to the opposite side.

3.4 Ruling and printing. Lines and numbers shall be produced by printing or machine ruling and shall conform generally to either Figure 1 or 2. Since these figures are representative of typical



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

columnar pads, slight deviations will be allowed to conform to commercial practices. Lines and numbers shall show no waviness or feathering. Unless otherwise specified, lines and numbers shall be printed or ruled on the top side of the sheet only.

3.4.1 Columns. The number of columns shall be as specified in the ordering data, paragraph 8. Unless otherwise specified, each column shall be unit ruled for 1,000,000. Unless otherwise specified, each pad shall have a name or description column which shall be not less than 3.8 cm (1 1/2") in length.

3.4.2 Directon of columns. Columns shall run perpendicular to the binding side on pads not punched for binders. On pads punched for binders columns shall run parallel to the binding side. Columns shall run perpendicular to the binding side when the pad has perforations and is punched for filing along the horizontal dimension.

3.4.3 Numbered columns. Pads with name or description columns shall be furnished with numbered columns. Columns shall be numbered from left to right with arabic numerals. The numbers shall be consecutive and shall be centered in the columns. The numbers may be enclosed by squares, circles or ovals, or may stand alone without adornment. When ruling and printing are specified for both sides of the sheets, the numbers shall be repeated on the reverse side in numerical order from left to right using the same numbers.

3.4.4 Numbered lines. Pads with name or description columns shall be furnished with numbered lines. Lines shall be numbered from top to bottom with consecutive arabic numerals. The numbers shall be consecutive and shall appear to the left of the name or entry space or first column, as applicable, and to the right of the last column. When ruling and printing are specified on both sides of the sheets, the numbers shall be repeated on the reverse side in numerical order using the same numbers.

3.5 Dimensions. The columnar pad dimensions shall be as specified in the ordering data, paragraph 8. The first dimension given shall be the binding dimension. A tolerance of 0.32 cm (+/- 1/8 inch) shall be allowed.

3.6. File punching. When specified, columnar pads shall be punched for filing. Holes shall be 0.64 +/- 0.16 cm (1/4 +/- 1/16 inch) in diameter. The holes shall be placed 0.95 +/- 0.16 cm (3/8 +/- 1/16 inch) edge to center. The hole spacing given between holes shall be from center to center, +/- 0.16 cm (+/- 1/16 inch). Holes shall be evenly punched through the whole pad. The number of holes, location and spacing shall be as specified in the ordering data, paragraph 8.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

3.7 Perforations. When punched pads are specified, sheets 40.6 cm (16 inches) or larger in the horizontal dimension shall be perforated in the upper right-hand corner to form a tear-out portion so that when the horizontal dimension is folded, the title space can be seen. The horizontal perforations shall be perpendicular to the vertical dimension of the pads, and the vertical perforations shall be perpendicular to the horizontal dimension of the pads. Perforations shall be even and uniform to allow for easy separation. There shall be no break-throughs along the perforation lines.

3.7.1 Fold columns. When pads are perforated, there shall be small unnumbered fold columns placed along the lines where the folds will occur, so that obliteration of entries will not result along these fold lines. These columns shall be not less than 0.32 cm (1/8 inch) nor more than 1.9 cm (3/4 inch) in width.

3.8 Assembly of pads. Not less than fifty sheets, cover and backing shall be securely fastened together along the binding edge with a strip of cloth or paper. Adhesion shall be accomplished by either glue or a plastic compound. The binding shall extend completely along the edge. The strip of cloth or paper binding shall overlap the cover and backing 0.95 +/- 0.32 cm (3/8 +/- 1/8 inch).

3.9 Workmanship. The pad paper shall be clean and free of holes, tears, wrinkles, creases, dirt, foreign particles or other imperfections that adversely affect appearance or serviceability. The pad cover and backing shall be clean, and without bent or broken corners. The edges to the columnar pads shall be evenly and smoothly cut, free from bent or broken corners or other imperfections that adversely affect appearance or serviceability.

4. Quality Assurance Provisions.
4.1 Inspection.

4.1.1 Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.1.2 Responsibility for Inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all the inspection requirements as specified herein. Except as otherwise specified, the contractor may utilize his own facilities or any other facilities suitable for the



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

performance of the inspection requirements specified herein, unless disapproved by the Government.

Sampling for examination and tests shall be performed in accordance with MIL-STD-105, using the plans specified in Table II, unless otherwise stated. For the purposes of sampling for end item testing, a lot shall consist of pads of one type, size, color and other available options submitted for inspection at one time. Unless otherwise specified, the sample unit shall be one columnar pad. Unless otherwise specified, every lot shall be tested. There shall be no failures to meet requirements.

TABLE II

| Examine | Inspection Level | AQL (%defect)/ Acceptance |
|---|---|---|
| Workmanship/Color/Writing quality/ General/ Ruling and Printing/Columns, Direction & Numbering/ Lines/File punching/Perforations/fold columns/Assembly/Dimensions | S-3 | 2.5 |
| Defects in Ruling and Directions of Columns: Color; Lines; Columns; Name or entry space; Numbered Columns; Numbered lines | S-2 | 2.5 |
| Physical Properties * | per Tappi | per Tappi |

*Sampling and Testing shall be according to Tappi.

5. Packaging, Packing, and Marking. Packaging, packing, and marking shall be as specified in the contract or order.

6. Applicable Documents and Document Sources. The following documents form a part of this Commercial Item Description to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply:

6.1 Tappi Standards.

Copies of Tappi Standards are available from the Technical Association of the Pulp and Paper Industry, PO Box 105113, Atlanta, Ga. 30348.

6.2 Federal Standards.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

Single copies of Commercial Item Descriptions, federal standards or specifications required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston; New York; Philadelphia; Washington, D. C.; Atlanta; Chicago; Kansas City, MO; Fort Worth; Houston; Denver; Los Angeles; San Francisco; and Auburn, WA.

6.3 Military Standards.

MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes, is available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Ave., Philadelphia, PA 19111-5094.

6.4 Code of Federal Regulations, Title 40, Protection of Environment.

Part 250, Guideline for Federal Procurement of Paper and Paper Products containing Recovered Materials. Copies of the U.S. Code of Federal Regulations may be purchased with a VISA, Master Card, or prepaid check through:
Government Printing Office, Washington, DC 20402
Phone (202) 783-3238

When ordering, ask for:
Title 40, Parts 190-250
Stock Number: 869-013-00-146-0

6.5 Executive Order 12873. Copies of the Federal Register dated Oct. 20, 1993, citing the Executive Order 12873 may be purchased with a VISA, Master Card, check or money order for $4.50 made payable to the Superintendent of Documents and mailed to:
New Orders, Superintendent of Documents, PO Box 371954, Pittsburgh,

Pa 15250-7954, or call (202) 783-3238. When ordering, cite: "Volume 58, No. 203, Federal Register, Pages 54911-54919".

7. Bleaching. To obtain an acceptable brightness, or color, in accordance with this document, a chemical bleaching process may be used. When specified in the ordering data, the bleaching process shall not include the use of chlorine, chlorine dioxide, hypochlorite, or other chlorine containing compound. Certification of compliance shall be made available upon request by the Government.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

8. Ordering Data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(1) Title, number, and date of this Commercial Item Description
(2) Basis Weight
(3) Dimensions
(4) Color of paper
(5) Color of rulings
(6) If sheets are to be printed or ruled on both sides
(7) Number of columns; units other than 1,000,000; when name or description column is not required
(8) If pads are to be file punched; the number, location and spacing of holes
(9) If non-chlorine bleaching is desired (see Paragraph 7)
(10) Packaging, packing and marking

MILITARY INTEREST:

NONE: DoD has no registered interest in revisions and amendments to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA-FSS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.

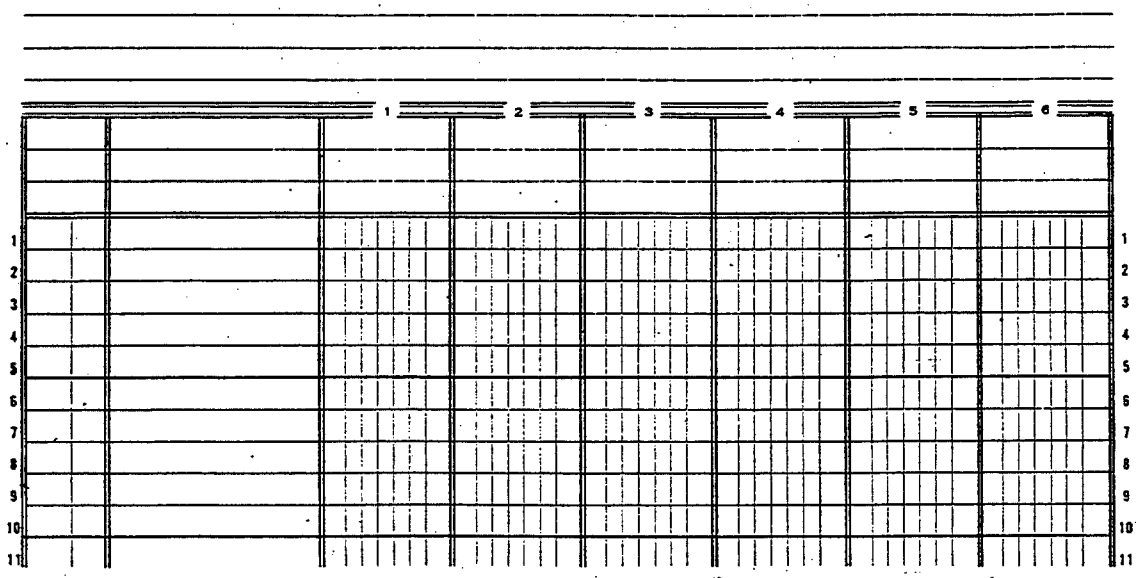



Figure 1. Example of columnar pad ruling with name space, numbered lines and numbered columns.

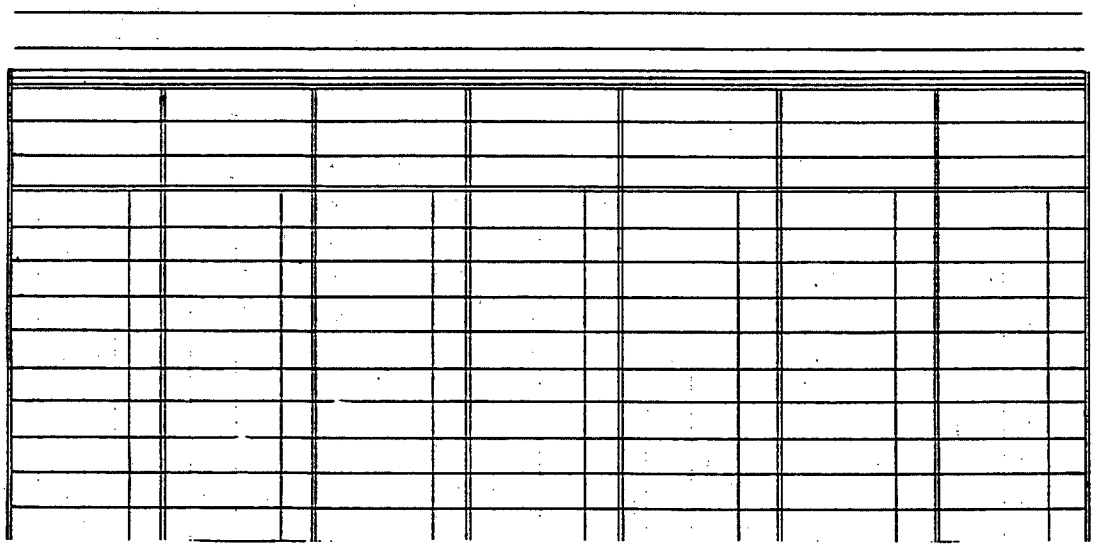


Figure 2. Example of columnar pad ruling without name space.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:26Z
Check the source to verify that this is the current version before use.