INCH-POUNDS

MIL-C-87010D(CG)
10 September 1991
SUPERSEDING
MIL-C-87010C(CG)
26 January 1989

MILITARY SPECIFICATION

COAT, WOMAN'S, DRESS, (COAST GUARD)

This specification is approved for use by the United States Coast Guard, Department of Transportation, and is available for use by all Department and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a polyester and wool dress coat.

1.2 Classification. The coats shall be of one type in the following sizes and lengths (see 6.2):

1.2.1 Sizes. 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 20, and 22.

1.2.2 Lengths. Short, regular and long.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, P. O. Box, Natick, MA 01760-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-280	- Thread, Cotton Gimp, Buttonhole
V-T-295	- Thread, Nylon
V-T-301	- Thread, Silk
CCC-C-438	- Cloth, Buckram, Woven and Non-Woven
DDD-L-20	- Label; For Clothing, Equipage, and Tentage (General Use)
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached, or Dyed)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-371	- Braid, Textile Tubular
MIL-C-823	- Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool
MIL-B-3461	- Buttons, Insignia, Metal, Uniform and Cap
MIL-C-15062	- Cloth, Flannel, Wool, Undercollar Cloth
MIL-P-15064	- Pads, Shoulder and Sleeve Head
MIL-C-15065	- Coat Fronts
MIL-C-16375	- Cloth, Wigan, Cotton
MIL-C-29137	- Cloth, Felt-Fabric Composite, Undercollar
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43718	- Cloth, Polyester; Polyester and Cotton; Polyester and Rayon for Pockets
MIL-C-44121	- Cloth, Twill, Polyester
MIL-C-44192	- Container, Shipping and Storage Coat (Hanger Pack)

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-2073-1	- DOD Materials Procedures for Development and Applications of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirement Codes

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specification, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issue of documents which are DoD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issue of the documents cited in the solicitation (see 6.2).

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads

(Application for copies of color cards should be addressed to the Color Association of the U.S., 343 Lexington Avenue, New York, NY 10016-0927).

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

AATCC Photographic Comparative Rating of Single and Double Needle Seams (Method 88B, Two photos)

(Application of copies should be addressed to the AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, NC 27709-2215).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Materials.

3.3.1 Basic material. The basic material for the coat shall be a 11.3 ounce polyester/wool serge conforming to type III, class 3 of MIL-C-823. The color shall be shade Blue 3362 and the piece number shall be 80353.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.2 Lining. The material for lining the coat, pockets and sleeves shall be rayon lining, 3.7 ounce, shade Blue 3351, conforming to class 1 of MIL-C-368. The piece number for the standard sample is 1533. As an alternate, the lining material may be a polyester twill cloth, Blue 3351, conforming to MIL-C-44121.

3.3.3 Collar interlining. The material for the collar interlining shall be cotton buckram, natural or bleached, conforming to type I, class 2 of CCC-C-438, except that the test for shrinkage shall be in accordance with test method 5580 of FED-STD-191 and the minimum stiffness requirement (inch pounds) shall be 0.015 in the filling.

3.3.4 Pocket reinforcement. The material for reinforcing the front pocket flaps and inside pockets shall be cloth, twill, polyester and cotton conforming to type I of MIL-C-43718. The color shall be black.

3.3.5 Undercollar cloth. The undercollar material shall be wool flannel conforming to MIL-C-15062 with an interlining of cotton buckram conforming to CCC-C-438, or a felt/fabric composite conforming to MIL-C-29137. The shade shall be black or a blue shade approximating the shade of the basic material and requirements for perspiration and crocking shall not apply. When felt/fabric composite is used the cotton buckram interlining is not required.

3.3.6 Wigan. The material interlining the sleeve bottoms shall be cotton wigan, 2.5 ounce, natural shade, conforming to type I of MIL-C-16375.

3.3.7 Hanger loop. The hanger loop for the coat shall be cotton tubular braid conforming to type III, class 1 of MIL-B-371 or shall be of the material specified in 3.3.2. The braid shall be black or shall match the lining or basic material and shall show good fastness to wet-dry cleaning and a crocking not lower than 3.0 when tested as specified in 4.4.1.

3.3.8 Coat front interlinings. The coat front interlinings shall conform to type XXI of MIL-C-15065. The interlinings shall be dyed black.

3.3.9 Shoulder and sleeve-head pads. The shoulder pads shall conform to type III, class 1 and the sleeve-head pads shall conform to type IV of MIL-P-15064.

3.3.10 Tapes.

3.3.10.1 Woven tape. The tape shall be cotton, preshrunk, conforming to class 1 or 2 and shall be of the following types and widths of DDD-T-86:

Type I - 5/8 inch wide stay tape for bridle at breakline of lapel
Type II - 3/16 inch wide stay tape for front neck gorge, back armhole and lower part of front armhole

3.3.10.2 Bias-cut. The stay tape for the shoulders, back neck, lapel, coat front, front and bottom edges and upper part of the front armhole shall be bias cut, 3/4 inch in width, twill cloth dyed or undyed, conforming to class 1 of MIL-C-43718.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.10.3 Tape, fusible. The tape for joining the front and facing shall be woven or non-woven, natural color, with a thermoplastic polyamide resin applied to the tape. The tape shall be 5/8 inch in width. Testing shall be as specified in 4.4.1.

3.3.11 Threads.

3.3.11.1 Thread, polyester core, covered. The polyester core, covered thread used for seaming and stitching shall be Ticket Nos. 50 and 70, 2 or 3 ply and Ticket No. 50, 2 or 3 ply for buttons and buttonholes conforming to MIL-T-43548. The color shall be Black AA, C.A. 66043 in accordance with DOD Standard Shade for Sewing Threads. The polyester core, polyester covered thread is not allowed.

3.3.11.2 Basting thread. The thread for basting and tacking shall be a good commercial grade cotton, bleached or unbleached. A monofilament synthetic thread may be used for only those basting operations where the thread is required to be removed provided the garment is subsequently given a treatment by a cleaning agent in which the synthetic thread is soluble. When this thread is used, any residue remaining on the garment after the dry cleaning process shall be brushed off or removed.

3.3.11.3 Silk thread. The silk thread for machine stitching shall conform to type I, Ticket No. 0, 3-ply and for machine or hand felling shall conform to type III, Ticket Nos. A and C, 2-ply of V-T-301. The color shall be dyed Black AA, C.A. 66043 in accordance with DOD Standard Shade for Sewing Threads.

3.3.11.3.1 Silk thread alternates. The following nylon thread may be utilized as alternates for the operations indicated below:

a. For machine blind stitching and felling - nylon thread conforming to type III, size A/1 or AA/1 of V-T-295.
b. For hand felling - nylon thread conforming to type IV, size A/2 or C/2 of V-T-295.
c. For padding lapels and collars - nylon thread conforming to type III, size 000 of V-T-295.

3.3.11.4 Colorfastness. The dyed thread shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-295, V-T-301 or MIL-T-43548. As a limit of acceptability, or when no standard is available, the dyed thread shall show a minimum of "good" colorfastness to wet-dry cleaning and light when tested as specified in V-T-295, V-T-301 or MIL-T-43548.

3.3.12 Gimp. The gimp for reinforcing the buttonhole shall be dyed Shade Black AA, CA. 66043 conforming to DOD Standard Shade for Sewing Threads and shall conform to type I or type II, size No. 8 of V-T-280.

3.3.12.1 Colorfastness. The dyed gimp shall show fastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. As a limit of acceptability, or when no standard sample is available, the dyed gimp shall show a minimum of "good" fastness to wet-dry cleaning when tested as specified in V-T-280.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.13 Buttons, insignia, metal. The buttons for the coat front and belt shall be type I, style 5, class A, 28-line, conforming to MIL-B-3461. The buttons for the flaps shall be 22-line conforming to the above. The buttons for the belt and flaps shall be furnished with 15/16 inch long bodkin toggles.

3.4 Label. Each coat shall have a combination personal/size/identification-/instruction label conforming to type VI, classes 10 and 14 of DDD-L-20. The printing shall show fastness to dry cleaning and shall bear the following inscription:

NAME:
SERVICE NO:
COAT, WOMAN'S, DRESS (CG)
FIBER CONTENT: POLYESTER (55%) AND WOOL (45%)
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
STOCK NO: 8410-00-000-0000 (EXAMPLE)
SIZE: 14 R (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (If other than contractor)

DRY CLEAN ONLY

NOTE: The length (Short, Regular, or Long) may be abbreviated as S, R or L.

3.4.1 Size ticket. A commercial type size ticket shall be attached on the outside of the right front sleeve 2 to 3 inches from the bottom edge. The ticket shall be tacked on four corners by machine or hand (6 to 8 stitches per tack by machine or 2 to 4 stitches per tack by hand). The corners may be double perforated for ease in tacking. The ticket shall be made of suitable commercial cardboard and shall be legibly printed with the following information:

Size - 12 Regular (Example)

The lengths may be abbreviated as stated above.

3.5 Design. The coat shall be of conventional length, fully lined, princess style, single breasted with a four 28-line Coast Guard button closure, with two outside pocket flaps, shawl collar, set-in sleeves, two button waist belt and two horizontal inside pockets (see Figure 1).

3.5.1 Figures. Figure 1 and 2 are furnished for information purposes only. Any inconsistencies between the specification and the figures, the specification shall govern.

3.6 Patterns. Standard patterns will be furnished by the Government to the contractor for use in cutting working patterns (see 6.3). The patterns allow 5/8 inch for all seams except as otherwise indicated in Table I. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.6.1 List of pattern parts. The component parts of coat shall be cut from the materials as specified and in accordance with the number of parts required for the manufacturing process as follows:

List of Pattern Parts

Material	Nomenclature of pattern parts	Cut Parts
Cloth, Basic Material	Front	2
	Side Back	2
	Back (Center)	2
	Facing (Front)	2
	Top sleeve	2
	Under sleeve	2
	Pocket flaps	4
	Belt	8
	Pocket facing (inside)	2
	Inside lower pocket welt facing	2
Lining	Front	2
	Side back	2
	Back (center)	2
	Top sleeve	2
	Under sleeve	2
	Pocket	2
Cloth, Felt/Fabric Composite or Cloth, Wool Flannel and Cloth Buckram, Cotton 1/	Undercollar	1
Cloth, wigan	Top sleeve	2
	Undersleeve	2
Template	Lapel/Collar finished shaper	-
	Lapel shaper	-
	Undercollar stand marker	-
	Collar shaper	-
	Finished belt shaper	-
	Finished flap shaper	-

1/ The undercollar may be cut from the felt/fabric composite cloth or a combination of the wool flannel and cotton buckram cloth (see 3.3.4).

3.7 Construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

SNSS printing or stenciling, a white paper label with the words "MIXED N

3.7.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the looper, that is the underthread, shall be on the inside of coat. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitching.

3.7.2 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked.

3.7.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7.4 Buttonholes. The buttonholes shall be eyelet end, square bar, cut before, reinforced with well worked over gimp pulled through to the underside and with the stitching securely caught in the fabric. The finished cut length of the buttonhole shall be 3/4 to 7/8 inch for the front buttonholes. The length of the buttonholes for the pocket flaps and belt, with only the eyelet cut out, shall be a 5/8 inch.

3.8 Manufacturing operation requirements. The coat shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification.

3.8.1 All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

3.8.2 Abbreviations in table of operations. The abbeviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR

1. Cutting.
a. Cut the coat in strict accordance with patterns which show size, placement of component parts, directional lines, and notches for the proper assembly of all parts.

b. All component basic material parts shall be cut from the same piece of material except the underply of pocket flaps and pocket welts which may be cut from ends. When cut from ends, they shall approximate the shade of the main assembly. The outside of the garment shall have a right hand twill line.

c. All component lining parts shall be cut from one piece of material except sleeve linings, which may be cut from ends. When cut from ends, they shall approximate the shade of the main assembly and shall be shade marked.

2. Replacement of defective components.
During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched components.

3. Marking.
a. All parts shall be marked or ticketed to insure a uniform shade, size and proper assembly throughout the garment.

b. The use of metal fastening devices for shade and size marking is permitted on the base fabric but is prohibited on the lining. When metal stapled tickets are used on the base fabric, the wire shall be aluminum.

c. The use of sewn-on tickets for shade marking is prohibited. Adhesive tickets which discolor or adhere to the material upon removal of the tickets are prohibited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. The use of ink pad numbering machine, rubber stamp, or pencil is acceptable provided the numbers do not show through the outside of the coat. Whenever possible, numbers shall be covered by the seam allowances.					
4.	Make coat front interlining. a. The coat front interlining shall conform to the requirements of 3.3.8.					
5.	Make dart. a. Form the dart on the front, face to face, placing edge of dart onto center of dart reinforcement piece, with reinforcement piece under the front side of the dart. The reinforcement piece shall be made of basic material or twill cloth specified in 3.3.4, cut 1-1/2 inches wide and the length shall be the same as the length of the dart.					
	b. Stitch dart 3/16 to 1/4 inch, catching reinforcement piece in the stitching. Press dart towards back and press the reinforcement piece towards the front of the coat.	301 or 401	SSab-1	10-14	50 50	50 70
	c. Top stitch 3/8 inch from folded edge, the length of the dart on the front and across the top to the top of the dart catching the reinforcement piece in the stitching.	301		10-14	50	50
6.	Make and attach pocket flaps. a. The pocket flaps shall consist of two plies of the basic fabric. Stitch the pocket plies together according to finished template, along the raw edges, face to face, leaving top edge open. Trim excess seamed edges and points and turn to finished position.	301 or 401	SSe-2(a)	10-14	50 50	50 70
	b. Press flaps smooth and flat.					
	c. Topstitch the sides and bottom edge of flap, 3/8 inches from folded edge.	301	SSe-2(b)	10-14	50	50
	d. Mark seamline on top edge of flap to conform to finished depth requirements of the finished template. The finished size and dimension shall be the same as the finished flap shaper template.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Stitch one buttonhole in each flap, with only the eyelet cut out. The center of the eyelet shall be 3/4 (+ 1/8) inch from pointed end. The eyelet shall be 1/8 to 3/16 inches in diameter.	Btnhl		50-54 per Btnhl		
	f. Tack ends of buttonhole stitching and gimp by machine using a 1/4 inch bartack. The purling of the buttonhole shall be on the outside of the coat.	Brtck		28per brtck	50	50
	g. Mark fronts for position of flaps as indicated by marks on pattern.					
	h. Position flaps on fronts with bottom finished edge facing upward. Stitch along marked stitch line, through a piece of reinforcing material on the inside of coat.	301	LSbl-2(a)	10-14	50	50
	i. Trim excess material to 1/8 inch from seam line. Turn flap down and stitch 3/8 inch from folded edge. The flap point shall be aligned with dart seam.	301	LSbl-2(b)	10-14	50	50
7.	Make belts.					
	a. The belts shall be made of two plies of the basic material. Stitch top and under ply of belt together, face to face, 1/4 inch from edge along three sides, leaving the back straight edge open.	301 or 401	SSe-2(a)	10-14	50 50	50 70
	b. Trim corners and points and turn to finished position, forcing out points and edges.					
	c. Top stitch the three sides of belt 3/8 inch from folded edges. Belt shall be in accordance with belt finished shaper.	301	SSe-2(b)	10-14	50	50
	d. Stitch one buttonhole in each belt, with only the eyelet cut out. The center of the eyelet shall be 7/8 (+ 1/8) inch from the pointed end. The eyelet shall be 1/8 to 3/16 inches in diameter.	Btnhl		50-54 per Btnhl		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Tack ends of buttonhole stitching and gimp by machine using a 1/4 inch bartack. The purling of the buttonhole shall be on the outside of the belt on the coat.	Brtck		28 per brtck	50	50
8.	Make backs.					
	a. The back shall consist of two center backs and two side backs.					
	b. Stitch side backs to center back, face to face, 5/8 inch from raw edge.	301	LSq-2(a)	10-14	50	50
	c. Stitch the two center backs together, face to face, 5/8 inch from edge.	301	LSq-2(a)	10-14	50	50
	d. Press center back seam allowance towards the left back. Press the side back to center back seam allowance towards the center back seam.					
	e. Top stitch the center back seam 3/8 inch on left center back. Top stitch the side back to center back seam 3/8 inch from seam on the center back panels.	301	LSq-2(b)	10-14	50	50
9.	Attach back to front.					
	a. Stitch the back to the front, face to face, 5/8 inch from raw edge. Press seams open and flat.	301	SSa-1	10-14	50	50
10.	Join shoulder seams.					
	a. Join shoulder seams face to face, 3/8 inch from edge, smooth and without distortion, working in proper fullness on back.	301	SSa-1	10-14	50	50
	b. Press shoulder seams open and flat, holding seam short.					
11.	Prepare front lining and facing.					
	a. Stitch dart in front lining together, face to face, 1/4 inch from edge. Press dart towards the side seam.	301	SSa-1	10-14	50	50
	b. Stitch front lining to front facing, face to face, with a 3/8 inch seam, matching the notches and distributing the fullness evenly. Stitching shall terminate at the shoulder seam notch. Press seam towards the side seam.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
12.	Make inside pocket and attach label. The finished inside pocket opening shall be 4 to 4-1/2 inches wide. The welt shall measure 3/16 to 1/4 inch wide and the pocket opening shall be positioned 9-1/2 (± 1/4) inches from the finished bottom of the coat for all sizes and lengths.					
	a. Turn under lower edge of welt facing and stitch to pocket piece. Turn under lower edge of other facing and stitch to other end of pocket piece. Position label on inside left pocket even with lower folded edge of facing and stitch all four sides of the label. The label shall face the wearer when worn.	301	LSd-1 and LSbj-1	10-14	50	50
	b. Position welt facing face down on inside of coat front facing and front lining and stitch with two rows of stitching 1/4 inch apart from line. Slit between the two rows of stitching. Tongue notch ends of opening. Care should be taken not to cut any of the stitching. The pocket opening shall extend into the facing 1/2 to 5/8 inches. The pocket shall be stitched through a reinforcement piece on the inside of the facing.	301	SSv-2	10-14	50	50
	c. Turn lower part of pocket welt facing with pocket piece and facing attached through the cut opening and raise stitch forming a welt.	301	SSv-1	10-14	50	50
	d. Turn upper part of pocket welt facing through the opening. Form a welt, turn up pocket to finished position and raise stitch securing welt and closing top of the pocket. Tack side of pocket opening.	301		10-14	50	50
	e. Stitch sides of pocket. The stitching shall extend across the pocket facings. An extra piece of the lining material 3 by 7 inches shall be stitched to the pocket when stitching the front of the pocket.	301	SSa-1	10-14	50	50
	f. Tack ends of pocket opening 1/4 to 3/8 inch through welt, facing, pocketing and pocket reinforcement piece.	301		10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	g. Operation "b" and "c" above may be accomplished with a double welt machine which stitches, cuts and turns welt edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine and the machine manufacturer's recommended pocket stay material may be used.	101		10-14	50	
13.	Join back lining.					
	a. Back lining shall consist of two center back and two side back sections.					
	b. Stitch side backs to center backs, face to face, 5/8 inch from edge. Press seams towards side seams.	301	SSa-1	10-14	50	50
	c. Stitch center backs together, face to face, 5/8 inch from edge. Press seam towards right back.	301	SSa-1	10-14	50	50
14.	Join fronts to back lining at side.					
	a. Join 5/8 inch from the raw edge the side back to front, face to face. Press seams open and flat.	301	SSa-1	10-14	50	50
15.	Stitch tape to fronts and back.					
	a. Stitch a bias tape to back neck. The ends of the tape shall clear the shoulder seam allowance with the top edge of the tape 1/8 to 1/4 inch from back neck. The bias tape should be stitched on each front along shoulder seam, 3/4 to 1 inch from undercollar edge to within 1/2 to 3/4 inch from armhole. Bias tape should be stitched on upper part of front armhole from 2 to 2-1/2 inches above armhole notch to within 1/2 to 3/4 inch from shoulder.	301	SSaa-1	10-14	50	50
	b. Stitch a 3/16 inch wide tape on armhole of foreparts approximately 1/4 to 1/2 inch from the side seam allowance to within 4 inches from shoulder seam allowance, holding tape taut.	301	SSaa-1	10-14	50	50
	c. Stitch a 3/16 inch wide tape to back of armhole approximately 1/2 to 3/4 inch from shoulder seam allowance to approximately 1 inch from the side seam allowance, holding tape taut.	301	SSaa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Press tapes.					
16.	Baste canvas interlining to fronts.					
	a. Canvas interlining shall extend full length of the coat fronts and beyond armholes and shoulders.					
	b. Baste a canvas interlining to each respective coat front at center from approximately 2 inches below shoulder edge to approximately 1-1/2 inches above bottom edge; keeping the interlining slightly full to retain shape and form of fronts.	Hand or Mchne			Comrcl	
	c. Baste around armhole and down back edge of canvas interlining, along breakline of lapel, and down front edge to bottom of coat.	Hand or Mchne			Comrcl	
	d. Tack seam allowance of front dart to canvas interlining from 1 inch below top of dart to approximately 3 inches from bottom of coat edge.	Hand or Mchne		2-4 4-6	70 70 or Comrcl	 70
	e. Stitch canvas interlining to shoulder and around armhole. Trim excess material.	301	SSa-1	10-14	50	50
	f. Position a 5/8 inch wide bridle stay tape adjacent to and behind breakline of each lapel from gorge area to 1-1/2 inches from bottom of lapel. Baste tape even and smooth for a distance of 3/4 to 1 inch from gorge area, then hold tape taut to work in not less than 1/4 inch or more than 3/8 inch breast fullness. The balance of tape shall be stitched without tautness or fullness. Tape and interlining shall be stamp marked to assure proper amount of fullness.	Hand or Mchne			Comrcl	
17.	Pad lapels.					
	a. Pad each lapel of coat to canvas interlining with 6 to 7 equally spaced rows of blindstitching. Fullness shall be equally distributed between rows of stitching in order to roll lapel.	103 or 306	SSm-6 or 7	6-8	50 50	 50
	b. Blindstitch both edges of bridle stay to canvas interlining.	103 or 306	SSm-2	6-8	50 50	 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
18.	Press fronts. Press front edge, lapel and bust on right and left forepart individually on a suitable shaped pressing block with a steam pressing machine to conform to the shape of the body.					
19.	Shape lapels and fronts. a. Position lapel shaper on the breakline and aligned with the shoulder point. Mark and shape lapels in accordance with lapel shaper. Trim lapel, front and bottom edges.					
	b. Trim canvas interlining approximately 3/16 to 1/4 inch in from lapel, front and bottom edges.					
	c. The canvas interlining may be cut diagonally at the bottom so that the edge is not caught in the tape stitching.					
	d. Mark turn up of bottom 1-1/8 (± 1/8) inches.					
20.	Join facing. Note: This operation may be performed after operation 22. If necessary, trim excess facing at center back after basting facing to front.					
	a. Stitch, 1/4 to 3/8 inch from raw edge, face to face, the top of the two facing pieces at the center back.	301	SSa-1	10-14	50	50
	b. Press seam open and flat.					
21.	Make and attach undercollar. a. Felt/fabric composite: Mark and stitch breakline in accordance with undercollar stand marker.	301	OSa-1	6-8	50	50
	b. Flannel and buckram: Mark and stitch breakline, joining flannel to buckram, in accordance with undercollar stand marker. Blind stitch with 7 or 8 rows of stitching and trim buckram so that the buckram does not show when undercollar is stitched to garment.	301 and 103 or 306	SSv-1 SSm-7	6-8 4-8	50 50 50	50 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Fell undercollar to neckline, matching notches. The undercollar shall overlap the raw edge of the neckline by approximately 3/8 inch.	Hand or Smlr Hand	LSa-1	6-8	A or C 50	
22.	Baste and join facings to coat front.					
	a. Match facing to front by aligning notches of facing to the shoulder seam and to the base of breakline. Baste facing to front distributing lapel and bust fullness. The facing shall be held taut (cupped) at the bottom of facing.	Hand or Mchne			Comrcl	
	b. Stitch undercollar to facing, commencing at center back and continuing down to the front simultaneously performing operation c.	301	SSe-2(a)	10-14	50	50
	c. Stitch a stay tape or fusible tape 3/16 inch from raw edge to the edge of coat front and facing, from the edge of undercollar down front and across bottom to a point 2 to 3 inches beyond back edge of facing. The tape on the lapel edge shall be sewn natural and smooth without material take-up and held taut from bottom of lapel breakline to bottom edge.	301	SSab-1 and OSa-1	10-14	50	50
	d. Blindstitch back edge of tape to interlining (stay tape only) on fronts and lapels.	103	SSm-1	3-4	50	50
	e. Press edges flat and smooth, pull basting threads and press edge seam open and flat. Pressing shall cause the fusible tape to adhere to the canvas interlining.					
	f. Trim around lapels, bottom corners and front edges. Turn facing to finished position, working out edges and bottom corners.					
	g. Turn up bottom of coat as marked and baste edge of hem.	Hand or Mchne			Comrcl	
	h. Baste (first basting) across and down lapels and front, and across bottom edge the width of facing.	Hand or Mchne			Comrcl	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	i. Baste facing along lapel fronts (second basting), approximately 1 inch from edge, along fronts to a point in line with top edge of flaps, holding lower corner of coat rolled in such a manner as to cause lower front edge of forepart to roll inward.	Hand or Mchne			Comrcl	
	j. Baste a row of stitching diagonally from lapel break to the gorge, placing fullness in lapel to allow lapel to roll.	Hand or Mchne			Comrcl	
	k. Baste along breakline of lapel, allowing fullness in facing, to permit lapel to roll.	Hand or Mchne			Comrcl	
	l. Baste back edge of facing (third basting)	Hand or Mchne			Comrcl	
23.	Tack facing to interlining.					
	a. Tack the inner edge of facing to the canvas interlining with one row of blindstitching from not more than 2-1/2 inches from shoulder seam to within 2 inches above bottom of coat.	Hand or 103 or 301	SSm-1	2-4 4-6 4-6	50 50 50	 50
24.	Fit and baste body lining to coat.					
	a. Baste lining fronts; commencing from the inner edge of facing approximately 3 inches above creased edge of coat, across bottom, up side seam (seam on seam) to approximately 4 inches below pit of armhole, then diagonally upward to the center of the shoulder seam.	Hand or Mchne			Comrcl	
	b. Baste lining back; pick up basting at pit of armhole at side seam; diagonally upward to center back neck edge, taking in excess material and forming a back pleat with the fold against the left or right back.	Hand or Mchne			Comrcl	
	c. Blindstitch complete bottom turn up of coat.	Hand or 103 or 306	EFl-1	6-10 6-8 6-8	A or C (silk) O O	 O (silk)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

does not show on the finished service hat

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Trim lining at armholes and shoulders. Bottom of lining may be trimmed where necessary.					
	e. Fold bottom edge of lining approximately 1/2 inch in from finished bottom of coat and baste allowing room for the felling operation.	Hand or Mchne			Comrcl	
25.	Make sleeves.					
	a. Baste wigan (top and undersleeve) to sleeve along forearm and backarm, or as an alternate, baste wigan to sleeve along bottom length of wigan piece. Bottom edge of wigan shall be 1/2 to 3/4 inch below turn up notch. Trim ends of wigan, if necessary. Join forearm seam of sleeve, face to face, 1/2 inch from edge, catching ends of wigan.	301	SSa-1	10-14	50	50
	b. Press seam open and flat holding seam short.					
	c. Join backarm seam of sleeve, face to face, 1/2 inch, catching ends of wigan.	301	SSa-1	10-14	50	50
	d. Press backarm seam open and flat.					
	e. Press turn-up of sleeve as indicated by notches.					
	f. Blindstitch top edge of sleeve turn-up to wigan.	103 or Hand	EFc-1	4-8	50 50	
26.	Make and attach sleeve lining.					
	a. Join the forearm seam of sleeve lining, face to face, 3/8 inch from edge, distributing fullness between notches.	301	SSa-1	10-14	50	50
	b. Join backarm seam of sleeve lining, face to face, 3/8 inch from the edge.	301	SSa-1	10-14	50	50
	c. The sleeve lining shall extend not less than 3/4 inch above top of the sleeve.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Tack forearm and backarm seam of sleeve lining to forearm and backarm seam of sleeves respectively, distributing lining fullness properly. The tacking shall extend from not more than 7 inches below top of sleeve to not more than 7 inches above creased bottom edge of sleeve.	Hand or 301		2-4 1/2 to 1-1/2 inch in length	50 50	 50
	Note: When tacking is done by hand, both ends of stitching shall be securely tacked with not less than 3 stitches.					
27.	Set sleeves.					
	a. Position sleeve to armhole according to notches and stitch 3/8 inch from raw edge, easing in sleeve around the cap.	301	SSa-1	10-14	50	50
	b. Press and shrink the fullness flat all around the armhole on a suitable shaped pressing buck, holding armhole seam short. Press seam towards sleeve.					
	c. Set shoulder pads in proper position and tack securely to coat.	Hand or 301		2-4 4-6	50 50	 50
28.	Baste and tack armhole.	Hand or Mchne			Comrcl	
	a. Baste around outside of front armhole placing lining, back end of shoulder and shoulder pad in proper place; continue the basting along shoulder seam to gorge area, distributing fullness of lining at armhole and leaving shoulder lining free on the underside.					
	b. Turn coat to lining side at shoulder and armhole; tack straight edge of each shoulder pad through sleeve armhole seam allowance.	Hand or Mchne		2-4 4-6	Comrcl	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Lap and baste back shoulder lining over front shoulder lining properly distributing fullness between neck gorge and end of shoulder at armhole. Baste balance of back armhole.	Hand or Mchne			Comrcl	
	Note: In lieu of basting shoulder linings and hand felling in 30c, the shoulder seam may be stitched by machine.					
	d. Tack all around armhole seam. Note: When armholes are tacked by machine, a loose but properly formed elastic stitch may be used, and when used the tacking operation 28e may be omitted. When armholes are tacked by hand, every other stitch from front notch, across top to end of shoulder pad shall be backstitched.	Hand or 301		2-4 10-14	50 50	 50
	e. Tack across base of armhole from sleeve notch on front to side seam.	301		4-6	50	50
	f. Trim away excess lining, interlining and shoulder pads.					
	g. Tack sleeve head wadding to armhole from front sleeve notch to back seam of sleeve. The sleeve head wadding shall be positioned with the folded edge adjacent to the edge of armhole, backing cloth side against sleeve and in such a manner as to cause it to fold on itself. The tacking shall be adjacent to the armhole seam and fullness shall be properly distributed. When armhole is tacked by machine, the sleeve head wadding shall be attached in the armhole tacking operation. When sleeve head waddings are tacked by hand, every other stitch shall be backstitched.	Hand or 301		2-4 10-14	50 50	 50
29.	Make hanger loop.					
	a. As an alternate to the braid, form a hanger loop by folding the lining material in half lengthwise with the raw edges turned in, face to face, and stitch 1/16 inch gauge. The finished hanger loop shall measure 3/16 to 1/4 inch wide.	301	EFp-2	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
30.	Complete felling.					
	a. Fell lining to armholes. When armholes are hand felled, backstitch pit of armholes from forearm seam to side seam. The sleeve lining shall be properly distributed and seams on seam with sleeve.	Hand or Mchne		6-10 6-8	A or C 50	
	OR					
	b. The sleeve lining may be stitched to the armhole on the inside from forearm seam of sleeve to the backarm seam across undersleeve.	301		10-14	50	50
	c. Fell lining at shoulder. See operation 28c for alternate machine method.	Hand		8-10	A or C	
	d. Fell lower opening of facing-lining assembly and across bottom of lining 5/8 to 3/4 inch from inner edge of facing.	Hand		8-10	A or C	
	e. Fell neck edge of lining to collar, forming a pleat in the center back. Attach hanger loop in center of collar, with the edge of hanger even with top folded edge of lining. The hanger loop opening shall be 1-3/4 (± 1/4) inches long.	Hand and 301		8-10	A or C and 50	50
	f. Fell bottom fold of sleeve lining to sleeve turn up. Fell underply of lining turn-up to coat hem.	Hand or Mchne		8-10 6-8	A or C 50	
31.	Finish fronts.					
	a. Press coat front edge and collar prior to removing edge basting and buttonhole operation.					
	b. Top stitch 3/8 inch from edge the front of coat, collar edge and across bottom width of facing.	301	SSe-2(b)	10-14	50	50
32.	Attach belts to coat.					
	a. Position belt onto front dart stitching and side back to center back stitching, with the pointed end 2 inches from the seam and stitch by machine or hand with the stitching superimposed onto the existing seam. When the belt is machine stitched, it shall be accomplished after the dart and backs are made. The eyelet shall be centered between the third and fourth button or buttonhole respectively.	Hand or Mchne		4-8 6-8	50 50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. With center of belt horizontal to bottom of coat, fold belts even with side seams and stitch belts face to face. Turn ends of belt under and stitch 3/8 inch from fold. Trim ends of belt 1/8 inch from stitch line.	301	SSa-1 and LSbj-1	10-14	50	50
	c. Position the stitch line in center of belt with side seam, tack top and bottom of belt to side seam. Turn pointed end of belt back over belt and tack point to belt. The belt must be kept straight and parallel to bottom edge of coat.	Hand		2-4	50	
33.	Make buttonholes.					
*	a. Stitch four buttonholes on right front in line with marks on patterns. The inside edge of the eyelet shall be 3/4 inch from the finished edge of the coat.	Button-hole		50-54 per buttonhole	50	50
	b. Tack ends of buttonhole stitching and gimp by machine using a 1/4 inch bartack. The purling of the buttonhole shall be on the outside of the coat.	Brtck		28 per brtck	50	50
34.	Clean coat.					
	a. Remove all basting.					
	b. All ends of stitching shall be trimmed and loose thread ends removed from the coat.					
Note:	Care shall be taken when trimming thread ends that damage to the fabric does not result.					
	c. Remove all spots and stains.					
	d. Remove all shade tickets without injury to the material.					
35.	Press coat.					
	a. Press edge of fronts, collar and bottom of coat on edge pressing machine.					
	b. Press right and left fronts on right and left breast machine respectively.					
	c. Sleeve shall be roll pressed.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	d. Press balance of fronts, side seams, and back on body machine.				
	e. Press collar on collar machine stretching outer edge of collar over shoulder area. Collar shall not be short nor too long.				
	f. Press armholes and shoulders on armhole machine. Shoulders may be pressed on a shoulder machine.				
	g. Press lapels. The lapels shall be rolled pressed into place.				
36.	Finish pressing.				
	a. Finish press lining smooth and flat.				
	b. Remove gloss, wrinkles, creases and pressing impressions from collar.				
	c. Touch up any areas missed by machine pressing.				
	d. Place coat on hanger until thoroughly dry.				
	e. Brush coat, removing foreign materials.				
	f. Attach size ticket (see 3.4.1).				
37.	Attach buttons.				
	a. Hand or machine sewn buttons shall have the thread ends securely tacked off with not less than two stitches and thread ends hidden.				
	b. All metal buttons shall be sewn with the eagle in upright position.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*	c. Mark and sew four 28-line metal buttons on left front corresponding to buttonholes on right front. The center of the buttons shall finish 3/4 inch from the finished front edge.	Hand or		4 per button double thread	50	
		101 or 301		14-16 per button	50	
				14-16 per button	50	50
	d. Insert back of 28-line metal button with permanently attached bodkin type toggle through each eyelet in belt and secure by setting bodkin.					
	e. Insert back of 22-line metal button with permanently attached bodkin type toggle through each eyelet in pocket flap and secure by setting bodkin.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.9 Sizes and measurements. Unless otherwise specified, finished measurements of coat shall be listed in Table II. All measurements are expressed in inches.

*Table II - Sizes and Measurements of Finished Coat

	(A)	Length of coat(B)			Sleeve Length (C)			(D)
Size	Bust	S	R	L	S	R	L	Hip
6	35-1/2	23-3/4	25	26-1/4	16	17	18	38-1/2
7	36	23-7/8	25-1/8	26-3/8	16	17	18	39
8	36-1/2	23-7/8	25-1/8	26-3/8	16	17	18	39-1/2
9	37	24	25-1/4	26-1/2	16	17	18	40
10	37-1/2	24	25-1/4	26-1/2	16	17	18	40-3/4
11	38	24-1/8	25-3/8	26-5/8	16	17	18	41-1/2
12	38-3/4	24-1/8	25-3/8	26-5/8	16	17	18	42-1/4
13	39-1/2	24-1/4	25-1/2	26-3/4	16	17	18	43
14	40-1/4	24-1/4	25-1/2	26-3/4	16	17	18	43-3/4
15	41	24-1/2	25-3/4	27	16	17	18	44-1/2
16	43	24-1/2	25-3/4	27	16	17	18	45-1/4
18	45	25	26-1/4	27-1/2	16	17	18	47-3/4
20	47	25	26-1/4	27-1/2	16	17	18	49-3/4
22	49	25-1/4	26-1/2	27-3/4	16	17	18	51-3/4
Tolerance	± 3/4	± 3/8	± 3/8	± 3/8	± 3/8	± 3/8	± 3/8	± 3/4

NOTE: Bust and length measurements shall be taken with coat fully buttoned and placed smooth and flat. Hip measurement shall be taken with coat unbuttoned, inside face down, spread smooth and flat.

A. Bust - Twice the measurement taken across front at the base of armhole from folded edge to folded edge.

B. Length of coat - Measurement taken from the base of undercollar (seam), down center back to bottom of coat.

C. Sleeve length - Measurement taken from the base of armhole, along inseam to bottom of sleeve.

* D. Hip - Twice the measurement taken from the center back seam to the front finished edge. The track of the measurement line shall be taken along five reference points. Each point shall be located 4 inches up from the bottom of the coat, along the seams and following the contour of the finished bottom hem.

3.9 Workmanship. The finished coats shall conform to the quality of product established by this specification. As a final step in the contractor's production control plan before formation of a lot, each dress coat (after pressing but prior to packaging) shall be buttoned on a model form and examined for selected defects. A coat containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in section 4 and are indicated by an asterisk (*). The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examination and tests) as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, a certificate of compliance for the web tape stated in 3.3.10.3 and hanger loop requirements stated in 3.3.7 is acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.2 In-process inspection. Examination shall be made of the following operations to establish conformance to specified requirements. The contractor shall inspect a minimum of 30% of each bundle in the sewing lot. Whenever nonconformance is noted, the contractor shall inspect 100% of those bundles in in question, and corrections shall be made to the items affected, the lot in process and to the operation. Parts which can not be corrected shall be removed from production. The contractor shall establish inspection stations for the following defects.

a. Visual and dimensional examination of the working patterns to determine that they conform to the government patterns in all respects.

b. Visual and dimensional examination of the cut parts to determine that they are properly cut with respect to size, material directional requirements (warp and filling); that location marks and notches on the parts are located correctly; and that parts containing material defects and damages have been removed and replaced (Table I, operations 1 and 2).

c. Visual examination of cut small part operations to insure that they are produced in accordance with specification requirements.

d. Visual examination of pressed fronts to determine that pressing is performed correctly and proper pressing machine is used (Table I, operation 35).

e. Visual examination of collar gorge area to determine that the bridle tape is positioned correctly (Table I, operation 16f).

f. Visual examination of sleeves (prior to basting lining to armhole, side seams, and bottom of coat) to determine that sleeves are set uniformly with fullness at armhole distributed without pleats or puckers (Table I, operation 27a).

g. Visual examination of taped front and back armholes to determine that armhole tape is stitched correctly without any indication of a stretched back and front armhole (Table I, operation 15b and c).

4.4.2.1 In-process examination of coat fronts. The right and left coat fronts after stitching darts, and attaching pocket flaps, coat front interlinings and bridle tape shall be examined for the defects listed below. The lot shall be all pairs (matched right and left) of coat fronts submitted for inspection at one time. The sample unit shall be one pair of coat fronts (right and left). The inspection level shall be II and acceptable quality level (AQL's), expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Examine	Defect
Front interlining	
	a. Not attached or positioned as specified.
	b. Basting and tacking of front to interlining omitted or insecure.
	c. Padding of lapel not blind stitched with six rows of stitching with fullness on the interlining between each row of blindstitching.
Breast pocket flaps	
	a. One or more misaligned or not parallel with front edge.
Bridle tape	
	a. Omitted, not held taut causing breakline to be stretched.
	b. Misplaced at gorge:
	- More than 3/8 inch behind lapel breakline.
	- Onto or extending beyond breakline on lapel side.
	c. Misplaced at bottom lapel breakline:
	- More than 5/8 inch behind breakline.
	- Onto or extending beyond breakline on lapel side.
	- Not within 1 to 1-1/2 inches from bottom of lapel.
	d. Tape and interlining not stamp marked for fullness of bridle.

4.4.2.2 In-process examination of fronts and backs after joining. The fronts and backs after joining shall be examined for the defects listed below. The lot shall be all joined fronts and backs submitted for inspection at one time. The sample unit shall be one joined front and back. The inspection level shall be II and the AQL's expressed in terms of defects per hundred units shall be 1.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Examine	Defects
Fronts and lapels	
	a. One or more not shaped in accordance with shaper pattern.
	b. Interlining of lapels, bottoms and front edges not trimmed as specified.
Right front	
	a. Not dressed from bottom notch to base of lapel.

4.4.3 Examination of the end item. Examination of the end item shall be in accordance with 4.4.3.1 through 4.4.3.4. The applicable acceptable quality levels (AQL's) shall be as indicated in 4.4.3.3. The sample unit shall be one finished coat. The lot size shall be expressed in units of coats. As part of the end item examination, the appropriate number of coats determined from the table below shall be measured for selective defect dimensions. The purpose of measuring is to determine conformance with the selective defect dimensionals requirements cited in this specification. The sample will be inspected for all end item characteristics as well as measured for the selective defect dimensional inspection. Additional selective defect dimensional measurements may be taken at any time in the remainder of the end item examination. The defects scored during this inspection will be included in the defects scored for the entire specified sample size of the end item examination.

The contractor will clearly identify the units subjected to this measurement inspection by stamping the identification/instruction label with a 1/2 inch stamp depicting a -D-, using indelible ink.

Sample size will be determined as indicated below:

Lot Size	Sample Size
Up thru 500	8
501 thru 3200	13
3201 thru 35,000	20

4.4.3.1 Visual examination. The coat shall be examined for defects in color, design, material, construction, workmanship and marking and the defects classified in accordance with the following list.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table III - Classification of defects

Defect	Major	Minor A	Minor B
A. GENERAL DEFECTS			
I. MATERIAL DEFECTS AND WORKMANSHIP DAMAGES			
a. Any hole, cut, tear, smash, burn, drill hole, run, scorched area or open place:			
1. On outside	X		
2. On inside (longest dimension in any direction)			
a. - Up to 1/4 inch inclusive			X
b. - More than 1/4 inch		X	
b. Knots and slubs (Knots and slubs shall be in accordance with the basic material requirements.)			
c. Misweave, area of no dye penetration, dye streak, missing yarn, broken yarn, visible mend, thin place or shade bar more than 1/4 inch (longest dimension in any direction) outside	X		
d. Loose yarn, coarse yarn, woven in waste (Visible at 3 feet) more than 1/2 inch (longest dimension in any direction)		X	
e. Permanent fold, pleat or crease in cloth (when caught in seaming or stitching) on outside	X		
f. Needle chew:			
1. On outside;			
(a) - up to 1/4 inch inclusive		X	
(b) - more than 1/4 inch	X		
2. On inside;			
(a) - up to 1/2 inch inclusive			X
(b) - more than 1/2 inch		X	
II. SHADED PART			
a. On outside:			
1. Variation in shade between two or more parts (except parts cut from ends)	X		
2. Variation in shade within a part (except parts cut from ends)	X		
3. Parts cut from ends badly shaded or unevenly shaded			X
b. On inside:			
1. Any lining part badly shaded (except sleeve lining)			X
2. Sleeve lining parts badly shaded or pair not matching each other			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
III PRESSING			
a. Omitted or poorly pressed	X		
b. Excess gloss			X
c. Edges bulky, i.e., not pressed solid			X
d. Lapel not roll pressed as specified			X
e. Sleeve not pressed as required			X
f. Armhole stretched		X	
g. Armhole or shoulder not blocked		X	
h. Lining (except sleeve linings) not finish pressed			X
i. Dart not pressed as specified		X	
j. Collar breakline not corresponding with breakline stitching			X
k. Collar breakline extending beyond undercollar			X
l. Wrinkles, creases or pressing impressions not removed			X
m. Any required seam not pressed open or not pressed smooth and flat for more than 1/2 inch			X
n. Finished pressed width of lapel not uniform (i.e., one side finishing 1/4 inch or more than other when measured across upper portion of horizontal from forced out edge to lapel crease line)		X	
o. Improper pressing, i.e., pleat, pressed fold or crease (on outside)		X	
IV CLEANNESS			
a. Any spot or stain on outside visible at 3 feet (longest dimension in any direction):			
1. Up to 3/8 inch inclusive			X
2. More than 3/8 inch up to 3/4 inch inclusive		X	
3. More than 3/4 inch	X		
b. More than 3 thread ends not trimmed to 1/4 inch or less on outside		X	
c. More than 5 thread ends not trimmed to 1/2 inch or less on inside			X
d. Two or more shade or size marking or tickets not removed			X
e. Any size or shade marking or residue on outside score as spot or stain			
f. Loose thread ends not removed from coat			X
g. Basting thread not completely removed from coat			X
V COMPONENT AND ASSEMBLY			
a. Any component part or operation omitted (Unless otherwise classified herein)	X		
b. Any component not as specified	X		
c. Any component part tight, twisted, distorted, pleated or full (unless otherwise classified herein)	X		
d. Any operation not as specified (unless otherwise classified herein)	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X	
VI CUTTING			
a. Any component part not cut in accordance with specified pattern, directional line on pattern or in accordance with specification requirements	X		
b. Twill line of any outside part not running in right hand direction	X		
VII. SEAMS AND STITCHING			
a. Accuracy of seaming:			
1. Seam puckered (on outside) (When examined at a distance of 3 feet and compared with the AATCC photographic comparative rating Method 88B for seams, puckering is equal to or worse than a rating of 3)			
(a) - From 1/4 to 1/2 the length of seam			X
(b) - More than 1/2 the length of seam		X	
2. Seams pleated or twisted on outside	X		
3. Seams irregular or wavy (unless otherwise classified herein)	X		
4. Any part of coat caught in any unrelated operation or stitching (unless otherwise classified herein)	X		
5. Blindstitching, tacking or hand felling of armhole exposed on outside		X	
6. Machine felling or hand felling (other than around armhole) exposed on outside for a distance of 3/8 inch or more			X
7. Ends of stitching when not caught in another line of stitching or seam not finished or backtacked		X	
8. Ends of a continuous line of stitching overlapped less than 1/2 inch		X	
9. Thread breaks secured by stitching back of break less than 1/2 inch		X	
10. Wrong or varying shades of thread			
(a) on outside	X		
(b) on inside		X	
11. Needle perforations visible on outside		X	
b. Gage of stitching			
1. Stitching irregular, not within range specified, or varies more than 1/16 inch when no range is specified (score only when condition exists on more than 1/2 of the length of the seam)			X
2. Edge, top or raised stitching sewn too close to edge resulting in damage to cloth	X		

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
3. Seam allowance not as specified or varies more than 1/16 inch when range is not specified (score only when condition exists on more than 1/2 the length of the seam)		X	
c. Open seam (resulting from 2 or more skipped, broken runoff or missing stitches)			
1. On joining seams:			
a. -Less than 1/4 inch			X
b. -1/4 inch to 1/2 inch inclusive		X	
c. -More than 1/2 inch	X		
2. On inside: Machine felling and hand felling (other than hand felling around armhole)			
a. -More than 3/8 inch up to 2 inches inclusive		X	
b. -More than 2 inches		X	
3. On inside: Stitch type 301 and hand felling around armhole			
a. -Up to 2 inches inclusive			X
b. -More than 2 inches		X	
d. Raw edge (Classify any edge not finished as specified including any protruding edge on the outside of the coat as a raw edge)			
1. On outside:			
a. -Up to 1/8 inch inclusive			X
b. -More than 1/8 inch up to 1/2 inch inclusive		X	
c. -More than 1/2 inch	X		
2. On inside:			
a. -1/2 inch up to 1 inch inclusive			X
b. -More than 1 inch		X	
e. Seam and stitch type			
1. Not specified seam or stitch type	X		
2. Any line of stitching omitted or insecure	X		
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Looper thread or 401 stitch type on outside	X		
f. Stitch tension			
1. Loose tension resulting in a loose seam:			
a. -Up to 1/2 inch inclusive			X
b. -More than 1/2 inch up to 3/4 inch inclusive		X	
c. -More than 3/4 inch	X		

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

Defect		Major	Minor A	Minor B
	2. Loose tension on raised or edge stitching resulting in exposed loose thread		X	
	3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X		
	4. Loosely exposed loops of lower or top thread on edge, top, or raised stitching		X	
g.	Stitches per inch (score only when condition exists on more than 1/2 the length of the seam):			
	1. More than the maximum specified			X
	2. Less than the minimum specified:			
	a. -By one or two stitches			X
	b. -By three or more stitches		X	
h.	Runoff, skipped or broken stitch:			
	1. Joining seam - use open seam classification			
	2. Edge, top or raised stitching (more than 1/4 inch)		X	
i.	Bartack, backtack, tack or tacking (except buttonhole bartack):			
	1. Missing, insecure, misplaced, not serving intended purpose or not specified length or type		X	
	2. Loose stitch tension			X
VIII	BUTTONHOLES OR EYELET			
a.	Misplaced or not positioned as specified	X		
b.	Omitted, not specified type or not finished as specified	X		
c.	Uncut buttonhole (when applicable)		X	
d.	Ragged edge, i.e., yarns or thread end on inside of buttonhole not trimmed to less than 1/4 inch, incomplete stitching; stitching not securely caught in fabric		X	
e.	Broken stitch or two or more skipped stitches			X
f.	More than just the eyelet of buttonhole cut where specified			X
g.	Gimp omitted, uncut, finished length or diameter not as specified, or end of gimp not pulled through to underside on square bar type buttonholes (except on flaps)		X	
h.	Buttonhole stitching extending beyond bartack		X	
i.	Bartack missing, loose, or misplaced (not serving intended purpose)		X	
j.	Stitches per buttonhole, eyelet, or bartack less than specified by:			
	1. One to three stitches			X
	2. Four or more stitches		X	
k.	Flap buttonholes not specified type or size or cut as specified			X

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
IX BUTTON AND TOGGLE			
a. Omitted, broken or defective		X	
b. Out of horizontal or vertical alignment by:			
1. 3/16 inch to 3/8 inch inclusive			X
2. More than 3/8 inch		X	
c. Misplaced, loose, not attached as specified, insecurely sewn			X
d. Stitching not locked at end of cycle (tug at the thread end when accessible to determine if it will ravel)		X	
e. Type, size, color or finish not as specified			X
f. Tacking stitches omitted or insecure (hand sewn)			X
g. Button sewn with anchor and wings of eagle in other than upright position			X
B. COAT BUTTONED ON FORM			
Note: Coat should be buttoned on model form.			
X POSITION AND ALIGNMENT OF FRONT, BACK, BUTTONS AND BUTTONHOLES			
a. Top or lower button or buttonhole misplaced or not positioned as specified by;			
1. 3/8 to 1/2 inch inclusive	X		
2. More than 1/2 inch	*		
b. Button and buttonhole not aligned, causing bulge or twist on front	X		
c. Spacing between front buttonholes varying more than 1/4 inch		X	
d. Right front below button swings to the right or left, when measured as a straight line extension of the front edge by more than 1/2 inch			X
e. Back shorter or longer than front by more than 1/2 inch	X		
f. Right front rolling outward below bottom front button	*		
g. Front buttonhole position (from inside edge of eyelet):			
1. Less than 5/8 inch but not less than 3/8 inch, or more than 3/4 inch, but not more than 7/8 inch from edge		X	
2. Less than 3/8 inch or more than 7/8 inch from edge	X		
3. Unevenly spaced from edge by 1/8 inch or more			X

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
XI LENGTH OF BUTTONED FRONTS			
a. Right front shorter or longer than left front at bottom by:			
1. More than 1/8 inch up to 1/4 inch inclusive		X	
2. More than 1/4 inch up to 1/2 inch inclusive	X		
3. More than 1/2 inch	*		
b. Facing and front and bottom edges;			
1. Front rolling outward below bottom button	*		
2. Facing tight, short or twisted causing fullness or twist on fronts	X		
3. Front or bottom edge stretched, bulky or irregular			X
4. Bottom corner or right front misshaped or distorted			X
5. Facing full; lapel will not lie smooth and flat	X		
6. Facing exposed beyond front or bottom edge by more than 1/16 inch for a distance of more than 1 inch			X
7. Bust curve or waist supression not uniform on both fronts		X	
8. Right front edge indented opposite a butttonhole			X
XII POCKET FLAP			
a. Misshapen or distorted - any point varying from finished shaper by:			
1. 1/4 inch or more but less than 1/2 inch	X		
2. 1/2 inch or more	*		
b. Not uniform in size or shape, varying from matching part by:			
1. 1/4 inch or more but less than 1/2 inch		X	
2. 1/2 inch or more	X		
c. Out of alignment in any direction or misplaced at any point by:			
1. 1/8 inch to 1/4 inch inclusive		X	
2. More than 1/4 inch up to 1/2 inch inclusive	X		
3. More than 1/2 inch	*		
d. Flap			
1. Twisted or bulged when tacked and buttoned	X		
2. Full		X	
3. Bottom corner of flap curled upwards	X		
4. Stitching joining flap to front not caught through stay piece		X	
5. Buttonhole out of alignment with point at center of flap by more than 1/8 inch or not positioned as specified			X

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
6. Point at center of flap out of alignment from dart seam by:			
(a) - more than 1/8 inch up to 1/4 inch inclusive			X
(b) - more than 1/4 inch	X		
e. Inside lower pocket opening:			
1. Opening gapped by 1/4 inch or more or length of opening not as specified			X
2. Width of welt not as specified by more than 1/16 inch			X
3. End of facing not caught in cloth pocket seaming		X	
4. Tacking at ends of pocket opening omitted or insecure			X
XIII COLLAR, UNDERCOLLAR AND LAPEL			
a. Misshapen or distorted - any point varying;			
1. More than 1/4 inch with corresponding point on finished shaper	*		
2. 1/8 inch up to 1/4 inch inclusive with corresponding point on finished shaper	X		
b. Twisted, short, tight or long; i.e., causing curled edges, puckering, fullness or pleat on one or more collar and lapel parts or in seamline joining parts	*		
c. Edge stitching of front and collar missing, tight or full causing the front edge of coat, lapel or collar to be distorted, wavy or not laying smooth and flat	X		
d. Collar			
1. Seam of collar off center by more than 1/4 inch		X	
2. Undercollar exposed beyond collar edge by more than 1/16 inch for more than 1/2 inch			X
3. Collar rolling up above collar breakline by more than 1/8 inch	X		
4. Long, i.e., setting away from neck, or lapel rolling higher than 2 inches above top front button or buttonhole	X		
5. Tight at joining to gorge area or across back, causing fullness or pleats on lapel or across outside back	X		
6. Top collar full, having pucker or folds 1/8 inch or more from edge of undercollar		X	
e. Lapel			
1. Front part of coat exposed by more than 1/16 inch for a distance of 1/2 inch or more		X	

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
2. Lapel edge not fully forced out (i.e., having folds of more than 1/8 inch), or front part exposed on lapel edge		X	
3. Bridle tape not held taut causing breakline to finish flat	X		
4. Fullness (not smooth and flat)		X	
5. Bridle tape misplaced:			
(a) At gorge area;			
(1) - more than 3/8 inch up to 5/8 inch beyond lapel breakline	X		
(2) - more than 5/8 inch	*		
(3) - bridle tape basted onto or extending beyond breakline on lapel side	*		
(b) At 1-1/2 inches from lapel bottom;			
(1) - more than 5/8 inch up to 7/8 inch behind lapel breakline	X		
(2) - more than 7/8 inch	*		
(3) - bridle tape basted onto or extending beyond breakline on lapel side	*		
(c) Bridle tape end not within 1 to 1-1/2 inches from bottom of lapel		X	
f. Undercollar:			
1. Interlining pleated, affecting smoothness of top collar		X	
2. Interlining or undercollar tight causing pleat or puckers on undercollar of neck of coat		X	
XIII SHOULDERS			
a. Improperly joined or set, causing shoulder or back to twist	X		
b. Shoulder seamline curved towards back from normal position at armhole end by;			
1. More than 3/8 inch		X	
2. 1/4 inch up to 3/8 inch inclusive			X
XIV SHOULDER PAD			
a. Not properly set, causing shoulder to twist, pucker or bulge	X		
b. Misplaced, not serving intended purpose, i.e., too far back or too far forward, not completely or securely caught in armhole tacking	X		

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
XV ARMHOLE			
a. Stretched causing excessive fullness on back between shoulder and armhole	X		
b. Crooked or puckered seamline		X	
c. Tape or armhole tacking stitches visible on outside		X	
d. Armhole not tacked as specified		X	
XVI SLEEVE HEAD WADDING			
a. Not tacked to armhole as specified , omitted, tacking incomplete, insecure, misplaced or not serving intended purpose		X	
XVII SLEEVE			
a. Set improperly, sleeve hangs with break or twist	*		
b. Sleeve reversed, i.e., right sleeve set in left armhole	X		
c. Fullness misplaced, or concentrated in one area	X		
d. Tight at armhole, i.e., roll effect not present on front or back of sleeve	X		
e. Front edge of sleeve either too far front or too far back when measured from its normal hanging position by:			
1. More than 2 inches	X		
2. More than 1 inch up to 2 inches inclusive		X	
f. Lining too long, extends below bottom edge or bags below felling of sleeve hem by 1/2 inch or more			X
g. Wigan twisted, tight or pleated causing puckering on outside of sleeve		X	
h. Bottom edge of sleeve uneven by:			
1. 1/4 to 3/8 inch inclusive			X
2. More than 3/8 inch		X	
i. Tacking of sleeve lining seam to sleeve seam omitted, insecure or incomplete			X
j. Sleeve lining twisted, tight or short causing fullness or twist on outside of sleeve	X		
k. Bottom edge of wigan not extending to bottom edge of sleeve by more than 1/8 inch, or tacking on bottom turn up to wigan omitted or insecure			X
l. Sleeve lining seam out of alignment more than 3/4 inch with sleeve seam at armhole or at bottom of sleeve			X

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

incomplete closure of container flaps, loose

Defect	Major	Minor A	Minor B
XVIII FITTING			
a. Body lining:			
1. Tight, short or twisted causing fullness or twist on outside of coat	X		
2. Lining too long, exposed beyond bottom edge of coat		X	
b. Interlining:			
1. Tight, short or twisted causing fullness or twist on outside of coat	X		
2. Too full, causing front to have a wavy appearance or not lie smoothly	X		
XIX DART			
a. Omitted	X		
b. Dart not tapered to a point causing bulge on outside		X	
c. Corresponding dart unequal in length by more than 1/2 inch		X	
d. Fold not facing direction specified			X
e. Darts or pleats not uniformly positioned		X	
f. Not pressed flat			X
g. Length, depth, location or construction other than specified		X	
XX BOTTOM HEM			
a. Twisted, puckered or pleated		X	
b. Irregular in width by more than 1/4 inch			X
c. Finished width not within tolerance			X
d. Seam lines in hem turn-up not aligned with coat seam lines by more than 1/4 inch			X
XXI BELT			
a. Not attached or positioned as specified	X		
b. Misshapen, twisted or distorted or not according to finished template		X	

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
C. COAT SPREAD OUT FLAT ON TABLE			
XXII INSIDE POCKET			
a. Tacking on front edge of pocket to interlining omitted or insecure		X	
b. Width of opening of pocket not within tolerance specified			X
c. Opening gapped by more than 1/4 inch or welts overlapping by more than 1/16 inch			X
d. Reinforcement piece omitted, distorted, incorrect size, or misplaced		X	
XXIII HANGER			
a. Omitted or insecure		X	
b. Misplaced; 1/2 inch or more off center with center of back			X
c. Finished length or opening not as specified			X
d. End not secure or total length not as specified			X
XXIV LABEL			
a. Missing, incorrect or illegible	X		
b. Not attached as specified or location incorrect			X
c. Stitching through printing			X
XXV. SIZE TICKET			
a. Missing, incorrect, or illegible			X
b. Not securely tacked to right front sleeve			X
XXV LINING			
a. Felling on lower back edge of facing or bottom front end of lining omitted			X
b. Not securely tacked at side seam or shoulder seam			X
c. Twisted or full but not affecting smoothness on outside			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

plainly stamped or printed thereon and under these words shall be legibly

4.4.3.1.1 Model forms. The model forms (for the selected defects examination and as specified), shall be women's forms conforming to the measurements specified below. The coat size listed shall be examined on the appropriate model form size as specified below:

Coat size	Model form size	Model form measurements		
		Bust 1/	Waist 2/	Hips 2/
6,7,8,9,10	6	34	25	35
11,12,13,14	12	37	28	38
15,16,18	16	40	31	41
20,22	20	43-1/2	34-1/2	45

1/ Tolerance ± 1 inch
2/ Tolerance ± 1/2 inch

4.4.3.2 Dimensional examination. The coat shall be examined for defects in accordance with the following:

a. Any measurement deviating from nominal dimensions and tolerances specified in Table II shall be scored as a measurement defect.

b. Sleeves uneven in length with each other by 3/8 inches or more shall be scored as a measurement defect.

4.4.3.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units for visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
For visual examination in 4.4.3.1		
Major	1.0	III
Major, Minor A (combined)	6.5	III
Total (Major, Minor A, Minor B combined)	15.0	III
For dimensional examination in 4.4.3.2		
One class	4.0	S-3

NOTE: Selective defects are not acceptable. If a selective defect is found, the lot shall be rejected.

4.4.4 Packaging inspection. Packaging inspection of hanger packs shall be in accordance with MIL-C-44192. The occurrence of defects shall not exceed the applicable point value or defect limit specified.

5. PACKAGING

5.1 Preservation. Preservation shall be as specified in 5.1.1 (see 6.2).

5.1.1 Hanger packs. Coats shall be hung with fronts lapped and unbuttoned, on a 17 inch hanger and preserved as specified in the appendix of MIL-C-44192.

5.2 Packing. Packing shall be as specified in 5.2.1 (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.2.1 Hanger packs. Twelve, (12) coats of one size and length only, perserved as specified in 5.1.1 shall be packed in a type I container, using style A or B hanger bar in accordance with MIL-C-44192. No mixed sizes are permitted within the same container.

* 5.2.2 Palletization. When specified (see 6.2), coats, packed as specified in 5.2 shall be palletized in accordance with the appedix of MIL-C-44192 using pallet load pattern number 95.

* 5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129. When hanger pack containers are used, the container shall have marked on each side in bold, clear, red or blue lettering "THIS SIDE UP" with arrows pointing to the top of the container.

* 5.4 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES
(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The coat specified herein is part of the service dress uniform to be worn by female personnel of the Coast Guard.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Sizes and lengths required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1 and 2.2).
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quality, testing and approval of the first article.
e. When palletization is required (see 5.4).
f. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2.

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.
Serge, polyester/wool
Single breasted
Uniform, Coast Guard
Uniform, dress


Custodian:
Navy - NU

Review Activity:
Navy - CG
DLA - CT

Preparing Activity:
Navy - NU

Project No.8410-N752

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

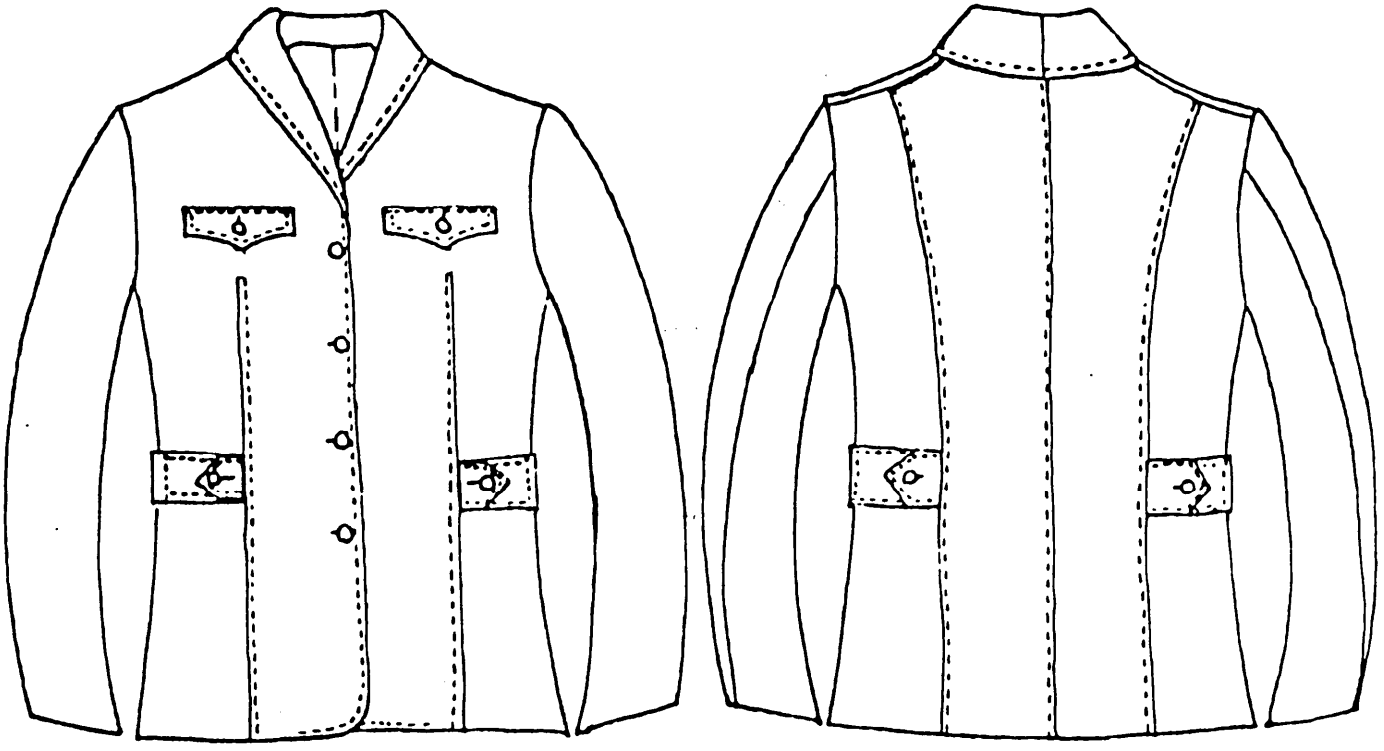

FRONT VIEW

BACK VIEW

FIG. 1 - COAT, WOMAN'S, DRESS (COAST GUARD)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
P.O. Box 59
Natick, MA 01760-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-87010D(CG)	COAT, WOMAN'S, DRESS (COAST GUARD)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20240-26104:522
Check the source to verify that this is the current version before use.