MIL-C-87014A(CG)
2 February 1982
SUPERSEDING
MIL-C-87014(CG)
1 March 1976

MILITARY SPECIFICATION

CAP, GARRISON, WOMAN'S (COAST GUARD)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for a polyester double knit garrison type cap.

1.2 Classification The garrison type cap shall be of one type only, and shall be procured in the following sizes as specified (see 6.2):

Schedule of Sizes

20, 20 1/2, 21, 21 1/2, 22, 22 1/2, 23, 23 1/2 and 24

2. APPLICABLE DOCUMENTS

2.1 Issue of documents The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

CCC-C-476 - Cloth, Bunting, Nylon; and Nylon and Wool
DDD-L-20 - Label; for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-29150 - Cloth, Double Knit, Polyester, Twill
MIL-T-43548 - Thread, Polyester, Cotton-covered

Beneficial comments (recommendations, additions, and deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-902 - Provisions for Evaluating Quality of Caps, Garrison, Women's

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

RULES AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Other publications The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Attn: Traffic Department, 1616 P Street, NW, Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, ILL 60606.)

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

(Application for copies of the AATCC Manual should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, Post Office Box 12215, Durham NC 27709.).

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.1 Guide sample Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials

3.3.1 Basic material The basic material for the cap, shall be of a double knit polyester twill conforming to MIL-C-29150. The material shall be dyed to match Blue Shade 3362. The colorfastness requirement to wet-dry cleaning specified therein shall not apply.

*3.3.2 Cloth, nylon bunting The nylon bunting cloth used for the sweatband of the cap (see table II, operation 1d), shall conform to type I, class A, of CCC-C-476. The cloth shall be dyed a suitable black shade approximating the shade of the fusible lining specified in 3.3.3, except that the colorfastness requirements specified therein shall not apply. The cloth shall show "good" fastness to laundering when tested as specified in 4.4.1.

3.3.3 Fusible lining The fusible lining material shall be dyed a suitable black shade and shall have a thickness of not greater than 0.030 inches. The lining fused to the basic material shall conform to the requirements specified in table I when tested as specified in 4.4.1.

Table I - Finished fusible requirements

Characteristics	Requirement
Appearance of fused sample:	
Initial	No evidence of bubbling, color change, or bleed through
After 5 launderings	No evidence of bubbling or delamination
Stiffness, inch lbs 1/	
Initial	
Warp	11×10^{-4} (min) 19×10^{-4} (max)
Filling	6×10^{-4} (min) 13×10^{-4} (max)
After 5 launderings:	
Warp	Shall retain a minimum of 75% of its original measured stiffness
Filling	Shall retain a minimum of 75% of its original measured stiffness
Peel strength:	
Initial	30 oz min.
After 5 launderings	25 oz min

1/ Six test samples shall be tested and averaged, three fusible side up and three with fusible side down.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.4 Thread The thread for seaming and stitching the caps shall be of a cotton-covered polyester, conforming to ticket numbers 50 and 70, 3 ply or 2 ply, of MIL-T-43548. The thread shall be dyed to approximate the shade of the basic material.

3.3.4.1 Colorfastness The dyed thread shall show fastness to light, laundering (after 3 cycles), and perspiration equal to or better than the standard sample when tested as specified in MIL-T-43548. A certificate of compliance will be acceptable for the stated requirements.

3.3.5 Labels

*3.3.5.1 Combination label Each cap shall have a combination indentification size and personal label conforming to type I, classes 4 and 10, of DDD-L-20, except that the inscription shall be as shown below. The size of the label shall be not more than 1 1/8 inches in height and 2 3/4 inches in length. The height of the lettering, except for the applicable size, shall be 1/16 inch. The lettering for size shall be not less than 1/4 inch. The markings shall show fastness to laundering.

NAME:	
SERVICE NO:	
NAME OF ITEM:	CAP, GARRISON, WOMAN'S
BASE FABRIC:	100% POLYESTER
CONTRACT NO:	DLA 100-00-0-0000 (EXAMPLE)
STOCK NO:	8410-00-000-0000 (EXAMPLE)
SIZE:	22 (EXAMPLE)

3.3.5.2 Instruction label An instruction label shall be packaged with the cap as specified in 5.1.1. The label shall be of a suitable lightweight white paper, measuring not less than 2 1/2 inches by 4 inches. The text shall be legibly printed in black indelible ink on one side of the label with the inscription as follows:

CAP, GARRISON, WOMAN'S

WASHING INSTRUCTIONS

WARNING: DO NOT USE HOT WATER OR BLEACH

Machine or hand wash using a mild soap or synthetic detergent in lukewarm water.

DO NOT WRING OR TWIST

Tumble dry in medium temperature or air dry.

Lines 1 thru 3 and all other caps shall not be less than 1/8 inch in height. All lower case lettering shall be not less than 3/32 inch in height. The statements "WARNING" and "DO NOT WRING OR TWIST" shall be underlined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.4 Design The cap shall be of a garrison style, consisting of a three piece crown lined with fusible material, a one piece apron lined with fusible material, and a one piece sweatband attached on the inside of the cap made from the nylon cloth. The apron shall be turned up on the outside of the cap, with the ends crossing at the front (see figure 1).

3.4.1 Figure Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Patterns Standard patterns will be furnished by the Government to the contractor for use in cutting working patterns (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way. The patterns allow 3/16 (± 1/16 inch) for all seams, except as otherwise indicated in table II.

*3.5.1 Pattern parts The component parts of the cap shall be cut from the material as specified, and in accordance with the number of parts required for the manufacturing process as follows:

Material	Nomenclature of Pattern Parts	Cut parts
Fused basic material	Crown side	2
	Crown top (gusset)	1
	Apron	1

3.6 Construction

3.6.1 Stitches, seams, and stitchings Stitch, seam, and stitching types specified in Table II shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the cap. Unless otherwise specified, topstitching or edgestitching shall be 1/16 inch from the edge.

3.6.2 Stitches per inch The minimum and maximum number of stitches per inch shall be as specified in Table II.

3.6.3 Thread breaks and ends of seams Ends of type 301 stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch. The end of type 401 stitching not caught in other seams or stitchings, shall have a 1/2 to 3/4 inch chain extending from it. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.7 Manufacturing operations requirements The cap shall be manufactured in accordance with operations listed in Table II. The contractor is not required to follow the exact sequence of operations as listed, provided the finished cap is identical with that produced by following the exact sequence of operations.

3.7.1 Shade and size marking The component parts of the cap shall be marked, ticketed, or bundled to insure a uniform shade and size throughout the cap. Any method may be used except:

1. Corrosive metal fastening devices.
2. Sew-on shade tickets.
3. Adhesive type tickets whose adhesive causes discoloration or adheres to the material upon removal of the tickets.

NOTE: The use of ink pad numbering machine, rubber stamp, or pencil is allowed, provided the numbering does not show on the outside of the cap.

3.7.2 Pressing All pressing as required in Table II shall be performed with a heated pressing iron or steam pressing machine.

* 3.7.3 Fusing The fusing of the lining to the back of the basic cloth shall be performed on a fusing press with the machine or warp direction of the fusible, whichever applies, parallel to the warp direction of the basic cloth, prior to cutting. Fusible and basic cloth parts may be cut in separate operations and fused in the manner specified, as long as the results obtained and methods for testing are equivalent to those for the cloth fused prior to cutting. The face side of the basic material shall be the twill side.

NOTE: Normal pressing equipment and hot head presses will not achieve the required results. The fusing equipment shall be capable of obtaining the appropriate temperature, pressure and dwell time settings recommended by the fusible material supplier. All fusing of the lining to the basic material shall be performed one layer at a time (stacking is not permitted) and in accordance with the fusible manufacturer's instructions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table II - Construction of cap

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the cap in strict accordance with patterns furnished, which show size, shape, directional lines for cutting, and notches for proper assembly of all component parts. b. Cut all component parts from the same piece of fused basic polyester double knit. c. Cut the nylon cloth on a bias, and turn the edges under for the sweatband to finish 1/2 (± 1/16) inch in width. The length shall vary according to the size required.					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-902 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking (see 3.7.1) All component parts cut from the fused basic cloth shall be marked, ticketed, or bundled to insure a uniform shade, size, and proper assembly throughout the cap.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table II - Construction of cap (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Assemble crown					
	a. Fold the top crown (gusset) piece in half in the length direction with the basic material face to face, and stitch 3/16 to 1/4 inch from folded edge at center tapering to a point 1/4 to 3/4 inch from each pointed end. Press flat with dart folded in position.	301 or 401	OSf-1	10-12	50 50	50 70
	b. Superimpose edge of top crown (gusset) piece to edge of one side crown piece face to face, with the notches of the side crown piece evenly aligned and the pointed ends of the top crown (gusset) piece placed at the notches. Stitch together 3/16 to 1/4 inch from the raw edge, notch to notch.	301 or 401	SSa-1	10-12	50 50	50 70
	c. Superimpose the opposite edge of the top crown (gusset) piece to edge of the second side crown piece face to face, with the notches of the side crown piece evenly aligned and the ends of the top crown (gusset) piece placed at the notches. Stitch together 3/16 to 1/4 inch from the raw edge, simultaneously catching the front and back ends of the side crown pieces.	301 or 401	SSa-1	10-12	50 50	50 70
	d. Notch side crown pieces at ends of gusset to side crown stitching, and continue stitching the front and back ends of the side crown pieces together.	301 or 401	SSa-1	10-12	50 50	50 70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table II - Construction of cap (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Pressing a. Press the outside of the cap neatly throughout. b. Remove all wrinkles, gloss marks, or pressing impressions on the outside of cap.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.8 The finished caps shall conform to the measurements as shown in Table III. All measurements and tolerances are expressed in inches.

Table III

Sizes and Measurements

Size	Center (Apron) Back A	Center (Apron) Front B	Side C	Height of cap D	Width of crown top E
20	1 1/2	1 5/8	2	3 1/4	3 1/8
20 1/2	1 5/8	1 5/8	2 1/8	3 3/8	3 1/8
21	1 5/8	1 3/4	2 1/8	3 3/8	3 1/4
21 1/2	1 5/8	1 3/4	2 1/4	3 1/2	3 1/4
22	1 3/4	1 7/8	2 1/4	3 1/2	3 3/8
22 1/2	1 3/4	1 7/8	2 3/8	3 5/8	3 1/2
23	1 3/4	1 7/8	2 3/8	3 5/8	3 5/8
23 1/2	1 7/8	2	2 1/2	3 3/4	3 3/4
24	1 7/8	2	2 1/2	3 7/8	3 7/8
Tolerance	± 1/8	± 1/8	± 1/8	± 1/8	± 1/8

NOTE: A thru E refer to Figure 1.

A. Measurement shall be taken from bottom folded edge of apron to top edge of apron back.
B. Measurement shall be taken from bottom folded edge of apron to top edge of apron front.
C. Measurement shall be taken at center of cap, from bottom folded edge of apron to top folded edge of apron.
D. Measurement shall be taken at center of cap, from bottom folded edge of apron to top folded edge of side crown.
E. Measurement shall be taken across the width of the top crown (gusset) piece at center of cap, folded edge to folded edge.

3.9 Workmanship The finished caps shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable point values specified in MIL-STD-902.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table II - Construction of cap (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Assemble crown (cont'd)					
	e. Spread open and flat the seam allowances of the front and back ends of the side crown piece, and topstitch 1/16 inch along both sides of each seam. Continue topstitching along each side of the top crown (gusset) piece, 1/16 inch from side to top crown seam, catching the seam allowance. The topstitching beyond the spread open seams of the front and back ends of the side crown pieces shall be crossed over to the top crown (gusset) piece.	301 or 401	SSz-3(b) and LSq-2(b)	10-12	50 50	50 70
	f. Overedge stitch the bottom edge of the crown.	503 or 504 or 505	EFd-1	8-10	50	50
5.	Assemble apron Turn under top edge 5/16 (± 1/16) inch, and double needle stitch 1/4 (± 1/16) inch gauge with the top row of stitching 1/16 inch from the folded edge.	301 or 401	EFa-2	10-12	50	50
6.	Attach apron to crown a. Overlap the ends of the apron piece, with left on top of right as indicated by notches.					
	b. Lap the side crown pieces over the apron, back to back 1/4 to 5/16 inch, and stitch all around the bottom edge of the crown 1/16 to 1/8 inch from the edge. The overlapped end of the apron shall cross at the center front of the cap.	301 or 401	LSa-1	10-12	50 50	50 70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table II - Construction of cap (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*7.	Attach sweatband and combination label					
	a. Align the bottom edge of the sweatband with the bottom edge of the crown around the inside of the cap. Stitch the sweatband to the cap with 2 rows of stitching, 1/16 inch from each folded edge, simultaneously inserting and catching the bottom edge of the combination label in the top edge of stitching on the right inside crown piece. Overlap the ends of the sweatband about 1 1/4 inch at the back of the cap, and turn the top end under 1/4 to 3/8 inch.	301 or 401	-	10-12	50 50	50 70
	b. Stitch the turned under end 1/16 inch from the folded edge.	301 or 401	- -	8-10	50 50	50 70
	c. Stitch the remaining three sides of label all around 1/16 inch from the edges. The label shall finish 3 1/2 (± 1/2) inches from the center back seamline. The printing shall be clearly visible. NOTE: The label stitching shall not show above the apron when worn.	301		10-12	50	50
8.	Finishing					
	a. All thread ends shall be trimmed, except for the required 1/2 to 3/4 inch chain extending beyond the end of type 401 stitching, and all loose threads removed throughout the cap.					
	b. All spots, stains, and shade tickets shall be removed.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection When required, the first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection Sampling for inspection shall be performed in accordance with MIL-STD-902.

4.4.1 Component and material inspection In accordance with 4.1, components and materials shall be inspected and tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. A certificate of compliance shall be submitted for the color and thickness of the fusible lining material (see 3.3.3). In addition, components and materials shall be tested for the characteristics specified in accordance with the referenced test methods of FED-STD-191 whenever applicable. Testing for all the requirements listed in Table IV is applicable to the sample unit. All test reports shall contain the individual values used in expressing the final result. For the cloth, nylon, the lot size shall be expressed in units of yards and the sample unit shall be 1/4 yard full width. For the fused (fusible and base fabric) material, the sample unit shall be as specified in 4.4.2.1. Two sample units shall be taken regardless of end item lot size. The lot for the cloth, nylon, shall be unacceptable if one or more units fail to meet the test requirement specified. The lot for the fused (fusible and base fabric) material shall be unacceptable if any unit fails to meet any test requirement specified. The sample size for testing the cloth, nylon, shall be as follows:

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table IV - Testing of components

Component	Characteristic	Requirement Paragraph	Test Method
Cloth, nylon	Colorfastness to laundering	3.3.2	5614 1/
Fusible material	Appearance of fused sample:		
	Initial	3.3.3	Visual
	After 5 launderings	3.3.3	AATCC-124-1973 2/ and visual
	Stiffness:		
	Initial	3.3.3	5206
	After 5 launderings	3.3.3	AATCC-124-1973 2/ and 5206
	Peel strength:		
	Initial	3.3.3	4.3.1.1
	After 5 launderings	3.3.3	AATCC-124-1973 2/ and 4.3.1.1

1/ Only the stain on the nylon fibers of the color transfer cloth shall be evaluated.
2/ One 15x15 inch specimen shall be laundered; wash temperature shall be 140° ± 5° F; drying shall be performed only after 5th washing; and the evaluation portion of the AATCC test method is not applicable. Pressing of the samples prior to evaluation is prohibited.

4.4.1.1 Apparatus and procedure for peel strength testing The apparatus to be used for this test shall be a commercial type spring scale accurate to 0.5 oz. The procedure to be followed in performing the test shall be as follows:

(1) Three 1x8 inch strips with the length parallel to the warp direction shall be cut (one each from the right, middle and left side of the sample) for peel strength testing.

(2) Separate the fusible from the basic fabric at the end of the 1 inch wide strips, for a distance of 2 inches.

(3) Secure the end of the basic fabric to a lightweight clamp-like holder 1 inch or more in width and approximately 1.0 ounce in weight. Hang the clamp from the end of the spring scale.

(4) Position the fusible in another clamp 1 inch or more in width, and pull the fusible downward in a vertical direction with a steady continuous motion until complete separation of the fusible from the sample. Minimum peel strength reading shall be taken as the lowest value appearing on the scale during testing. Failure occurs when the lowest value is less than the minimum required (see 3.3.3). Failure of any individual strip shall indicate failure of the sample.

NOTE: Care shall be taken not to jerk the fabric during the testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.2 In-process inspection

4.4.2.1 Sample size The size of the check sample shall be the total area of cloth fused at one time on each press in use for production of the caps.

4.4.2.2 Number of check samples One check sample (see 4.4.2.1) shall be taken following the fusing of each 100 yards of cloth, and tested as specified in 4.4.2.2.1 and 4.4.2.2.2.

4.4.2.2.1 Appearance of the fused check sample Each check sample shall be visually inspected for color change, bleed through, and bubbling. If there is evidence of any of these conditions present, the previously fused 100 yards shall be inspected and rejected if any of these conditions is found.

4.4.2.2.2 Peel strength The method of testing shall be as specified in 4.4.1.1. If the check sample fails the peel strength test, the previously fused 100 yards and the check sample shall be re-fused after the problem resulting in the faulty fusing has been corrected. If the check sample fails a second time, all fusing performed on that press since the last passable check test shall be rejected.

4.4.3 End item examination Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-902.

5. PACKAGING

5.1 Preservation packaging Packaging shall be level A or C (commercial) as specified (see 6.2).

5.1.1 Level A Each cap with an instruction label (see 3.3.5.2), shall be inserted into a snug-fitting, flat style, clear polyethylene film bag of 0.00125 inch thickness (± 20 percent tolerance). As an alternate, the bag may be fabricated from polyethylene film tubing or sheeting. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The open end of the polyethylene bag shall not be sealed, and shall extend approximately one inch beyond the end of the cap.

5.1.2 Level C (commercial) Caps shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be Level A, B, or C (Commercial) as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.2.1 Level A Thirty-five (35) caps, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type SF, class weather-resistant, grade V2s, size 1A, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather resistant, variety DW, grade V15c, of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of kraft paper, of any suitable commercial grade.

5.2.2 Level B Thirty-five (35) caps, of one size only and packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, grade 275, size 1A, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 200, of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of kraft paper, of any suitable commercial grade.

5.2.2.1 Weather-resistant fiberboard containers When specified (see 6.2), the shipping container shall be a grade V3c, W5c, or W6c fiberboard shipping container fabricated in accordance with MIL-B-17757, and closed in accordance with the appendix of the box specification.

5.2.3 Level C (Commercial) Caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
SIZE
QUANTITY

6. NOTES

6.1 Intended use The caps are intended for wear by female personnel of the Coast Guard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

6.2 Ordering data Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. Whether first article sample is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. Whether weather resistant fiberboard shipping containers are required for level B shipments (see 5.2.2.1).

6.3 Samples and patterns For access to samples and patterns, address the procuring office issuing the invitation for bids.

*6.4 Marginal notations The margins of this specification are marked with an asterisk to indicate where changes have been made from the previous issue. Since the government assumes no liability for inaccuracies in these notations, bidders and contractors are advised to evaluate the requirements of this document based on the entire contents irrespective of the marginal notations.


Custodian:
Navy - NU


Review Activities:
Navy - CG
DLA - CT

Preparing Activity:
Navy - NU

Project No. 8410-N367

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

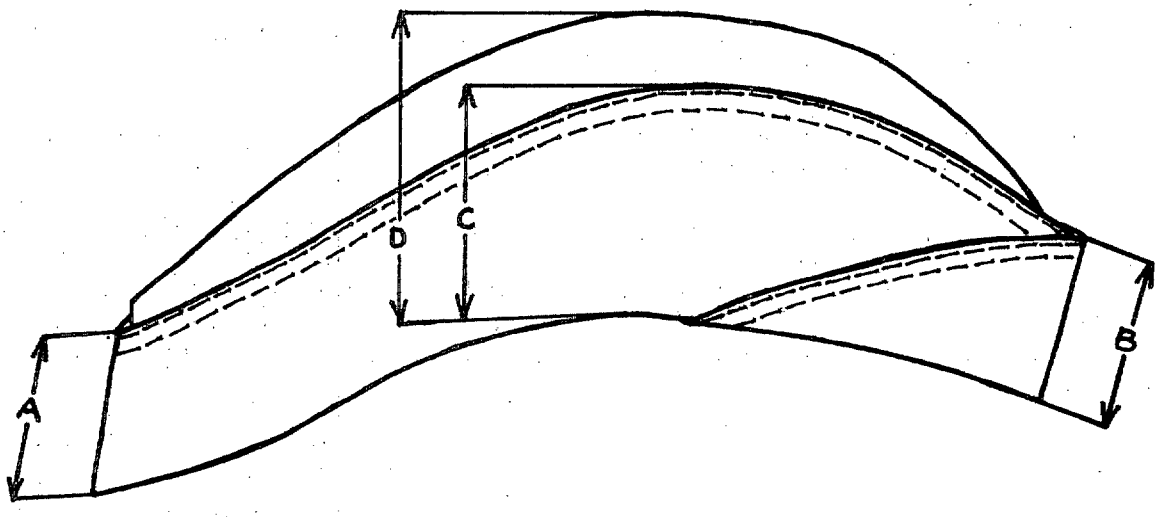



TOP VIEW OF TOP CROWN
(GUSSET)

FIGURE 1 - CAP, GARRISON, WOMAN'S (COAST GUARD)

☆U.S. GOVERNMENT PRINTING OFFICE: 1982—505-022/1011

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-87014A(CG) CAP, GARRISON, WOMAN'S (COAST GUARD)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer In Charge
Navy Clothing & Test Rsch Facility
Code 50
21 Strathmore Rd.
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.