INCH-POUND

MIL-C-87014B(CG)
21 MAY 1990
SUPERSEDING
MIL-C-87014A(CG)
2 February 1982

MILITARY SPECIFICATION

CAP, GARRISON, WOMAN'S (COAST GUARD)

* This specification is approved for use by the United States Coast Guard and is available for use by the Department of Transportation.

1. SCOPE

* 1.1 Scope. This specification covers the requirements for a polyester and wool garrison type cap.

1.2 Classification. The garrison type cap shall be of one type only, and shall be procured in the following sizes as specified (see 6.2):

Schedule of Sizes

20, 20-1/2, 21, 21-1/2, 22, 22-1/2, 23, 23-1/2 and 24

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

* NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
CCC-C-476	- Cloth, Bunting, Nylon, and Nylon and Wool
DDD-L-20	- Label, for Clothing, Equipage, and Tentage (General Use)

MILITARY

* MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
* MIL-C-823	- Cloth, Serge, Wool, Wool and Nylon, Polyester,and Wool
* MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
* MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-covered
MIL-C-44121	- Cloth, Twill, Polyester

STANDARDS

FEDERAL

* FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

* MIL-STD-105	- Sampling Procedures and Tables for Inspection By Attributes
MIL-STD-129	- Marking for Shipment and Storage
* MIL-STD-147	- Palletized Unit Loads
* MIL-STD-2073-1	- DOD Material Procedures For Development & Application Of Packaging Requirements
* MIL-STD-2073-2	- Packaging Requirement Codes

* (Unless otherwise indicated, copies of federal and military specification, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. POSTAL MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

* 2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issue of documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are be the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

The Department of Defense Standard Shades for Sewing Threads

(Application for copies of color cards should be addressed to the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016-0927).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

* 3.3.1 Basic material. The basic material for the cap shall be 11.3 oz/lin. yd, polyester/wool serge cloth conforming to type III, class 3 of MIL-C-823. The color shall be Blue 3362.

3.3.2 Cloth, bunting, nylon. The cloth, bunting nylon used for the sweatband of the cap (see Table I, operation 1c), shall conform to type I, class A, of CCC-C-476. The cloth shall be dyed black and shall show "good" fastness to laundering when tested as specified in 4.4.1.

* 3.3.3 Lining. The material for lining the crown sides and crown top shall be a rayon twill, 3.7 oz/yd^2, conforming to class 1 of MIL-C-368. The material shall be dyed to approximate shade of the basic material, or, as an alternate, may be dyed black. As an alternate, the lining material may be a polyester twill cloth, Blue 3351, conforming to MIL-C-44121. The material shall be dyed to approximate the shade of the basic material, or, as an alternate, may be dyed black.

* 3.3.4 Thread, polyester, covered. The thread for stitching and seaming the caps shall be polyester core thread conforming to the requirements of MIL-T-43548 except that the use of polyester-covered polyester core thread is not allowed. The thread shall be ticket numbers 50 and 70, 3 or 2 ply, of MIL-T-43548. The color shall be Black AA, C.A. 66043 in accordance with The Department of Defense Standard Shades for Sewing Threads.

* 3.3.4.1 Colorfastness. The dyed thread shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample tested as specified in MIL-T-43548. As a limit of acceptability or when no standard sample is available the dyed thread shall show a minimum of "good" colorfastness to wet-dry cleaning and light when tested as specified in MIL-T-43548.

3.3.5 Labels.

* 3.3.5.1 Combination label. Each cap shall have a combination identification size and personal label conforming to type VI, classes 4 and 10, of DDD-L-20, except that the inscription shall be as shown below. The size of the label shall be not more than 1-9/16 inches in height and 2-3/4 inches in length. The height of the lettering, except for the applicable size and dry cleaning information shall be not less than 1/16 inch. The lettering for the dry cleaning information shall be not less than 1/8 inch. The markings shall show fastness to laundering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

NAME:
SERVICE NO:
NAME OF ITEM: CAP, GARRISON, WOMEN'S S
BASE FABRIC: POLYESTER (55%) AND WOOL (45%) I
CONTRACT NO: DLA 100-00-0-0000 (EXAMPLE) Z
STOCK NO: 8410-00-000-0000 (EXAMPLE) E
NAME OF CONTRACTOR:
DRY CLEAN ONLY

The applicable cap size shall be displayed sideways on the right side of the label.

* 3.4 Design. The cap shall be of a garrison style, consisting of a three piece crown lined with a rayon lining, a one piece apron and a one piece sweatband attached on the inside of the cap made from the bunting, nylon cloth. The apron shall be turned up on the outside of the cap, with the ends crossing at the front (see Figure 1).

3.4.1 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

* 3.5 Patterns. Standard patterns will be furnished by the Government to the contractor for use in cutting working patterns (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification. The seam allowance shall be 3/16 (± 1/16 inch), unless otherwise specified in Table I.

* 3.5.1 Pattern parts. The component parts of the cap shall be cut from the material as specified, and in accordance with the number of parts required for the manufacturing process as follows:

Material	Nomenclature of Pattern Parts	Cut parts
Cloth, Bunting, Nylon	Crown side	2
	Crown top (gusset)	1
	Apron	1
Lining, Rayon	Crown side lining	2
	Crown top lining (gusset)	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.6 Construction.

* 3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the cap. Unless otherwise specified, topstitching or edgestitching shall be 1/16 inch from the edge.

* 3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.6.3 Thread breaks and ends of seams. Ends of type 301 stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch. The end of type 401 stitching not caught in other seams or stitchings, shall have a 1/2 to 3/4 inch chain extending from it. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type.

* 3.7 Manufacturing operations requirements. The cap shall be manufactured in accordance with all operations requirements listed in Table I. The contractor is not required to follow all the exact sequence of operations as listed, provided that the finished cap is identical to those produced by following the sequence of operations in Table I. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification.

* 3.7.1 Shade and size marking. The component parts of the cap shall be marked or ticketed to insure a uniform shade and size throughout the cap. Any method may be used except:

1. Corrosive metal fastening devices
2. Sew-on shade tickets
3. Adhesive type tickets whose adhesive causes discoloration or adheres to the material upon removal of the tickets.

NOTE: The use of ink pad numbering machine, rubber stamp, or pencil is allowed, provided the numbering does not show on the outside of the cap.

3.7.2 Pressing. All pressing as required in Table I shall be performed with a heated pressing iron or steam pressing machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.7.3 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
1.	Cutting and overedging apron					
*	a. Cut the cap in strict accordance with patterns furnished, which show size, shape, directional lines for cutting, and notches for proper assembly of all component parts.					
*	b. All component basic material parts shall be cut from one piece of material. The outside of the cap shall have a right hand twill line.					
	c. Cut the nylon, bunting cloth on a bias, and turn the edges under for the sweatband to finish 1/2 (± 1/16) inch in width. The length shall vary according to the size required. Only one splice is allowed per sweatband.					
*	d. Component lining parts may be cut from ends. They shall approximately match the main assembly and shall be shade marked.					
*	e. Overedge top raw edge of apron.	503 or 504 or 505	EFd-1	8-10	50	50
2.	Replacement of defective components					
*	During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in Table IV shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking (see 3.7.1)					
*	All components parts cut from the basic cloth and lining shall be marked, or ticketed to insure a uniform shade, size, and proper assembly throughout the cap.					
4.	Attach combination label to lining.					
*	Position the combination label on the lining piece, approximately 1-1/4 inches from the bottom edge of lining and stitch around all sides, 1/16 inch from the edges. The bottom edge of the label shall finish parallel to the bottom edge of lining. The label shall finish on the right side of the cap as worn.	301	LSbj-1	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
5.	Assemble crown					
*	a. Superimpose the crown top lining on the crown top wrong sides face to face and fold piece in half in the length direction with the basic material face to face, and stitch 3/16 to 1/4 inch from folded edge at center tapering to a point 1/4 to 3/4 inch from each pointed end. Press flat with dart folded in position. Join the outer edges of the crown top lining and crown top by stitching 1/4 inch from raw edges.	301 or 401	OSf-1 and SSa-1	10-12	50 50	50 70
*	b. Join the left and right crown sides at front and back ends of cap with a 3/8 inch seam from the lower edge up to the notch.	301 or 401	SSz-3(a)	10-12	50 50	50 50
*	c. Join the left and right lining crown sides at front and back ends of cap with a 3/8 inch seam from the lower edge up to the notch.	301 or 401	SSz-3(a)	10-12	50 50	50 50
*	d. Spread seam allowance of front and back ends of crown side piece open and flat, and topstitch 1/16 inch along both sides of the seam and across seam, starting at lower edge and crossing over seam at notch.	301 or 401	SSz-3(b)	10-12	50 50	50 50
*	e. Join crown top at front and back ends of crown sides face to face by stitching from point of gusset to notch on both ends.	301 or 401	SSa-1	10-12	50 50	50 50
*	f. Join top edges of crown side and crown side lining with the crown top between the two plies, match notches and stitch 3/16 to 1/4 inch from raw edges.	301 or 401	SSa-1	10-12	50 50	50 50
*	g. Join top edges of opposite side crown side and crown side lining with the crown top between the two plies, match notches and stitch 3/16 to 1/4 inch from raw edges.	301 or 401	SSa-1	10-12	50 50	50 50
*	i. Spread lining front and back end seams open and flat and overedge together the basic material and lining along bottom edge of crown.	503 or 504 or 505	EFd-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
6.	Assemble apron					
*	Turn under overedged side 5/16 (± 1/16) inch, and double needle stitch 1/4 (± 1/16) inch gauge with the top row of stitching 1/16 inch from the folded edge.	301 or 401	EFa-2	10-12	50	50
7.	Attach apron to crown					
	a. Overlap the ends of the apron piece, with left on top of right as indicated by notches.	301 or 401	LSa-1	10-12	50 50	50 70
	b. Lap the side crown pieces over the apron, back to back 1/4 to 5/16 inch, and stitch all around the bottom edge of the crown 1/16 to 1/8 inch from the edge. The overlapped end of the apron shall cross at the center front of the cap.					
8.	Attach sweatband					
*	a. Align the bottom edge of the sweatband with the bottom edge of the crown around the inside of the cap. Stitch the sweatband to the cap with 2 rows of stitching, 1/16 inch from each folded edge. Overlap the ends of the sweatband about 1 1/4 inch at the back of the cap, and turn the top end under 1/4 to 3/8 inch. Care shall be taken to avoid pulling sweatband too tight, causing wrinkles on outside lower bottom edge.	301	SSat-2	10-12	50	50
	b. Stitch the turned under end 1/16 inch from the folded edge.	301 or 401	- -	8-10	50 50	50 70
9.	Finishing					
	a. All thread ends shall be trimmed, except for the required 1/2 to 3/4 inch chain extending beyond the end of type 401 stitching, and all loose threads removed throughout the cap.					
	b. All spots, stains, and shade tickets shall be removed.					
10.	Pressing					
*	a. Press only the topstitched top crown seams and the lower bottom edge with a hand press.					
	b. Remove all wrinkles, gloss marks, or pressing impressions on the outside of cap.					

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.8 Sizes and measurements. Unless otherwise specified, finished measurements of cap shall be as listed in Table II. All measurements and tolerances are expressed in inches.

Table II - Sizes and Measurements

Size	Center (Apron) Back A	Front B	Side C	Height of cap D	Width of crown top E	Head measurement F
20	1-1/2	1-5/8	2	3-1/4	3-1/8	21-1/4
20-1/2	1-5/8	1-5/8	2-1/8	3-3/8	3-1/8	21-3/4
21	1-5/8	1-3/4	2-1/8	3-3/8	3-1/4	22-1/4
21-1/2	1-5/8	1-3/4	2-1/4	3-1/2	3-1/4	22-3/4
22	1-3/4	1-7/8	2-1/4	3-1/2	3-3/8	23-1/4
22-1/2	1-3/4	1-7/8	2-3/8	3-5/8	3-1/2	23-3/4
23	1-3/4	1-7/8	2-3/8	3-5/8	3-5/8	24-1/4
23-1/2	1-7/8	2	2-1/2	3-3/4	3-3/4	24-3/4
24	1-7/8	2	2-1/2	3-7/8	3-7/8	25-1/4
Tolerances:	± 1/8	± 1/8	± 1/8	+ 1/4, - 1/8	± 1/8	± 1/4

NOTE: A thru F refer to Figure 1.

A. Measurement shall be taken from bottom folded edge of apron to top edge of apron back.

B. Measurement shall be taken from bottom folded edge of apron to top edge of apron front.

C. Measurement shall be taken at center of cap, from bottom folded edge of apron to top folded edge of apron.

D. Measurement shall be taken at center of cap, from bottom folded edge of apron to top folded edge of side crown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

E. Measurement shall be taken across the width of the top crown (gusset) piece at center of cap, folded edge to folded edge.

F. Measurement shall be taken from folded edge straight across and parallel to top of cap, to the opposite folded edge then doubled.

3.9 Workmanship. The finished caps shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable classification specified in Table IV.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, appearance and dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

* 4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. Components and materials shall be tested for the characteristics specified in accordance with the referenced test methods of FED-STD-191 whenever applicable. The lot size for the requirement listed in Table III shall be expressed in units of yards and the sample unit shall be 1/4 yard full width. All test reports shall contain the individual values used in expressing the final report result. The lot for the cloth, bunting nylon shall be unacceptable if one or more units fail to meet the test requirement specified. The sample size for testing the cloth, bunting, nylon shall be as follows:

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

* Table III - Testing of components

Component	Characteristics	Requirement Paragraph	Test Method
Cloth, bunting, nylon	Colorfastness to wet-dry cleaning	3.3.2	5622

4.4.2 Examination of the end item. The defects found during the examination of the fully assembled garrison cap shall be classified in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The lot size shall be expressed in terms of the sample unit. The sample unit shall be one finished cap.

* 4.4.2.1 Visual examination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table IV - Classification of Defects

Defect	Classification Major	Minor A	Minor B
I Material Defects and Workmanship Damages			
a. Any hole, cut, tear, smash, mend, needle chew, drill hole or open place:			
1. On outside (longest dimension in any direction):			
(a) up to 1/4 inch, inclusive		X	
(b) more than 1/4 inch	X		
2. On inside (longest dimension in any direction):			
(a) up to 1/4 inch, inclusive			X
(b) more than 1/4 inch		X	
b. Loose yarn, snagged yarn, misweave, float, coarse yarn, area of no dye penetration, dye streak, missing yarn, broken yarn, thin place, shade bar or woven in waste:			
1. On outside (longest dimension in any direction):			
(a) up to 1/4 inch, inclusive			X
(b) more than 1/4 inch		X	
c. Permanent fold, pleat or crease in cloth (when caught in seaming or stitching):			
1. On outside	X		
d. Knot or slub on outside 1/		X	
1/ In accordance with basic material requirements			
II Shaded parts			
a. On outside:			
1. Any part shaded or variation in shade within a part		X	
III Pressing			
a. Burned or scorched	X		
b. Blocking or pressing omitted			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table IV - Classification of Defects (cont'd)

Defect	Classification Major	Minor A	Minor B
III Pressing (cont'd)			
c. Pressing impression or gloss on outside of cap			X
d. Bottom edge of cap not pressed as specified			X
IV Cleanness			
a. Any spot or stain visible at three feet:			
1. On outside (longest dimension in any direction):			
(a) up to 1/4 inch		X	
(b) more than 1/4 inch	X		
2. On inside			X
b. Any marking exposed or visible on outside	X		
c. Thread ends:			
1. On outside:			
(a) more than one but not more than three not trimmed to less than 3/8 inch			X
(b) more than three not trimmed to less than 3/8 inch		X	
(c) three or more loose threads not removed			X
2. On inside:			
(a) three or more thread ends not trimmed to less than 1/4 inch			X
d. One or more shade or size tickets not removed			X
e. Visible basting thread not removed			X
f. Thread end caught for a distance of more than 1/4 inch in line of stitching on outside			X
V Component and Assembly			
a. Any component part or operation omitted (unless otherwise classified herein)	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table IV - Classification of Defects (cont'd)

Defect	Classification Major	Minor A	Minor B
V Component and Assembly (cont'd)			
b. Any component not as specified	X		
c. Any component part tight, twisted, distorted, pleated full (unless otherwise classified herein)		X	
d. Any operation not as specified (unless otherwise classified herein)		X	
VI Cutting			
a. Any component part not cut in accordance with specified pattern, directional lines on patterns, or not in accordance with specification requirements	X		
b. Twill line of any outside part not running in specified direction	X		
VII Seams and Stitching			
a. Accuracy of seaming:			
1. Seam puckered (score only when on major portion of seam)			X
2. Seam irregular, pleated or wavy	X		
3. Part caught in any unrelated operation or stitching	X		
4. End of stitching when not caught in another seam or stitching backtacked less than 1/4 inch, or end of continous overlapped less than 1/2 inch			X
5. Stitching overlapping end of thread break less than 1/2 inch			X
6. Not specified color or varying shades of thread used on outside		X	
7. Optional basting or holding stitching visible on outside of cap			X
b. Gage of stitching and seam allowance:			
1. Edge, top or raised stitching sewn too close to edge resulting in damage to cloth		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table IV - Classification of Defects (cont'd)

Defect	Classification Major	Minor A	Minor B
VII Seams and Stitching (cont'd)			
2. Seam allowance not as specified by 1/16 inch or more. (Score only when condition exists on more than 1/2 the length of the seam)			X
3. Irregular or not within range specified or varies more than 1/16 inch when no range is specified (score only when condition exists on more than 1/2 the length of the seam)			X
c. Open seam:			
1. more than 1/4 inch	X		
2. more than 1/4 inch up to 1/2 inch inclusive		X	
3. up to 1/4 inch inclusive			X
d. Raw edge:			
1. On outside:			
(a) up to 1/4 inch inclusive			X
(b) more than 1/4 inch up to 3/4 inch inclusive		X	
(c) more than 3/4 inch	X		
2. On inside:			
(a) 1/4 inch up to 1/2 inch inclusive			X
(b) more than 1/2 inch up to and including one inch		X	
(c) more than 1 inch	X		
e. Seam and stitch type:			
1. Not specified seam or stitch type		X	
2. Any line of stitching omitted	X		
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Looper thread of 401 stitch type on outside		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table IV - Classification of Defects (cont'd)

Defect	Classification Major	Minor A	Minor B
VII Seams and stitching (cont'd)			
f. Stitch tension:			
1. Loose tension resulting in a loose seam	X		
2. Loosely exposed loops of lower or top thread on edge of top or raise stitching		X	
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X		
g. Stitches per inch (score only when condition exists on more than 1/2 the length of seam):			
1. more than the maximum specified			X
2. less than the minimum specified			
(a) by one or two stitches			X
(b) by three or more stitches		X	
h. Runoff skipped or broken stitch:			
1. Joining seam - use open seam classification			
2. Edge, top or raised stitching:			
(a) up to 1/2 inch inclusive			X
(b) more than 1/2 inch		X	
VIII Sweatband (Bias Band)			
a. Omitted	X		
b. Short or tight, causing puckering, gathering or pleats on apron	X		
c. Finished width not as specified			X
d. Seamed end of sweatband not turned under and stitched to crown side			X
e. Sweatband not of uniform width along major portion of sweatband			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table IV - Classification of Defects (cont'd)

Defect	Classification Major	Minor A	Minor B
VIII Sweatband (Bias Band) (cont'd)			
f. Lower edge of sweatband exposed beyond rolled edge of apron		X	
g. Lower edge of sweatband not positioned above bottom rolled edge of apron as specified			X
h. Folded end of band not on right or left side and more than 3 inches from back of cap			X
i. More than one splice	X		
j. Raw edges of splice on outside of sweatband	X		
k. Splice not sewn diagonally	X		
IX Top Crown (Gusset)			
a. Width less than or more than specified			X
b. Gusset seam offset from center:			
1. 1/8 inch to 1/4 inch inclusive			X
2. more than 1/4 inch		X	
c. Twisted, poorly shaped, tight, puckered or poorly constructed at joining to the side crown		X	
d. Depth of tuck less than 3/16 inch or more than 1/4 inch deep			X
e. Crease line at center of crown not aligned with center front:			
1. 1/8 inch to 1/4 inch inclusive			X
2. more than 1/4 inch		X	
X Crown side piece			
a. Twisted, distorted or excessive fullness		X	
b. Top edge poorly shaped or puckered		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table IV - Classification of Defects (cont'd)

Defect	Classification Major	Minor A	Minor B
X Crown side piece (cont'd)			
c. Side-crown joining seam raised toward crown		X	
d. Crease line at center of crown not aligned with center front and center back seam			X
e. Crown exposed more than 1/8 inch above side		X	
f. Front and back seams of sides not spread open and top stitched			X
XI Combination label			
a. Missing, incorrect or illegible		X	
b. Not securely caught in stitching			X
c. Not positioned as specified			X
d. Label stitching visible on side crown when apron is turned up		X	
e. Size of lettering on label not as specified			X
XII Apron			
a. Top edge poorly shaped		X	
b. Top edge long or stretched, causing apron to stand away from side of cap		X	
c. Excessive fullness, puckering or distortion at joining sides	X		
d. Point at center front where apron overlaps, out of alignment with front seam by:			
(a) 1/4 inch or more but not more than 1/2 inch		X	
(b) more than 1/2 inch	X		
e. Seam not properly forced out			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table IV - Classification of Defects (cont'd)

Defect	Classification Major	Minor A	Minor B
XII Apron (cont'd)			
f. Reverse lap at front (i.e., not overlapped as required)	X		
g. Front bottom edge not having rounded effect, i.e., pointed		X	
XIII Lining			
a. Tight, short, twisted or distorted, causing distortion on outside of cap	X		
b. Lining exposed below bottom edge of curtain		X	
c. Depth of tuck through center of crown not less than 3/16 inch or more than 1/4 inch at center			X
d. Tuck through center of crown not tapered at each end			X
e. Lining not anchored to crown-to-side joining seam			X
f. Omitted	X		

* 4.4.2.2 Dimensional examination. The finished cap shall be examined for defects in design, material, construction, workmanship and dimensions. The sample unit shall consist of one finished cap. Inspection level and acceptable quality level (AQL) shall be as specified in 4.4.2.3.

* 4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's), expressed as defects per 100 units, for the visual and dimensional examinations shall be as follows:

	AQL'S	Inspection level
For visual examination in 4.4.2.1:		
Major	1.0	III
Major and Minor A (combined)	4.0	III
Total (Major, Minor A and Minor B, combined)	10.0	III
For dimensional examination in 4.4.2.2:	4.0	S-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping containers fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units in accordance with MIL-STD-105.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the Acceptable Quality Level, AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or C as specified (see 6.2).

* 5.1.1 Level A. Each cap shall be inserted into a snug-fitting, flat style, clear polyethylene film bag of 0.00125 inch thickness (± 20 percent tolerance). As an alternate, the bag may be fabricated from polyethylene film tubing or sheeting. The polyethylene bag shall be formed with heat sealed seams that are straight, continous, and parallel to each other and the formed edges of the bag. The open end of the polyethylene bag shall not be sealed, and shall extend approximately one inch beyond the end of the cap.

* 5.1.2 Level C. Caps shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

* 5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Thirty-five (35) caps, of one size only, packaged as specified in 5.1, shall be packed on a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class weather-resistant, grade V15C, variety DW, size IA, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of kraft paper, of any suitable commercial grade.

* 5.2.2 Level B. Thirty-five (35) caps, of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety DW, grade 200, size 1A, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, of MIL-B-17757. Each container shall have the contents completely covered on the top and bottom with a sheet of kraft paper, of any suitable commercial grade.

* 5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 5.4 Palletization. When specified (see 6.2), item, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C and D or Film bonding F or G. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood groups I, II, III or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

* 5.5 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The caps are intended for wear by female personnel of the Coast Guard.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification
b. Sizes required (see 1.2)
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity, testing and approval of the first article.
e. When palletization is required (see 5.4)
f. Levels of preservation and packing required (see 5.1 and 5.2)
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.6 Subject term (key word) listing.
Crown
Gusset
Hat
Uniform


Custodian:
Navy - NU


Preparing activity:
Navy - NU

Review activities:
Navy - CG
DLA - CT

Project 8410-N721

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

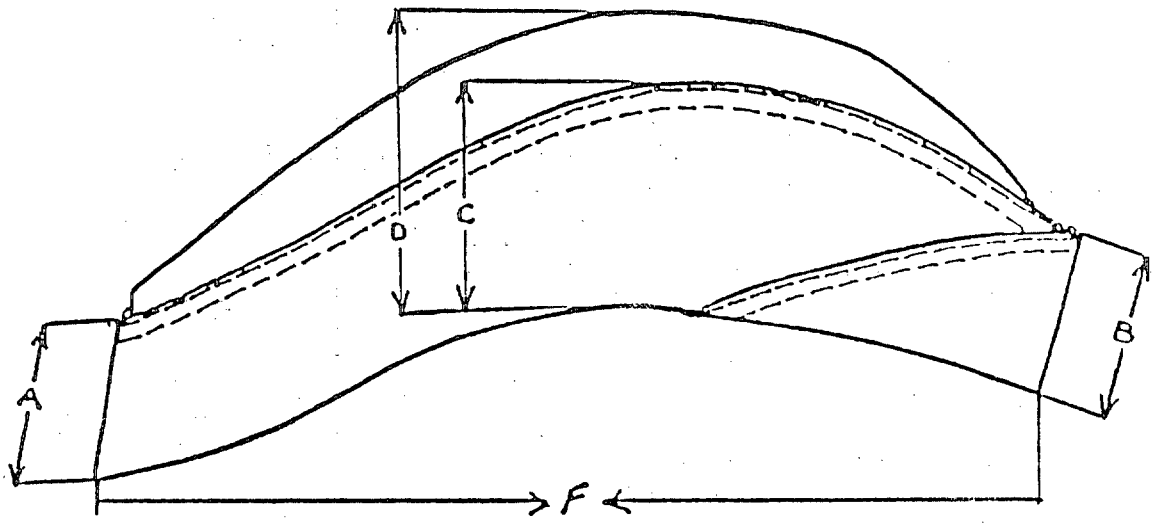



TOP VIEW OF TOP CROWN
(GUSSET)

FIGURE 1 - CAP, GARRISON, WOMAN'S (COAST GUARD)

☆U.S. GOVERNMENT PRINTING OFFICE: 1990 - 704-034/30624

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-87014B(CG)	CAP, GARRISON, WOMAN'S (COAST GUARD)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 02 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.