MIL-C-87026A(CG)
25 JUL 1988
SUPERSEDING
MIL-C-87026(CG)
17 November 1976

MILITARY SPECIFICATION

COAT, MAN'S, POLYESTER/WOOL, SERGE (COAST GUARD)

This specification is approved for use by the United States Coast Guard, Department of Transportation, and is available for use by all Department and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers the requirements for a blue single breasted dress coat fabricated of polyester/wool serge cloth.

1.2 Classification. The coat shall be of one type, in the following sizes and lengths, as specified in (see 6.2):

1.2.1 Sizes: 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, and 48

1.2.2 Lengths: Short, Regular, Long, and Extra Long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
V-T-280	- Thread, Cotton Gimp, Buttonhole
V-T-285	- Thread, Polyester
V-T-295	- Thread, Nylon
V-T-301	- Thread, Silk
* NN-P-71	- Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial)
CCC-C-438	- Cloth, Buckram, Woven and Non-Woven
DDD-L-20	- Label; For Clothing, Equipage, and Tentage (General Use)
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached, or Dyed)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-371	- Braid, Textile Tubular
* MIL-C-823	- Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool
MIL-B-3461	- Buttons, Insignia, Metal, Uniform and Cap
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4-Way Entry
MIL-C-15062	- Cloth, Flannel, Wool, Undercollar Cloth
MIL-P-15064	- Pads, Shoulder and Sleeve Head
* MIL-C-15065	- Coat Fronts
MIL-C-16375	- Cloth, Wigan, Cotton
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-29137	- Cloth, Felt-Fabric, Composite, Undercollar
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43718	- Cloth, Twill, Polyester, Polyester and Cotton; Polyester and Rayon
* MIL-C-44121	- Cloth, Twill, Polyester
* MIL-C-44192	- Container, Shipping and Storage Coat (Hanger Pack)

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained form the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402).

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AATCC Photographic Comparative Rating of Single and Double Needle Seams (Method 88B, two photos)

(Applications for copies should be address to the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, N.C. 27709-9989)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

* 3.3.1 Basic material. The basic material for the coat shall be a 11.5 ounce polyester/wool serge conforming to Type III, Class 3 of MIL-C-823. The color shall be shade Blue 3362 and the piece number shall be 80353.

* 3.3.2 Lining. The material for lining the fronts, sleeves, yoke, right vent, and for the weltings and facings of the inside breast pockets shall be rayon lining, 3.7 ounce, shade Blue 3351, conforming to class 1 of MIL-C-368. The piece number for the standard sample is 1533. As an alternate, the lining material may be a polyester twill cloth, blue 334, conforming to MIL-C-44121.

3.3.3 Collar interlining. The material for the collar interlining shall be cotton buckram, natural or bleached, conforming to type I, class 2 of CCC-C-438, except that the test for shrinkage shall be in accordance with test method 5580 of FED-STD-191 and the minimum stiffness requirement (inch pounds) shall be 0.015 in the filling.

3.3.4 Undercollar cloth. The undercollar material shall be wool flannel conforming to MIL-C-15062 with an interlining of cotton buckram conforming to CCC-C-438, or a felt/fabric composite conforming to MIL-C-29137. The shade shall be black or a blue shade approximating the shade of the basic material and requirements for perspiration and crocking shall not apply. When felt/fabric composite is used the cotton buckram interlining is not required.

3.3.5 Wigan. The material interlining the sleeve bottoms shall be cotton wigan, 2.5 ounce, natural shade, conforming to type I of MIL-C-16375.

3.3.6 Pocketing. The material for lining the front pockets, inside breast pockets, top of vent, and for use as pocket stays shall be twill cloth conforming to class 1 of MIL-C-43718. The shade shall be black and requirements for perspiration and crocking shall not apply.

3.3.7 Hanger loop. The hanger loop for the coat shall be cotton tubular braid conforming to type III, class 1 of MIL-B-371 or shall be of the material specified in 3.3.2. The braid shall be black or shall match the lining or basic material and shall show good fastness to wet-dry cleaning and a Munsell value for crocking not lower than 8.5 when tested as specified in 4.4.1.

3.3.8 Coat front interlinings. The coat front interlinings shall conform to type XVII of MIL-C-15065. The interlinings shall be dyed black.

3.3.9 Shoulder and sleeve-head pads. The shoulder pads shall conform to type I, class 1 and the sleeve-head pads shall conform to type IV of MIL-P-15064.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.10 Tapes and binding.

3.3.10.1 Woven tape. The tapes for staying the coat shall be cotton, preshrunk, conforming to classes 1 or 2 of DDD-T-86. The types and widths of the tapes shall be as follows:

Type I - 5/8 inch wide stay for bridle at breakline of lapel
Type II - 3/16 inch wide stay for left vent, neck gorge, back armhole, and lower part of front armhole
Type III - 3/8 inch wide stay for lapel, front, and bottom edges

3.3.10.2 Cross-cut tape. The tapes for staying the shoulder, back neckline, and upper part of front armhole shall be cross-cut, 1/2 inch in width, twill cloth dyed or undyed, conforming to Class 1 of MIL-C-43718. The raw edges of the cross-cut tape shall be treated with a synthetic resin to prevent ravelling and shall be tested in accordance with 4.4.1.

3.3.11 Thread.

3.3.11.1. Polyester, covered. The thread for the coat shall be a polyester core thread, dyed shade Blue AT, Cable No. 66060 conforming to MIL-T-43548 in the following types and sizes shall be used. The polyester covered, polyester core thread is not allowed.

Use	Ply	Ticket No.
Assembling and tacking	2 or 3	50, 70
Button sewing		
Hand	2 or 3	16
Machine	2 or 3	20

3.3.11.2 Cotton thread. As an alternate to the polyester core thread, a cotton thread may be use, and shall be dyed shade Blue AT, Cable No. 66060 and shall conform to V-T-276 in the following types and sizes:

Use	Type	Ticket No.	Ply
Seaming and stitching	IA3	30, 50	3
	IC2	A	3
Tacking armholes and attaching sleeve-head pads	IA1 or IA2	30	3
Button sewing	IA3 or IB3	12, 16, 20	4
Padding lapels	IA3	70	2

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.11.3 Basting thread. The cotton thread for basting and tacking shall be a good commercial grade, bleached or unbleached. A monofilament synthetic thread may be used for only those basting operations where the thread is required to be removed provided the garment is subsequently given a treatment by a cleaning agent in which the synthetic thread is soluble. When this thread is used, any residue remaining on the garment after the dry cleaning process shall be brushed off or removed.

3.3.11.4 Silk thread. The silk thread shall be dyed to approximate Cotton Shade Blue AT, Cable No. 66060 and shall conform to V-T-301 in the following types and sizes:

Use	Type	Class	Ticket No.	Ply
Machine felling and blindstitching	I	-	0	3
Buttonholes and bartacks	I	-	B, C	3
Hand or machine felling	III	3	A, C	2

3.3.11.5 The following threads may be utilized as alternates to the silk and cotton threads specified above for the operations indicated:

(a) For machine felling - polyester thread conforming tp type I, size A/3 or AA/2 of V-T-285 or a monofilament nylon thread of comparable type and size.

(b) For hand felling - nylon thread conforming to type IV, size A/2 or C/2 of V-T-295.

(c) For padding lapels - nylon thread conforming to type III, size 000 of V-T-295.

3.3.11.6 Nylon thread. If an automatic machine which sews shank buttons imitating hand sewing is used, the thread shall be nylon waxed monocord, special No. 4, having a breaking strength of 11 pounds and a minimum length per pound of 3,250 yards and shall be tested for these requirements in accordance with test methods outlined in V-T-295.

3.3.11.6.1 Colorfastness of thread. The dyed threads shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-276, V-T-285, V-T-295, V-T-301, or MIL-T-43548. When no standard sample is available, the dyed threads shall show good colorfastness to wet-dry cleaning and light when tested as specified in V-T-276, V-T-285, V-T-295, V-T-301 or MIL-T-43548.

3.3.12 Gimp. The gimp for reinforcing the buttonholes shall be thread, cotton gimp, buttonhole conforming to typeI or II,size No. 8 of V-T-280. The gimp shall be dyed shade Blue AT, Cable No. 66060.

3.3.12.1 Colorfastness. The dyed gimp shall show fastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. When no standard sample is available, the dyed gimp shall show good fastness to wet-dry cleaning when tested as specified in V-T-280.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.13 Buttons. The metal buttons for the coat shall be gold plated, 22-1/2 line, hopper back (flat) with bodkin type toggles for the front pocket flaps, and 35 line hopper back (depressed) for the right front conforming to type I, style 5, class A of MIL-B-3461, except length of bodkin for 22-1/2 line button shall be 15/16 (± 1/32) inches.

3.3.14 Labels.

3.3.14.1 Identification and size label. Each coat shall have a combination identification and size label conforming to type VI, classes 1 and 2 of DDD-L-20. The label marking shall show colorfastness to dry cleaning. The inscription shall be as follows:

COAT, MAN'S, POLYESTER/WOOL, SERGE
CONTRACT NO: DSA 100-00-0-0000 (EXAMPLE)
STOCK NO: 8405-00-000-0000 (EXAMPLE)
SIZE: 38 REGULAR (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER (If other than the contractor)

3.3.14.2 Personal and instruction label. Each coat shall have a combination personal and instruction label conforming to type VI, classes 3 and 10 of DDD-L-20, except that the Name and Service No. shall be in letters not less than 1/4 inch in height; all other lettering shall be 1/8 inch in height. The overall size of the label shall be 3-1/2 (± 1/8) inches by 1-1/2 (± 1/8) inches. The label shall show colorfastness to dry cleaning and the inscription shall be as follows:

NAME:
SERVICE NO:

DRY CLEAN ONLY

ROLL PRESS SLEEVES AND LAPELS

3.3.15 Size ticket. A commercial type size ticket shall be attached on the outside of the right front sleeve 2 or 3 inches from the bottom edge. The ticket shall be tacked on four corners by machine or hand (6 to 8 stitches per tack by machine or 2 to 4 stitches per tack by hand). The corners may be double perforated for ease in tacking. The ticket shall be made of suitable commercial cardboard and shall be legibly printed with the following information:

Size - 38 Regular (Example)

The length (Short, Regular, Long, or Extra Long) may be abbreviated as S, R, L, or XL.

3.4 Design. The coat design is four-button single breasted with square fronts, notched lapels, two breast patch pockets, and two lower inside hanging pockets, all with self-lined flaps; back is two-piece with a center vent. Inside of coat is half-lined with yoke back, fully lined sleeves, and two inside breast pockets (see Figures 1 and 2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

3.4.1 Figures. The figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.5 Patterns. Standard patterns to be used for cutting the contractor's working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the standard patterns and shall not be altered in any way, except as allowed by footnotes to the list of pattern parts. The patterns allow 3/8 inch for all seams except as otherwise indicated in Table I.

3.5.1 Pattern parts. The component parts shall be cut from the materials specified and in accordance with the following pattern parts:

Material	Pattern Parts	Cut Parts
Cloth, Serge, Polyester/Wool	Front	2
	Side body	2
	Back	2
	Right front facing	1
	Left front facing	1
	Topsleeve	2
	Undersleeve	2
	Topcollar	1
	Breast patch pocket	2
	Breast patch pocket flap	4
	Lower pocket flap	4
	Lower pocket top and bottom piping	2
	Lower pocket facing	2
Cloth, Lining	Front lining	2
	Back yoke lining	1 1/
	Topsleeve lining	2
	Undersleeve lining	2
	Right vent lining	1
	Inside breast Pocket welt and facing	2 2/
Twill Cloth	Breast patch pocket lining	2
	Lower pocket	2
	Lower pocket stay	2
	Inside breast pocket stay	2
	Breast patch pocket stay	2
	Inside breast pocket	2
Cloth, Wool, Flannel	Undercollar	1 1/
Cloth, Buckram, Cotton	Undercollar interlining	1 1/
Cloth, Felt/Fabric Composite	Undercollar (alternate)	1
Cloth, Cotton, Wigan	Sleeve interlining	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Templates	Lapel shaper	-
	Undercollar shaper	-
	Left and right front marker	-
	Undercollar stand marker	-
	Breast patch pocket marker	-
	Finished lapel and collar shaper	-
	Finished lower pocket flap	-
	Finished breast pocket flap	-
	Finished breast pocket	-

1/ Pattern may be cut as two (2) pieces with seam allowance added.
2/ When automatic pocket machine is used, the pattern part shall be cut in half.

3.6 Construction.

3.6.1 Stitches, seams, and stitching types. Stitch, seam, and stitching types as specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches and thread breaks may be repaired by using 301 stitch type.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements. The coat shall be manufactured in accordance with the operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed provided that the finished coat is identical to those produced by following the sequence of operations as listed in Table I.

3.7.1 All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

3.7.2 Shade and size marking. The component parts of the coat shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) The use of corrosive metal fastening devices or sew-on type tickets.
(2) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment, and wherever possible, is covered by the seam allowance.

3.7.3 Abbreviations in table of operations. The abbreviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting. a. Cut the coat in strict accordance with patterns, which show size, shape, placement of pockets, directional lines and notches for the proper assembly of all parts. Perforated paper markers and plain paper markers shall not be used on the basic fabric. Felt back paper markers are permitted. b. All component basic material parts shall be cut from one piece of material except the lower pocket facings and underply of flaps, which may be cut from ends. When under ply of flaps are cut from ends, they shall match each other. c. All component lining parts shall be cut from one piece of material except sleeve linings, which may be cut from ends and when so cut shall approximately match the main assembly. Sleeve linings cut from ends shall be shade marked and match each other. d. Cut all other component parts listed in 3.5.1 as indicated by patterns from the material specified. When the wool flannel undercollar is cut in two pieces, the two pieces shall match each other.				
2.	Replacement of defective components. Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages, as specified in section 4, are excluded and replaced with non-defective and properly matched material.				
3.	Shade marking. All component parts of the basic material and linings, including sleeve linings, whether cut from ends or in the main lay, shall be marked or ticketed to assure a uniform shade throughout the coat. Other parts cut from ends need not be shade marked (see 3.7.2).				

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
4.	Make coat front interlinings. The coat front interlinings shall conform to the requirements of 3.3.8.					
5.	Make collar.					
	a. Wool flannel undercollar construction.					
	1. The undercollar shall consist of a wool flannel undercollar and a cotton buckram interlining.					
	2. If the undercollar is two pieces, seam together, face to face, along center back 1/4 inch from edge.	301 or 401	SSa-1	10-14	50 50	50 70
	3. Press seam open and flat.					
	4. If interlining is cut as two pieces, overlap edge at center back approximately 3/8 inch.	301 or 401	LSa-1	10-14	50 50	50 70
	5. Pad interlining to wool flannel undercollar with seven to eight rows of blindstitching.	103 or 306	SSm-7 or 8	4-8	70	
	6. Press undercollar flat.					
	7. Mark and shape undercollar to conform to undercollar shaper. Trim interlining 1/8 to 3/16 inch from neck edge of undercollar.					
	NOTE: Marking and shaping of undercollar may be performed with a clicker machine using dies conforming to undercollar template.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	8. Mark the breakline of the finished undercollar in accordance with the undercollar stand marker.					
	9. Seam wool flannel undercollar to interlining at breakline (the finished collar stand at center shall measure 1-1/4 (± 1/8) inches.	301 or 401	SSv-1	10-14	50 50	50 70
	10. Baste top edge of finished undercollar along straight top edge of topcollar matching and distributing fullness of topcollar between the notches on outer edge of undercollar and topcollar.	Hand or Machine			Comrcl	
	NOTE: This operation shall be omitted when top edge of collar is machine felled.					
	11. Baste along breakline and ends of collar.	Hand or Machine			Comrcl	
	12. Trim, turn, and baste edges of topcollar over interlining between wool flannel undercollar and interlining.	Hand or Machine			Comrcl	
	13. Fell corners, top and side edges of topcollar to finished undercollar by hand. Top edge may be machine felled with simulated hand stitching. Fullness of topcollar shall be matched and distributed between notches on outer edge of undercollar and topcollar.	Hand or Machine		8-10 6-10	C (silk) 0 (silk)	0
	14. Trim neck edge of topcollar to allow for seaming.					
	15. Press and crease the stand of the topcollar and the undercollar together in one operation to shape, stretching the outer edge of the collar across the shoulders and holding the creaseline short. Center area of creaseline shall be straight for a distance of 3 to 4 inches.					
	or					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	b. Composite undercollar construction.				
	1. The composite undercollar shall be one piece. A separate collar interlining is not required with this type undercollar material.				
	2. Mark and shape undercollar to conform to undercollar shaper. Marking and shaping of undercollar may be performed with a clicker machine using dies conforming to undercollar shaper.				
	3. Baste top edge of finished undercollar along straight top edge of topcollar matching and distributing fullness of topcollar between the notches on outer edge of undercollar and topcollar. NOTE: This operation shall be omitted when top edge of collar is machine felled (see operation 5b6)	Hand or Machine			Comrcl
	4. Baste the topcollar to undercollar along creaseline and outer edge putting in proper fullness. The finished collarstand at center shall measure 1-1/4 (± 1/8) inches.	Hand or Machine			Comrcl
	5. Trim, turn, and baste edges of topcollar.	Hand or Machine			Comrcl
	6. Fell top and side edges of topcollar to finished undercollar by hand or top edge may be machine felled with simulated hand stitching. Fullness of topcollar shall be matched and distributed between notches on outer edge of undercollar and topcollar.	Hand or Machine		8-10 6-10	C (silk) 0 0 (silk)
	7. Trim neck edge of topcollar to allow for seaming.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	8. Press and crease the stand of the topcollar and the undercollar together in one operation to shape, stretching the outer edge of the collar across the shoulders and holding the creaseline short. Center area of creaseline shall be straight for a distance of 3 to 4 inches.					
6.	Make sleeves and sleeve linings.					
	a. Join forearm seam of sleeve (basic material), face to face, 3/8 inch from edge distributing fullness between notches.	301	SSa-1	10-14	50	50
	b. Press forearm seam open and flat holding seam short.					
	c. Stitch sleeve interlining (wigan) to forearm seam and sides of backarm seam allowances. Bottom edge of sleeve interlining shall be 1/2 to 3/4 inch below turnup notches. Trim ends of sleeve interlining even with edges of sleeve.	301	SSa-1	10-14	50	50
	d. Press turnup of sleeve as indicated by notches in pattern.					
	e. Join backarm seam of sleeve, face to face, 3/8 inch from edge.	301	SSa-1	10-14	50	50
	f. Press backarm seam open and flat.					
	g. Blindstitch top edge of sleeve turnup to interlining.	103 or 306 or Hand	EFc-1(b)	4-8 4-8	50 50 50	 50
	h. Join the forearm seam of the sleeve linings, face to face, 3/8 inch from edge distributing fullness between notches.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the currenversion before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	i. Join the backarm seam of sleeve linings, face to face, 3/8 inch from edge.	301	SSa-1	10-14	50	50
7.	Attach sleeve lining to sleeve. a. The sleeve lining shall extend not less than 3/4 inch or more than 1 inch above top of the basic material sleeve.					
	b. Tack forearm and backarm seam of sleeve lining to forearm and backarm seam of sleeves respectively distributing proper fullness in lining. Tacking shall extend from not more than 6 inches below top to not more than 6 inches above creased bottom edge. When tacking is done by hand, both ends of the stitching shall be securely backstitched with not less than three stitches.	301 or machine or Hand		4-8 1/2 to 1-1/2 inches in length	50 or Comcrl	50 or 0/3 or Comcrl
	c. Pull sleeve through lining and baste turnup of sleeve lining. Sleeve lining shall have not less than 1-1/4 inches turnup. NOTE: The bottom of the sleeve lining may be felled without basting.	Hand or Machine			Comcrl	
	d. Fell bottom of sleeve lining to sleeve turnup.	Hand or Machine		6-8	A or C (silk)	
	e. Turn sleeves to finished position and assemble in pairs.			6-10	0 (silk)	0
8.	Make yoke lining. a. A one or two piece yoke is permitted.					
	b. When a two piece yoke is used, stitch center back seam, face to face, 1/2 inch from raw edge. When stitching the hem of a two piece yoke, the seam allowance shall be folded towards the right back.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Turn under bottom raw edge 3/16 to 1/4 inch and stitch 1/16 inch from folded edge forming a 1/4 to 3/8 inch finished hem.	301	EFb-1	10-14	50	50
	d. Press a 3/8 to 1 inch pleat at center and press bottom hem flat.					
9.	Make four pocket flaps.					
	a. The pocket flaps shall be made of and lined with the basic material.					
	b. Stitch lining to flaps, around side and bottom edges, face to face, 3/16 to 1/4 inch from raw edge. Trim corners, turn to finished position, work out points.	301	SSa-1	10-14	50	50
	c. Baste pocket flaps around side and bottom edges 1/8 inch from edges.	Hand or Machine			Comcrl	
	d. Press pocket flaps smooth and flat.					
	e. Make a vertical square bar, cut-first type buttonhole or cut-after cross bar buttonhole in each flap with the exception that only the eyelet portion of the buttonhole will be cut open to allow insertion of the bodkin type toggle and the use of gimp is not necessary. The buttonhole shall be centered between the side edges, with the inside edge of the eyelet 1/2 to 5/8 inch from the point of flap. The length of the partially cut finished buttonhole after tacking shall measure 5/8 to 3/4 inch.	Button-hole	Size: 5/8 inch 3/4 inch	Stchs Per Size: 42-48 50-56 not including bartacks	C (silk)	B

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Tack the end of each buttonhole by hand or machine with a 1/8 to 3/16 inch bartack.	Hand or Machine		10-12 per tack 21 per bar-tack	B (silk) B (silk)	
	g. Overedge stitch together the top raw edges of each flap with a 1/8 to 3/16 inch bight.	502 or 503 or 504	SSa-1	6-8	50	50
	NOTE: Care shall be exercised so that the basic material does not stretch when being overedged. Overedge stitching has a tendency to stretch the raw edges to a point where the ends may protrude beyond the sides of the flap when stitched to the coat.					
10.	Make two breast patch pockets.					
	a. Stitch, face to face, 3/8 inch from raw edge, the top edges of the pocket and pocket lining.	301	SSa-1	10-14	50	50
	b. Fold pocket piece at top to form a hem that extends 7/8 to 1-1/8 inches above seamline of pocket lining. Stitch pocket lining to pocket around sides and bottom 1/8 to 3/16 inch from raw edges of pocket. Trim excess lining material to pocket raw edge.	301	SSa-1	10-14	50	50
11.	Prepare front linings.					
	a. Seam underarm darts.	301	SSa-1	10-14	50	50
	b. Stitch forepart of front linings to facings 3/8 inch from raw edge.	301	SSa-1	10-14	50	50
12.	Make inside breast pockets and attach labels.					
	a. There shall be two inside double welt pockets, one on the right and one on the left breasts of the coat as indicated by marks on pattern.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Center each inside breast pocket welt and facing on inside of breast pocket and turn under both edges 1/4 to 3/8 inch and stitch. Selvage edges need not be turned under.	301	LSd-1	10-14	50	50
	c. The top edge of the identification and size label shall be centered, inserted, and caught under the edge of facing of right inside breast pocket; printing on label shall not be obscured. Stitch the remaining three sides of label to pocketing. Label shall be located on the pocket ply next to the coat front.	301	LSbj-1	10-14	50	50
	OR					
	As an alternate, stitch the four sides of the identification and size label to the right front pocket piece with the top edge of label overlapping facing.	301	LSbj-1	10-14	50	50
	d. Position fold line of pocket assembly to front facing/lining assembly according to marks on pattern. Double stitch 1/4 to 3/8 inch gauge, centered over fold line.	301	Smlr to LSbt-2(a)	10-14	50	50
	e. Cut opening of pocket through each pocket facing-lining assembly and stay piece midway between the row of stitching; tongue notch the ends of opening and turn pocket piece through opening.					
	f. Stitch under layer of pocket piece to each facing lining assembly and pocket stay through all plies.	301	LSbj-1	10-14	50	50
	g. Topstitch each facing-lining assembly at ends and top of pocket opening with tongue tab at each end turned under and seam allowance at top of pocket turned upward.	301	LSq-2(b) (shows finished seam at top of pocket opening)	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	h. Stitch sides and bottom of each pocket, securely tacking corners of pocket opening thru tongue notch. The back part of each pocket shall be held taut to prevent gapping of pocket opening.	301	SSa-1	10-14	50	50
	i. Notch top of each pocket at front edge for the full width of seam allowance and blindstitch inner ply of pocket to facing.	103 or 306	SSm-1	2-4	50	50
	j. The finished inside breast pockets shall measure 5-1/4 (± 1/4) inches wide, 6-3/4 (± 1/2) inches deep and shall extend into the facing 1/2 (± 1/4) inch. NOTE: As an alternate, the above pocket opening operations may be accomplished with a double welt pocket machine which stitches, cuts, and turns welt edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine. The bottom welt piece shall be raise stitched 1/16 inch through all plies of material. The top welt piece shall be raise stitched through all plies closing top of the pocket opening. Ends of pocket opening shall be securely tacked. In addition, when this machine is used, the contractor may utilize the machine manufacturer's recommended pocket stay material.					
	k. Position top edge of personal and instruction label on outside of right inside breast pocket, 1/8 to 1/4 inch below joining seam of lower welt at center of pocket opening and stitch label on all four sides to the front lining through one ply of the pocketing.	301	LSbj-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
13.	Make backs.					
	a. Turn under edges of center back and side seam allowances of back parts 1/4 to 5/16 inch and blindstitch.	103 or 301	EF1-1	6-8	50 50	 50
	b. Join 5/8 inch from folded edge the center back seam face to face catching a stay-piece at top of vent. The bottom end of seam shall terminate 3/8 to 1/2 inch below the top end of vent step.	301	SSa-1	10-14	50	50
	c. Slash seam allowance of right back diagonally at top of vent and press back seam open and flat.					
	d. Fold back left vent in line with center seam line and bottom notch.					
	e. Press left vent.					
14.	Make left vent.					
	a. Stitch a 3/16 inch wide woven stay tape along back of fold line of left vent. Tape shall extend from top of vent to bottom turnup.	301	SSaa-1	10-14	50	50
	b. Fold raw edge of left vent under 3/4 to 1 inch and edgestitch 1/16 inch from folded edge.	301	EFa-1	10-14	50	50
	c. The finished left vent shall measure 1-1/8 to 1-5/8 inches wide.					
15.	Make right vent.					
	a. Fold right vent lining in half lengthwise, face to face, and seam top edge 1/16 to 1/8 inch from raw edge. Turn and force out seam.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Stitch raw edge side of vent lining to raw edge of right vent 1/16 to 1/8 from edge. Vent lining shall extend above the top of vent.	301	SSe-2(a)	10-14	50	50
	c. Double stitch diagonally across top of vent thru all plies, the width of the left seam allowance.	301		10-14	50	50
	d. Turn right vent lining to finished position and edgestitch 1/16 inch from folded edge of vent.	301	SSe-2(b)	10-14	50	50
	e. Hand fell vent lining to basic fabric across top folded edge of lining and down 1 to 1-1/4 inches on raw edge side of lining.	Hand		8-10	A or C (silk)	
16.	Make fronts.					
	a. Join front edge of side body pieces to the back edge of left and right fronts, face to face, 3/8 inch from edge (underarm seam) as indicated by notches on pattern.	301	SSa-1	10-14	50	50
	b. Press each underarm joining seam open and flat.					
	c. Mark fronts for position of breast pockets, breast pocket flaps, lower pocket openings, and lower pocket flaps as indicated by marks on pattern.					
	d. Stitch breast patch pockets on fronts at marks, 1/8 to 3/16 inch from raw edges. The stitching shall be invisible when pockets are finished.	301	LSbj-1	10-14	50	50
	e. Stitch breast pocket flaps on fronts at marks, 1/8 to 3/16 inch from overedged edge. Stitching shall be through a pocketing stay piece on the underside of front.	301	LSbj-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Fold flap down to finished position and stitch a 1/4 to 5/16 inch long vertical tack at the top corners of each flap.	301		4-6 per tack	50	50
NOTE:	The pocket and pocket flaps shall be in accordance with finished pocket flap and pocket templates.					
17.	Make two lower pockets.					
	a. Double piping construction:					
	(1) Position top edge of facing piece on pocketing and turn in the bottom edge of facing piece and seam to pocketing. Selvage edge need not be turned in.	301	LSd-1	10-14	50	50
	(2) Position the piping piece of pocketing with edge even with opposite end of pocketing and single stitch 1/4 to 3/8 inch from edge.	301	SSa-1	10-14	50	50
	(3) Position piping piece on outside of coat fronts at mark and seam with two rows of stitching through coat and pocketing stay piece on the underside of coat. The narrow piping piece shall be used to form the upper piping.					
	(4) Cut opening through coat and pocketing stay piece on underside of coat and tongue notch the ends of the pocket opening. Turn pocket through opening.					
	(5) Open seam and fold each piping piece to form a firm 1/8 to 1/4 inch piping and seam between the folds through seam. The stitching shall be imbedded in the seam.	301	SSaf-2(b)	10-14	50	50
	(6) Turn pocketing up and stitch across top of pocket adjacent to top piping piece; stitch, catching facing and pocketing in the stitching, closing top of pocket.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	(7) Adjust piping, tongues, and pocketing stay piece and tack ends of pocket opening, continue stitching around the pocketing.	301		10-14	50	50
	OR					
	b. As an alternate, the above pocket opening may be accomplished with a double piped pocket machine which stitches, cuts, and turns piped edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine. The joining seam of the bottom piping piece shall be raise stitched through front and piping piece and the joining seam of the top piping piece shall be raise stitched through all plies in the closing of the top pocket. Ends of pocket shall be securely tacked. In addition, when this machine is used, the contractor may utilize the machine manufacturer's recommended pocket stay material in addition to the pocketing stay material.	101 and 301		10-14	50 or A/3 50 or A/3	 50 or A/3
	c. Stitch lower pocket flaps on fronts at marks, 1/8 to 3/16 inch from overedged edge. Stitching shall be through a pocketing material stay piece on the underside of front.	301	SSa-1	10-14	50	50
	d. Fold flap down to finished position and stitch a 1/4 to 5/16 inch long vertical tack at the top corners of each flap.	301		4-6 per tack	50	50
	e. Press flaps smooth and flat. The finished flap shall conform to the finished lower pocket flap template.					
	f. The finished lower pocket openings shall measure for sizes 33 through 37, 5-1/2 (± 1/8) inches; and for sizes 38 through 48, 6 (± 1/8) inches.					
18.	Baste coat front interlining to front.					
	a. Baste coat fornt interlining to front from top of breast flap, through patch pocket, along front to top edge of lower pocket flap, to front end of pocket opening and down to bottom of coat.	Hand or Machine			Comrcl	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	b. Tack breast pocket flap stay piece to interlining along each side and across top. Tack lower pocket stay to interlining at front top corner, and down front edge of interlining to bottom of coat.	Hand or Machine		1-2	Comrcl or 50 50
	c. In addition, baste the interlining to coat front as follows:	Hand or Machine			Comrcl or 50 50
	(1) Across shoulder allowing room for placement of shoulder pads.				
	(2) Around armhole and down back edge of interlining.				
	(3) Along breakline of lapel.				
	(4) Down the front edge of interlining to bottom of coat.				
	d. Position a 5/8 inch wide bridle stay tape adjacent to and behind breakline at each lapel from gorge to 1 to 1-1/2 inches from bottom of lapel. Baste tape even and smooth for a distance of 1-1/2 to 2 inches from gorge, then hold tape taut for a distance of 4 to 5 inches to work in not less than 1/2 inch or more than 5/8 inches breast fullness. The balance of the tape shall be stitched without tautness or fullness. Tape and interlining shall be stamp marked to assure amount of fullness.	Hand or Machine			Comrcl or 50 50

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Pad (blindstitch) each lapel of coat with 6 to 8 equally spaced rows of stitching with fullness of interlining between the rows of stitching to roll lapel.	103 or 306	SSm-6 to 8	4-8	70 70	 70
	f. Blindstitch bridle stay along both edges.	103 or 306	SSm-2	4-8	70 70	 70
	g. After the lapels are padded, the left and right fronts shall be pressed individually on the left and right coat chest machine respectively to conform to the shape of the body.					
19.	Join side bodies and back.					
	a. Join back to side bodies, face to face, 5/8 inch from edge (side seam).	301	SSa-1	10-14	50	50
	b. Press seams open and flat.					
20.	Stitch tapes to fronts and backs.	301	SSaa-1	10-14	50	50
	a. Stitch a 3/16 inch wide woven tape on neck gorge of front 1/8 inch from edge.					
	b. Stitch a 1/2 inch wide cross-cut tape on each front along shoulder seam 3/4 to 1 inch from gorge to within 1/2 to 3/4 inch from armhole.	301	SSaa-1	10-14	50	50
	c. Stitch a 1/2 inch wide cross-cut tape on upper part of front armhole from 2 to 2-1/2 inches above armhole notch to within 1/2 to 3/4 inch from shoulder.	301	SSaa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Stitch a 3/16 inch wide woven tape on armholes of foreparts from approximately 3/4 inch of underarm seam to approximately 1/2 inch beyond cross-cut tape on front; holding tape taut to draw up material and working in proper fullness.	301	SSaa-1	10-14	50	50
	e. Stitch a 3/16 inch wide woven tape on back of armhole 1/2 to 3/4 inch from top of shoulder to approximately one inch in back of underarm seam; holding tape taut to draw up material and working in proper fullness. NOTE: As an alternate, armholes may be taped in one operation.	301	SSaa-1	10-14	50	50
	f. Stitch a 1/2 inch wide cross-cut tape to back neckline.	301	SSaa-1	10-14	50	50
21.	Shape lapels and fronts. a. Position lapel shaper on breakline of lapel and mark as indicated by the shaper. b. Trim lapels, fronts, and bottom edge of coat front. c. Trim interlining 1/4 to 5/16 inch back from lapel and front edges. Interlining at bottom may be cut diagonally so that the bottom edge is not caught in the tape stitching. NOTE: Marking and trimming of lapels, fronts, and bottom may be performed with a clicker machine.					
22.	Match and baste facings. Match, fit, and baste facings to each front putting in proper lapel and breast fullness. The facings shall be held slightly taut at bottom edges of foreparts.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
23.	Tape lapel, front, and bottom edges.					
	a. Stitch a 3/8 inch wide woven tape, 1/8 to 3/16 inch from edge of coat, from lapel notch, across top of lapel, down front and across bottom to a point 2 to 3 inches beyond back edge of facing. Tape on lapel edge shall be sewn natural and smooth without material take-up.	301	SSab-1 and LSbj-1	10-14	50	50
	b. Blindstitch back edge of tape to interlining on fronts and lapels.	103 or 306	SSm-1	3-6	50 50	 50
	c. Press edges flat and smooth, pull basting threads and press edge seam open and flat.					
24.	Baste coat edges and join facings to fronts.					
	a. Notch corners of lapels, trim around rounded corners of lapels, bottom corners and front edges. Turn facing to finished position, work out lapels and bottom corner of fronts.					
	b. Turn under complete bottom edge of coat 1/4 (± 1/16) inch and blindstitch.	103 or 306 or Hand	EFl-1	6-8	0(silk) 0 0 (silk) A(silk)	
	c. Baste edge (first basting) across and down lapel and front, and the bottom width of facing.	Hand or Machine			Comrcl	
	d. Turn up bottom of coat as indicated by patterns matching lengths of vent opening and baste.	Hand or Machine			Comrcl	
	e. Blindstitch complete bottom turn-up of coat.	103 or 306 or Hand	Efl-1	6-8	0(silk) 0 0 (silk) A(silk)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	f. Baste facings along lapel fronts (second basting) approximately 1 inch from edge to a point in line with top edge of breast flaps, holding lower corner of coat rolled in such a manner as to cause lower front edge of forepart to roll inward.	Hand or Machine			Comrcl
	g. Baste a row of stitching diagonally from lapel break to the point of lapel placing fullness in lapel to allow lapel to roll.	Hand or Machine			Comrcl
	h. Baste along breakline of lapel, allowing fullness in facing, to permit lapel to roll.	Hand or Machine			Comrcl
	i. Baste back edge of facing, putting fullness over chest.	Hand or Machine			Comrcl
25.	Tack facings to interlining. Tack the back edge of facings to the interlining with a row of blindstitching from not more than 2-1/2 inches from the shoulder seam to not more than 2 inches above inside breast pocket openings. Continue the tacking along outer ply of inside breast pocket seam allowance and seam allowance of facing to approximately 2 inches from bottom of coat.	103 or 306 or Hand	SSm-1 SSm-1	2-4 2-4 2-4	50 or Comrcl 50 50 or Comrcl 50 or Comrcl
26.	Sew shoulder pads. Insert shoulder pads between interlining and padding and tack to shoulder in proper position.	301 or Hand		1-2 1-2	50 50 or Comrcl 50 or Comrcl
27.	Baste lining. a. Tack upper back edge of inside breast pockets to interlining with ends of stitching tacked.	301 or Hand		4-6 3-5	50 50 or Comrcl 50 or Comrcl
	b. Fit and baste lining to coat front taking in excess material and forming a vertical pleat at each shoulder. Baste across shoulders around armholes, down the side seams to the bottom and across bottom.	Hand or Machine			Comrcl

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Turn under the bottom and sides of lining and baste to body of coat; basting to allow room for felling.	Hand or Machine				Comrcl
	d. Trim gorge and the lining of armholes and shoulders.					
28.	Fell lining. Blindstitch the bottom and sides of front lining to body of coat.	301 or Hand		6-10	0 (silk) A or C (silk)	0
29.	Join shoulder seam. a. Join respective backs and fronts at shoulder 3/8 inch from edge working in proper fullness on backs.	301	SSa-1	10-14	50	50
	b. Press shoulder seam open and flat over a suitable block; holding shoulder seam short and shaping armhole end of seam towards the front.					
30.	Baste shoulder. a. Position shoulder interlining and lining and baste upper part of each shoulder on outside and turn coat to inside. Turn under edges of yoke lining at shoulder and baste upper part of each shoulder, continuing basting across neck at back.	Hand or Machine				Comrcl
	OR					
	b. In lieu of basting the lining at the shoulder as required in operations 30a, 34a, and hand felling as required in operation 35b, the front and yoke lining at shoulder may be trimmed to allow for thickness of the shoulder pad and stitched on the inside.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
31.	Set collar.					
	a. Seam topcollar to front facing at gorge to a point not less than 1 inch back of lapel breakline.	301	Ssa-1	10-14	50	50
	b. Tack gorge seam open catching bridle stay in the tacking.	301 or Hand		10-14 2-4	50 50 or Comrcl	50 or Comrcl 50 or Comrcl
	c. Baste undercollar to coat putting in proper fullness over the shoulder.	Hand or Machine			Comrcl	
	d. Tack outlet at neck to undercollar canvas interlining.	301 or Hand		4-6 2-3	50 50 or Comrcl	50 or Comrcl 50 or Comrcl
	NOTE: This operation shall not be performed when the neck edge (gorge seam to gorge seam) of the topcollar is machine stitched.					
	e. As an alternate (when used in lieu of a braid); for a hanger loop by folding the lining material in half lengthwise with the raw edges turned in face to face and stitched 1/16 inch from edge. The finished hanger loop shall measure 3/16 to 1/4 inch wide.	301	EFp-2	10-14	50	50
	f. Stitch the ends of a hanger loop (braid or lining) to neck edge with the loop centered over the center back seam.	301		10-14	50	50
	g. The finished hanger loop shall measure 1-3/4 (± 1/4) inches between inner edges.					
	h. Turn under lower edge of topcollar and baste across neck.	Hand or Machine			Comrcl	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	NOTE: This operation shall not be performed when the neck edge (gorge seam to gorge seam) of the topcollar is machine stitched.					
	i. Fell undercollar to neckline of coat by hand or machine and tack corners by hand.	Hand	LSa-1	8-10	C(silk)	
		or Ma-chine (hand type felling)	LSa-1	8-10	C (silk)	C
		or 306	LSa-1	8-10	0 (silk)	0
	NOTE: This operation shall be performed after the neck edge (gorge seam to gorge seam) of the topcollar is machine sewn. When 306 stitch type is used the raw edge of the undercollar shall be enclosed within the felling stitches.					
	j. Fell lower edge of topcollar from gorge seam to gorge seam tacking ends of hanger loop.	Hand		8-10	C (silk)	
	k. Finished collar shall measure as follows:					
	-Topcollar (measure from creaseline to outer edge) 1-5/8 (± 1/8) inches wide at center back.					
	- Collar stand section of undercollar (measure from creaseline to bottom edge) 1-1/4 (± 1/8) inches wide at center back.					
	l. In lieu of operations 31d, 31h, and 31j, stitch lower edge of topcollar across neck from gorge seam to gorge seam.	301	Smlr to SSbd-1	10-14	50	50
32.	Set in sleeves. Set sleeves, matching top sleeve notch with front armhole notch and backarm seam with back armhole notch, 3/8 inch from raw edge, distributing the fullness.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
33.	Press armhole seam. Press fullness of sleeve flat around the armhole. Press seam open across top from 3/4 to 1 inch above backarm seam to a point 3 to 4 inches forward of shoulder seam. In pressing armhole seam, care shall be taken not to stretch or distort armhole.					
34.	Baste and tack armholes. a. Baste around outside armholes positioning front backlining and shoulder pad and back of shoulder in place or back part of armholes may be basted from the lining side. Baste balance of shoulder lining. The shoulder edge of yoke lining shall be folded under and lapped over the front lining.	Hand or Machine			Comrcl	
	NOTE: In lieu of basting and hand felling operations the shoulder seam may be stitched by machine.	301	SSa-1	10-14	50	50
	b. Tack all around armhole through all plies of material.	Hand or 301		2-4 4-6	50 or Comrcl 50 or Comrcl	50
	NOTE: When armholes are tacked by machine, a loose but properly formed and elastic stitch shall be used. When armholes are tacked by hand, tacking shall be backstitched every other stitch from front notch to side (underarm) seam across top of armhole.					
	c. Tack across base of armhole from sleeve notch on front to side (underarm) seam.	301	SSa-1	4-6	50 or Comcrl	50
	d. Trim away excess lining, interlining and shoulder pads.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	e. Tack sleeve head wadding to armhole from front sleeve notch to back seam of sleeve. The sleeve head wadding shall be positioned with the folded edge adjacent to the edge of armhole, backing cloth side against sleeve and in such a manner as to cause it to fold on itself. The tacking shall be adjacent to the armhole seam and fullness shall be properly distributed. When armhole is tacked by machine, the sleeve head wadding shall be attached in the armhole tacking operation. When sleeve head waddings are tacked by hand, every other stitch shall be backstitched.	Hand or 301		2-4 4-6	50 or Comrcl 50 50 or Comrcl
35.	Complete felling.				
	a. Fell lining all around armholes. Backstitch pit of armhole from forearm seam of sleeve to side seam areas when armholes are hand felled. The sleeve lining shall be seam on seam with sleeve.	Hand or Machine (hand type)		7 (min) 6-8	C (silk) A (silk)
	OR				
	The sleeve lining may be stitched to the armhole on the inside from forearmseam of sleeve to the backarm seam across undersleeve.	301	SSa-1	10-14	50 50
Note:	When a hand stitch simulating machine is used, the operation shall be performed as a finishing operation versus an internal construction operation.				
	b. Hand fell lining at shoulder.	Hand		8-10	A or C (silk)
	c. Hand fell side of front lining the depth of the back yoke.	Hand		8-10	A or C (silk)
	d. Hand fell corners of yoke across side seam outlet.	Hand		8-10	A or C (silk)
	e. Hand fell corners of lining and facing at bottom.	Hand		8-10	A or C (silk)
	f. Hand fell corners of lining and bottom hem at side seam.	Hand		8-10	A or C (silk)

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	g. Front edge of inside pockets may be tacked by hand in lieu of operations 12i and 25. Tack through facing, pocket seam allowance and interlining from corner of pocket opening and down for a distance of not less than 3 inches.	Hand		2-4	A or C (silk)	
36.	Press fronts. a. Press left front prior to buttonhole operations.					
	b. Press right front and right and left lapels before removal of basting thread.					
37.	Mark and stitch buttonholes on left front. a. All buttonholes shall be eyelet end, square bar, cut first type reinforced with well worked over gimp with the stitching securely caught in the fabric and the ends of the gimp pulled through the underside. Buttonholes shall be clean, correctly positioned and the purling finishing on the outside.	Bartack or Hand		21 per bar-tack 10-12 per tack	C B (silk) C (silk)	
	b. The ends of all left front buttonholes shall be bartacked by hand or machine in a separate operation from buttonhole making; securely catching ends of gimp and covering the width of the bar. The bartack shall be not more than 3/16 inch long.					
	c. Stitch four horizontal buttonholes in left front as indicated by marks on pattern. The inside edge of eyelets shall be 5/8 to 3/4 inch from the finished edge of coat. The fully cut finished buttonhole after tacking shall measure not less than 1 inch nor more than 1-1/8 inches. The top buttonhole shall be on a line with the eyelet of buttonhole in breast pocket flaps.	But-ton-hole	Size: 1 inch 1-1/8 inches	53-60 60-70 (not including tack)	C B (silk)	
38.	Cleaning. a. Remove all basting threads.					
	b. All ends of stitching shall be trimmed and loose threads removed from the coat.					
	c. All spots and stains shall be removed. Shade tickets shall be removed without injury to the material.					

NOTE: Care should be taken when trimming to ensure that damage to fabric does not result.

Document Supplied by IHS Licensee=IHS Not for Resale, 12/10/2026 Distributed: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
39.	Pressing. a. Press edges of lapels, fronts, collar and bottom of coat on edge pressing machine. b. Press right and left fronts on right and left breast machine respectively, including pockets and flaps. c. Sleeves shall be roll pressed. d. Press balance of fronts, side seams, and back on body machine. e. Press collar on collar machine stretching outer edge of collar over shoulder area. Collar shall not be short nor too long. f. Press armholes and shoulders on an armhole machine. g. Press armhole solid on the inside. Crease the armhole from not less than 1/2 inch above backarm seam to not less than 4 inches of shoulder seam. The armpit and back of the armhole shall be held short and pressed flat. h. Press lapels. The creasing of the lapels shall extend a uniform distance from the gorge seam. The lapels shall be roll pressed from midway between the gorge seam to bottom of lapel.				
40.	Finish pressing. a. Press coat lining smooth with a hand iron maintaining creased pleats at front shoulder and center of yoke. b. Block armholes and shrink top sleeve. c. Press any wrinkle missed by previous pressing operations.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF COAT

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Touch up any areas missed by machine pressing.					
	e. Remove gloss and all pressing impressions.					
	f. Place coat on hanger until thoroughly dried.					
41.	Mark and sew buttons on right front. a. Mark the location of the four right front buttons to correspond with buttonholes on left front. Hand or machine sewn buttons shall have the thread ends securely tacked off with not less than two stitches and thread ends hidden. Buttons shall be sewn vertically aligned and 1-3/4 (+ 1/8) inches from front edge of right front with anchor in the upright position.					
	b. Sew a 35-line hopper back button on each mark thru all plies of material.	Hand		4 per button or double thread	12 or 16	
		or 101		14-16 per button	20	
		or 301		14-16 per button	20	20
		or 205		12 (min) per button	No. 4 nylon	
42.	Attach flap buttons. Insert shank of 22-1/2 line button thru buttonhole eyelet of each flap and secure with bodkin type toggle.					
43.	Attach size ticket. Attach removeable size ticket to outside of lower left sleeve.	Hand machine		2-4 6-8		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of finished coat shall be as shown in Table II (see Figure 1). All measurements are expressed in inches.

Table II - Sizes and finished measurements

	Chest	Coat Length (B)				Sleeve length(C)			
Sizes	(A)	Short	Regular	Long	Ex-Long	Short	Regular	Long	Ex-Long
33	36	27-7/8	29-3/8	30-7/8	32-3/8	16	17	18	19
34	37	28	29-1/2	31	32-1/2	16	17	18	19
35	38	29-1/8	29-5/8	31-1/8	32-5/8	16	17	18	19
36	39	28-1/4	29-3/4	31-1/4	32-3/4	16	17	18	19
37	40	28-3/8	29-7/8	31-3/8	32-7/8	16	17	18	19
38	41	28-1/2	30	31-1/2	33	16	17	18	19
39	42	28-5/8	30-1/8	31-5/8	33-1/8	16	17	18	19
40	43	28-3/4	30-1/4	31-3/4	33-1/4	16	17	18	19
41	44	28-7/8	30-3/8	31-7/8	33-3/8	16	17	18	19
42	45	29	30-1/2	32	33-1/2	16	17	18	19
43	46	29-1/8	30-5/8	32-1/8	33-5/8	16	17	18	19
44	47	29-1/4	30-3/4	32-1/4	33-3/4	16	17	18	19
45	48	29-3/8	30-7/8	32-7/8	33-7/8	16	17	18	19
46	49	29-1/2	31	32-1/2	34	16	17	18	19
47	50	29-5/8	31-1/8	32-5/8	34-1/8	16	17	18	19
48	51	29-3/4	31-1/4	32-3/4	34-1/4	16	17	18	19
Tolerance		±3/4	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

NOTE: Chest and length of coat measurements shall be taken with coat fully buttoned, placed smooth and flat.

(A) Chest - Twice the measurement taken across front at the base of armholes from folded edge to folded edge.

(B) Coat length - Measurement taken from the base of undercollar (seam), down center back to bottom of coat.

(C) Sleeve length - Measurement taken from the base of the armhole, along inseam to bottom of sleeve.

3.9 Workmanship. The finished coats shall conform to the quality of product established by this specification. As a final step in the contractor's production control plan before formation of a lot, each dress coat (after pressing but prior to packaging) shall be buttoned on a model form and examined for selected defects. A coat containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in section 4 and are indicated by an asterisk (*). The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition a certificate of compliance will be acceptable as evidence that the tape for staying the front edges of the coat shall conform to the cross cut, width, and edge treatment requirements in 3.3.10.2 and the colorfastness requirements of 3.3.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.2 In-process inspection. Examination shall be made of the following operations to establish conformance to specified requirements. The contractor shall inspect a minimum of 30% of each bundle in the sewing lot. Whenever nonconformance is noted, the contractor shall inspect 100% of those bundles in in question, and corrections shall be made to the items affected, the lot in process and to the operation. Parts which can not be corrected shall be removed from production. The contractor shall establish inspection stations for the following defects.

a. Visual and dimensional examination of the working patterns to determine that they conform to the government patterns in all respects.

b. Visual and dimensional examination of the cut parts to determine that they are properly cut with respect to size, material directional requirements (warp and filling); that location marks and notches on the parts are located correctly; and that parts containing material defects and damages have been removed and replaced. (table I, operation 1 and 2)

c. Visual examination of cut small part operations to insure that they are produced in accordance with specification requirements.

d. Visual examination of pressed fronts to determine that pressing is performed correctly and proper pressing machine is used (Table I, operation 18g).

e. Visual examination of collar gorge seam to determine seam is tacked open and the bridle tape is caught in the tacking. (Table I, operation 31b).

f. Visual examination of sleeves (prior to basting lining to armhole, side seams, and bottom of coat) to determine that sleeves are set uniformly with fullness at armhole distributed without pleats or puckers (Table I, operation 32).

g. Visual examination of taped front and back armholes to determine that armhole tape is stitched correctly without any indication of a stretched back and front armhole (table I. operation 20d and 20e).

4.4.2.1 In-process examination of coat fronts. The right and left coat fronts after stitching darts, making lower pockets, and attaching breast pockets, pocket flaps, coat front interlinings and bridle tape shall be examined for the defects listed below. The lot shall be all pairs (matched right and left) of coat fronts submitted for inspection at one time. The sample unit shall be one pair of coat fronts (right and left). The inspection level shall be II and acceptable quality level (AQL's), expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Examine	Defect
Darts, underarm	a. One or more omitted b. One or more not as specified c. One or more not pressed as specified
Front interlining	a. Not attached or positioned as specified b. Basting and tacking of front to interlining omitted or insecure. c. Padding of lapel not blind stitched with six rows of stitching with fullness of the interlining between each row of blindstitching.
Breast pockets, flaps	a. One or more misaligned or not parallel with front edge.
Bridle tape	a. Omitted, not held taut causing breakline to be stretched b. Misplaced at gorge: - More than 3/8 inch behind lapel breakline - Onto or extending beyond breakline or lapel side. c. Misplaced at bottom lapel breakline: - More than 5/8 inch behind breakline. - Onto or extending beyond breakline or lapel side. - Not within 1 to 1-1/2 inches from bottom of lapel. d. Tape and interlining not stamp marked for fullness of bridle.

4.4.2.2 In-process examination of fronts and backs after joining. The fronts and backs after joining shall be examined for the defects listed below. The lot shall be all joining fronts and backs submitted for inspection at one time. The sample unit shall be one joined front and back. The inspection level shall be II and the AQL's expressed in terms of defects per hundred units shall be 1.5.

Examine	Defects
Fronts and lapels	a. One or more not shaped in accordance with shaper pattern b. Interlining of lapels, bottoms and front edges not trimmed as specified.
Left front	a. Not dressed from bottom notch to base of lapel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.3 Examination of the end item. Examination of the end item shall be in accordance with 4.4.3.1 through 4.4.3.3. The applicable acceptable quality levels (AQL's) shall be as indicated in 4.4.3.3. The sample unit shall be one finished coat. The lot size shall be expressed in units of coats. As part of the end item examination, the appropriate number of coats determined from the table below shall be measured for selective dimensions. The purpose of measuring is to detemine conformance with the dimensions requirements cited in this specification. The sample will be inspected for all end item characteristics as well as measured for this dimensional inspection. Additional dimensional measurements may be taken at any time in the remainder of the end item examination. The defects scored during this inspection will be included in the defects scored for the entire specified sample size of the end item examination.

The contractor will clearly identify the units subjected to this measurement inspection by stamping the identification/instruction label with a 1/2 inch stamp depicating a -D-, using indelible ink.

Sample size will be determined as indicated below:

Lot Size	Sample Size
Up thru 500	8
501 thru 3200	13
3201 thru 35,000	20

4.4.3.1 Visual examination. The coats shall be examined for defects of shade, design, material, construction and workmanship, and the defects classified in accordance with Table III. The model forms for examination of defects X through XXIV in Table III shall be men's forms conforming to measurements specified below. The coat sizes tested shall be examined on the appropriate model form size as specified below.

Model Form Measurements for Coast Guard Coats

		Model form measurements (± 1/2 inch)		
Coat size	Model form size	Chest	Waist	Seat-Hip
33	32	34	28	34
34-35	34	36	30	36
36-37	36	38	32	38
38-39	38	40	34	40
40-41	40	42	36	42
42-43	42	44	38	44
44-45	44	46	40	46
46-47	46	48	42	48
48	48	50	44	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table III - Classification of defects 1/

Defect	Major	Minor A	Minor B
I. MATERIAL DEFECTS AND WORKMANSHIP DAMAGE			
a. Any hole, cut, tear, smash, mend, burn, scored area, or open place:			
1. On outside	X		
2. On inside (longest dimension in any direction):			
(a) - up to 1/4 inch, inclusive			X
(b) - more than 1/4 inch		X	
b. Loose yarn, misweave, area of no dye penetration, dye streak, missing yarn, broken yarn, thin place, shade bar, or woven in waste; more than 1/4 inch (largest dimension in any direction) on outside.		X	
c. Permanent fold, pleat, or crease in cloth (when caught in seaming or stitching) on outside	X		
d. Needle chew:			
1. On outside:			
(a) - up to 1/4 inch inclusive		X	
(b) - more than 1/4 inch	X		
2. On inside:			
(a) - up to 1/2 inch inclusive			X
(b) - more than 1/2 inch		X	
e. Knot or slub on outside (exceeding the limits specified in the basic cloth specification)		X	
II. SHADED PART			
a. On outside:			
1. Variation in shade within a part or between parts (except parts which may be cut from ends).	X		
2. Part cut from ends badly shaded			X
b. On inside:			
1. Any lining part badly shaded (except sleeve linings)			X
2. Sleeve lining part badly shaded, pairs not matching each other			X

1/ Defects I through X are general defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
III. PRESSING			
a. Pressing omitted (any specified operation)	X		
b. Excess gloss or poorly pressed		X	
c. Edge bulky, i.e., not pressed solid			X
d. Lapel not roll pressed as specified			X
e. Sleeve not pressed as required		X	
f. Armhole stretched		X	
g. Armhole not blocked		X	
h. Inside of armhole not creased as required		X	
i. Lining (except sleeve linings) not finish pressed		X	
j. Any required seam not pressed open or not pressed smooth and flat for more than 1/2 inch			X
k. Finished pressed width of lapel not uniform (i.e., one side finishing 1/4 inch or more than other when measured across upper portion of horizontal from forced out edge to lapel crease line)		X	
l. Improper pressing, i.e., pleat, pressed fold or crease (on outside)		X	
IV. CLEANNESS			
a. Spot or stain on outside:			
1. Up to 1/4 inch inclusive in longest direction		X	
2. More than 1/4 inch in longest direction	X		
b. Any marking exposed or visible on outside	X		
c. Five or more thread ends on inside not trimmed to 1/2 inch or less or three or more threads on outside not trimmed to 1/4 inch or less		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
d. Two or more shade or size tickets on coat not removed			X
e. Basting thread (including monofilament thread or fragments of monofilament thread) not completely removed from outside			X
V. COMPONENT AND ASSEMBLY			
a. Any component part or operation omitted (unless otherwise classified herein)	X		
b. Any component not as specified (type, size, color, etc)	X		
c. Any component part tight, twisted, distorted, pleated, or full (unless otherwise classified herein)			X
d. Any operation not performed as specified (unless otherwise classified herein)			X
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X	
VI. CUTTING			
a. Any component part not cut in accordance with specified pattern, directional lines on patterns or in accordance with specification requirements	X		
b. Twill line of any outside part not running in specified direction	X		
VII. SEAMS AND STITCHING			
a. Accuracy of seaming:			
1. Seam puckered (on outside) (When examined at a distance of 3 feet and compared with the AATCC photographic comparative rating Method 88B for seams, puckering is equal to or worse than a rating of 3)			
(a) - From 1/4 to 1/2 the length of seam			X
(b) - More than 1/2 the length of seam		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
2. Seam irregular, pleated, or wavy (unless otherwise classified herein)		X	
3. Any part of coat caught in an unrelated operation or stitching		X	
4. Blindstitching, tacking, or hand felling of armhole exposed on outside			X
5. Machine felling or hand felling (other than around armhole) exposed for a distance of 3/8 inch or more			X
6. End of stitching when not caught in another seam or stitching not finished as specified.			X
7. Stitching overlapping end of thread break less than 1/2 inch			X
8. End of a continuous line of stitching overlapped less than 1/2 inch			X
9. Not specified color thread used on outside		X	
10. Needle perforation visible on outside of coat		X	
b. Gage of stitching and seam allowance:			
1. Edge, top, or raised stitching sewn too close to edge resulting in damage to cloth	X		
2. Seam allowance not as specified by 1/16 inch or more (score only when condition exists on more than half the length of the seam).			X
3. Irregular or not within range specified or varies more than 1/16 inch when no range or tolerance is specified (score only when condition exists on more than half the length of the seam).			X
c. Open seam: 2/			
1. On outside (excluding lower edge of undercollar):			
(a) - more than 3/4 inch	X		
(b) - more than 1/2 inch up to 3/4 inch inclusive		X	
(c) - up to 1/2 inch inclusive			X

2/ Classify a seam as open when one or more stitches joining a seam are broken or run off, or when two or more continuous skipped stitches occur.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
2. On inside: Machine felling and hand felling (other than hand felling around armhole):			
(a) - more than 3/8 inch up to 2 inches inclusive			X
(b) - more than 2 inches		X	
3. On inside: Stitch type 301 and hand felling around armhole			
(a) - up to 2 inches inclusive			X
(b) - more than 2 inches		X	
d. Raw edge: 3/			
1. On outside:			
(a) - up to 1/2 inch inclusive			X
(b) - more than 1/2 inch up to 3/4 inch inclusive		X	
(c) - more than 3/4 inch	X		
2. On inside:			
(a) - 3/8 inch up to 2 inches inclusive			X
(b) - more than 2 inches		X	
e. Seam and stitch type:			
1. Not specified seam or stitch type		X	
2. Any line of stitching omitted or insecure	X		
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Looper thread of 401 stitch type on outside	X		

3/ Classify any edge not finished as specified including any protruding edge on the outside of the coat as a raw edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
f. Stitch tension:			
1. Loose tension resulting in a loose seam:			
(a) - up to 1/2 inch inclusive			X
(b) - more than 1/2 inch up to 3/4 inch inclusive		X	
(c) - more than 3/4 inch	X		
2. Loosely exposed loops of lower or top thread on edge, top, or raised stitching		X	
3. Tight tension (stitches break when strain is applied in the direction of the seam or stitching)	X		
g. Stitches per inch (score only when condition exists on more than half the length of seam):			
1. More than the maximum specified			X
2. Less than the minimum specified			
(a) - by one or two stitches			X
(b) - by three or more stitches		X	
h. Runoff, skipped or broken stitch			
1. Joining seam - use (open seam) classification (see VII.C)			
2. Edge, top, or raised stitching (more than 1/4 inch)			X
i. Bartack, backtack, tack, or tacking (except buttonhole bartack):			
1. Missing, insecure, misplaced, not serving intended purpose, or not specified size or type			X
2. Loose stitch tension			X
VIII. BUTTONHOLE OR EYELET			
a. Omitted, added, not specified type, or not finished as specified	X		
b. Gimp omitted, uncut, finished length or diameter not as specified, or end of gimp not pulled through to underside on square bar type buttonholes (except on flaps)		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
c. Ragged edge, incomplete stitching, stitching not securely caught in fabric, bulky appearance, or stitches not uniform		X	
d. Broken stitch, or two or more skipped stitches		X	
e. Buttonhole stitching extending beyond bartack		X	
f. Bartack missing, loose, or misplaced (not serving intended purpose)		X	
g. Stitches per buttonhole, eyelet, or bartack less than specified by:			
1. One to three stitches			X
2. Four or more stitches		X	
h. Flap buttonholes not specified type or size or cut as specified			X
IX BUTTON OR TOGGLE			
a. Omitted, broken, or defective		X	
b. Out of horizontal or vertical alignment by:			
1. 3/16 to 3/8 inch			X
2. More than 3/8 inch		X	
c. Misplaced, loose, not attached as specified, or insecurely sewn			X
d. Tacking stitches omitted or insecure (hand sewn)			X
e. Button sewn with anchor and wings of eagle in other than upright position (front and flap buttons)			X
f. Stitching on button not locked at end of cycle (tug at loose end of the thread when accessible to determine whether it will ravel)			X
Note: Coat should be buttoned on model form.			
X. ALIGNMENT OF FRONT, BUTTON, OR BUTTONHOLE			
a. Top front button or buttonhole out of horizontal alignment with breast pocket flap buttons by:			
1. More than 3/8 inch up to 1/2 inch inclusive	X		
2. More than 1/2 inch	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
b. Lower front button or buttonhole misplaced by more than 3/8 inch from top of pocket	X		
c. Left front rolling outward below bottom front button	*		
d. Button and buttonhole not aligned, causing a bulge or twist on front	X		
e. Front buttonhole position (from inside edge of eyelet):			
1. Less than 5/8 inch but not less than 3/8 inch, or more than 3/4 inch, but not more than 7/8 inch from edge			X
2. Less than 3/8 inch or more than 7/8 inch from edge		X	
3. Unevenly spaced from edge by 1/8 inch or more			X
f. Spacing between front buttonholes varying more than 1/4 inch			X
XI. LENGTH OF BUTTONED FRONT			
a. Left front shorter or longer than right front at bottom by:			
1. More than 1/8 inch up to 1/4 inch inclusive		X	
2. More than 1/4 inch up to 1/2 inch inclusive	X		
3. More than 1/2 inch	*		
XII. POCKET OR FLAP			
a. Misshapen or distorted - any point varying from finished shaper by:			
1. 1/4 inch or more but less than 1/2 inch	X		
2. 1/2 inch or more	*		
b. Not uniform in size or shape, varying from matching part by:			
1. 1/4 inch or more but less than 1/2 inch		X	
2. 1/2 inch or more	X		
c. Out of alignment or misplaced by: 3/			
1. 1/8 inch to 1/4 inch inclusive		X	
2. More than 1/4 inch up to 1/2 inch inclusive	X		
3. More than 1/2 inch	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
d. Flap (any)			
1. Twisted or bulged when tacked and buttoned	X		
2. Full		X	
3. Bottom corner of flap curled upwards; stitching joining flap to front not caught through twill cloth stay piece or flap not completely covering pocket opening.		X	

3/ Following focal points shall be measured in the examination for this condition:

1. Flap: Top corner of flap nearest front edge of coat and front edge of flap just before the curved corner.			
2. Patch pocket: Bottom of straight edge nearest front edge of coat.			
3. Welt pocket: Top corner or pocket nearest front edge of coat.			
4. Misplaced, not positioned as specified		X	
5. Raw edge beneath top edge of flap; corner of flap; corner of flap not securely backstitched			X
6. Buttonhole out of alignment with point at center of flap by more than 1/8 inch or not positioned as specified			X
7. Overedge stitching omitted			X
e. Breast pocket flap			
1. Point at center of flap from center of pocket pleat:			
(a) - more than 1/8 inch up to 1/4 inch inclusive			X
(b) - more than 1/4 inch		X	
2. Lower side edge of flap not covering side of pocket by:			
(a) - more than 3/16		X	
(b) - 1/8 up to 3/16 inch (inclusive)			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
3. Pocket flaps are tacked at each corner:			
(a) - tacking visible on outside of flap			X
(b) - less than 2 stitches on hand tacking			X
f. Breast pocket:			
1. Side of pocket not parallel with front edge of coat by: 5/			
(a) - more than 3/8 inch	X		
(b) - 1/4 inch up to 3/8 inch		X	
2. Twill cloth exposed on pocket edge or twill cloth tight or short causing fullness or puckers in outside of pocket		X	
3. Stitching at end of pocket opening not securely stitched through stay piece; or end of stitching at end of pocket not backtacked as specified			X
g. Lower pocket opening:			
1. Opening gapped by 1/4 inch or more or length of opening not as specified			X
2. Width of corded or piped edge not as specified by more than 1/6 inch			X
3. Front edge of flap not parallel with front edge of coat by more than 1/4 inch when coat is buttoned			X
4. End of facing not caught in twill cloth pocket seaming			X
5. Tacking at ends of pocket opening omitted or insecure			X

5/ Measure from straight front edge of coat to front edge of pocket at top (immediately below flap), and also at bottom of pocket, just before the rounded corner. Any difference between measurements is the amount pocket is not parallel with front edge.

XII. LAPEL OR COLLAR

a. Misshapen or distorted - any point varying 1/4 inch or more with corresponding point on finished shaper	X		
b. Not uniform insize or shape - any point varying			
1. More than 1/4 inch with corresponding point on matching part	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
2. More than 1/8 inch but not more than 1/4 inch with corresponding point of matching part		X	
c. Twisted, short, or tight, causing collar or lapel to turn out	*		
d. Collar:			
1. Collar rolling up above collar breakline by more than 1/8 inch	X		
2. Long, i.e., setting away from neck, or lapel rolling higher than 2 inches above top front button or buttonhole	X		
3. Tight at joining to gorge seam or across back, causing fullness or pleats on lapel or across outside back	X		
4. Collar edge:			
(a) - crooked, irregular, or wavy		X	
(b) - undercollar exposed along collar edge for a length of 1/4 inch or more			X
5. Gorge seam not spread open (any portion): not straight; tacking insecure or tacking omitted			X
6. Gorge seam not uniform in length by 1/4 inch or more (measure from collar breakline to end of gorge seam notch)			X
7. Tacking in corner of undercollar to lapel omitted or insecure			X
8. Top collar full, having pucker or folds 1/8 inch or more from edge of undercollar		X	
e. Undercollar:			
1. Interlining pleated, affecting smoothness of top collar		X	
2. Center seam more than 1/4 inch from center back seam; width of undercollar stand at center back seam not as specified			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
3. Interlining or undercollar tight causing pleat or puckers on undercollar of neck of coat			X
4. Lower raw edge of undercollar not enclosed within felling stitches for more than 3/4 inch			X
5. Blind tacking at corner of collar and lapel exposed on outside of coat			X
6. Bottom edge of undercollar exposed beyond collar edge		X	
f. Lapel:			
1. Gap between top edge of lapel and end of collar on one side of coat not uniform with other side of coat by:			
(a) - more than 1/8 inch up to 1/4 inch		X	
(b) - 1/4 inch up to 3/8 inch	X		
(c) - 3/8 inch or more	*		
2. Puckers of pleat	X		
3. Lapel edge irregular or wavy		X	
4. Lapel edge not fully forced out (i.e., having folds of more than 1/8 inch), or front part exposed on lapel edge		X	
5. Bridle tape not held taut causing breakline to finish flat.	X		
6. Fullness (not smooth and flat)		X	
7. Bridle tape misplaced:			
(a) At gorge			
(1) - more than 3/8 inch up to 5/8 inch beyond lapel breakline	X		
(2) - more than 5/8 inch	*		
(3) - bridle tape basted onto or extending beyond breakline on lapel side	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
(b) At 1-1/2 inches from lapel bottom:			
(1) - more than 5/8 inch up to 7/8 inch behind lapel breakline	X		
(2) - more than 7/8 inch	*		
(3) - bridle tape basted onto or extending beyond breakline on lapel side	*		
(c) Bridle tape end not within 1 to 1-1/2 inches from bottom of lapel		X	
XIV. SHOULDER CONSTRUCTION			
a. Improperly joined or set, causing shoulder or back to twist	X		
b. Shoulder seam curved towards back from normal position at armhole end by:			
1. More than 3/8 inch		X	
2. 1/4 inch up to 3/8 inch, inclusive			X
XV. SHOULDER PAD			
Not completely caught in armhole tacking; or misplaced, not serving intended purpose, i.e., too far back or too far forward		X	
XVI ARMHOLE OR SHUOLDER			
a. Fullness or puckering in any of the following locations:	X		
1. Over shoulder in back area			
2. In collar or shoulder area			
3. Between lapel and sleeve seam			
b. Puckering on front or back of coat around armhole from back seam to forearm seam	X		
c. Stretched affecting appearance	X		
d. Crooked seam; armhole not completely tacked; sleevehead pad not completely tacked; or sleevehead pad misplaced, not serving intended purpose		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
XVII. SLEEVE			
a. Setting and hang:			
1. Break or twist on sleeve, or top sleevehead too short	*		
2. Sleeve fullness misplaced or concentrated in one area	X		
3. Sleeve tight, i.e., front or back part of sleeve not having roll effect at armhole	X		
4. Sleeve too far front or back, i.e., front edge of sleeve away from center of lower flap button or center of pocket:			
(a) - more than 2 inches	X		
(b) - more than 1 inch up to 2 inches, inclusive		X	
5. Sleeve lining too long, causing lining to sag below bottom edge of sleeve by more than 1/4 inch		X	
b. Construction of sleeve:			
1. Wigan twisted, tight, or pleated, causing ridge or puckering on outside of sleeve		X	
2. Bottom edge of wigan not extending to bottom edge of sleeve by more than 1/8 inch, or tacking on bottom turn up to wigan omitted or insecure			X
3. Sleeve lining seam out of alignment more than 3/4 inch with sleeve seam at armhole or at bottom of sleeve			X
4. Sleeve bottom edge uneven by more than 1/4 inch			X
5. Tacking on sleeve lining seam to sleeve seam omitted, insecure, or incomplete for a distance of more than 6 inches from top or bottom edges			X
6. Sleeve lining twisted, tight, or short causing fullness or twist on outside of sleeve	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
XVIII. FITTING			
a. Fitting of body and yoke lining: tight, short, or twisted causing fullness or twist on outside of coat	X		
b. Fitting of front interlining:			
1. Tight or short causing fullness on outside of coat	X		
2. Too full causing coat front to have a wavy appearance or not lie smoothly	X		
XIX. FRONT AND BOTTOM EDGE			
a. Front rolling outward below bottom button	*		
b. Front edge stretched, puckering, or fold more than 1/8 inch on front or bottom edge, front edge irregular, or bottom corner of left front misshapen or distorted		X	
c. Left front below bottom button, swings to right or left of the perpendicular by more than 1/2 inch			X
XX. VENT OPENING			
a. Left vent edge stretched causing vent to spread open	X		
b. Left vent edge crooked or irregular; or right vent lining tight, short, or twisted, causing fullness on outside of right vent.		X	
c. Left vent 1/4 inch or more longer or shorter than right vent, or bottom turnup exposed or visible on left front edge			X
d. Diagonal row of stitching across top of vent opening omitted			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
XXI. SIDE SEAM OR CENTER BACK SEAM			
a. Side seam or center back seam puckered		X	
b. Side seam or center back seam full	X		
c. Side seam or center back seam twisted (i.e., having a diagonal twist on front or back of coat)	X		
XXII. HANGER			
End not secure or length not as specified			X
XXIII. FRONT FACING			
a. Short, tight or twisted, causing fullness or twist on fronts	X		
b. Exposed beyond edge of left front by more than 1/16 inch			X
c. Tacking catching through pocket or forepart			X
d. Tacking of back edge to interlining insecure or incomplete for a distance of more than 2-1/2 inches below shoulder seam, more than 2 inches above bottom of coat; or felling at bottom corner of facings omitted or insecure			X
e. Fullness on facing between button, buttonhole, or between front edge and button or buttonhole			X
Coat should be layed out flat and smooth on table			
XXIV. INSIDE POCKET			
a. Opening not extending into facing - 1/4 to 3/4 inch, or extending into armhole			X
b. Pocket opening badly gapped, width of opening or depth of pocket not as specified			X
XXV. LABEL			
a. Missing, incorrect, or illegible			
1. Size label, instruction label or combinationlabel		X	
2. Identification label			X
b. Not attached as specified, misplace, or stitching through the printing			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Major	Minor A	Minor B
XXVI. SIZE TICKET			
a. Missing, incorrect, or illegible			X
b. Not securely tacked to right front sleeve			X
XXVII. BACK YOKE			
a. Width of center pleat less than specified, center pleat omitted or width of bottom hem not as specified			X
b. Felling at lower edge of yoke lining to side seam outlet omitted or insecurely felled on one or both sides			X
XXVIII. FRONT BODY LINING			
a. Pleat omitted at shoulder, underarm dart omitted		X	
b. Lining exposed below bottom edge of coat		X	
c. Felling on bottom corners of lining and vent omitted or insecure			X
d. Pleat on center back lining omitted		X	
XXIX. RIGHT VENT LINING			
a. Top edge not completely covering edge of center back seam outlet			X
b. Diagonal stitching across top of vent not full width of left back seam allowance			X
XXX. LINING SIDE OF ARMHOLE			
Backstitching at armpit of armhole, from forearm seam of sleeve to side seam omitted (hand type sewing only)			X
XXXI. BOTTON HEM AND TURNUP			
a. Hem and back parts twisted or irregular in width by 1/4 inch or more			X
b. Tacking on turn-up of front to front omitted or insecure			X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.3.2 Dimensional examination. The coats shall be examined for measurement defects in accordance with Table II. Any measurement deviating from nominal dimensions and tolerances shall be scored as a measurement defect.

4.4.3.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units for visual and dimensional examination shall be as follows:

	AQL	Inspection level
For visual examination in 4.4.3.1		
Major	1.0	III
Major, Minor A (combined)	6.5	III
Total (Major, Minor A and B combined)	15.0	III
For dimensional examination in 4.4.3.2	4.0	S-3

* 4.4.4 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

* 4.4.5 Packaging inspection. Packaging inspection of hanger packs shall be in accordance with MIL-C-44192. The occurrence of defects shall not exceed the applicable point value or defect limit specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 4.4.6 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

* 5.1 Preservation-packaging. Packaging shall be level A, C or hanger packs as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Folding. Each coat shall be laid back down and a bending or non-bending paperboard shoulder form shall be inserted into the coat so as to fit snugly into the collar and shoulders. The buttonhole front shall overlap the button front. The sleeves shall be positioned full length so that sleeve ends rest over the pockets. The coat shall then be folded inhalf by bringing the collar portion down even with the bottom edge so that the folded coat measures not more than 23 by 15 inches.

5.1.2 Level C. Coats shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

* 5.1.3 Hanger packs. Coats shall be hung with fronts lapped and unbuttoned on a 17 inch hanger and preserved as specified in the appendix of MIL-C-44192.

* 5.2 Packing. Packing shall be level A, B, C or hanger packs as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Five coats of one size and length only, packaged as specified in 5.1.1.1 shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather resistant, grade V15c, variety DW, size 2A of MIL-B-17757. The fiberboard used for fabricating the box liner shall conform to type CF, class domestic, of MIL-B-17757. Level A folded coats shall be stacked flat, collars alternated, five in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Level B. Five coats of one size and length only, packaged as specified in 5.1.1.1 shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard used for fabricating the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A folded coats shall be stacked flat, collars alternated, five in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.2.4 Hanger packs. When specified (see 6.2), 12 coats of one size and length only, packaged as specified in 5.1.3 shall be packed in a Type I container, using style A or B hanger bar in accordance with MIL-C-44192. No mixed sizes are permitted within the same container.

* 5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129. When hanger pack containers are used, the container shall have marked on each side in bold, clear, red or blue lettering not less than two inches high "DO NOT DROP" and "THIS SIDE UP" with arrows pointing to the top of the container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4.1 Hanger packs. When specified (see 6.2), coats packed as specified in 5.2, shall be palletized in accordance with the appendix of MIL-C-44192 using pallet load pattern number 95.

6. NOTES

6.1 Intended use. The coat specified herein is part of the dress uniform worn by the Coast Guard enlisted male personnel.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification
b. Sizes and lengths required (see 1.2).
c. When first article sample is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arragements for examinations, quantity, and testing and approval of the first article.
d. Levels of packaging and packing required (see 5.1 and 5.2).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

*6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

*6.7 Subject term (key word) listing.
Coat, dress, Coast Guard
Polyester/wool serge
Single breasted
Uniform, dress

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8405-N064

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

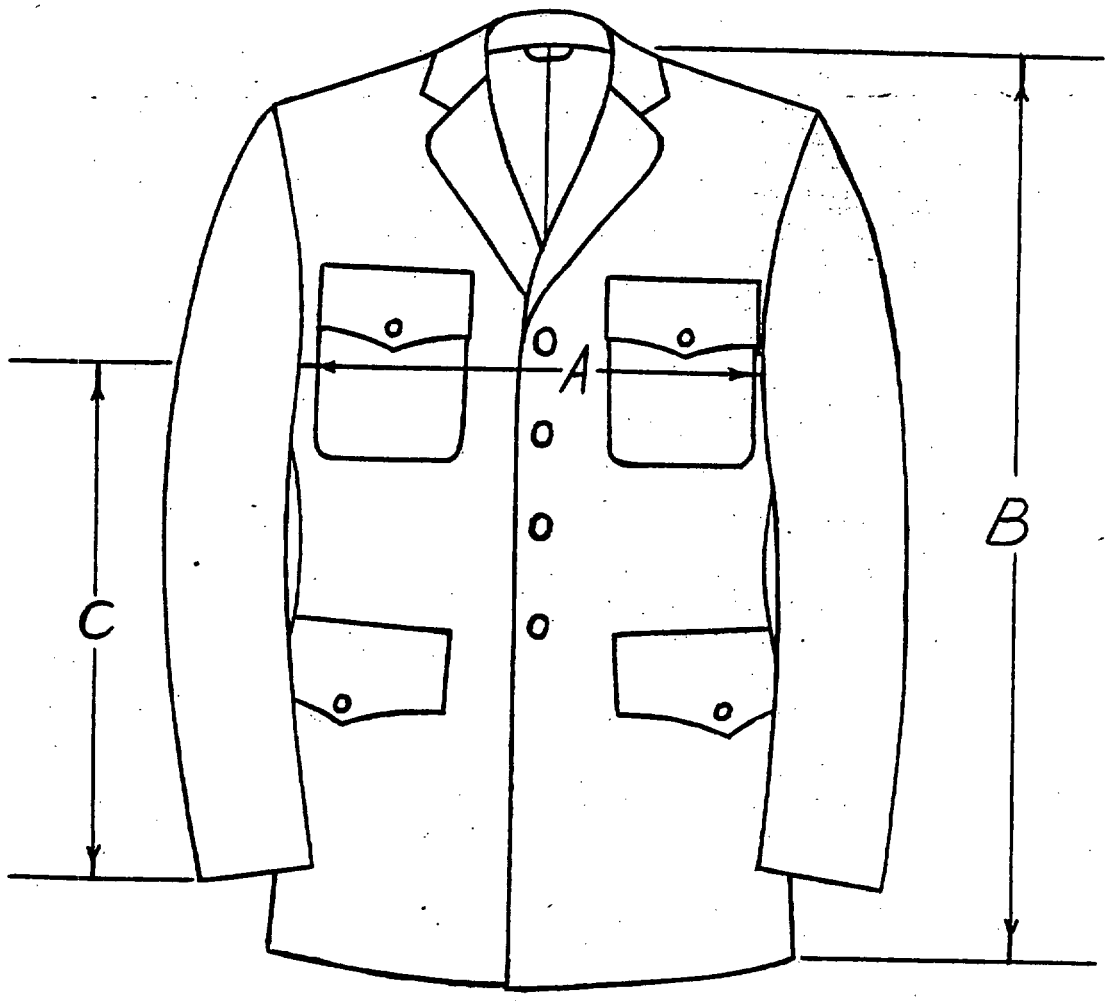


FIG. 1 - COAT, MAN'S, POLYESTER/WOOL, SERGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

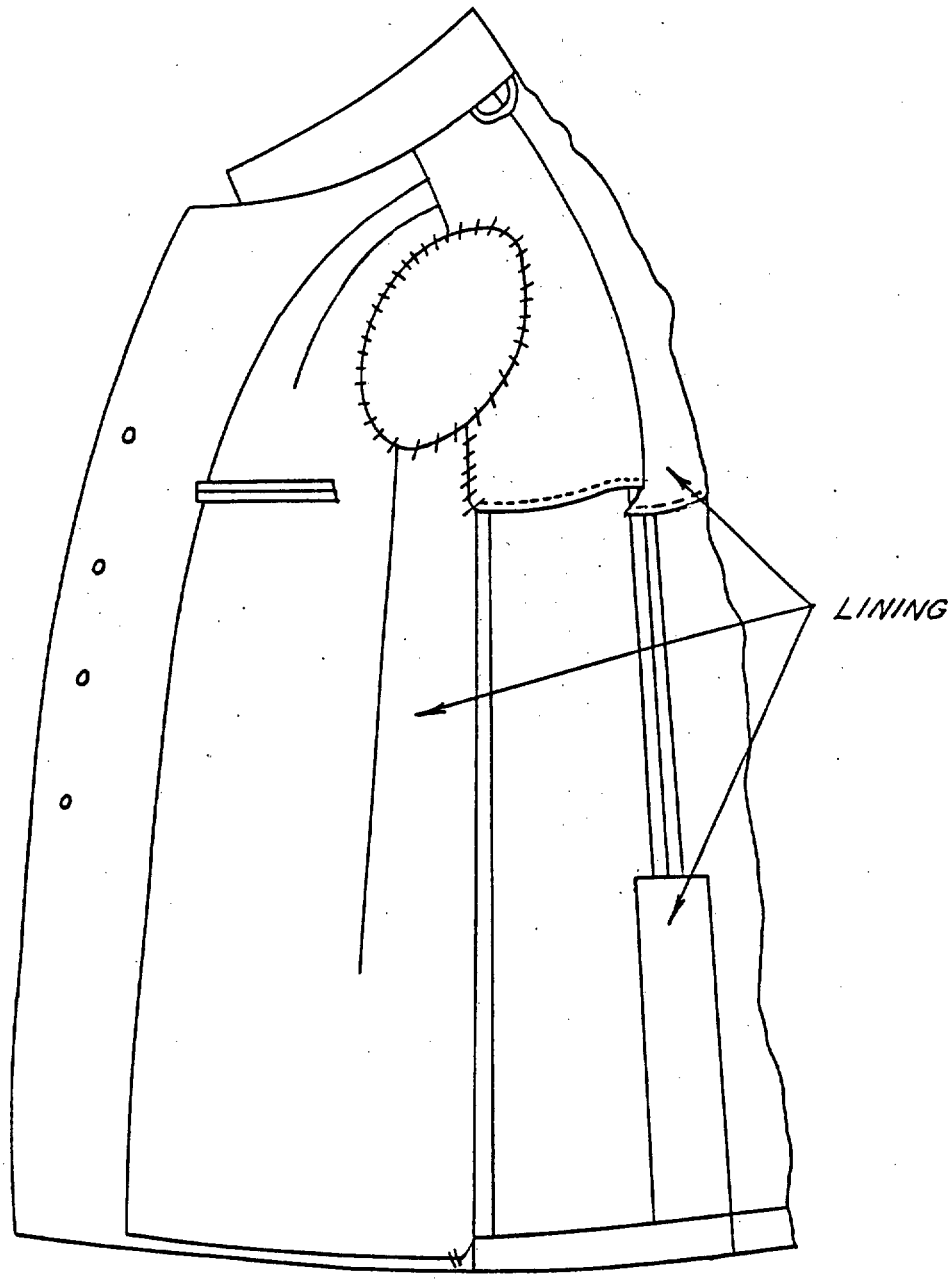


FIG. 2-COAT, MAN'S, POLYESTER/WOOL, SERGE

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:52Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-87026A(CG)	COAT, MAN"S, POLYESTER/WOOL, SERGE (COAST GUARD)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.