MIL-C-87032B(SH)
18 April 1986
SUPERSEDING
MIL-C-87032A(SH)
26 June 1978
(See 6.7)

MILITARY SPECIFICATION

COVERALLS DIVER'S (MK-12)

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for the MK-12 diver's coverall.

1.2 Classification. The coveralls shall be of one type in the following sizes:

1 (Small)
2 (Medium)
3 (Large)
4 (X-Large)
5 (XX-Large)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-T-295 - Thread, Nylon.
DDD-L-20 - Label: For Clothing, Equipage, and Tentage, (General Use).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Sea Systems Command, SEA 55Z3, Department of the Navy, Washington, DC 20362-5101 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4220
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

FEDERAL (Continued)
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-636 - Boxes, Shipping, Fiberboard.

MILITARY
MIL-C-7219 - Cloth, Duck, Nylon.
MIL-F-21840 - Fastener Tapes, Hook and Pile, Synthetic.
MIL-C-43006 - Cloth and Strip Laminated, Vinyl-Nylon High Strength, Flexible.

STANDARDS

FEDERAL
FED-STD-751 - Stitches, Seams and Stitchings.
FED-STD-595 - Colors.

MILITARY
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

2.1.2 Other Government document. The following other Government document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issue shall be that in effect on the date of the solicitation.

DEPARTMENT OF DEFENSE (DoD), DEFENSE PERSONNEL SUPPORT CENTER (DPSC)
Handbook 4120.1: List of Armed Services Colors for Clothing Equipage and Textiles.

(Application for copies should be addressed to the Commander, Defense Personnel Support Center, Code DPSC-LS, 2800 South 20th Street, Philadelphia, PA 19101.)

(Copies of specifications, standards, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)
D 3951 - Standard Practice for Commercial Packaging. (DoD adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

THE COLOR ASSOCIATION OF THE UNITED STATES
Department of Defense Standard Shades for Sewing Threads 1968.

(Application for copies of the color card should be addressed to the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.2 Material.

3.2.1 Basic material. The material used in fabrication of the coverall shall be a nylon duck conforming to either type II, class 1 or type III, class 1 of MIL-C-7219. Color of the material shall conform to blue, 3369 of DPSC Handbook 4120.1. Standard sample swatches may be obtained from Commander, Defense Personnel Support Center.

3.2.2 Fastener tapes. The hook and pile fastener tapes to be used shall conform to type II, class 4 of MIL-F-21840. The color shall conform to black 3230 in accordance with the Department of Defense Standard Shades for Sewing Threads. The hook and pile fastener tapes shall be supplied in the following widths:

(a) 1-inch wide hook and pile shall be used in shoulder loops, pocket and flaps (side hip), adjustable band (thigh), pocket and adjustable band (calf).
(b) 2-inch wide hook and pile shall be used in sleeve opening, leg opening, inner front flap, left side front, pocket and flap (thigh) and flap (calf).

3.2.3 Thread, nylon. The nylon thread shall conform to type I, class A, size E of V-T-295 and shall be black AA CA 66043 in color.

3.2.4 Cloth, laminated. The laminated cloth used as strips along sleeves, legs and for size number shall conform to type I, class 2, form 1 of MIL-C-43006. The color shall conform to yellow 23655 of FED-STD-595. The width of the strips for sleeves and legs shall be 1-1/2 ± 1/8 inches.

3.2.5 Loops. The metal loops used with the leg straps shall be steel or brass wire, with a chrome or rustproof finish, 1/8 inch diameter. Inside dimensions of the loop opening shall be 1 by 1/2-inch (see 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.2.6 Label. Each coverall shall have a label conforming to type I, class 14 of DDD-L-20. The label shall bear the following information:

Coverall, diver's, (MK-12)
Fiber content:
Contract no:
Stock no:
Size:
Name of contractor:

"INSTRUCTIONS

Hand wash with a mild soap solution.
Hang on a hanger to dry."

3.3 Design. The coveralls shall have hook and pile front, leg and sleeve closures. There shall be three weight pockets with flaps on each leg. The pockets on the thigh and calf shall have adjustable bands attached to pocket flaps. The coveralls shall also have knee and elbow patches, shoulder loops and leg straps (see figure 1).

3.4 Patterns. Standard patterns will be furnished by the Government to the contractor for use in cutting the working patterns (see 6.5). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way. Unless otherwise specified (see 3.6), the patterns shall allow 1/2 inch for all seams.

3.4.1 Pattern parts. The component parts of the coveralls shall be cut from material as specified and in accordance with the pattern parts required for the manufacturing process as specified in table I.

TABLE I. Pattern parts.

Material	Nomenclature of pattern parts	Cut parts
Cloth, duck nylon	Back	2
	Front	2
	Topsleeve	2
	Undersleeve	2
	Pocket (top ply) (side hip)	2
	Pocket & flap (bottom ply) (side hip)	2
	Pocket (top ply) (thigh)	2
	Pocket, flap & adjustable band (thigh)	2
	Band adjustable (bottom ply) (thigh)	2
	Pocket (top ply) (calf)	2
	Pocket, flap & adjustable band (calf)	2
	Band adjustable (bottom ply) (calf)	2
	Flap (closure) sleeve opening	2
	Flap (closure) leg opening	2
	Facing - sleeve opening	2
	Facing - leg opening	2
	Patch elbow reinforcement (top ply)	2
	Patch elbow reinforcement (bottom ply)	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I. Pattern parts. - Continued

Material	Nomenclature of pattern parts	Cut parts
	Patch knee reinforcement (top ply)	2
	Patch knee reinforcement (bottom ply)	2
	Facing neck (bias cut)	1
	Loops (shoulder & legs)	-
	Inner front flap (right side, cut face up)	1
	Left side front (cut face up)	1
Cloth, laminated	Size numbers	
	1	2
	2	2
	3	2
	4	2
	5	2
Templates	Elbow patch marker	-
	Knee patch marker	-

3.5 Construction.

3.5.1 Stitches, seams and stitchings. Stitches, seams and stitching types specified in table II shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same operation any one may be used. The gauge of the safety stitched seams shall be 1/4 inch. The guides and knives on safety stitch machines shall be set to trim only the ravelled ends of the fabric. The trimming shall not exceed 1/16 inch. The looper thread of stitch type LSbm-4 shall be concealed on the inside of folded seam. The gauge of stitching for double stitched seams shall be 3/16 to 5/16 inch with the first row of stitching 1/16 to 1/8 inch from folded edge.

3.5.2 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks may be repaired by 301 stitch type. When stitch type 401 is permitted, as an option, it shall not be used unless the ends are caught in other seams or stitching.

3.5.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6 Manufacturing operations requirements. The coveralls shall be manufactured in accordance with operation requirements as specified in table II. The contractor will not be required to follow the exact sequence of operations listed provided that the finished coverall is identical to that produced by following sequence of operations as specified in table II.

3.6.1 Shade and size marking. The component parts of the coveralls shall be marked, ticketed or bundled to ensure a uniform shade and size throughout the garment. Any method may be used except:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

(a) Corrosive metal fastening devices.
(b) Sew-on shade tickets.
(c) Adhesive type tickets which leave traces of adhesive on the material after removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil will be allowed, provided the numbering will not show on the outside of the garment and wherever possible, will be covered by the seam allowance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls.

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
1.	Cutting. (a) Cut the coveralls in strict accordance with patterns, which shall show directional lines for cutting and instructions and notches for the proper assembly of all component parts. (b) Component pattern parts shall be cut from one piece of material except the shoulder loops, leg straps, neck facing, sleeve and leg facings, inner front flap and left side front facings which may be cut from ends. Parts cut from ends shall approximate the shade of the coverall. (c) The straps for the shoulder loops and leg straps may be placed on rolls, however, there shall be no pieced straps visible on coveralls.					
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects as specified in section 4 shall be removed from production and replaced with nondefective and properly matched components.					
3.	Marking (see 3.6.1). Mark, ticket, or bundle all parts except those parts cut from ends, to ensure a uniform shade and size throughout the coveralls.					

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
4.	Make elbow and knee patches.					
	(a) Stitch, face to face, matching notches the top ply to bottom ply, 1/4 ± 1/16 inch from raw edges. (b) Leave an approximate 1-1/2 inch opening for turning purposes. (c) Turn patches to finished position, forcing out edges properly.	301	SSa-1	9-11	E	E
5.	Make shoulder loops and leg straps.					
	(a) (1) Make loops by turning the raw edges inward and stitch with four rows of stitching.	301	EFp-2 (except with four rows of stitching)	9-11	E	E
	or					
	(2) Make loops by turning in the edge of two pieces of strapping and stitch together.	301	EFn-4	9-11	E	E
	or					
	(3) Make loops by turning edge under, abutting the folded edges and stitch with four rows of stitching.	301	EFs-2 (except with four rows of stitching)	9-11	E	E
	(b) The finished width of the loops and straps shall be according to patterns.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
6.	Make thigh pockets.					
	(a) Turn top edge of pocket top ply under 1/4 ± 1/16 inch and stitch 1/16 inch from folded edge.	301	EFb-1	9-11	E	E
	(b) Stitch three 2-inch wide strips of pile fastener tapes to marks on pocket top ply, 1/16 inch from edges on all four sides.	301	LSbj-1	9-11	E	E
	(c) Form the square drainage holes by placing 1/2 ± 1/16 inch bartacks according to marks.	Bartack		28 per bartack	E	E
	(d) Burn an approximate 1/4 ± 1/16 inch circular hole in the center of the square bartacked drainage holes. Care should be taken to prevent the burned portion of the holes from abutting the bartacks.					
7.	Attach thigh band adjustable (bottom ply) to band flap pocket.					
	(a) Stitch face to face 1/2 ± 1/16 inch from raw edges, thigh band adjustable (bottom ply) to thigh adjustable band flap and pocket, piece along side and bottom edges.	301	SSe-3(a)	9-11	E	E
	(b) Notch seam allowance of thigh adjustable band flap and pocket piece for ease in turning.					
	(c) Clip corners for point turning.					
	(d) Turn assembly to finished position, forcing out corners and edges.					
	(e) Stitch with two rows of stitching the folded edges of the assembled thigh band adjustable (bottom ply) and thigh adjustable band flap and pocket assembly.	301	SSe-3(b)	9-11	E	E

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
8.	Form flap for thigh pocket assembly.					
	(a) Fold, face to face, to notch the top of thigh band flap pocket, forming the flap and stitch both sides 1/2 ± 1/16 inch from raw edges.	301	SSe-2(a)	9-11	E	E
	(b) Clip corners for point turning.					
	(c) Turn to finished position, forcing out corners and edges.					
	(d) Topstitch 1/16 to 1/8 inch from folded edges, both sides and bottom edge of flap.	301	SSe-2(b) and OSf-1	9-11	E	E
	(e) Position a 2-inch wide strip of hook fastener tape to flap according to marks and stitch 1/16 inch on all four sides.	301	LSbj-1	9-11	E	E
	(f) Position a 2-inch wide strip of pile fastener tape to flap according to marks and stitch 1/16 inch on all four sides. The stitching shall be superimposed upon hook tape stitching.	301	LSbj-1	9-11	E	E
9.	Attach pockets to thigh flap assembly.					
	(a) Stay stitch the inner edge of pocket to flap assembly 1/8 ± 1/16 inch from raw edge continuing across bottom of pocket, forming the pleats according to notches.	301	SSa-1	9-11	E	E
	(b) Form weight compartments by stitching from bottom of pocket to top of pocket. Stitching shall be centered at bottom raw edges of pocket between the pleats and continue to top of pocket. Stitching at the top of pocket shall end centered between the pile fastener tapes. The center distance between the pile fastener tapes shall be placed on the marks.	301	SSv-1	9-11	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
9.	Attach pockets to thigh flap assembly. (Continued)					
	(c) Fold under according to notches, the outer edge of pocket (band side) and stitch 1/16 to 1/8 inch from folded edge.	301	LSd-1	9-11	E	E
	(d) Fold under the bottom and inner edge of pocket 1/2 ± 1/16 inch and stitch 1/16 to 1/8 inch from folded edge.	301	SSn-1	9-11	E	E
	(e) The edge stitching performed on the inner and outer edges shall be in line with the edge-stitching performed in operation 8(d).					
	(f) Place two 1/2 ± 1/16 inch vertical bartacks at the top of pockets one on each side of the stitching performed in operation 9(b).	Bartack		28 per bartack	E	E
10.	Attach hook fastener tapes to thigh band adjustable (bottom ply).					
	(a) Position four 1-inch wide strips of hood fastener tapes to thigh band adjustable (bottom ply) according to marks and stitch on all four sides 1/16 inch from edges.	301	LSbj-1	9-11	E	E
11.	Make calf pockets.					
	(a) Turn top edge of pocket top ply under 1/4 ± 1/16 inch and stitch 1/16 inch from folded edge.	301	EFb-1	9-11	E	E
	(b) Stitch, four 1-inch wide strips of pile fastener tapes to marks on pocket top ply, 1/16 inch from edge on all four sides.	301	LSbj-1	9-11	E	E
	(c) Form the square drainage holes by placing 1/2 ± 1/16 inch bartacks according to marks.	Bartack		28 per bartack	E	E

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
11.	Make calf pockets. (Continued)					
	(d) Burn an approximate 1/4 ± 1/16 inch circular hole in the center of the square bartacked drainage holes. Care should be taken to prevent the burned portion of the holes from abutting the bartacks.					
12.	Attach calf band adjustable (bottom ply) to calf band flap pocket.					
	(a) Stitch, face to face, 1/2 ± 1/16 inch from raw edges, calf band adjustable (bottom ply) to calf adjustable band flap and pocket, piece along side and bottom edges.	301	SSe-3(a)	9-11	E	E
	(b) Notch seam allowance of adjustable calf band flap and pocket for ease in turning.					
	(c) Clip corners for point turning.					
	(d) Turn assembly to finished position forcing out corners and edges.					
	(e) Stitch with two rows of stitching the folded edges of the assembled calf band adjustable (bottom ply) and calf adjustable band flap and pocket assembly.	301	SSe-3(b)	9-11	E	E
13.	Form flap for calf pocket assembly.					
	(a) Fold, face to face, to notch the top of calf band flap pocket, forming the flap and stitch both sides 1/2 ± 1/16 inch from raw edges.	301	SSe-2(a)	9-11	E	E
	(b) Clip corners for point turning.					
	(c) Turn to finished position, forcing out corners and edges.					
	(d) Top stitch 1/16 to 1/8 inch from folded edges, both sides and bottom edge of flap.	301	SSe-2(b) and OSf-1	9-11	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
13.	Form flap for calf pocket assembly. (Continued)					
	(e) Position a 2-inch wide strip of hook fastener tape to flap according to marks and stitch 1/16 inch from the edges on all four sides.	301	LSbj-1	9-11	E	E
	(f) Position a 2-inch wide strip of pile fastener tape to flap according to marks and stitch 1/16 inch from the edges on all four sides. The stitching shall be superimposed upon the hook tape stitching.	301	LSbj-1	9-11	E	E
14.	Attach pocket to calf flap assembly.					
	(a) Stay stitch the inner edge of pocket to flap assembly 1/8 ± 1/16 inch from raw edges, continuing across bottom of pocket, forming the pleats according to notches.	301	SSa-1	9-11	E	E
	(b) Form weight compartments by stitching from bottom of pocket to top of pocket. Stitching shall be centered at bottom raw edges of pocket between the pleats and continue to top of pocket. Stitching at the top of pocket shall end centered between the pile fastener tapes. The center distance between the pile fastener tapes shall be placed on the marks.	301	SSv-1	9-11	E	E
	(c) Fold under according to notches, the outer edge of pocket (band side) and stitch 1/16 to 1/8 inch from folded edge.	301	LSd-1	9-11	E	E
	(d) Fold under the bottom and inner edge of pocket 1/2 ± 1/16 inch and stitch 1/16 to 1/8 inch from folded edge.	301	SSn-1	9-11	E	E
	(e) The edge stitching performed on the inner and outer edges shall be in line with the edge stitching performed in operation 13d.					

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
14.	Attach pocket to calf flap assembly. (Continued)					
	(f) Place two 1/2 ± 1/16 inch vertical bartacks at the top of pockets one on each side of the stitchings performed in operation 14b.	Bartack		28 per bartack	E	E
15.	Attach hook fastener tapes to calf band adjustable (bottom ply).					
	(a) Position four 1-inch wide strips of hook fastener tapes to calf band adjustable (bottom ply) according to marks and stitch on all four sides 1/16 inch from edges.	301	LSbj-1	9-11	E	E
16.	Form flap on side hip pocket.					
	(a) Fold, face to face, top edge of the side hip pocket and flap bottom ply, to notch and stitch 1/2 ± 1/16 inch from raw edges the side edges. (b) Clip corners for point turning. (c) Turn to finished position, forcing out corners and edges.	301	SSe-2(a)	9-11	E	E
	(d) Top stitch 1/16 to 1/8 inch from folded edges both sides and bottom edge of flap.	301	SSe-2(b) and OSf-1	9-11	E	E
	(e) Position a 1-inch wide strip of hook fastener tape to flap according to marks and stitch 1/16 inch from edges on all four sides.	301	LSbj-1	9-11	E	E
17.	Make side hip pocket.					
	(a) Turn top edge of pocket top ply under 1/4 ± 1/16 inch and stitch 1/16 inch from folded edge.	301	EFb-1	9-11	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
17.	Make side hip pocket. (Continued)					
	(b) Stitch two 1-inch wide strips of pile fastener tapes to marks on pocket top ply, 1/16 inch from edges on all four sides.	301	LSbj-1	9-11	E	E
	(c) Form the square drainage holes by placing 1/2 ± 1/16-inch bartacks according to marks.	Bartack		28 per bartack	E	E
	(d) Burn an approximate 1/4 ± 1/16-inch circular hole in the center of the square bartacked draining holes.					
	(e) Care should be taken to prevent the burned portion of the holes from abutting the bartacks.					
18.	Join top ply of side hip pocket to bottom ply of side hip pocket.					
	(a) Stay stitch the side and bottom edge of the top ply and bottom ply 1/8 ± 1/16 inch from raw edges, forming the pleats according to notches along the bottom edge.	301	SSa-1	9-11	E	E
	(b) Form weight compartments by stitching from bottom of pockets to top of pockets with two rows of stitching. Stitching shall be centered at bottom raw edges of pocket between the pleats and continue to top of pocket. Stitching at the top of pockets shall end centered between the pile fastener tapes. The center distance between the pile fastener tape shall be placed on the marks.	301	SSv-2	9-11	E	E
	(c) Fold under the side and bottom edges of pocket assembly 1/2 ± 1/16 inch and stitch 1/16 to 1/8 inch from folded edges. The edge stitchings performed on the side and bottom edges shall be in line with the edge stitching performed in operation 16(d).	301	SSn-1	9-11	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
18.	Join top ply of side hip pocket to bottom ply of side hip pocket. (Continued)					
	(d) Place two 1/2 ± 1/16 inch vertical bartacks at the top of pockets one on each side of the two rows of stitching performed in operation 18(b).	Bartack		28 per bartack	E	E
19.	Make inner front flap (right side).					
	(a) Stitch, face to face, 1/2 ± 1/16 inch from raw edge, the top of flap to notches.	301	SSe-2(a)	9-11	E	E
	(b) Stitch, face to face, 1/2 ± 1/16 inch from raw edges, the bottom of flap to notches.	301	SSe-2(a)	9-11	E	E
	(c) Clip corners for turning purposes.					
	(d) Turn to finished position, forcing out corners and edges.					
	(e) Position 2 inch wide strip of pile fastener tape to inner front flap starting even at folded inner edge to guide line trimming and tapering the fastener tapes as necessary. The top of the fastener tapes shall be positioned even with top folded edge of flap. Stitch 1/16 to 1/8 inch from edges of all four sides of fastener tapes. The pile tape shall extend to bottom of inner front flap.	301	SSe-2(b) and LSbj-1	9-11	E	E
20.	Make left side front facing.					
	(a) Turn under 3/8 ± 1/16 inch the inner and bottom edges of facing and stitch 1/16 to 1/8 inch from folded edges.	301	EFa-1	9-11	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
21.	Make sleeve and leg flaps.					
	(a) Stitch, face to face, 3/8 ± 1/16 inch from raw edges, the top and side edge continuing across step. (b) Notch seam allowance at step and clip corners for turning purposes. (c) Turn to finished position, forcing out corners and edges.	301	SSe-2(a)	9-11	E	E
	(d) Stitch, face to face, 3/8 ± 1/16 inch from raw edges, the bottom of flap. (e) Clip corners for point turning. (f) Turn to finished position, forcing out corners and edges.	301	SSe-2(a)	9-11	E	E
22.	Attach hook fastener tapes to sleeve and leg flaps.					
	(a) Position a 2-inch wide strip of hook fastener tape even with the top, bottom and outer folded edges.					
	(b) Edge stitch 1/16 to 1/8 inch from the folded edges continuing the stitching across step simultaneously catching three sides of the fastener tape in the stitching.	301	SSe-2(b) and OSf-1	9-11	E	E
	(c) Stitch, 1/16 to 1/8 inch from edge the remaining side of fastener tape. NOTE: The 2-inch wide hook fastener tape may be stitched on all four sides to the sleeve and leg flaps prior to operation 22(b).	301	LSbj-1	9-11	E	E
23.	Join sleeves.					
	Join top sleeve and under sleeve along top sleeve seam with a double lapped, double stitched seam. Topsleeve shall overlap undersleeve.	301	LSc-2	9-11	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
24.	Attach yellow strips to sleeve.					
	(a) Form dart in top sleeve, according to notches.	301	OSf-1	9-11	E	E
	(b) Turn to outside and top stitch 3/16 inch from folded edge tapering to end of dart.	301	Finished seam similar to OSe-1	9-11	E	E
	(c) Position and stitch yellow stripping to top sleeve according to marks, 1/16 to 1/8 inch from edge.	301	LSbj-1	9-11	E	E
	(d) Stitch across width of stripping at arm hole. NOTE: Strips shall be of a continuous length when applied to sleeves.	301	SSa-1	9-11	E	E
25.	Sew on elbow patches.					
	(a) Position according to marks and stitch with two rows of stitching to sleeve. NOTE: Make sure opening left for turning in make up of elbow patches is closed with no raw edges visible.	301	Similar to LScc-2(b)	9-11	E	E
26.	Join center back seam.					
	(a) Join center back seam with a double lapped, double stitched seam.	301	LSc-2	9-11	E	E
27.	Join shoulder seam.					
	(a) Join shoulder seam with a double lapped, double stitched seam.	301	LSc-2	9-11	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
28.	Join sleeve to arm hole.					
	(a) Stitch, 1/2 ± 1/16 inch from raw edge the sleeve to arm hole.	301 or 401	SSa-1	9-11	E	E
	(b) Over edge stitch the raw edges together.	503 or 504 or 602	SSa-1	9-11	E	E
	(c) As an alternate, operations 28(a) and 28(b) may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 519	LSbm-4(a)	9-11	E (chain stitching)	E
					E (overedge stitching)	E
	(d) Turn with back and front lapped over sleeve and stitch with two rows of stitching 1/16 to 1/8 inch from folded edge.	301	LSbm-4(b)	9-11	E	E
29.	Join side seam and underarm seam.					
	(a) Join the side seams and underarm seams in one operation with a double lapped, double stitched seam with fronts lapped over backs. The stitching on underarm seam shall stop at notch for sleeve flap positioning. The seams at underarms shall not be staggered more than 3/8 inch measured from center of seam to center of seam.	301	LSc-2	9-11	E	E
30.	Attach yellow strips to side seam.					
	(a) Position and center over side seam, fold top edge under 1/4 ± 1/16 inch placing folded edge even with bottom row of double stitching at arm hole.					
	(b) Stitch across width at top and down both sides 1/16 to 1/8 inch from edge.	301	LSd-1 and LSbj-1	9-11	E	E
	NOTE: Strips shall be of a continuous length when applied to side seams.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
31.	Attach knee patches.					
	(a) Position according to marks and stitch with two rows of stitching to leg.	301	Similar to LScc-2(b)	9-11	E	E
	NOTE: Make sure opening left for turning in make up of knee patches is closed with no raw edge visible.					
32.	Attach neck facing and left side facing.					
	(a) Turn edge of neck facing under 3/16 inch to form a 1/4-inch hem and stitch 1/16 to 1/8 inch from inner folded edge.	301	EFb-1	9-11	E	E
	(b) Stitch, face to face neck facing to neck of coveralls, 3/8 ± 1/16 inch from raw edges.	301	SSe-2(a)	9-11	E	E
	(c) Stitch, face to face, left side facing to neck of coverall, continuing the stitch down the front, 3/8 ± 1/16 inch from raw edges.	301	SSe-2(a)	9-11	E	E
	NOTE: Operations 32b and c may be performed in one operation.					
	(d) Clip corner at left side facing for turning purposes.					
	(e) Turn to finished position the left side facing and neck facing forcing out corners and edges.					
	(f) Stitch with two rows of stitching the neck facing and the front edge of left side facing.	301	SSe-2(b)	9-11	E	E
33.	Attach inner front flap (right side).					
	(a) Stitch, face ply of inner front flap 1/4 to 3/8 inch from raw edge to front edge of coverall.	301	SSa-1	9-11	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
33.	Attach inner front flap (right side). (Continued)					
	(b) Turn seam allowance of inner front flap and front flap and front inward towards facing. Turn under back raw edge of inner front flap laying it upon seam allowance and stitch 1/16 to 1/8 inch from folded edge with two rows of stitching. (c) Operator shall notch seam allowance at base of inner front flap for turning purposes.	301	Finished seam similar to SSq-3	9-11	E	E
34.	Attach hook fastener tape to left front facing.					
	(a) Position a 2-inch wide strip of hook fastener tape to left facing as follows: (1) Top of strip shall be 1/8 to 1/4 inch from top edge of facing, cut to the shape of facing at top edge. (2) The side edge of strip shall be placed 1/2 ± 1/16 inch from outer facing edge.					
	(b) Stitch strip on all four sides 1/16 to 1/8 inch from edges. (c) The hook tape shall extend to bottom of left front facing.	301	LSbj-1	9-11	E	E
35.	Close crotch seam.					
	(a) Stitch crotch, face to face, 1/2 ± 1/16 inch from raw edges.	301	SSag-3(a)	9-11	E	E

Source: https://assist.dla.mil. Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
35.	Close crotch seam. (Continued)					
	(b) Spread seam open and flat, position a strip of self material folding under the raw edge and stitch to spread open seam 1/16 inch from folded edge. The seam allowance of the crotch seam shall be caught in between the folded edge of the self material and the edge stitching. (c) The strip of self material shall finish approximately 3-1/4 inches in length and be sufficient in width to cover the seam allowance of crotch seam.	301	Similar to SSag-3(b)	9-11	E	E
36.	Join inseams.					
	Join inseams with a double lapped, double stitched seam. Fronts shall be lapped over backs. The seam at crotch shall not be staggered more than 1/2 inch when measured from center of seam to center of seam.	301	LSc-2	9-11	E	E
37.	Attach side hip pockets to coveralls.					
	(a) Position side hip pockets, according to marks and stitch with two rows of stitching on all four sides. (b) The stitching across the flap shall be according to marks and the stitching along the bottom and side edges shall be superimposed upon the stitching performed in operation 18(c).	301	Similar to LSd-2	9-11	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
38.	Attach thigh pockets to coveralls. Finished appearance.					
	When thigh pockets are attached to the coveralls, the straight edge of pocket shall face the front of coverall and the adjustable band shall face the back. The bands wrap around the back of the leg onto the front.					
	(a) Position assembled thigh pockets according to marks and stitch with two rows of stitching on all four sides. (b) The stitching across the flap shall be according to marks and the stitching along the bottom and side edges shall be superimposed upon the stitching performed in operations 9(c) and 9(d).	301	Similar to LSd-2	9-11	E	E
39.	Attach calf pockets to coveralls. Finished appearance.					
	When calf pockets are attached to the coveralls, the straight edge of pocket shall face the front of coverall and the adjustable band shall face the back. The bands wrap around the back of the leg onto the front.					
	(a) Position assembled calf pockets, according to marks and stitch with two rows of stitching on all four sides. (b) The stitching across the flaps shall be according to marks and the stitching along the bottom and side edges shall be superimposed upon the stitching performed in operations 14(c) and 13(d).	301	Similar to LSd-2	9-11	E	E

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
40.	Bartack pockets.					
	Place four 1/2 ± 1/16-inch bartacks, one on each corner of the pockets. The bartacks shall be superimposed upon the inner row of stitching performed in operations 37(a), 38(a) and 39(a).	Bartack		28 per bartack	E	E
41.	Attach hook fastener tapes to shoulder straps.					
	(a) Turn under end of strap 3/8 to 1/2 inch and stitch on all four sides hook fastener tape to strap 1/16 inch from edges. (b) The top of tape shall be positioned even with fold edge of strap.	301	LSbj-1	9-11	E	E
42.	Attach flaps to leg opening.					
	(a) Stitch flaps to front opening of leg, face to face according to marks 1/2 ± 1/16 inch from raw edges.	301	SSa-1	9-11	E	E
43.	Attach facings to leg opening.					
	(a) Turn under all inner edges of facings and stitch 1/16 inch from raw edges.	301	EFa-1	9-11	E	E
	(b) Stitch facing to leg opening and flap, 1/2 ± 1/16 inch from raw edges. The stitching shall extend approximately 1/2 inch above top opening before proceeding across top opening.	301	SSe-2(a)	9-11	E	E
	(c) Turn facing to inside and stitch with two rows of stitching, both sides and top of opening.	301	SSe-2(b) and SSq-2(b)	9-11	E	E

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
43.	Attach facings to leg opening. (Continued)					
	(d) Stitch inner folded edges of facing to body with stitching superimposed upon stitching performed in operation 43(a).	301	Similiar to LSd-1	9-11	E	E
44.	Attach flaps to sleeve opening.					
	Stitch flaps to front opening of sleeve face to face, according to marks 1/2 ± 1/16 inch from raw edges.	301	SSa-1	9-11	E	E
45.	Attach facings to sleeve opening.					
	(a) Turn under all inner edges of facings and stitch 1/16 inch from raw edges.	301	EFa-1	9-11	E	E
	(b) Stitch facings to sleeve openings and flap, 1/2 ± 1/16 inch from raw edges. The stitching shall extend approximately 1/2 inch above top opening before proceeding across top opening.	301	SSe-2(a)	9-11	E	E
	(c) Turn facing to inside and stitch with two rows of stitching, both sides and top of opening.	301	SSe-2(b) and SSq-2(b)	9-11	E	E
	(d) Stitch, inner folded edges of facing to body with stitching superimposed upon stitching performed in operation 45(a).					
46.	Hem sleeve and leg bottoms.					
	(a) Fold raw edge under, forming a 1 ± 1/8 inch wide hem and stitch 1/16 inch from folded raw edge.	301	EFb-1	9-11	E	E

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
47.	Attach pile fastener tapes to sleeve and leg openings.					
	(a) Position pile tapes according to marks and stitch on all four sides 1/16 inch from edges.	301	LSbj-1	9-11	E	E
48.	Attach shoulder loops to shoulder seam.					
	(a) Burn raw edge of shoulder loops. (b) Position loops over shoulder seams, with burned edge even with inner row of double stitching at neck edge. (c) Stitch with a cross over box stitch. The stitching shall be approximately 1/8 inch from outer folded edges of loops. (d) Position strip of pile fastener tape, on shoulder seam, so it corresponds with hook portion on loop. Stitch pile portion on all four sides, 1/16 to 1/8 inch from edges. (e) The finished shoulder loop shall measure 4-3/4 plus 1/4, minus 1/8 inches long.	301	LSbj-1	9-11	E	E
49.	Bartacks.					
	(a) Place two horizontal 1/2 ± 1/16 inch bartacks on leg and sleeve openings: (1) One at step. (2) One at the top of flap superimposed on edge stitching.	Bartack		28 per bartack	E	E
	(b) Place one horizontal 1/2 ± 1/16 inch bartack at the base of front opening, catching the end of inner front flap in the bartack operation.	Bartack		28 per bartack	E	E

Source: https://assist.dla.mil downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of coveralls. - Continued

No.	Description of operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
50.	Attach label.					
	(a) Combination label shall be stitched on all four sides and positioned on center back seam 1 ± 1/8 inch from bottom folded edge of neck facing. The stitching shall not be through the printing. A 1/2-inch off center tolerance shall be allowed.	301	LSbj-1	9-11	E	E
51.	Attach size numbers.					
	Position a size number on each sleeve according to marks and stitch completely around each number.	301	LSbj-1	9-11	E	E
52.	Attach leg straps to legs.					
	(a) Burn one raw edge of leg straps. (b) Insert leg straps through two metal loops and fold under 1-1/2 ± 1/16 inch to form a loop. With metal loops against the loop, stay stitch straps 3/4 to 7/8 inch from outer edge of folded loop.	301	EFa-1	9-11	E	E
	(c) Position leg straps to legs according to marks and stitch with cross over box stitch. Box stitch shall start and be superimposed upon stay stitch performed in operation 52(b). (d) The metal loops shall face upward with the free burned end of strap hanging below bottom of leg. (e) The finished leg strap shall measure 16-1/4 plus 1/2, minus 1/4-inches long.	301	Similar to LSce-2	9-11	E	E
53.	Clean coveralls.					
	(a) Trim all ends of threads and remove loose threads. (b) Remove all spots and stains. (c) Remove all shade and size tickets.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.7 Sizes and measurements. Unless otherwise specified, (see 6.2), finished measurements of finished coveralls shall be as specified in table III. Measurements and tolerances are expressed in inches.

TABLE III. Sizes and measurements.

	Size					
	1	2	3	4	5	Tolerances
Chest	45	48	51	55	59 (149.9)	+1 -1/2
Waist	40	43	46	50	54 (137.2)	+1 -1/2
Vertical trunk	67-1/2	68-1/2	69-1/2	70-1/2	71-1/2 (181.6)	+1 -1/2
Overall length	59	61	63	65	67 (170.2)	+1 -1/2
Sleeve inseam	20	21	22	23	25 (63.5)	+1 -1/2
Leg inseam	28-1/4	29-3/4	31-1/4	32-3/4	34-1/4 (67.0)	+1 -1/2
Sleeve opening (bottom)	5-3/8	5-5/8	5-7/8	6-1/4	6-3/8 (16.2)	±1/4
Leg opening (bottom)	6-3/8	6-3/4	7-1/8	7-1/2	7-7/8 (20.0)	±1/4
Thigh band	25	26	27	28	29 (78.7)	±1/2
Calf band	20	21	22	23	24 (61.0)	±1/2

The following measurements shall be taken with the coveralls laid flat and smooth:

(a) Chest. Double the measurement taken across chest from folded edge to folded edge at base of arm hole.
(b) Waist. Double the measurement taken from folded edge to folded edge, midway between arm hole and side hip pocket.
(c) Vertical trunk. Double the measurement from fold at shoulder to fold at crotch, along front.
(d) Overall length. Measurement shall be taken from center back seam to bottom of leg, with coveralls laid face up and adjustable bands open.
(e) Sleeve inseam. Measurement shall be taken with sleeve opening closed, from bottom of sleeve to base of arm hole.
(f) Leg inseam. Measurement shall be taken with leg opening closed, from bottom of leg to crotch.

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

(g) Sleeve opening (bottom). Measurement shall be taken at bottom of sleeve from folded edge to folded edge. The sleeve opening shall be properly closed.
(h) Leg opening (bottom). Measurement shall be taken at bottom of leg from folded edge to folded edge. The leg opening shall be properly closed.
(i) Thigh band. Measurement shall be taken from pocket edge to end of band.
(j) Calf band. Measurement shall be taken from pocket edge to end of band.

3.8 Workmanship. The finished coverall shall conform to the quality of product established by the specification and the occurrence of defects shall not exceed the applicable acceptable quality level (AQL) (see 4.5.1).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 First article inspection. First article inspection shall consist of the examinations and tests as specified in 4.5.2, 4.5.3 and 4.5.4.

4.4 Quality conformance inspection. Inspection shall be in accordance with MIL-STD-105, except where otherwise specified herein.

4.5 Examinations.

4.5.1 Inspection levels and acceptable quality levels. The inspection levels and AQL's expressed in defects per 100 units, for visual and dimensional examination shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

	AQL	Inspection levels
For examination in 4.5.2		
Major	2.5	II
Total (major and minor combined)	6.5	II
For examination in 4.5.3		
One class	4.0	S-3

4.5.2 Visual examination. The coveralls shall be examined for defects in design, material, workmanship and marking and the defects classified in accordance with table IV.

TABLE IV. Visual defects.

Defect	Classification	
	Major	Minor
Material defects and workmanship damages		
(a) Hole, cut, tear, smash, mend, scorched area or open place:		
(1) On outside (longest dimensions in any direction):		
(a) up to 1/4 inch inclusive		X
(b) more than 1/4 inch	X	
(2) On inside (longest dimensions in any direction):		
more than 1/4 inch		X
(b) Knot or slub on outside		X
(c) Permanent fold, pleat or crease in cloth (when caught in seaming or stitching):		
(1) on outside		X
(d) Missing or broken yarn on outside (longest dimension in any direction):		
(1) more than 1 inch		X
(e) Needle holes visible on outside, more than 2 inches in length		X
(f) Vinyl fabric		
(1) Tear or abraded area		X
(2) Objectionable odor		X
(3) Vinyl cracks when bent		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE IV. Visual defects. - Continued

Defect	Classification	
	Major	Minor
Material defects and workmanship damages		
Shaded parts		
Shade varying within a part or between two or more parts on outside (except parts which may be cut from ends)		X
Cleanness		
(a) Any spot, stain or marking on outside (largest dimension in any direction):		
(1) more than 1/4 inch		X
(b) Two or more lot, shade or size tickets not removed		X
(c) Thread ends not trimmed or loose thread not removed on a major portion of the coverall		X
Components and assembly		
(a) Any component part, reinforcement piece or operation omitted (unless otherwise classified herein)	X	
(b) Any component not as specified	X	
(c) Any operation not performed as specified	X	
(d) Any component part tight, twisted, distorted, puckered or pleated (unless otherwise classified herein)	X	
(e) The edge of any component part required to be forced out having folds of more than 1/8 inch		X
Cutting		
Any component part not cut in accordance with specified pattern, directional lines on patterns or not in accordance with specification requirements	X	
Seams and stitchings		
(a) Accuracy of seaming:		
(1) Any part of coverall caught in any unrelated stitching operation	X	
(2) Seam noticeably puckered or irregular (unless otherwise specified herein)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE IV. Visual defects. - Continued

Defect	Classification	
	Major	Minor
Material defects and workmanship damages		
Seams and stitchings (Continued)		
(3) End of stitching when not caught in other seams or stitching not back-stitched as specified		X
(4) Thread break repaired by stitching back of the break less than 1/2 inch		X
(5) Ends of a continuous line of stitching overlapped less than 1/2 inch		X
(6) Shade of thread used on outside not as specified		X
(7) Restitched seam not neatly accomplished, affecting appearance		X
(b) Stitching margin:		
(1) Edge or top stitching sewn too close to edge resulting in serious damage to cloth	X	
(2) Irregular, affecting appearance		X
(3) Margin not within range specified or varies more than 1/8 inch when no range is specified (score only when condition exists on more than one-half the length of seam)		X
(c) Seam allowance:		
Width of seam allowance not as specified by 1/8 inch (score only when condition exists on more than one-half the length of seam)		X
(d) Open seam		
(1) On outside, except hems:		
a. Less than 3/4 inch		X
b. 3/4 inch or more	X	
(2) On inside and hems:		
More than 3/8 inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE IV. Visual defects. - Continued

Defect	Classification	
	Major	Minor
Material defects and workmanship damages		
Seams and stitchings (Continued)		
(e) Runoff, skipped or broken stitches:		
(1) Joining seam, use open seam classified		X
(2) Edge or top stitching, more than 1/4 inch (when not resulting in an open seam)		X
(f) Raw edges		
(1) On outside:		
a. Less than 3/4 inch		X
b. 3/4 inch or more	X	
(2) On inside and hems:		
a. 1 to 2 inches		X
b. 2 inches or more	X	
(g) Seam and stitch type:		
(1) Not specified seam or stitch type	X	
(2) Looper thread of 401 stitch type on outside	X	
(3) Any line of stitching omitted	X	
(4) Any line of stitching not beginning or ending where specified or insecure		X
(5) Any seam or pleat not lapped or folded in direction specified		X
(h) Stitch tension:		
(1) Loose tension resulting in loosely exposed loops of lower or top thread (score only when condition exists on more than one-half the length of seam)		X
(2) Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X	
(3) Loose tension resulting in a loose seam:		
3/8 inch or more		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE IV. Visual defects. - Continued

Defect	Classification	
	Major	Minor
Material defects and workmanship damages		
Seams and stitchings (Continued)		
(i) Stitches per inch (score only when condition exists on more than one-half the length of seam)		
Two or more stitches less than the minimum or any number in excess of the maximum specified		X
(j) Bartack, backtack or tack:		
(1) Missing, insecure, misplaced, not serving intended purpose or not specified size or type	X	
(2) Loose stitch tension		X
(3) Length less than 7/16 or more than 9/16 inch		X
(4) Other than direction specified (vertical or horizontal)		X
(5) Number of stitches less than specified by three or more		X
Fastener tapes (hook and pile)		
(a) Misplaced or not positioned as specified, for example not serving intended purpose	X	
(b) Type, color or width not as specified		X
(c) Stitched too loose or too tight causing noticeable puckering or twist on outside	X	
Metal loops		
Not as specified, for example material, finish diameter or inside dimensions	X	
Sleeves		
(a) Sleeves reversed	X	
(b) Pleated or excessive fullness at arm hole		X
(c) Tight at arm hole causing puckers on front or back		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE IV. Visual defects. - Continued

Defect	Classification	
	Major	Minor
Material defects and workmanship damages		
Hems (sleeve, leg)		
(a) Finished width less than 7/8 inch or more than 1-1/8 inches		X
(b) Irregular in width by 1/4 inch or more than one-half the length of seam		X
Elbow and knee patches		
(a) Misplaced by more than 3/4 inch from pattern marks		X
(b) Puckered, twisted, pleated or poorly shaped, affecting appearance		X
Front closure		
(a) Front noticeably twisted, puckered or bulging when fastened	X	
(b) Strips of pile fastener tapes on inner front flap not abutting, for example exposing coverall material (when laid flat and smooth)		X
(c) Strip of hook fastener tape not cut to shape of left front facing at top edge		X
Pockets and flaps		
(a) Omitted	X	
(b) Not positioned as specified by 1/2 inch or more	X	
(c) Burned drainage holes omitted	X	
(d) Burned edges of drainage holes abutting bartacks		X
(e) Weight compartments omitted	X	
(f) Pockets not constructed as specified	X	
(g) Thigh and calf pockets positioned on coveralls with adjustable band facing front of coverall	X	
(h) Calf pocket:		
(1) Length less than 8-1/4 or more than 8-7/8 inches	X	
(2) Width less than 5-7/8 or more than 6-1/4 inches	X	
(3) Depth less than 6-7/8 or more than 7-1/4 inches	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE IV. Visual defects. - Continued

Defect	Classification	
	Major	Minor
Material defects and workmanship damages		
Pockets and flaps (Continued)		
(i) Thigh pocket:		
(1) Length less than 8-3/4 or more than 9-3/8 inches	X	
(2) Width less than 7-7/8 or more than 8-1/4 inches	X	
(3) Depth less than 7-3/4 or more than 8-1/8 inches	X	
(j) Side hip pocket:		
(1) Length less than 5-1/4 or more than 5-7/8 inches	X	
(2) Width less than 7-1/4 or more than 7-5/8 inches	X	
(3) Depth less than 4-3/4 or more than 5-1/8 inches	X	
NOTE: The above measurements for (h), (i) and (j) shall be taken as follows:		
(a) Length - From top edge of pocket flap to bottom edge of pocket		
(b) Width - From side edge to side edge		
(c) Depth - From top of pocket opening to bottom edge of pocket		
Sleeve and leg openings		
(a) Facings omitted	X	
(b) Flap omitted	X	
(c) Hook fastener tape not stitched to inside of flap		X
Crotch reinforcement piece		
(a) Omitted	X	
(b) Not positioned or stitched as specified		X
(c) Not of sufficient width or length to perform function intended		X
Seams		
(a) Seams at underarm staggered more than 3/8 inch		X
(b) Seams at crotch staggered more than 1/2 inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE IV. Visual defects. - Continued

Defect	Classification	
	Major	Minor
Material defects and workmanship damages		
Shoulder loops		
(a) Omitted	X	
(b) Not positioned or constructed as specified		X
(c) Finished length less than 4-5/8 or more than 5 inches	X	
(d) Pile fastener tape not aligned properly with hook fastener tape, causing an improper or crooked closure		X
(e) Loops having one or more splices		X
Size numbers		
(a) Omitted	X	
(b) Size number incorrect, for example not corresponding to garment size	X	
Label		
(a) Combination label missing, incorrect or illegible	X	
(b) Label not stitched on all four sides		X
(c) Stitching through printing		X
(d) Combination label positioned less than 7/8 inch or more than 1-1/8 inches from bottom edge of neck facing		X
(e) Combination label positioned off center of center back seam by more than 1/2 inch		X
Vinyl strips		
(a) Width less than 1-3/8 inches or more than 1-5/8 inches		X
(b) Not positioned on coverall according to pattern marks		X
(c) Not continuous in length		X
(d) Not type or color specified	X	
Leg straps		
(a) Omitted	X	
(b) Not positioned or constructed as specified		X
(c) Finished length less than 16 or more than 16-3/4 inches	X	
(d) Straps having one or more spliced		X
(e) Metal loops omitted	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.5.3 Dimensional examination. The coveralls shall be examined for defects in dimensions in accordance with the following:

(a) Any measurement deviating from nominal dimensions and tolerances specified shall be scored as a measurement defect.
(b) Sleeves and legs unequal in length by 1/2 inch or more shall be scored as a size measurement defect.

4.5.4 Examination of the end item. Examination of the end item shall be as specified in 4.5.2 and 4.5.3.1. The applicable inspection levels and AQL's shall be as specified in 4.5.1. The sample unit for the examination shall be one finished coverall.

4.6 Inspection of packaging. Sample packages and packs, and the inspection of the preservation-packaging, packing and marking for shipment and storage shall be in accordance with the requirements of section 5 and the documents specified therein. Defects shall be scored as specified in table V. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Examination for the closure defect listed below shall be made on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

TABLE V. Packaging defects.

Examine	Defect
Marking (interior and exterior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components such as: polyethylene bags with heat-sealed seams that are crooked, noncontinuous, open or not parallel. Closure of shipping container not as specified. Bulged or distorted containers.
Content	Number of coveralls per shipping container is more or less than required.

4.6.1 Inspection of exterior containers. When exterior containers are required to be in accordance with PPP-B-636 or PPP-B-601, examination for defects in the assembly and closure (for fiberboard containers) shall be in accordance with the appendix of the applicable container specification.

5. PACKAGING

(The packaging requirements specified herein apply only for direct Government acquisition. For the extent of applicability of the packaging requirements of referenced documents listed in section 2, see 6.5.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.1 Preservation-packaging. Preservation-packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each coverall shall be folded as follows: 1. Lay coverall face up with sleeves in natural position over body front. 2. Fold legs up to waist. 3. Fold upper portion of coverall down over legs. Approximate measurements shall be 20 by 20 inches. Place each folded coverall in a flat style clear polyethylene film bag having a minimum thickness of 0.0025 inch (plus or minus 20 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the seal made as close as possible to the open end. A 1/4-inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. Alternatively the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Commercial. Coveralls shall be packaged in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A. Nine coveralls of one size only, preserved-packaged as specified in 5.1, shall be packed in a close fitting box as specified in PPP-B-601, overseas type, grade B, style optional. Strapping shall be zinc coated.

5.2.2 Level B. Nine coveralls, of one size only, preserved-packaged as specified in 5.1 shall be packed in a fiberboard shipping container conforming to class weather-resistant, type SF, grade V2s, style RSC as specified in PPP-B-636. Level A packages shall be packed flat, two in length, one in width and four in depth with the ninth coverall placed in the center of the container. The voids within the container shall be filled with cushioning material to immobilize the coveralls. Inside dimensions of each shipping container shall approximate 45 inches in length, 25 inches in width and 20 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed and reinforced in accordance with method V of the appendix of PPP-B-636. Toward the end of the contract, or when there are less than the required amount per shipping container of the same size, mixed sizes may be packed within the same container.

5.2.3 Commercial. Coveralls, of one size only, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or order, level A and B intermediate packages and shipping containers shall be marked in accordance with MIL-STD-129. Marking for commercial shipments shall be in accordance with ASTM D 3951.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon, and under these words shall be legibly printed or stamped the correct quantities and sizes contained therein.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The coveralls are intended to be worn as part of the MK-12 diving system which is designed to keep personnel dry in a diving situation.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) Whether first article is required (see 3.1).
(d) When finished measurement of finished coveralls not as specified in table III (see 3.7).
(e) Selection applicable levels of preservation and packing (see 5.1 and 5.2).

6.3 First article. When a first article inspection is required, the item should be a first article sample. The first article should consist of one unit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirements for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 The loops specified in 3.2.5 may be obtained from Wilcox-Crittenden (North and Judd) PO Box 111, Middletown, CT 06457. Part no. 595 - 1 inch wide by 1/2 inch high 0.135 diameter steel wire.

6.5 Samples and patterns. For access to samples and patterns, the contracting activity may be contacted.

6.6 Sub-contracted material and parts. The packaging requirements of referenced documents listed in section 2 do not apply when material and parts are acquired by the contractor for incorporation into the equipment and lose their separate identity when the equipment is shipped.

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 4220-N306)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

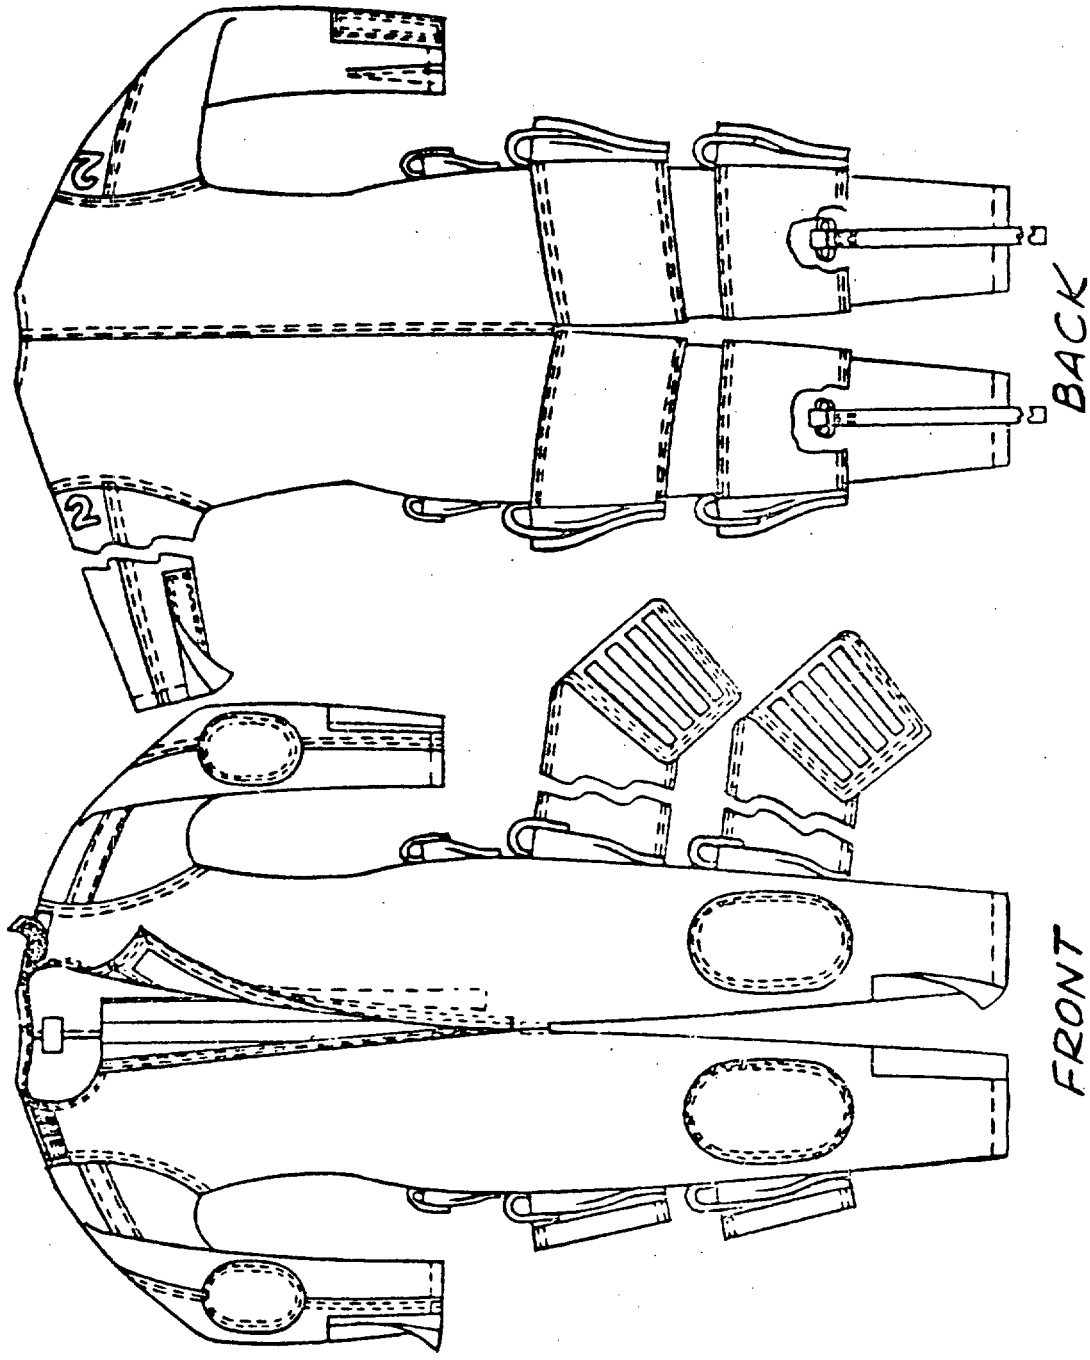


FIGURE 1. Coveralls, diver's (MK-12).

SH 131815

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

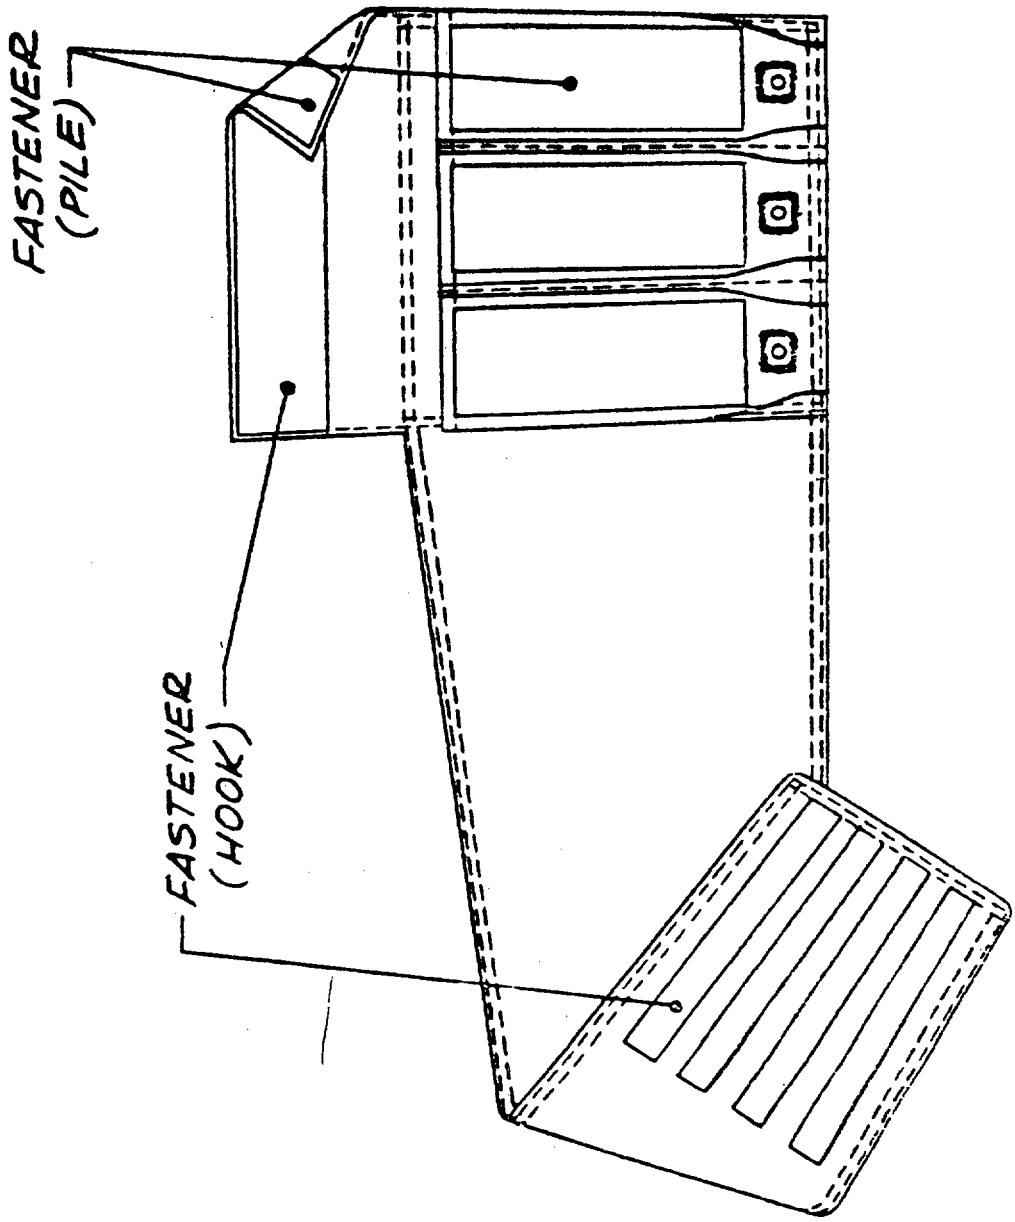


FIGURE 2. Pocket, weight (thigh).

SH 131816

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-87032B(SH)	COVERALLS DIVER'S (MK-12)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.