MILITARY SPECIFICATION

COLLAR, JACKET, DETACHABLE CWU-63/P

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of detachable collar.

1.2 Sizes. The collar shall be furnished in one of the following sizes as specified (see 6.2):

30 32 34 36 38 40 42 44 46 48 50

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified.

SPECIFICATIONS

FEDERAL

A-A-203	Paper, Kraft, Untreated
V-T-280	Thread, Gimp, Cotton, Buttonhole
V-T-285	Thread, Polyester
DDD-L-20	Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard

MILITARY

MIL-C-6590	Cloth, Pile (Synthetic Mouton, Knitted)
MIL-F-10884	Fasteners, Snap
MIL-C-83453	Cloth, Twill, Nylon Warp, Rayon Filling

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENES, Wright-Patterson AFB, OH 45433 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191 Textile Test Methods
FED-STD-751 Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 Marking for Shipment and Storage
MIL-STD-1188 Commercial Packaging of Supplies and Equipment
MS27980 Fasteners, Snap, Style 2 (Regular Wire Spring Clamp Type)

(Copies of specifications, standards, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads 1968

(Copies of these publications can be obtained from The Color Association of the United States, Inc.; 24 East 38th St., New York, NY 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials

3.1.1 Basic fabric. The basic fabric for the detachable collar shall conform to type II of MIL-C-83453 and shall be USAF color shade No. 1157 (see 6.3).

3.1.2 Thread. Unless otherwise specified herein, the thread for all sewing shall be DoD thread shade Black AA, Cable No. 66043 (see DoD Standard Color Card of Official Standardized Shades for Sewing Threads 1968) and shall conform to type I, class 1, letter size B, 3 ply of V-T-285.

3.1.3 Gimp. The gimp for reinforcing the buttonholes shall conform to type I or II, No. 8 of V-T-280 and shall be black.

3.1.4 Snap fasteners. The snap fasteners for attaching the collar shall conform to style 2, finish 2 of MIL-F-10884 and shall consist of the following components: MS27980-7B (stud), MS27980-8B (eyelet), MS27980-1B (button), and and MS27980-6B (socket).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.1.5 Knitted synthetic mouton. The knitted synthetic mouton for the collar shall conform to type I of MIL-C-6590 except that the color shall be USAF color Shade No. 1157 (see 6.3).

3.2 Design. The detachable collar shall have a topcollar that is made of knitted synthetic mouton and shall be attached by means of buttonholes, buttons and snap fasteners.

3.3 Construction. The detachable collar shall be constructed in accordance with table I. Unless otherwise specified herein, the manufacturer will not be required to follow the exact sequence of operations as listed therein.

3.3.1 Stitches, seams, and stitchings. Stitches, seams, and stitchings specified in table I shall conform to FED-STD-751. Wherever two or more methods, seams, or stitches are specified for the same operation, any one of them may be used. All seams shall start and finish evenly. Seam allowances shall be maintained so that raw edges, run-offs, twists, pleats, puckers, or open seams will not result. Thread tension shall be maintained so that tension will not be tight or loose. The looper thread (under thread) of stitch 401 shall be on the inside of the detachable collar.

3.3.1.1 Thread breaks and ends of seams and stitchings. Thread breaks of all stitch types shall be secured by stitching back of each end not less than 1/2 inch. Skipped stitches or thread breaks of stitch type 401 may be repaired using stitch type 301. Ends of all seams and stitchings produced with stitch type 301, except for ends of seams and stitchings caught in other seams or stitchings and ends of continuous line of stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching, except on labels, shall be overlapped not less than 1/2 inch. The ends of stitchings on labels shall be overlapped not less than three stitches.

3.3.1.2 Sewing tolerances. Unless otherwise specified herein, a tolerance of ±2 stitches per inch will be permitted for stitches per inch. A tolerance of ±1/16 inch will be permitted for 1/4-inch gage and 5/16-inch gage stitching. A tolerance of +0 or -1/8 inch will be permitted for 3/8-inch gage stitching. A tolerance of +0 or -1/16 inch will be permitted for raise seam 1/4-inch gage. A tolerance of +1/32 or -0 inch will be permitted for stitching 1/16 inch from the edge.

3.4 Patterns. When specified (see 6.2), standard patterns will be furnished by the Government. The standard patterns shall be used by the manufacturer to cut the working patterns. The working patterns shall be identical in size and shape to the standard patterns. The standard patterns and the working patterns shall not be altered in any way.

3.4.1 Pattern parts. The collar shall be cut from the materials specified herein in accordance with the pattern parts listed in table II.

3.5 Finished measurements. The finished measurements of the collar shall conform to table III. The finished measurements of the collar shall be taken as follows: Measure the neck length along the neck.

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations.

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
1	Cut parts a. Lay the cloth in uniform lengths. Take care in spreading the cloth so that the plies will not be stretched or full and so that one side of the lay will be even. Unless otherwise specified herein, lay the patterns in accordance with the directional lines (warp direction of the cloth) indicated on the patterns. The knitted synthetic mouton for the collar may be cut in either the warp or the filling direction of the knitted synthetic mouton. b. Cut the parts of the collar in strict accordance with the patterns which show size, directional lines for cutting, markings, notches, and shape for the proper assembly of the parts. c. Replace at the time of cutting any part that contains any material defect that could affect the appearance or the serviceability of the collar.			
2	Shade mark parts Mark, ticket, or bundle all parts of the basic fabric to ensure a uniform shade and size throughout the collar. The marking may be any method except adhesive type tickets that will leave traces of paper or adhesive on the material after the tickets are removed or metal fastening devices.			
3	Replace damaged parts Replace during the manufacturing operations any part that contains any workmanship damage that could affect the appearance or serviceability of the collar.			

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
4	Make detachable collar			
	a. Join the sides and the bottom of the lower collar attachment tab 1/4 inch from the edge.	301 or 401	SSe-2(a)	12
	b. Turn and raise the sides and the bottom of the lower collar attachment tab 1/4 inch from the edge.	301	SSe-2(b)	12
	c. Make five cut-after, taper-bar-type buttonholes in the lower collar attachment tab to fit a 24-line button, as indicated by the pattern marks, with the end of each buttonhole 3/8 ±1/16 inch from the edge. The purl shall finish on the top of the finished overcollar tab.	304	purl type	42-46 stitches per buttonhole including tack
			or	
			whip type	11 stitches per buttonhole
	d. Place the lower collar attachment tab between the two topcollars (one of basic fabric and one of knitted synthetic mouton) as indicated by the pattern marks at the bottom of the collar and stitch across the bottom 3/8 inch from the edge.	301 or 401	SSaw-2(a)	12
	e. Turn and raise on the undercollar across the bottom 1/8 inch from the edge.	301	SSaw-2(b)	12
	f. Join the undercollar at the bottom with a 3/8-inch seam.	301 or 401	SSe-2(a)	12
	g. Turn and raise the undercollar at the bottom with a 1/4-inch seam.	301	SSe-2(b)	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	h. Install the studs and the eyelets of the five snap fasteners in the undercollar as indicated by the pattern marks.			
	i. Place the undercollar on the topcollar, and stitch the sides and the top of the collar with a 1/4-inch safety-stitch.	516 or 519	SSa-2(b)	8-10
	j. Turn and raise on the undercollar, starting 3 inches from the points of the collar, 1/16 inch from the edge.	301	LSq-2(b)	8-10
5	Attach label			
	Position the combination identification and size label, on the overcollar, at the center, so that the top edge of the combination identification and size label will be 1/2 ±1/4 inch from the top seam line in the finished collar. Join the combination identification and size label on all four sides to the collar with a single row of stitching 1/16 inch from the edge.	301	LSbj-1	10-12
6	Clean collar			
	a. Trim the ends of stitching. Remove the loose threads from the collar.			
	b. Remove all spots and stains.			
	c. Remove the shade tickets.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. List of pattern parts.

Material	Pattern Part	Cut Parts
Basic fabric (see 3.1.1)	Overcollar	1
	Lower collar attachment tab	2
	Overcollar (bottom)	2
Knitted synthetic mouton (see 3.1.5)	Overcollar	1

TABLE III. Finished measurements.

Finished Measurements in Inches 1/ 2/	
Size of Collar	Neck Length
30	17
32	17-1/2
34	18
36	18-1/2
38	19
40	19-1/2
42	20
44	20-1/2
46	21
48	21-1/2
50	22

1/ The finished measurements shall be taken as specified in 3.5.
2/ The tolerance for the finished measurements shall be ±1/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.6 Identification of product. The collar shall have a combination identification and size label. The combination identification and size label shall conform to type VI, classes 1 and 2 of DDD-L-20 except that the specification number and the words "Dry Clean Only" shall be included on the label. The combination identification and size label shall have colorfastness to both laundering and dry cleaning.

3.7 Workmanship. The collar shall be manufactured in a thoroughly workmanlike manner.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection required by this specification is classified as quality conformance inspection.

4.2.1 Quality conformance inspection. The quality conformance inspection shall consist of the following:

a. Material and component inspection

b. End item inspection

c. Preparation for delivery inspection.

4.2.2 Material and component inspections. Materials and components shall be examined and tested in accordance with all of the applicable subsidiary documents referenced herein to the extent applicable.

4.2.2.1 Sampling for testing. Unless otherwise specified in documents referenced herein, sampling for testing materials and components shall be as specified below:

Lot sizes	Sample sizes
800 or less	2
801 to 22,000 inclusive	3
22,001 or more	5

4.2.2.2 Certificate of compliance. If a certificate of compliance is submitted for any requirement specified herein, the Government shall have the right to check test items to determinethe validity of the certification.

4.2.3 End item inspection. The end item shall be examined as specified in 4.2.3.1 and 4.2.3.2. The sample unit for these examinations shall be one collar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.2.3.1 Visual examination. The end item shall be visually examined for the defects listed in table IV. The inspection level for this visual examination shall be II of MIL-STD-105. The acceptable quality level for this visual examination shall be 2.5 defects per 100 units (dhu) for major defects, 15.0 dhu for major and minor A defects, and 40.0 dhu for major and minor A and minor B defects.

4.2.3.2 Examination of finished measurements. The end item shall be measured as specified in 3.5 to determine conformance to the finished measurements specified herein. The inspection level for the examination of the finished measurements shall be S-3 of MIL-STD-105. The acceptable quality level for the examination of the finished measurement shall be 4.0 dhu for defects (one class). Each finished measurement of the end item that deviates from the finished measurement specified in table III shall be classified as a finished measurement defect.

4.2.4 Preparation for delivery inspection. Shipping containers fully prepared for delivery shall be examined, for the defects listed in table V, to determine compliance with the packaging, packing, and marking requirements specified herein. The sample unit for this examination shall be one shipping container fully prepared for delivery except that it need not be sealed. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 of MIL-STD-105. The acceptable quality level shall be 2.5 dhu for defects (one class).

TABLE IV. Classification of defects.

Defect	Major	Minor A	Minor B
Buttonholes			
One or more buttonholes omitted or added.	X		
Buttonhole stitches not caught in fabric, causing stitches to pull away from fabric.	X		
One or more broken stitches in one buttonhole.		X	
One or more broken stitches in two or more buttonholes.	X		
More than two skipped stitches in one or more buttonholes.		X	
Ragged edges in any buttonhole affecting appearance.			X
Gimp of buttonhole omitted.			X
Any buttonhole uncut.			X
End of one buttonhole insecurely tacked.		X	
Ends of two buttonholes insecurely tacked.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects. - Continued

Defect	Major	Minor A	Minor B
Cleanness			
Indelible ink shade stamping exposed on outside or spots or stains of permanent nature.		X	
Removable spot or stain clearly noticeable.		X	
Thread ends not trimmed or one or more shade tickets not removed.			X
Component and assembly			
Any component defective.	X		
Any component missing.	X		
Any required operation omitted or improperly performed.	X		
Cutting			
Any component not cut in accordance with directional lines on patterns or specified requirements.	X		
Materials defects and workmanship damages			
Any weakening material defect such as hole, smash, multiple float, or slub, which might develop into hole.	X		
Shade bars, slubs, or any other similar nonweakening material defects on outside of collar.		X	
Shade bars, slubs, or any other similar nonweakening material defects on inside of collar.			X
Large drill hole, cut, tear, mend, or needle chew that might develop into hole.	X		
Ruptured fibers in line of sewing (usually caused by broken, blunt, or hooked needles) affecting appearance or serviceability.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects. - Continued

Defect	Major	Minor A	Minor B
Seams and stitchings			
Seam twisted, pleated, or badly puckered. 1/		X	
Part of collar caught in any unrelated operation or stitching.	X		
Thread breaks or end(s) of stitching, if not caught in other seams or stitchings, not securely backstitched or tacked as specified.		X	
Gage of edge, top, or raise stitching irregular, i.e. unevenly gaged or corresponding stitchings not uniformly gaged, affecting appearance.		X	
Gage of edge, top, or raise stitching not within range of gage specified or varies more than 1/16 inch if no range is specified.			X
Open seam over 1/4 inch on joining seam. 2/		X	
Open seam over 1/8 inch but not over 1/4 inch on joining seam. 2/			X
Stitches skipped or broken over 1/4 inch but not over 1/2 inch on edge, top, or raise stitching when seam is seamed, turned, and stitched. 2/			X
Stitches skipped or broken over 1/2 inch on edge top, or raise stitching when seam is seamed, turned, or stitched. 2/		X	
Raw edges on outside over 1/8 inch but not over 1/4 inch. 3/			X
Raw edges on outside over 1/4 inch. 3/		X	
Raw edges on inside over 1/2 inch but not over 1 inch. 3/			X
Raw edges on inside over 1 inch. 3/		X	
Run-offs on joining seams, if resulting in open seam. 2/		X	
Run-offs on edge, top, or raise stitching, if not resulting in open seam (outside only), over 1/2 inch but not over 1 inch.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects. - Continued

Defect	Major	Minor A	Minor B
Run-offs on edge, top, or raise stitching, if not resulting in open seam (outside only), over 1 inch.		X	
Stitch or seam type not as specified.		X	
Loose stitch tension, resulting in loose seam.	X		
Loose stitch tension on edge, top, or raise stitching, recognized by loose exposed loops of top or lower thread.		X	
Tight tension. 2/		X	
One or two stitches per inch less than minimum specified. 4/			X
Three stitches per inch less than minimum specified. 4/		X	
Four or more stitches per inch less than minimum specified. 4/	X		
One or more stitches per inch more than maximum specified. 4/		X	
Shaded parts			
Outside parts (visible when collar is worn) shaded.		X	
Snap fasteners			
Snap fastener missing, loose, or not functioning properly.		X	
Snap fastener clinched too tightly, cutting surrounding fabric.	X		
Detachable collar			
Edge of detachable collar irregular			X
Combination identification and size label			
Size on combination identification and size label missing, incorrect, or illegible.	X		
Information (except size) on combination identification and size label incomplete, incorrect, or illegible.		X	

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects. - Continued

Defect	Major	Minor A	Minor B
Combination identification and size label misplaced or off center of back more than 1/2 inch.			X
Stitching on one or more edges or combination and size label omitted.		X	

1/ Some puckering is an inherent characteristics in joining seams and stitching of cloth parts. This normal puckering shall not be classified as a defect.

2/ A break in a line of stitching (except on edge, top, or raise stitching), run-offs on joining seams (if resulting in an open seam), and tight tension (stitches breaking when normal strain is applied to seam or stitching) shall be classified as open seams.

3/ A raw edge shall be classified as such when it occurs along an edge required to be turned under but the edge is securely caught in the stitching. If the edge is not securely caught in the stitching, the defect shall be classified as an open seam.

4/ Stitches per inch shall be classified as a defect only when the condition exists on the major portion of the seam or stitching.

TABLE V. Examination of preparation for delivery.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged (affecting serviceability), or not as specified.
Workmanship	Inadequate application of components such as: incomplete closure of container flaps, loose strapping, or inadequate stapling.
	Bulging or distortion of container.
Content	Number of collars per container more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Five jacket collars of one size only shall be neatly stacked in a bundle and secured with cotton tape or twine.

5.1.2 Commercial. The jacket collars shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A. Unless otherwise stipulated, a quantity of jacket collars one size only, preserved as specified in 5.1, shall be packed in a weather resistant fiberboard shipping container conforming to PPP-B-636, style and grade optional. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15C of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each fiberboard container shall be closed in accordance with Method III, waterproofed in accordance with Method V, and reinforced in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Unless otherwise stipulated, a quantity of jacket collars one size only, preserved as specified in 5.1, shall be packed in a domestic fiberboard shipping container conforming to PPP-B-636, style and grade optional. The inside of each shipping container shall be fitted with a box liner conforming to class domestic, variety DW, grade 275 of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I of A-A-203. Each shipping container shall be closed in accordance with Method II as specified in the appendix of PPP-B-636.

5.2.3 Commercial. Jacket collars preserved as specified in 5.1 shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract or order shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188.

5.3.1 Mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label, 5 by 4 inches, with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the corrected quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The detachable collar covered by this specification is intended to be worn with Jacket, Cold Weather, Security Police CWU-46/P (MIL-J-83472).

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Size required (see 1.2)

c. Standard patterns furnished by Government (see 3.4)

d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).

6.3 Color shades. Samples of color shades may be obtained from the procuring activity or as directed by the contracting officer.

6.4 Figures. Figures 1 and 2 show general style of the collar and are furnished for information only. Should any inconsistencies exist between the requirements of this specification and the figures, the requirements of this specification shall govern.

Custodian:
Air Force - 11

Reviewer:
Air Force - 82, 99

User:
Air Force - 45

Preparing activity:
Air Force - 11

Project No 8315-F357

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

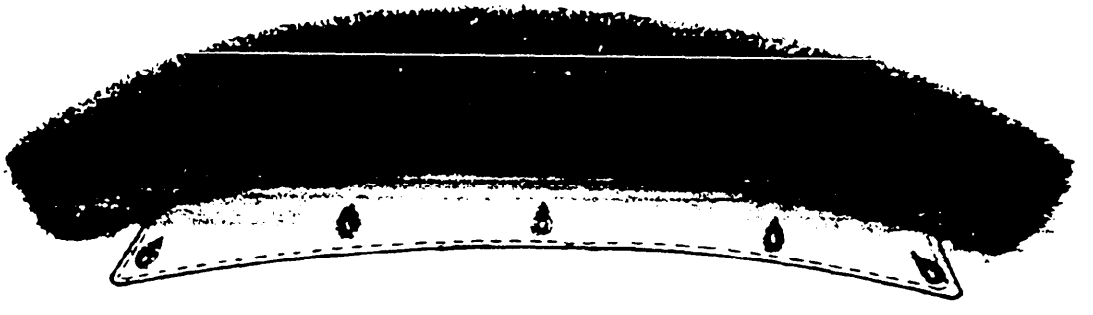


FIGURE 1. Detachable collar (front view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

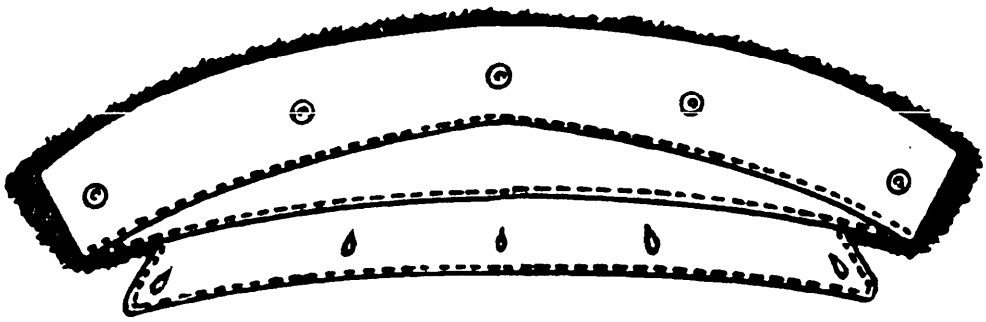


FIGURE 2. Detachable collar (back view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE
ASD/ENESS
Wright-Patterson AFB OH 45433

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

ASD/ENESS
Wright-Patterson AFB OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:53Z
Check the source to verify that this is the current version before use.