MIL-H-87072A
8 June 1987
SUPERSEDING
MIL-H-87072(NU)
4 February 1980

MILITARY SPECIFICATION

HANDBAG, WOMAN'S, SYNTHETIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers the requirements for women's polyurethane handbags.

* 1.2 Classification. The handbags shall be of one type, and in the following classes as specified (see 6.2):

Class 1 - Black polyurethane handbag
Class 2 - White polyurethane handbag

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8445

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

*FEDERAL

V-F-106	- Fasteners, Slide, Interlocking
V-T-276	- Thread, Cotton
V-T-295	- Thread, Nylon
NN-P-71	- Pallets, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
CCC-C-700	- Cloth, Coated, Vinyl, Coated (Artificial Leather)
DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use)
PPP-B-566	- Boxes, Folding, Paperboard
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-B-676	- Boxes, Setup

*MILITARY

MIL-F-10884	- Fasteners, Snap
MIL-P-15011	- Pallets, Material Handling, Wood Post Construction, 4 Way Entry

STANDARDS

FEDERAL

FED-STD-191	- Textile, Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

*MILITARY

MS-27981	- Fasteners, Snap, Style 2A
MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402).

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

DEPARTMENT OF DEFENSE STANDARD COLOR CARD
OF OFFICIAL STANDARDIZED SHADES FOR SEWING THREAD

(Applications for copies may be obtained from the Color Association of the United States, Inc., 343 Lexington, St., New York, NY 10016).

*TECHNICAL ASSOCIATION OF THE PULP AND PAPER INDUSTRY

T403 OM-85 - Bursting Strength of Paper
T410 OM-83 - Grammage of Paper and Paperboard (Weight per Unit Area)
T411 OM-84 - Thickness Caliber of Paper and Paperboard
T414 OM-82 - Internal Tearing Resistance of Paper
T489 OM-86 - Stiffness of Paperboard

(Applications for copies should be addressed to the Technical Association of the Pulp and Paper Industry, Technology Park/Atlanta, P.O. Box 105113, Atlanta, GA 30348-5113).

*(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material.

* 3.3.1.1 Base fabric. The base fabric, prior to coating, shall be cotton, napped on one side, conforming to the requirements of one of the following fabrics when tested as specified in 4.4.1. The class 1 fabric shall be dyed black and the class 2 shall be white.

	5 Harness Satcen	4 Harness 2/2 Twill
Weight, ounces per square yard (minimum - maximum)	7.0 - 7.8	8.0 - 9.2
Yarns per inch (minimum)		
Warp	60	55
Filling	56	40
Breaking strength, pounds (minimum)		
Warp	60	85
Filling	70	100
Tearing strength, pounds (minimum)		
Warp	9.7	8.2
Filling	9.0	12.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.3.1.2 Cloth, coated, polyurethane. The base fabric specified in 3.3.1.1 shall be coated on the napped side only with polyurethane suitably compounded and pigmented black Army Shade No. 432 (class 1) or white (class 2). The coated fabric shall be embossed with a simulated leather grain and shall match the standard sample for color, grain and finish. The piece number for the black standard sample is 3044. The coated fabric shall conform to the requirements of one of the following coated fabrics when tested as specified in 4.4.1:

	5 Harness Sateen	4 Harness 2/2 Twill
Weight, ounces per square yard (minimum-maximum)	10.0 - 12.0	11.0 - 13.0
Breaking strength, pounds (minimum)		
Warp	60	85
Filling	70	100
Tearing strength, pounds (minimum)		
Warp	5.5	5.5
Filling	2.6	2.6
Adhesion of coating, pounds per 2 inch width	17.0	17.0
Blocking, scale rating	No. 3	No. 3
Resistance to low temperature	1/	1/
Resistance to oven ageing	2/	2/

1/ There shall be no evidence of the coating cracking when examined along the fold line.

2/ The coated cloth shall show no evidence of becoming stiff, brittle, soft or tacky. In addition, there shall be no noticeable change in the color or appearance of the exposed test specimen when compared to the original test specimen.

3.3.2 Component fabrics.

* 3.3.2.1 Cloth, coated, vinyl. The coated cloth used for lining the handbag shall conform to the requirements for class 7 of CCC-C-700, except that the minimum weight shall be 16 oz per sq yard and the hydrostatic resistance is not required. The coating shall be pigmented to approximate the shade of the outershell material and it shall be embossed with a simulated leather grain.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.3.2.2 Felt. The felt used for padding the outershell of the handbag shall be made of acetate, cotton, polyester, or a blend of all three fibers and shall weigh 3.0 to 5.0 ounces per square yard with a thickness of 0.051 (± 0.015) inch at 0.6 psi (see 4.4.1).

* 3.3.2.3 Cloth, sheeting, cotton. The material used for reinforcing the gusset tab and front pocket shall be a cotton sheeting having a minimum thread count of 44 ends and 38 picks per inch and a minimum weight of 2.7 ounces per square yard (see 4.4.1). A pressure sensitive fabric tape (coated or uncoated) or the coated outershell fabric specified in 3.3.1 may be used as an alternate to the cotton sheeting for the front pocket reinforcement.

3.3.3 Thread. The thread for all stitching shall be cotton or nylon conforming to the requirements specified in 3.3.3.1 or 3.3.3.2. The color for class 1 handbags shall be black AA, Cable No. 66043 and white AH, Cable No. 66050 for the class 2 handbags.

3.3.3.1 Thread, cotton. The cotton thread shall conform to the requirements for type IC, 3 ply, ticket No. 0 of V-T-276.

3.3.3.2 Thread, nylon. The nylon thread shall conform to the requirements for type I or II, class 1, size B, or type III, size B of V-T-295.

3.3.4 Welting, vinyl. The welting shall be an extruded vinyl compounded with suitable plasticizers. The color shall match the coated fabric specified in 3.3.1.2. The welting shall be of the flat ribbon type, 1/4 inch in width, with a beaded edge 1/16 inch in diameter. The flat portion shall be slashed at equal intervals for ease in fabrication. The welting shall be smooth, uniform in texture, and free from cracks and other defects affecting appearance and serviceability (see 4.4.1).

3.3.5 Adhesives. The adhesives used for bonding various parts of the handbag shall form a good bond and they shall remain soft and flexible, be non-migratory, and shall not stain or damage the materials to which they are applied (see 4.4.1).

3.3.6 Masking tape. The masking tape used for taping together edges of the interlining papers and the back of the lock closure shall be a pressure sensitive tape and suitable for the intended purpose.

3.3.7 Rings, loop. The double loop and single loop rings used for adjusting and attaching the shoulder strap to the gusset tabs shall conform to requirements specified in Figure 2. The double loop shall hold firmly together in a flat plane and shall not disengage or rotate along its axis when normal thumb pressure is applied against the joint.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.3.7.1 Finish. The loop rings for the class 1 handbag shall be given a baked-on black semigloss enamel finish. Prior to enameling, the loop rings may be given preparatory treatments to improve adhesion. The finished enamel surface shall show good resistance to brittleness and solvent when tested as specified in 4.5.1 and 4.5.2. The loop rings for the class 2 handbag shall have a polished brass finish and baked lacquer coating. The lacquered surface shall show no change in color when tested as specified in 4.5.4.

3.3.8 Lock. The lock for the handbag shall conform to requirements specified in Figure 2 and shall be tested in accordance with 4.4.1.

3.3.8.1 Finish. The exposed, visible surfaces of the lock closure for both classes of handbags shall be polished brass with a high lustre finish and a permanent baked-on lacquer coating. The lacquer shall be continuous,level, adherent, and free from dust, lint, or other foreign inclusions. There shall be no change in the exposed lacquered surfaces of the lock closure, except for a slight discoloration along the edges and the tissue paper shall not adhere to the lacquered surface when tested as specified in 4.5.3 and 4.5.4.

* 3.3.9 Snap fasteners. The snap fasteners for attaching the strap and center divider pocket shall conform to style 2A of MIL-F-10884. The snap fasteners for the class 1 (black) handbag shall be black chemical finish 2 and the class 2 (white) handbag shall be bright brass finish 1 with a clear lacquer finish on the button cap (see 4.4.1). The male component shall consist of a stud and size 1 eyelet and the female component shall consist of size 2 button and socket of Military Standard MS 27981.

* 3.3.10 Label. Each finished handbag shall have an identification label conforming to type VI, classes 1 and 10 of DDD-L-20. The label shall measure 3 (± 1/8) inches wide by 1-3/8 (± 1/8) inches long and shall have the following information and format:

NAME:
SERVICE NO:
HANDBAG, WOMAN'S SYNTHETIC
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
STOCK NO: 8445-00-000-0000 (EXAMPLE)
CONTRACTOR:

3.3.11 Paperboard, reinforcing.

3.3.11.1 Latex impregnated paperboard. The three thicknesses of latex impregnated paperboard shall conform to the requirements of Table I when tested as specified in 4.4.1. The impregnated paperboard shall consist of a high alphacellulose wood pulp fiber, impregnated with a minimum of 12 percent latex based on the dry fiber weight.

* 3.3.11.2 Bogus paper. The various bogus papers shall conform to the appropriate thickness requirements specified in Table I when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Table 1 - Physical requirements of paperboard (minimum)

Material				
Latex impregnated paperboard				
Thickness 1/		.015	.020	.025
Tear resistance (grams)				
- machine direction		225	300	375
- cross direction		260	350	400
Bursting strength (psi)		60	70	90
Folding endurance (MIT)				
- machine direction		130	175	225
- cross direction		100	125	150
Weight (lbs/sq ft)		45 (±5)	60 (±5)	75 (±5)
Bogus paper				
Thickness 1/	.012	.018	.024	.040

1/ Thickness is in inches and a tolerance of ± 0.002 is permitted.

3.3.12 Stain. The exposed cut ends of the carrying strap shall be stained with a permanent type stain to match the color of the basic material (see 4.4.1).

3.3.12.1 Final finish or cleaner. When a final finish or cleaner is applied to the finished handbag to remove dirt, stains, spots, or cement, it shall not affect the color, luster, or finish of the basic material and shall not damage the sewing threads (see 4.4.1).

* 3.3.13 Cap and rivet. The cap and rivet for securing the gusset tab shall be Townsend Fastening Systems full tubular rivet style #632, 5/16 inch long and cap style #536 (see 6.4 and 4.4.1), or an equal item (see 6.5). The cap and rivet shall have a black oxide finish on the Class 1 handbag and a brass finish on the Class 2 handbag.

*3.3.14 Base stop and stud. The base stops shall be brass half-ball with steel stud conforming to Fulford Mfg. Co., part numbers 9562 and P-296 or equal (see 6.4, 6.5, and 4.4.1).

*3.3.15 Slide fastener. The slide fastener for the center pocket shall be a preassembled, continuous element, monofilament plastic coil conforming to Type I, Style 2, Size M, of V-F-106. The length of the chain shall be as required for the pocket opening. The bottom closed stop shall be a staple type and the pull shall be the long tab type conforming to V-F-106. The color of the chain, tape, slide body, pull tab, and stops shall approximate the shade of the base material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.3.15.1 Continuous chain application. As an alternate to using preassembled slide fasteners, a continuous chain application may be utilized as part of the manufacturing method. The method requires that the entire chain tape and tape extensions be securely stitched with the required seam without any puckering or waviness. The slider shall be indexed into position to provide for a smooth running chain disengagement with its mouth squarely against the bottom staple stop and smooth running chain engagement with its throat evenly against the top stops and with no excess chain elements showing. If continuous element plastic chain is used, sewn top stops without gapping are allowed.

3.4 Design. The finished handbag shall consist of a polyurethane outershell with vinyl coated cloth lining, a metal turn lock closure and an adjustable detachable shoulder strap. The shape of the handbag shall be rectangular with folding single wing gussets at the sides. The inside of the handbag shall contain front, back, and accessory pockets, and a detachable center divider pocket with slide fastener closure. The outside has a back pocket.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow 3/8 inch for turning in edges. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

* 3.5.1 List of pattern parts. The component parts of the handbag shall be cut from materials as specified and in accordance with the pattern parts required for the manufacturing process as follows:

Table II - List of pattern parts

Material	Pattern nomenclature	Cut parts
Cloth, polyurethane coated	Flap	1
	Front	1
	Bottom	1
	Back pocket (outside)	1
	Back strip	1
	Gusset (left and right)	2
	Gusset tab	2
	Strap	1 1/
Cloth, Vinyl coated (lining)	Flap lining	1
	Front lining	1
	Front pocket	1
	Back lining (inside)	1
	Interior back pocket	1
	Accessory pocket	1
	Center divider pocket	2
	Back pocket lining (outside)	1
	Back lining (outside)	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Material	Pattern nomenclature	Cut parts
Felt padding	Flap felt	1
	Gusset felt (left and right)	2
	Front felt	1
	Botton felt	1
	Back pocket felt (outside)	1
Cotton sheeting	Gusset tab stabilizer	2
.012 Bogus paper	Front pocket reinforcement	1
	Accessory pocket reinforcement	1
	Back pocket (inside) reinforcement	1
	Bottom reinforcement	1
.018 Bogus paper	Front & back lining reinforcement	2
.024 Bogus paper	Flap reinforcement	1
.040 Bogus paper	Gusset inner form	2
	Front, bottom, back reinforcement (1 piece)	1
.015 Latex impregnated paperboard	Flap lining reinforcement	1
	Back pocket reinforcement	2
.020 Latex impregnated paperboard	Gusset reinforcement (left and right)	2
	Gusset tab reinforcement	2
.025 Latex impregnated paperboard	Front, back strip reinforcement	2
	Strap reinforcement	1
Templates	Hardware location	

1/ Strap may be cut as two pieces and joined on the diagonal. Seam allowance must be added.

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitch, seams, and stitching types specified in Table III shall conform to FED-STD-751. All edge and topstitching, unless otherwise specified, shall be 1/16 to 1/8 inch from the folded edge. Seam allowances shall be maintained with seams properly sewn so that no raw edges, runoffs, twists, pleats, or open seams will result.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.6.2 Thread breaks, skipped stitches, runoff stitches, and ends of seams. Ends of all seams and stitching, when not caught in other seams or stitchings, shall be tacked or backstitched not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks and two or more consecutive skipped or runoff stitches shall be overstitched not less than 1/2 inch or more than 1 inch beyond the defective stitching area.

* 3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table III.

3.7 Manufacturing operations requirements. The handbag shall be manufactured in accordance with the operation requirements specified in Table III. The contractor is not required to follow the exact sequence of operations listed provided that the finished handbags are identical to those produced by following the sequence of operations as listed in Table III.

3.7.1 Application of adhesive. The width of the cement line applied to the edges of component parts shall be 3/8 to 1/2 inch from the edge, unless otherwise specified in Table III.

3.7.2 Abbreviations in table of operations. The abbreviations used in Table III are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III - CONSTRUCTION OF HANDBAG

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*1.	Cutting. Cut all component parts in accordance with Government patterns which indicate directional lines and notches for proper assembly. The outershell parts (front, flap, bottom, back pocket, back strip, gussets, gusset tabs and strap) shall match in shade, finish, and grain. The coated outershell fabric and impregnated paperboard used for strapping may be strip cut. Cut the bogus paper and impregnated paperboard in strict accordance with patterns which show directional lines, holes, slots, and notches for proper assembly.					
2.	Replacement of defective components. During the cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with nondefective and properly matched components.					
*3.	Attach base stops and studs. Superimpose bottom felt onto uncoated side of bottom outershell according to notches and cement in position. Center bogus paper bottom reinforcement on felt and punch holes through bottom as indicated on pattern and attach four base stops with locking studs.					
*4.	Make outershell and outside back pocket. a. Center front felt onto uncoated side of front outershell according to notches and cement in position. Apply cement along uncoated top edge of front and back strip pieces. Position .025 impregnated paperboard front and back strip reinforcement pieces along top of each cemented edge in accordance with notches on pattern. Turn back cemented edges of outershell and adhere to paperboard.					
	b. With coated sides together, stitch along the front and bottom outershell piece 3/16 to 5/16 inch from the bottom cut edge as indicated by marks on pattern.	301	LSq-2(a)	8-10	0/3 or B	0/3 or B

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III - CONSTRUCTION OF HANDBAG

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Turn seam allowance toward bottom piece and stitch through bottom and seam allowance 1/16 to 1/8 inch from seamline.	301	LSq-2(b)	8-10	0/3 or B	0/3 or B
	d. Center back pocket felt onto uncoated side of back pocket outershell and cement in position. Apply cement to uncoated top edge of the back pocket piece and felt back pocket. Position .015 impregnated paperboard back pocket reinforcement along top edge in accordance with marks on pattern. Turn back cemented edge of outershell and adhere to paperboard and felt.					
	e. Apply cement along top edge to uncoated side of back pocket lining. Position .015 impregnated paperboard back pocket reinforcement along top edge in accordance with marks on pattern. Turn back cemented edge of lining and adhere to paperboard.					
	f. With the uncoated side of back pocket lining facing the back pocket felt, align top folded edge and stitch along top 1/8 inch from folded edge through the reinforcement pieces. Baste side edges together.	301	Smlr to SSc-1	8-10	0/3 or B	0/3 or B
	g. Overlap uncoated side of bottom edge of the back strip onto coated side of back lining (outside) in accordance with marks on pattern and stitch 1/16 - 1/8 inch from edge.	301	LSa-1	8-10	0/3 or B	0/3 or B
	h. Place back pocket with outer shell exposed on back assembly aligning bottom edges. Stitch across bottom.	301	SSa-1	8-10	0/3 or B	0/3 or B
	i. With coated sides together, stitch along bottom and back assembly 3/16 to 5/16 inch from the cut edge as indicated by marks on pattern.	301	LSq-2(a)	8-10	0/3 or B	0/3 or B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III - CONSTRUCTION OF HANDBAG

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	j. Turn seam allowance toward bottom piece and stitch through bottom and seam allowance 1/16 to 1/8 inch from seamline	301	Smlr to LSq-2(b)	8-10	0/3 or B	0/3 or B
6.	Prepare gusset. Cement gusset felt to uncoated side of gusset pieces. Apply cement along the uncoated top edge of gusset and position .020 impregnated paperboard gusset reinforcement piece on felt in accordance with notches on pattern. Turn back top cemented edge of gusset and adhere to top edge of reinforcement.					
7.	Make gusset tabs. a. Cement .020 impregnated paperboard gusset tab reinforcement to cotton sheeting tab making a two ply interlining for the gusset tab. See 3.3.2.3 for alternates to the cotton sheeting.					
	b. Apply cement to uncoated side of gusset tab along the edges. Place sheeting side of interlining against uncoated side of tab. Fold cemented edges down and adhere the tab edges to the paperboard side of interlining.					
8.	Attach gusset tab. a. Slip on the single metal loop and fold the prepared gusset tab in half with the pointed ends even. Topstitch tab to gusset. The top row of tab stitching shall be 15/16 to 1-1/16 inch from the pointed end of tab. The top folded edge of tab shall be 7/8 to 1-1/8 inch from the top folded edge of gusset. The back side edge of the tab shall be 1/2 inch from and parallel to the back edge of gusset.	301	SSc-1 and LSbj-1	6-8	0/3 or B	0/3 or B
	NOTE: The tab may be temporarily attached to the gusset using a staple or other suitable means prior to folding the tab in half and stitching.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III - CONSTRUCTION OF HANDBAG

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Insert and cement .040 gusset inner form on felt and gusset reinforcement positioned at the back edge of gusset.					
	c. Attach a rivet and cap through the gusset tab and gusset, with the rivet on the outside of the bag. The rivet shall be centered in the gusset tab top stitching performed in operation 8a. See 3.3.13 for appropriate caps and rivets.					
9.	Attach welting and side reinforcement. Position welting on outside of handbag starting and ending 13/16 to 15/16 inch from top folded edge of handbag extending down sides and across bottom.	301	LSa-1	4-6	0/3 or B	0/3 or B
10.	Attach gusset. a. With coated sides together, stitch gussets to sides and bottom of prepared outershell simultaneously catching the vinyl welting.	301	SSk-1	8-10	0/3 or B	0/3 or B
	b. Turn bag right side out, shaping welt and gusset.					
*11.	Make flap. a. Cement felt flap to one side of .024 bogus paperboard flap reinforcement making a fully padded interlining for the flap.					
	b. Apply cement to uncoated side of flap along all edges.					
	c. Position the felt side of interlining assembly on the uncoated side of flap outershell. Turn down the edges of the flap and adhere to the paperboard side of interlining.					
	d. Apply cement to the cloth side of the vinyl flap lining and along all edges.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III - CONSTRUCTION OF HANDBAG

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Position the .015 impregnated paperboard flap lining reinforcement on the cloth side of the vinyl flap lining. Turn down the sides and curved edge and adhere the edges to the paperboard side of the interlining.					
	f. Apply cement to the .015 paperboard. Cement the paperboard side of the outershell flap and flap lining together.					
	g. Stitch around side and bottom (curved) edge, 1/8 inch from folded edge, leaving top edge unstitched.	301	Smlr to SSc-1	8-10	0/3 or B	0/3 or B
12.	Attach flap. Position the top (straight) edge of the vinyl flap lining on the back strip in accordance with pattern marks. Stitch the flap to the back strip with two parallel rows of stitching 1/16 to 1/8 inch gauge, with the outer row stitched 1/8 to 3/16 inch from folded edge of flap.	301	Smlr to SSc-2 and LSbj-2	8-10	0/3 or B	0/3 or B
13.	Insert paperboard reinforcement. a. Insert .040 bogus paperboard reinforcement piece underneath and corresponding with the .025 impregnated paperboard strip reinforcement attached in operation 4a.					
14.	Attach turnlock fastener. a. Insert turnlock portion of fastener through front of outershell in accordance with pattern marks. Clinch prongs securely to steel washer on underside of outershell.					
	b. Cover steel washer completely with masking tape.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III - CONSTRUCTION OF HANDBAG

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
15.	Prepare vinyl innershell. a. Apply a sufficient amount of cement to one side of each .018 bogus paperboard lining reinforcement piece and adhere to the uncoated side of the front and back (inside) lining pieces. Position in accordance with notches on pattern.					
	b. Apply cement along top uncoated edge of the front and back lining pieces. Turn down the top edges of the vinyl coated lining and adhere to the cemented edges of paperboard.					
	c. Cut two pieces of outershell material approximately 1 by 4 inches long and cement it to the front lining paperboard positioned to reinforce the stitching line used in attaching the sides of the front pocket to the front lining.					
*16.	Prepare vinyl pockets and attach label. a. Cement .012 bogus paperboard to the uncoated side of all three interior vinyl pockets (front, back, accessory) in accordance with marks on pattern.					
	b. Apply cement along the bottom and side edges of the affixed paperboard. Turn in the edges of the vinyl lining and adhere to the paperboard.					
	c. Position identification label on the vinyl side of the accessory pocket in accordance with pattern marks and stitch label on all four sides. The face of the label shall finish towards the back of the handbag and the bottom edge of label towards the top of the handbag. The stitching shall not be through the printing.	301	LSbj-1	8-10	0/3 or B	0/3 or B
	d. Fold all three pockets in half lengthwise as indicated by marks on patterns and stitch along fold.	301	OSf-1	8-10	0/3 or B	0/3 or B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III - CONSTRUCTION OF HANDBAG

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
17.	Stitch vinyl pockets and join front and back lining.					
	a. Position all pockets in accordance with marks on patterns.					
	b. Stitch the sides, bottom, and pocket compartments of the accessory pocket to the interior back pocket.	301	SSc-1 and SSb-1 and LSbj-1	8-10	0/3 or B	0/3 or B
	c. Stitch the sides and bottom of the assembled back and accessory pocket to the back lining.	301	SSa-1 and SSb-1	8-10	0/3 or B	0/3 or B
	d. Stitch the sides and bottom of front pocket to front lining.	301	SSc-1 and SSb-1	8-10	0/3 or B	0/3 or B
	e. With coated sides together, stitch the front and back lining pieces along bottom and sides.	301	SSa-1	8-10	0/3 or B	0/3 or B
18.	Assemble inner and outershells.					
	a. With uncoated sides facing, insert prepared vinyl lining into prepared outershell.					
	b. Join vinyl innershell to polyurethane outershell by edgestitching completely around the top back, gussets and top front of bag. Edgestitching shall be 1/16 to 1/8 inch from folded edge.	301	SSc-1	8-10	0/3 or B	0/3 or B
19.	Prepare center divider pocket.					
	a. Apply cement to uncoated side of one center divider pocket piece and cement onto the uncoated side of the remaining divider pocket piece.					
	b. Cut out center section according to marks on pattern and stain cut edges.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III - CONSTRUCTION OF HANDBAG

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Insert and stitch slide fastener (see 3.3.15) in center cut out. Ends of fastener shall extend past cut opening and all edges shall be securely stitched forming a rectangle.	301	SSa-1	8-10	0/3 or B	0/3 or B
	d. Bring sides parallel to slide fastener together, and stitch around sides and bottom. The slider shall be on the outside of the divider pocket. The slider shall disengage from the left to the right, and engage from right to left when facing the handbag front.	301	SSa-1	8-10	0/3 or B	0/3 or B
20.	Insert center divider pocket.					
	a. Place center divider pocket in handbag, according to marks on pattern.					
	b. Attach a snap fastener through the center divider pocket and gusset. The cap portion of the socket shall be on the face side of the gusset. The center of the cap shall be 1/2 inch from the top edge of the gusset and 2-1/8 inches from the back gusset side seam. The stud portion of the eyelet shall be on the top corner of the center divider pocket.					
	NOTE: After attachment to the center divider pocket, the snap fastener shall be opened a minimum of 3 times to verify that the socket and stud assemblies function properly.					
21.	Attach eyelet portion of turnlock fastener.					
	a. Position and punch a rectangular shaped hole through flap in accordance with marks on pattern.					
	b. Insert eyelet fastener and clinch prongs securely.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III - CONSTRUCTION OF HANDBAG

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
22.	Make shoulder strap.					
	a. When strap is cut as two pieces, cement and overlap the diagonally cut ends of shoulder strap. Stitch through strap along the diagonally spliced seam.	301	LSa-2	8-10	0/3 or B	0/3 or B
	b. With uncoated side of outershell together, fold strap in half lengthwise and insert strap reinforcement in center. An alternate strap construction using roll form of outershell and impregnated paperboard reiforcement in conjunction with a continuous folding operation is permitted. The roll form strapping shall be cut to the length of the working pattern.					
	c. Turn under side edges approximately 1/4 inch and stitch both sides and ends of strap 1/16 to 1/8 inch from edges. A folder may be used in this operation. Round off each end of strap.	301	SSc-1, SSa-1 and OSf-1	8-10	0/3 or B	0/3 or B
	d. Thread one end of strap through double loop. The cut end of strap shall extend 1-1/8 to 1-3/8 inches beyond center bar of loop.					
	e. Permanently attach strap to double loop by stitching end of strap to body of strap with 1/4 inch wide by 1/2 inch long boxstitch. The lower row of boxstitching shall finish 1/16 to 1/8 inch from cut raw edge of strap and the two side rows shall not be superimposed on the edge stitching.	301	Boxstitch	8-10	0/3 or B	0/3 or B
	OR					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III - CONSTRUCTION OF HANDBAG

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	Permanently attach strap to double loop by sewing end of strap to body of strap with two rows of 1/4 inch gauge stitching.	301	SSa-2	8-10	0/3 or B	0/3 or B
	f. Thread free end of strap through single loop of left tab, across handbag and through the double loop covering the permanently attached end of strap.					
	g. Secure snap fastener firmly to free end of strap in accordance with marks on pattern. Center and secure snap fastener socket 3 (+1/8) inches from strap end, and snap fastener stud 3/8 (+1/8) inch from strap end. Cap portion of socket shall be on the exposed side of the strap and the stud portion of the eyelet shall be on the inside of the strap.					
	h. Thread strap end with snap fastener through single loop of right tab and close snap fastener.					
	NOTE: After attachment to the strap, the snap fastener shall be opened a minimum of three times to verify that the socket and stud assembly functions properly.					
23.	Finishing.					
	a. Trim and remove all thread ends.					
	b. Remove all spots, stains, and excess cement (see 3.3.12.1).					
	c. Stain all cut, raw, or exposed edges which may otherwise seriously affect the finished appearance of the bag.					
	NOTE: Care shall be taken when trimming thread ends to ensure that damage to the material does not result.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

*3.8 Dimensions. Dimensions of the finished handbag shall be as follows:

OUTERSHELL

Flap width (A) - measured along top, side edge to side edge, with flap closed: 11-1/4 (± 1/4) inches

Bottom width (B) - measured along bottom, welt edge to welt edge: 11-1/4 (± 1/4) inches

Bottom depth (C) - measured from front to back seam: 3-1/4 (± 1/4) inches

Height (D) - measured from the bottom to the top with flap closed and handbag in upright position: 7-3/8 (± 1/4) inches

Flap length (E) - measured from bottom edge to top seam across center with flap open: 6-1/4 (± 1/4) inches

NOTE: A, B, C, D, and E refer to Figure 1.

SHOULDER STRAP

Width - 7/8 (± 1/8) inch

Length - 49 (± 1/4) inches (exclusive of the two folded under ends)

POCKETS

Front - measured from folded edge to folded edge

Width - 6-1/4 (± 1/4) inches

Depth - 3-1/8 (± 1/4) inches

Inside back - measured from folded edge to folded edge

Width - 10 (± 1/4) inches

Depth - 5-3/8 (± 1/4) inches

Accessory - measured from folded edge to stitchline or stitchline to stitchline

Comb (left) - 1-3/4 (± 1/4) inches wide by 4-3/4 (± 1/4) inches deep

Mirror (center) - 5-7/8 (± 1/4) inches wide by 4-3/4 (± 1/4) inches deep

Pen or pencil (right) - 1-3/8 (± 1/4) inches wide by 4-3/4 (± 1/4) inches deep

Center divider

Slide fastener opening - measured from side to side including stops (when applicable): 8-1/2 (± 1/4) inches

Depth - measured from inside bottom seam to top edge of slide fastener teeth: 6 (± 1/4) inches

Outside back

Width - measured from side seam to side seam including welts, at pocket opening: 11-1/8 (± 1/4) inches

Depth - 5-1/4 (± 1/4) inches

3.9 Workmanship. The finished handbags shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required (see 6.2), the contractor shall furnish a sample for first article inspection and approval. The item shall be inspected for compliance with design, workmanship, appearance, and dimensional requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, components and materials listed in Table IV shall be tested for the characteristics specified and in accordance with the referenced test methods of FED-STD-191. A certificate of compliance shall be submitted and will be acceptable for the felt requirements of 3.3.2.2, sheeting requirements of 3.3.2.3, welting requirements of 3.3.4, adhesive requirements of 3.3.5, stain requirements of 3.3.12, final finish requirements of 3.3.12.1, cap and rivet requirements of 3.3.13, base stop and stud requirements of 3.3.14, and snap fastener requirements of 3.3.9. The physical and chemical values specified in Section 3 represent the average of the number of test specimens selected for a sample unit for test purposes as specified in the applicable test method, except where otherwise specified.

All test reports shall contain the individual values utilized in expressing the final result. The lot shall be unacceptable if one or more units fail to meet any requirement specified. The sample size shall be as follows:

Lot size	Sample size
800 or less	2
801 thru 22,000	3
22,001 and over	5

The sample unit and basis for lot size shall be expressed as follows:

Component	Lot size expressed as	Sample unit for testing
Base fabric (uncoated)	Yards	1 yard, full width
Base fabric (coated)	Yards	3 yards, full width
Rings	Gross	6 each
Lock (3 parts)	Gross	8 each
Paperboard (latex impregnated)	Pounds, sheets or square feet	9 square feet
Paperboard (bogus type)	Pounds, sheets or square feet	9 square feet
Felt	Yards	1/2 yard, full width

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the currentversion before use.

Table IV - Test methods

Component	Characteristics	Requirement paragraph	Test method
Base fabric (uncoated)	Weave	3.3.1.1	Visual 1/
	Weight	3.3.1.1	5041 1/
	Yarns per inch	3.3.1.1	5050 1/
	Breaking strength	3.3.1.1	5100 1/
	Tearing strength	3.3.1.1	5132 1/
Base fabric (coated)	Weight	3.3.1.2	5041
	Breaking strength	3.3.1.2	5100
	Tearing strength	3.3.1.2	5132
	Adhesion of coating	3.3.1.2	5970
	Blocking, scale rating	3.3.1.2	5872
	Resistance to low temperature	3.3.1.2	3/
	Resistance to oven aging	3.3.1.2	4/
Lining fabric	Weight	3.3.2.1	5041
Felt	Material ident	3.3.2.2	1/
	Weight	3.3.2.2	5041 1/
	Thickness	3.3.2.2	5030 1/
Loop rings	Brittleness	3.3.7.1	4.5.1 2/
	Solvent resistance	3.3.7.1	4.5.2 2/
	Liver of sulphur	3.3.7.1	4.5.4 2/
Lock	Material ident	3.3.8	1/
	Lacquer ident	3.3.8.1	1/
	Liver of sulphur	3.3.8.1	4.5.4 2/
	Tackiness	3.3.8.1	4.5.3 2/
Latex impregnated paperboard	Material ident	Table I	1/
	Thickness	Table I	T411 5/
	Weight	Table I	T410 5/
	Bursting strength	Table I	T403 5/
	Tear resistance	Table I	T414 5/
	Stiffness	Table I	T489 5/
Bogus paperboard	Material ident	Table I	1/
	Thickness	Table I	T411 5/

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirement.

2/ One determination per sample unit

3/ After exposure for 4 hours at a temperature of -10 (+ 2)°F and while still at that temperature, the coated cloth shall be subjected to the test described in Method 5874 of FED-STD-191 except that the determination for hydrostatic resistance is not required under this test.

4/ One 8 inch by 8 inch test specimen shall be exposed in a circulating air oven at 180 (+ 2)°F for ten (10) days, then brought back to equilibrium at standard conditions and examined.

5/ Testing shall be performed in accordance with procedures of the Technical Association of the Pulp and Paper Industry.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.4.1.1 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are carried out as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection had indicated non-conformance.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.3. The sample unit shall be one completely fabricated handbag of each class offered for inspection. The lot size shall be expressed in the terms of the sample unit.

4.4.2.1 Visual examination. The finished handbags shall be examined for defects in color, design, construction, material, and workmanship and classified in accordance with the list below:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Classification of defects

Defect	Classification Major	Minor
COATED, CLOTH OUTERSHELL		
a. Color, grian, or finish not as specified	X	
b. Uncoated area	X	
c. Hole(s), cut(s), tear(s), or scratches	X	
d. Abraded area or other similar surface imperfection	X	
e. Wrinkled, blistered, or cracked	X	
f. Pronounced variation in color or finish of exterior component parts when bag is worn with flap closed	X	
g. Slight variation in color or finish between exterior component parts when bag is worn with flap closed		X
h. Any exposed raw edge(s) not stained to match outershell	X	
i. More than one splice on shoulder strap		X
COATED CLOTH LINING		
a. Not specified color or finish	X	
b. Objectionable odor or tackiness		X
c. Any imperfection or damage	X	
d. Excess lining fullness	X	
e. Wrinkled, blistered, or cracked		X
HARDWARE		
a. Finish omitted or not as specified	X	
b. Finish not smooth; contains scratches, streaks, or other visible defects		X
c. Finish peeling, chipped, or blistered	X	
d. Base metal is visible	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
e. Any part that will not function properly	X	
(1) Snap fasteners shall be opened a minimum of 3 times to verify proper function of socket and stud assemblies	X	
(2) Tightly clinched, damaging, or cutting adjacent material	X	
(3) Loosely clinched permitting any component to rotate freely, but not to the degree that any component can be expected to become detached during use		X
(4) Clinched loosely, to the degree that components can be expected to become detached during use.	X	
COMPONENT(S) AND CONSTRUCTION		
a. Any component part of operation omitted	X	
b. Any component not as specified (type, size, color, etc)	X	
c. Any component damaged, distorted, or otherwise defective	X	
d. Any operation not as specified		X
CLEANLINESS		
a. Any permanent spot or stain on outside	X	
b. Any permanent spot or stain on inside		X
c. Any spot or stain that can be removed without damaging the surface		X
d. More than three thread ends not trimmed to 1/4 inch or less on outside		X
e. More than 5 thread ends not trimmed to 1/4 inch or less on inside		X
SEAMS AND STITCHING		
a. Any open seam	X	
NOTE: A seam shall be classified as open when two or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur.		
b. Needle chew(s)	X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
c. Two or more stitches less than the minimum specified per inch, except on gusset tab		X
d. Two or more stitches less than the minimum specified per inch, except on gusset tab		X
e. Stitches per inch less than the minimum specified for gusset tab	X	
f. More than the specified number of stitches per inch	X	
(1) Damaging material	X	
(2) Not damaging material		X
g. Not specified seam or stitch type	X	
h. Any required line of stitching omitted	X	
i. Improper stitch tension resulting in loops exposed on surface for a total distance of more than 3/8 inch		X
j. Tight stitch tension resulting in cutting of material or thread breaks	X	
k. Loose stitch tension resulting in a loosely secured seam	X	
l. Stitch margin not as specified or irregular		X
m. Any puckering or pleating:		
(1) On outside	X	
(2) On inside		X
n. End of seam or stitching, when not caught in another seam or stitching backtacked less than 3/8 inch		X
o. Repair stitching on thread break and skipped stitched areas extends less than 1/2 inch or more than 1 inch beyond ends of repair area		X
p. Any seam restitched and damaging material to a degree where it may tear along the row of stitching	X	
q. Restitched seam not neatly accomplished		X
r. Top or edge stitching sewn too close to edge resulting in damage to material		
(1) Affecting appearance		X
(2) Affecting serviceability	X	
s. Any part caught in unrelated row of stitching	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
LABEL		
a. Missing, incorrect, illegible, misplaced, or not attached in specified manner		X
b. Not specified type or size		X

4.4.2.2 Dimensional examination. The finished handbag shall be examined for defects in dimensions, as specified in 3.8. Any dimension that is not within the established tolerances shall be scored as a defect. The sample unit for this examination shall be one finished handbag. Inspection level and acceptable quality level (AQL) shall be as specified in 4.4.3.

4.4.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's), expressed in defects per one hundred units (DHU) shall be as follows:

	Inspection level	AQL Major	Total
For visual examination in 4.4.2.1	II	2.5	6.5
For dimensional examination in 4.4.2.2	S-3	-	4.0

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

4.5 Tests.

4.5.1 Resistance to brittleness. The resistance of the enamel rings to brittleness shall be tested by holding a knife blade at approximately a 90 degree angle and drawing it across the surface striving to remove the enamel surface. Any evidence of flaking or jagged edges along the scratched area shall constitute failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.5.2 Resistance to solvent. The resistance of the enamel on the rings to a solvent shall be tested by immersing a ring in Stoddard's solvent maintained at 70° ± 5°F (21° ± 3°C), for a period of not less than twenty minutes. After immersion, the ring shall be thoroughly air dried and the surface visually examined for changes in appearance. The surface shall also be scraped with the thumbnail. Any appreciable change in the appearance of the enamel, except for a slight loss of gloss, or any evidence of the enamel softening due to scraping shall constitute failure.

4.5.3 Tackiness test. A piece of tissue paper shall be pressed against the finished lacquered metal device while at room temperature (60° to 80°F) for 15 seconds with any pressure capable of being exerted by the thumb and two fingers. At the completion of 15 seconds, the finger pressure shall be released to determine compliance with 3.3.8.1.

4.5.4 Liver of sulfur test for lacquer. The sample shall be immersed in a 2 percent by weight of CP liver of sulfur (potassium sulfide) water solution at a temperature of 100° to 110°F (38° to 43°) for 3 minutes. The piece shall then be removed and rinsed in warm, then cold, then hot water after which it shall be wiped gently with an absorbent cellulose material or whirled to remove residual moisture, allowed to air dry at room temperature for 1 hour and examined to determine compliance with 3.3.7.1 and 3.3.8.1.

5. PACKAGING

5.1 Preservation packaging. Preservation packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. The center section of each handbag shall be stuffed with wadded tissue paper or unprinted newspaper and the bag closed. Each handbag shall be placed in a snug-fitting clear polyethylene bag having a film thickness of 0.00125 inch (± 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. Closure of the polyethylene bag shall be accomplished by means of a mechanical tie (paper or plastic covered soft steel wire, aluminum band, etc.). A 1/4 inch diameter hole shall be made at one corner of each bag to allow excess air to escape. Each handbag shall be further packaged in a set-up paperboard box conforming to type II, variety 1, class A, style 3 of PPP-B-676, except that the thickness of the paperboard shall be not less than 0.038 inch. As an alternate, a paperboard box conforming to variety 1, style VIII, type G, class j of PPP-B-566 may be used. The inside dimensions of each box shall be 12-1/2 inches in length, 9 inches in width, and 3 inches in depth. The depth of the box lid shall be not less than 1-1/2 inches.

5.1.2 Level C (Commercial packaging). Handbags shall be packed to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The contractor may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:53Z
Check the source to verify that this is the currentversion before use.

5.2.1 Level A. Twenty-four (24) handbags, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type CF, class weather-resistant, variety DW, grade V15c, style RSC of PPP-B-636. The fiberboard for the liner shall conform to type CF, class domestic, variety SW, grade V15c, style RSC-L of PPP-B-636. Level A packages shall be packed on their sides, two in length, six in width, and two in depth within the shipping container. The packages in the second layer will be packed with their lids in the reverse direction. Inside dimensions of the shipping container shall approximate 26 inches in length, 19 inches in width, and 20 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed, waterproofed, and reinforced in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Twenty-four (24) handbags, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type CF, class domestic, variety DW, grade 275, style RSC of PPP-B-636. The fiberboard for the liner shall conform to type CF, class domestic, variety SW, grade V15c, style RSC-L of PPP-B-636. Level B packages shall be packed on their sides, two in length, six in width, and two in depth within the shipping container. The packages in the second layer will be packed with their lids in the reverse direction. Inside dimensions of the shipping container shall approximate 26 inches in length, 19 inches in width, and 20 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.3 Level C (Commercial packing). Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type IA of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Handbags covered by this specification are intended for use by female personnel of the Department of Defense.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, testing, and approval of the first article.
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
d. Classes required (see 1.2).
e. When palletization is required (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

6.4 Component sources. As a matter of information only, sources for components indicated in section 3 of this document are as follows:

a. Rivet - #632 x 5/16 inch long
Cap - #536

Townsend Fastening Systems
530 West Street
Braintree, MA 02184

b. Stud - 9562 steel stud, wide flanges
Stop - P-296, brass half ball

Fulford Mfg. Co.
107 Steward St.
Providence, RI 02901

6.5 Equal item. Prior to the use of an "or equal" item (see 3.3.13 and 3.3.14) approval must be given by the procuring agency.

* 6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

6.7 Subject term (key word) listing.

Pocketbook, synthetic
Polyurethane coated fabric
Shoulder strap, adjustable

Custodian:
Navy - NU

Review Activity:
DLA - CT

User:
Navy - MC
- CG

Preparing Activity:
Navy - NU

Project No. 8445-N093

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.


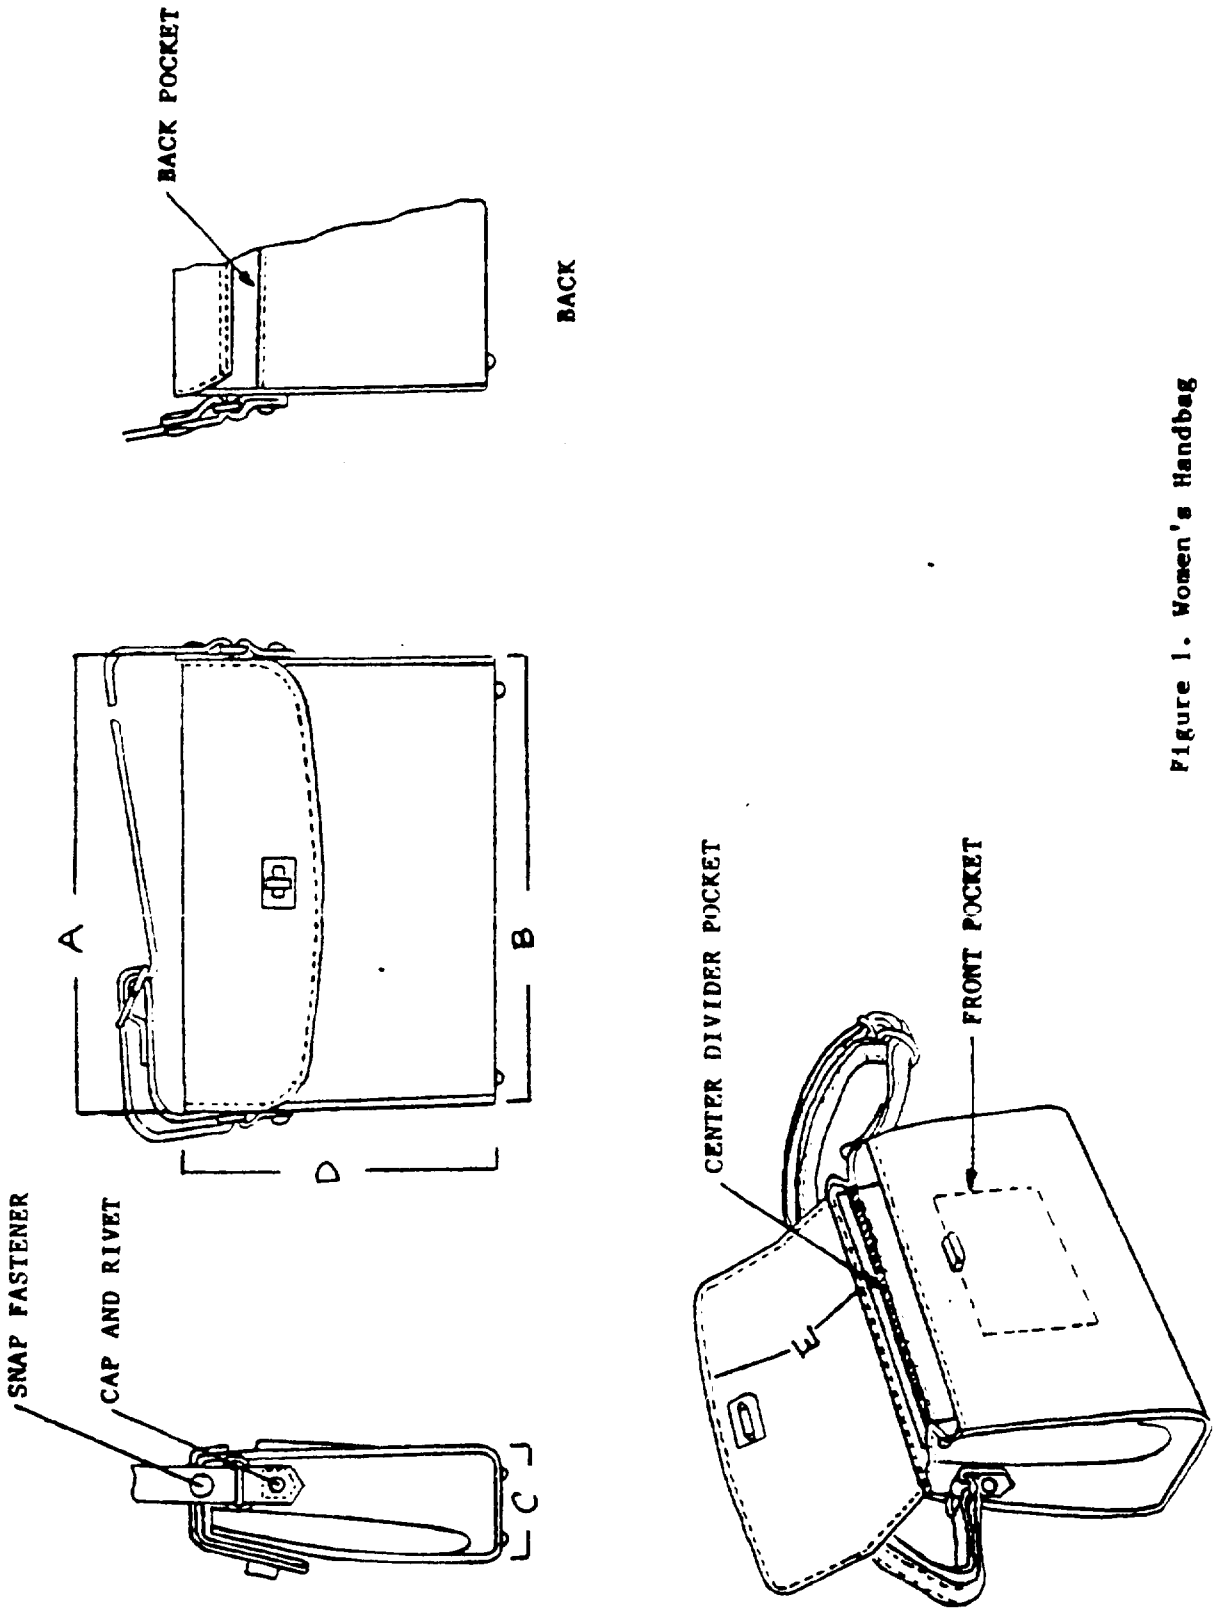


Figure 1. Women's Handbag

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

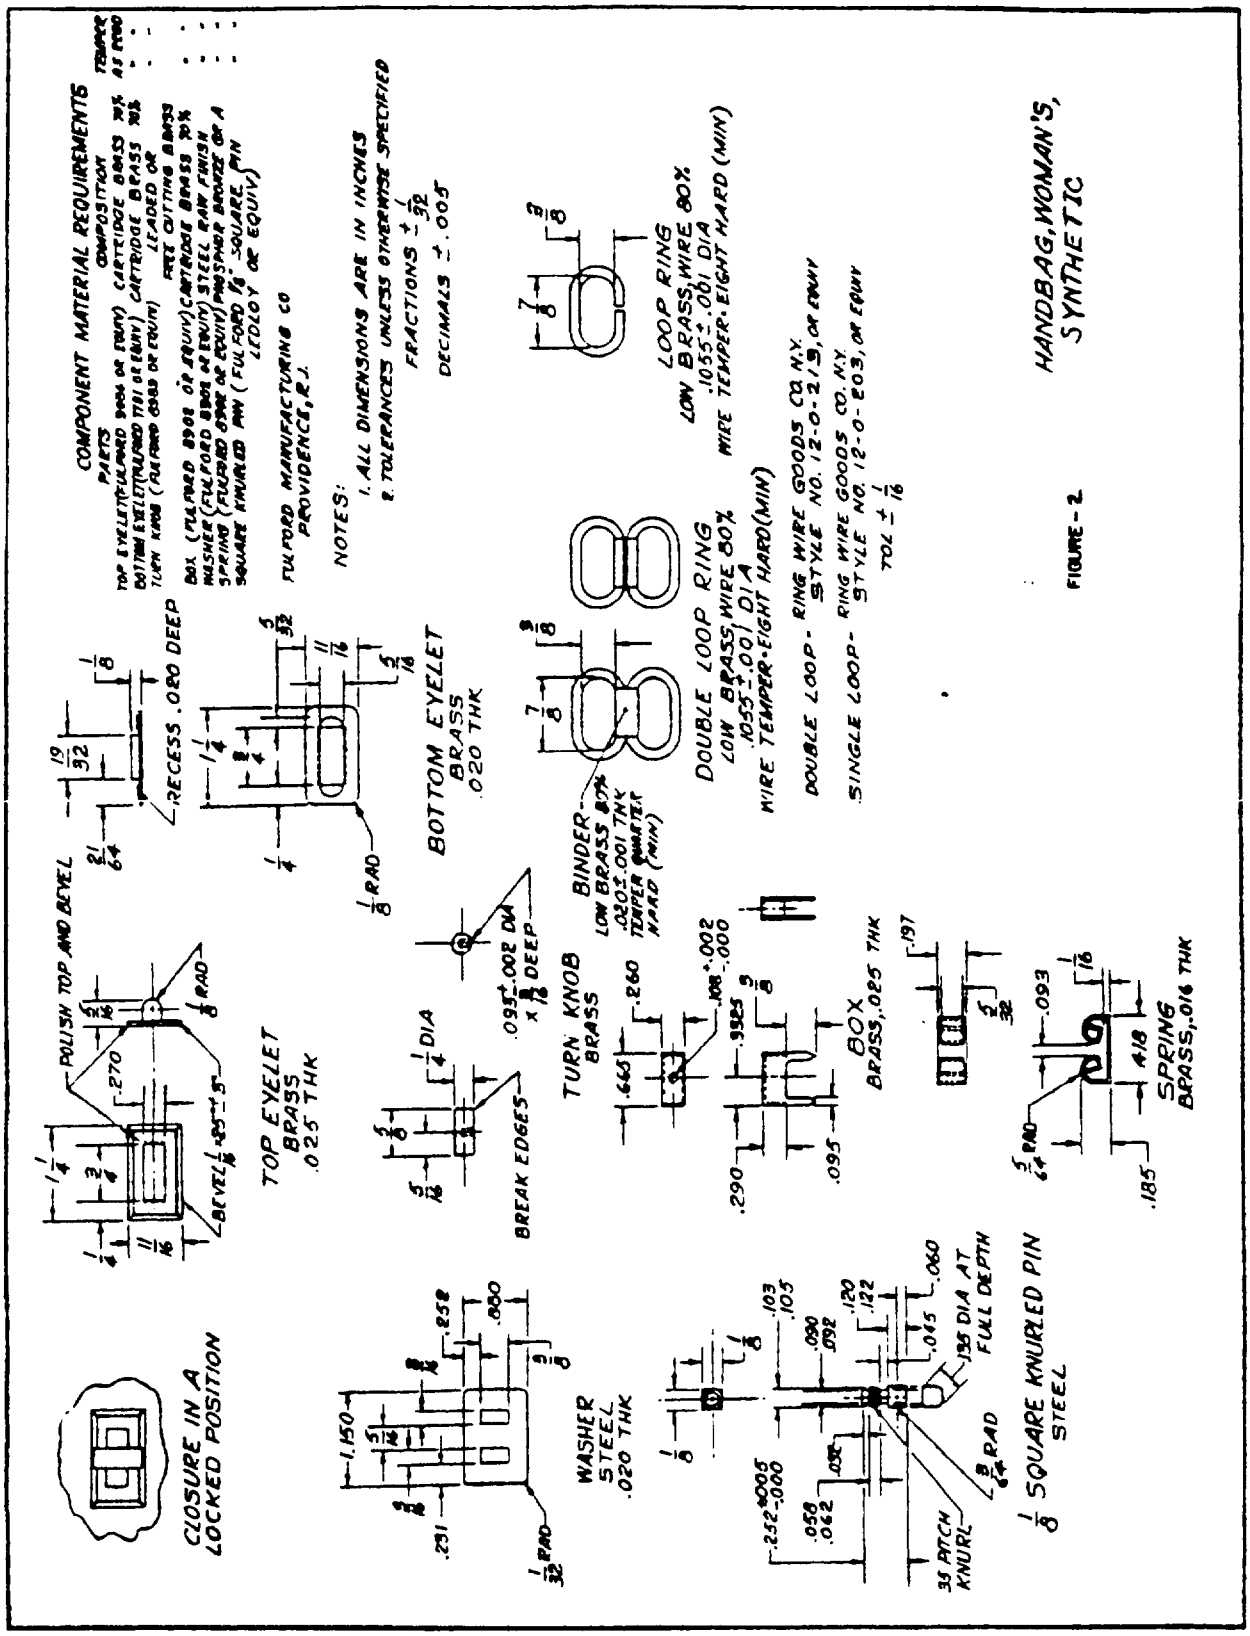

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
21 Strathmore Road
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-H-87072A	Handbag, Woman's, Synthetic

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:53Z
Check the source to verify that this is the current version before use.