MIL-J-87036B(NU)
15 April 1985
SUPERSEDING
MIL-J-87036A(NU)
11 February 1983

MILITARY SPECIFICATION

JUMPER, MAN'S (BLUE UNDRESS)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a blue undress jumper worn by enlisted male personnel of the Navy.

1.2 Classification. The jumpers shall be of one type only and of the following sizes and lengths (see 6.2):

Schedule of Sizes
30, 32, 34, 36, 38 40, 42, 44, 46 48, 50, 52

Lengths
Short, Regular, Long and Extra-Long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road. Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole and Button, Staple (Plastic)
V-T-276	- Thread Cotton
V-T-280	- Thread, Cotton Gimp, Buttonhole
DDD-L-20	- Labels; For Clothing, Equipage and Tentage (General Use)
DDD-T-86	- Tape, Textile; Cotton, General Purpose (Unbleached Bleached or Dyed)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth; Twill Rayon
MIL-B-17757	- Boxes Shipping. Fiberboard, (Modular Sizes)
MIL-C-24910	- Cloth, Tropical, Polyester and Wool
MIL-T-43548	- Thread. Polyester Cotton-Covered and Rayon Covered

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents. drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department 1616 P Street N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago Illinois 60606).

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Shades for Buttons - 1966

Standard Shades for Threads - 1968

(Applications for copies of color cards should be addressed to the Color Association of the U.S., 24 Ea. 38th Street, New York, NY 10016)

* 2.3 Order of Precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material for the jumper shall be a polyester and wool blend conforming to MIL-C-24910. Prior to cutting, the fabric shall be sponged.

* 3.3.2 Tape. The cotton tape shall be vat-dyed black, 1/2 inch wide and shall conform to type II, class 3 of DDD-T-86. As an alternate, the bias cut rayon binding conforming to the requirements of 3.3.5 may be used.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.3.3 Button, plastic. The button for the inside pocket shall be 22 line and conform to type II, class D, style 19 of V-B-871. The color shall be Black, Shade BT, Cable no. 62001 in accordance with the Standard Shades for Buttons.

3.3.4 Thread. The thread for seaming, stitching, buttonholes and button sewing shall be covered polyester thread, ticket Nos. 50, 2 or 3 ply and 70, 2 or 3 ply conforming to MIL-T-43548. The thread shall be dyed to match Black AA, Cable No. 66043, in accordance with the Standard Shades for Thread.

* 3.3.4.1 Thread, Cotton. As an alternate to the thread specified in 3.3.4, a cotton thread conforming to Type I, IC2, Black AA. Cable No. 66043. Ticket Nos. A, 0 and 00, 3 ply of V-T-276 may be used.

* 3.3.4.2 Thread for crow tack. The thread for crow tacks shall be type I, IC2, Black AA, Cable No. 66043, Ticket No. B or C, 3 ply or 30, 2 ply of V-T-276.

3.3.4.2.1 Colorfastness of thread. The dyed thread shall show colorfastness to laundering, perspiration and light equal to or better than the standard sample when tested as specified in MIL-T-43548 or V-T-276. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, perspiration and light when tested as specified in MIL-T-453548 or V-T-276.

* 3.3.5 Binding Rayon. The bias-cut rayon binding shall be 1 (+ 1/8) inch in width, dyed black conforming to class 1 of MIL-C-368. The edges of the binding shall be treated with a resin to prevent raveling. The ends of the binding (when not caught in other seams or binding) shall be overlapped not less than 1/2 inch or the binding turned over on itself and securely stitched or bartacked.

3.3.6 Gimp. The cotton gimp used for reinforcing the buttonholes shall be dyed to match shade Black AA, Cable No. 66043, in accordance with the Standard Shades for Threads and shall conform to type I or II, size No. 8 of V-T-280.

3.3.6.1 Colorfastness of gimp. The dyed gimp shall show colorfastness to laundering equal to or better than the standard sample when tested as specified in V-T-280. When no standard sample is available, the dyed gimp shall show "good" colorfastness to wet-dry cleaning when tested as specified in V-T-280.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.3.7 Combination label. Each jumper shall have a combination label listing identification, size personal and instruction data and shall conform to type VI, classes 10 and 14 of DDD-L-20. The label marking shall show colorfastness to laundering The format and inscription shall be as follows:

NAME:
SERVICE NO.:
JUMPER, MAN'S (BLUE UNDRESS)
FIBER CONTENT: (Polyester 75% Wool 25%)
CONTRACT NO.: DLA-100-00-0-0000 (Example)
NAME OF CONTRACTOR:
SIZE: 38R (Example)
STOCK NUMBER: 8405-00-000-0000 (Example)

LAUNDERING INSTRUCTIONS

MACHINE WASH - WARM WATER

DO NOT BLEACH

TUMBLE DRY - MEDIUM HEAT - REMOVE PROMPTLY

OR

FOLLOW NAVEDTR MANUAL 414-01-45-81
Formula III

NOTE: The length (short, regular, long and extra-long) may be abbreviated as S R, L or XL.

* 3.3.7.1 Size and fabric content ticket. Each jumper shall have a commercial type size and fabric content ticket attached above the left hem on the outside of the sleeve. The ticket shall be tacked on four corners by machine or by hand (6 to 8 stitches per tack by machine or 2 to 4 stitches per tack by hand). The corners may be double perforated for ease in tacking. The tickets shall be made of suitable commercial cardboard and shall be legibly printed with the following information:

38R (Example)
75% Polyester/25% Wool

There shall be a 3/4 to 1 inch blank space on the ticket directly below the information.

3.4 Design. The jumpers shall have a front and back yoke, a plain loose square sailor collar without trimmings, a "V" neck, one piece sleeves with turned-up hem, and it shall be finished at the bottom with turned-up hem. There shall be a beason style pocket on the outside left front yoke and a buttoned patch pocket on the right inside front (see figure 1)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

3.4.1 Figure. The figure is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns will be furnished by the Government to the contractor for use in cutting working patterns (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way. The patterns provide a 1/2 inch seam allowance for sleeve, armhole, and side seams, 3/8 inch seam allowance for shoulders, yokes and collar at neck joining seams. All other seams are as indicated in Table I.

* 3.5.1 Pattern parts. The components parts of the jumper shall be cut from material as specified and in accordance with the following:

Material	Pattern parts	Cut parts
Cloth, Polyester/Wool	Back	1
	Front	1
	Sleeves	2
	Back Yoke	1
	Front yoke	1
	Collar (top and under collar)	2
	Inside patch pocket (all sizes)	1
	Flap - inside patch pocket (all sizes)	2
	Outside breast pocket	1
	Pocket welt	1

3.6 Construction.

3.6.1 Stitches, seams, and stitching types. Stitch, seam and stitching types shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used. Where stitch type 401 or 101 is used, the looper (under thread) shall be on the inside of the jumper. Unless otherwise specified topstitching and edgestitching shall be 1/16 to 1/8 inch from the edge. Double needle stitching shall be 1/4 (+ 1/16) inch gauge with the outer row of stitching 1/16 to 1/8 inch from the edge.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitching shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less then 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type. Where stitch type 401 or 101 is permitted as an option, it shall not be used unless the ends are caught in other seams or stitching.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.6.4 Buttonhole. The buttonhole specified in Table II shall be clean cut and correctly positioned. The stitching shall be caught in the fabric with the purling on the outside. Buttonholes shall be of the eyelet end, taper bar type, with ends tacked and worked over gimp. The cut length shall be 5/8 inch. The bar end of buttonhole shall have a minimum of 4 stitches, not counting the first cross-over in that it is part of the buttonhole and not the bar. Ends of gimp finishing on top of buttonhole should be pulled through to the underside.

3.7 Manufacturing operations requirements. The jumper shall be manufactured in accordance with the operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed provided that the finished jumper is identical to that produced by following the sequence of operations as listed in Table I.

3.7.1 Pressing. All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

3.7.2 Shade and size marking. The component parts of the jumper shall be marked to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) Corrosive metal fastening devices
(2) Sew-on shade tickets
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible is covered by the seam allowance.

3.7.3 Abbreviations in table of operations. The abbreviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF THE JUMPER

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREA NDL BOB, LPR
1.	Cutting. a. The jumper shall be cut in strict accordance with patterns furnished, which shall show size, shape and directional lines for cutting, and notches and pattern marks for proper assembly of all parts. b. All component parts shall be cut from one piece of material, except inside pocket and inside pocket flap, which may be cut from ends. Parts cut from ends shall approximate the shade of the main assembly.				
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in section 4 shall be removed from production and replaced with nondefective and properly matched components.				
3.	Shade and size marking (see 3.7.2). All parts shall be marked or ticketed to insure a uniform shade, size, and proper assembly throughout the garment, except those parts cut from ends.				
*4.	Make outside pocket. a. Pocket welts shall be formed with an automatic double welt pocket machine. Each welt shall finish 1/8 inch wide. Welts shall be even and uniform with no raw edges, distortion, gapping or overlapping at the ends of the pocket. The welt pocket shall be made on the left front only. b. Position pocket piece on inside of yoke in accordance with pattern marks with the long portion of the pocket below welt marks.				

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF THE JUMPER

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOBLP
	c. Insert welt piece in the pocket machine. Form welts.	101 or 401	pocket machine	12-16	50 50	- 70
	d. Turn welts to finished position. Turn lower raw edge of welt under and stitch to pocket piece. Caution shall be exercised in performing this operation that no distortion or bulging results.	301 or 401	LSd-1	10-14	50 50	50 70
	e. Topstitch 1/16 inch below lower welt through all plies the length of the pocket and 1 or 2 stitches beyond the ends of the pocket.	301	LSca-2(b)	10-14	50	50
	f. Turn up pocket piece matching top edges and close sides of pocket 3/8 inch from the edge.	301 or 401	SSa-1	10-14	50 50	50 70
	g. Topstitch 1/16 inch above upper welt through all plies the length of the pocket and 1 or 2 stitches beyond the ends of the pocket.	301	LSca-2(b)	10-14	50	50
5.	Finish outside pocket.					
	a. Make a uniform crowtack with 3 pointed rays at each end of pocket opening. The crowtacks shall measure 3/4 (± 1/16) inch between tips of the two opposite rays. The crowtack shall be stitched with the center ray pointed horizontally and the two opposite rays pointed vertically. Crowtacks at ends of opening shall be made through the yoke welt ends, and shall cover square ends of the pocket openings without extending into the welts.	crow-tack	126 per crowtack (min)	C or B	30 or	
	b. The finished pocket shall measure 3-1/2 (± 1/4) inches wide at the opening and shall be not less than 4 inches or more than 4-1/2 inches deep for all sizes.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currenversion before use.

TABLE I - CONSTRUCTION OF THE JUMPER

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
6.	Make inside pocket and flap.					
	a. The pocket shall be one piece.					
	b. Hem top of pocket 1-1/4 (+ 1/8) inches wide with stitching 1/16 to 1/8 inch from turned under folded edge.	301	EFb-1	10-14	50	50
	OR					
	Overedge top of pocket and fold over and stitch 1-1/4 (+ 1/8) inch from folded edge to form hem.	503 or 504 or 602 and 301	EFd-1 and EFa-1	10-14	70	70
	c. Bind raw edges of pocket.	301 or 401	BSc-1	10-14	50 50	50 70
	d. The flap shall be two pieces.					
	e. Bind and stitch together bottom curved raw edges of pocket flap.	301 or 401	BSe-2	10-14	50 50	50 70
	f. Overedge top raw edges of pocket flap.	503 or 504 or 602	EFd-1	10-14	70	70
7.	Set inside pocket and flap.					
	a. Double stitch pocket to right inside front as indicated by marks on pattern.	301	LSbj-2	10-14	50	50
	b. Double stitch top edge of pocket flap to right inside front with lower row of double stitching 3/8 (+ 1/8) inch above top edge of pocket.	301	LSbj-2	10-14	50	50
	c. The flap shall finish 2-1/8 (+ 1/8) inches deep in the center and 5-1/8 (+ 1/4) inches wide for all sizes.					
	d. The pocket shall measure outside, 4-7/8 (+ 1/8) inches wide and 5 (+ 1/4) inches long for all sizes.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF THE JUMPER

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB LPR
*8.	Label. Stitch the combination label to the outside of the back yoke on all four sides, centered, with the top edge of the combination label 1/2 (± 1/8) inch below neck seamline.	301	LSbj-1	10-14	50	50
9.	Join body shoulder seam.					
	a. Join body and shoulder seams 3/8 inch from edge with the under sides of the front and back together.	301 or 401	SSz-3(a)	10-14	50 50	50 70
	b. Spread seam open and flat and topstitch underside 1/8 inch gauge on each side of seam.	301 or 401	SSz-3(b)	10-14	50 50	50 70
	OR					
	c. Operation 9b, 10b, 11b, and 11d may be performed in one operation by using a double needle lock stitch machine with a special plough foot.	301 or 401	SSz-3(b)	10-14	50 50	50 70
10.	Join yoke shoulder seams.					
	a. Join yoke shoulder seams 3/8 inch from edge, face to face.	301 or 401	SSz-3(a)	10-14	50 50	50 70
	b. Spread seam open and flat and topstitch 1/8 inch gauge on each side of seam (see operation 9c).	301 or 401	SSz-3(b)	10-14	50 50	50 70
11.	Join collar and yokes.					
	a. Join undercollar to yoke along neck, face to face.	301 or 401	SSz-3(a)	10-14	50 50	50 70
	b. Spread seam open and flat and topstitch 1/8 inch gauge on each side of seam (see operation 9c).	301 or 401	SSz-3(b)	10-14	50 50	50 70
	c. Join topcollar to body along neck with face of topcollar against inner side of body.	301 or 401	SSz-3(a)	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF THE JUMPER

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Spread seam open and flat and topstitch 1/8 inch gauge on each side of seam (see operation 9c).	301 or 401	SSz-3(b)	10-14	50 50	50 70
	e. Stitch front yoke to body along neck opening and continuously stitch undercollar to topcollar with a 5/16 to 3/8 inch seam.	301	SSe-3(a)	10-14	50	50
	f. Turn jumper, working out collar points, and double topstitch.	301	SSe-3(b)	10-14	50	50
	g. Align neckline seams and stitch from shoulder seam to shoulder seam on the back yoke superimposing the stitching over the seam topstitching.	301	SSa-1	10-14	50	50
	h. Stitch yokes to body along armholes 1/16 to 1/8 inch from edge.	301 or 401	SSa-1	10-14	50 50	50 70
	i. Double topstitch the lower edge of yokes to body. Stitching shall not run off the yoke.	301 or 401	LSd-2	10-14	50 50	50 70
	NOTE: The double stitching shall be straight, evenly gauged, with not thread floats greater than 1/4 inch.					
12.	Bartack.					
	a. Make a horizontal bartack centered (+ 1/16 inch) at the base of the V neck opening and aligned (+ 1/16) with opening.	Bartack or Automatic Loop Tacker		21-28 per bartack 24-28 per bartack	50	50
	b. Bartack shall be not less than 3/8 inches long or more than 1/2 inches long.					
13.	Sleeve, armholes, and sides.					
	a. Seam and bind armhole, starting and finishing at side seams, catching yoke and body .	301	BSe-2	10-14	50	50
	b. Double stitch sleeves to armhole with sleeves on top of body on the outside.	301 or 401	LSak-3(b)	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF THE JUMPER

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Double lap and double stitch underarm sleeve seam and side seam, front over back, in one continuous operation.	301 or 401	LSc-2	10-14	50 50	50 70
	d. Turn under sleeve bottom 1/2 inch and hem sleeves to finish 2 1/8 (± 1/8) inches deep.	301	EFb-1	10-14	50	50
14.	Bottom.					
	a. Bind bottom edge of jumper, forming a loop 1/2 (± 1/8) inch back from side seam with the runoff binding by turning the end onto itself and securely bartacking or tacking through all plies.	301	BSc-1	10-14	50	50
	OR					
	b. Bind bottom edge of jumper inserting the ends of a 1/2 inch wide black hanger loop tape at the back approximately 1/2 inch from folded edge of side seams.	301 or 401	BSc-1	10-14	50 50	50 70
	c. The hanger loop tape shall be folded in half with raw edges of tape hidden by the binding.					
	d. Hem bottom edge of jumper to finish 1-1/2 (± 1/8) inches wide simultaneously folding prestitched hanger loop towards top of jumper and catching it in hem stitching	301	EFa-1	10-14	50	50
	e. The tape loop shall have a 1-1/4 (± 1/8) inch opening					
15.	Buttonhole					
	a. Buttonhole shall be 5/8 inch long, cut after, worked over gimp, eyelet end, taper bar type with overlap in bar not more than 1/4 inch. The vertical buttonhole shall be centered in the pocket flap 1/2 to 5/8 inch above the point of the flap. The gimp shall be pulled to the inside. The purling shall finish on the outside.	buttonhole		45 per buttonhole	50	50
	b. All thread ends shall be trimmed and buttonholes cleaned.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF THE JUMPER

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAL NDL	THREAL BOB/ LPR
16.	Button					
	a. Sew one 22 line button on inside pocket to correspond with buttonhole in pocket flap.	101 or 301		14-16 per buttonhole	50 50	70
17.	Cleaning and pressing.					
	a. Trim and remove all loose ends of threads on the inside and outside of the jumper. Care shall be taken to trim and remove all loose thread and gimp ends from buttonhole.					
	b. Remove all shade tickets.					
	c. Press jumper inside out using a heated iron or pressing machine.					
	d. Fold collar in half matching edges and press to crease. Unfold, turn edges in (undercollar to undercollar) and press flat. Crease from attaching seam to edge of flap.					
	e. Press sleeve flat with underarm seam to front of jumper. Crease from shoulder seam to edge of sleeve.					
	f. Press body of jumper flat, with side seams to front. Crease from edge of hem to bottom point of yoke.					
	g. Remove gloss and impressions.					
	NOTE: (1) Care should be taken when trimming thread ends that damage to fabric does not result.					
	(2) When buck pressing, apply vacuum only after unlocking. When automatic press is used, apply bottom steam and dry only.					
	(3) If impressions and gloss occur, the buck may be lowered in that area without locking and the garment steamed and dried.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Unless otherwise specified, the sizes and measurements of the finished jumper shall be in accordance with table II. All measurements and tolerances are expressed in inches.

Table II- Sizes and measurements

Size	Chest (A)	Bottom (B)	Body Length (C)			
			S	R	L	XL
30	17	15 1/2	23 1/2	25	27	29
32	18	16 1/2	23 1/2	25	27	29
34	19	17 1/2	23 3/4	25 1/4	27 1/4	29 1/4
36	20	18 1/2	24	25 1/2	27 1/2	29 1/2
38	21	19 1/2	24 1/4	25 3/4	27 3/4	29 3/4
40	22	20 1/2	24 1/2	26	28	30
42	23	21 1/2	24 3/4	26 1/4	28 1/4	30 1/4
44	24	22 1/2	25	26 1/2	28 1/2	30 1/2
46	25	23 1/2	25 1/4	26 3/4	28 3/4	30 3/4
48	26	24 1/2	25 1/2	27	29	31
50	27	25 1/2	25 3/4	27 1/4	29 1/4	31 1/4
52	28	26 1/2	26	27 1/2	29 1/2	31 1/2
Tolerances	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

Size	Sleeve Length (D)				Collar Width (E)	Collar Depth (F)
	S	R	L	XL		
30	30	31 1/4	32 3/4	34 1/4	10 1/4	9 1/4
32	30 3/8	31 5/8	33 1/8	34 5/8	10 5/8	9 1/4
34	31	32 1/4	33 3/4	35 1/4	11	9 3/8
36	31 3/8	32 5/8	34 1/8	35 5/8	11 3/8	9 3/8
38	31 3/4	33	34 1/2	36	11 3/4	9 1/2
40	32 3/8	33 5/8	35 1/8	36 5/8	12 1/8	9 5/8
42	32 3/4	34	35 1/2	37	12 1/2	9 3/4
44	33 3/8	34 5/8	36 1/8	37 5/8	12 7/8	9 7/8
46	33 3/4	35	36 1/2	38	13 1/4	10
48	34 3/8	35 5/8	37 1/8	38 5/8	13 5/8	10 1/8
50	34 3/4	36	37 1/2	39	14	10 1/4
52	35 1/8	36 3/8	37 7/8	39 3/8	14 1/4	10 3/8
Tolerances	± 1/2	± 1/2	± 1/2	± 1/2	± 1/4	± 1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

NOTES: A, B, C, D, E, and F refer to figure 1.

A. Chest - Measurement taken across front at base of armholes from folded edge to folded edge.
B. Bottom - Measurement taken at the bottom hem from folded edge to folded edge.
C. Length - Measurement taken from base of undercollar down center of back to bottom.
D. Sleeve - Measurement taken from center back at neck seam across shoulder to bottom of sleeve.
E. Collar width - Measurement taken at bottom of collar from collar edge to collar edge.
F. Collar depth - Measurement taken at center of collar from back neck seam to bottom edge of collar.

3.9 Workmanship. The finished jumpers shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded amended, modified or qualified in this specification or applicable procurement documents.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.2 Examination of the end item The defects found during the examination of the end item shall be classified in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The lot size shall be expressed in units of jumpers. The sample unit shall be one finished jumper.

* 4.4.2.1 Visual examination. The finished jumpers shall be examined for the defects listed below:

4.4.2.1.1 General defects.

Defects	Classification Major	Minor A	Minor B
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES			
a. Any hole, cut, tear, smash, burn, drill hole scorched area, multiple float or open place.	X		
b. Misweave, area of poor dye penetration, dye-streak, broken and missing sections of yarn, visible mend, thin place or shade bar.	X		
c. Knot or slub on outside 1/			
Knot larger than C, or slub larger than D.		X	
SHADED PART(S)			
a. Variation in shade within a part or between parts (except part(s) which may be cut from ends)	X		
b. Part(s) cut from ends poor approximation to main assembly		X	
CLEANNESS			
a. Any spot or stain clearly noticeable - on outside		X	
- on inside			X
b. More than 3 thread ends not trimmed to 1/4 inch or less on outside.		X	
c. More than 5 thread ends not trimmed to 1/4 inch or less on inside			X

1/ For these defects use the Sears Fabric Defect Scale (see 6.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
d. Two or more shade tickets not removed			X
e. Shade stamping or marking readily visible on outside.		X	
f. Excessive lint			X
g. Foreign matter embedded in seams		X	
COMPONENT AND ASSEMBLY			
a. Any component part or operation omitted (unless otherwise classified herein)	X		
b. Any component not as specified	X		
c. Any component part tight, twisted distorted, pleated or full (unless otherwise classified herein)		X	
d. Any operation not as specified (unless otherwise classified herein)		X	
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X	
CUTTING			
Any component part or basic material not cut in accordance with patterns or in accordance with specification requirements	X		
PRESSING			
a. Burned or scorched	X		
b. Poorly pressed, pressing omitted or not pressed as specified		X	
c. Gloss or impressions not removed			X
d. Shading or spotting		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
SEAMS AND STITCHING			
a. Accuracy of seaming			
1. Seam twisted, puckered, or pleated	X		
2. Part of garment caught in any unrelated operation or stitching	X		
3. End of seam or stitching when not caught in another seam or stitching back-tacked less than 3/8 inch		X	
4. Ends of a continuous line of stitching overlapped less than 1/2 inch		X	
5. Thread break not secured or stitching back of the break less than 1/2 inch		X	
6. Wrong or varying shades of thread used on outside	X		
b. Gauge of stitching			
1. Irregular, i.e., unevenly gauged, not uniform		X	
2. Beyond range of width specified or varies more than 1/16 inch when no range is specified			X
3. Edge or top stitching too close to edge resulting in damage to the cloth	X		
c. Open seams (resulting from 2 or more skipped, broken, runoff or missing stitches)			
1. On joining seams (including one or both rows of double-needle stitching):			
- less than 1/4 inch			X
- 1/4 inch to 1/2 inch		X	
- more than 1/2 inch	X		
2. On edge and topstitching:			
- up to 1/2 inch on inside			X
- on outside, or more than 1/2 inch on inside		X	
3. On overedging or binding			
- up to 3 inches			X
- over 3 inches		X	
d. Raw edges			
1. On outside			
- less than 1/8 inch long			X
- 1/8 inch to 1/2 inch long inclusive		X	
- more than 1/2 inch long	X		
2. On inside:			
- 1/2 inch to 1 inch long inclusive			X
- more than 1 inch long		X	
3. Binding or overedging omitted (Score as a raw edge on inside)			

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
e. Seam and stitch type			
1. Not specified seam or stitch type		X	
2. Looper thread of 401 or 101 stitch type finishing on the outside of the jumper	X		
f. Stitch tension			
1. Loose tension resulting in a loose seam			
- up to 1/2 inch inclusive			X
- more than 1/2 inch up to 3/4 inch inclusive		X	
- more than 3/4 inch	X		
2. Loose tension on raised or edge stitching resulting in exposed loose threads		X	
3. Tight tension (stitches break when strain is applied in the direction of the seam or stitching	X		
g. Stitches per inch (Score only when condition exists for more than 2 inches)			
1. Less than minimum specified			
- one stitch			X
- two stitches		X	
- three or more stitches	X		
2. Three or more than maximum specified			X
CROWTACKS AND BARTACKS			
a. Missing insecure, not as specified or not serving intended purpose:			
- one crowtack or bartack		X	
- two crowtacks or one crowtack and one bartack	X		
b. One or more skipped or broken stitches			
- in one crowtack or bartack			X
- in two crowtacks or one crowtack and one bartack		X	
*c. Crooked i.e., bartack or opposite rays of crowtack deviate from vertical or horizontal axis, as applicable, by more than 1/16 inch, or causing distortion		X	
BUTTONHOLES			
a. Omitted	X		
b. Not specified type or size		X	
c. Uncut or partially cut buttonhole		X	

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the currenversion before use.

Defects	Classification Major	Minor A	Minor B
d. Buttonhole not securely caught on fabric causing stitching to pull away from fabric	X		
e. End not securely tacked, tack not places as specified		X	
f. Ragged edges, ie., yarn thread or gimp ends on inside of buttonhole not trimmed to less than 1/4 inch			X
g. Gimp omitted		X	
h. Gimp not pulled through to inside			X
i. Purling on the underside of flap			X
j. Off center of flap by more than 1/4 inch		X	
k. One or more broken or two or more skipped stitches		X	
l. Position from bottom edge of flap (measured from inside edge of eyelet):			
- less than 3/8 inch inch or more than 5/8 inch			X
- less than 1/4 inch or more than 3/4 inch		X	
m. Stitching incomplete		X	
n. Crooked or positioned incorrectly		X	
BUTTONS			
a. Missing, loose or defective		X	
b Not specified type or size		X	
c. Button not aligned with buttonhole, causing bulge or twist when buttoned		X	
"V" NECK OPENING			
*a. Stitching of yoke to body causing distortion twisting or bulging on front, along front edge of opening or at base of V	X		
POCKET (outside)			
a. Welts irregular in width by more than 1/16 inch within or between welts		X	
b. Welts less than 1/16 inch or more than 3/16 inch			X
c. Opening gapped more than 1/8 inch at center		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
d. Opening less than 3-1/4 inches or more than 3-3/4 inches wide		X	
e. Pocket less than 4 inches or more than 4-1/2 inches deep at center		X	
f. One or both crowtacks caught through front body			X
g. Top and bottom edges of pocket (above and below welts) not parallel, or less than 1/4 inch or more than 3/8 inch apart		X	
h. Stitching along top and bottom edges does not continue 1 or 2 stitches beyond the ends of pocket or extends more than 1/8 inch beyond vertical rays of crowtack		X	
i Ends of stitching along top and bottom edges not secured in crowtacks			X
j. Raw edges distortion, gapping or overlapping at ends of the welts		X	
k. Distance from each end of pocket opening to bottom of jumper deviates more than 1/4 inch, indicating pocket set on crooked		X	
POCKET AND FLAP (inside)			
a Patch pocket			
1. Hem less than 1-1/8 inches or more than 1-3/8 inches wide			X
2. Excessively full or tight			X
3. Width of pocket: - less than 4-5/8 inches or more than 5-1/8 inches wide		X	
4. Depth of pocket - less than 4-3/4 inches or more than 5-1/4 inches deep		X	
5 Binding omitted		X	
b. Flap			
1. Lower row of double stitching at top of flap less than 1/4 inch or more than 1/2 inch above top edge of pocket			X
2. Less than 2 inches or more than 2-1/4 inches deep at center			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
3. Width of flap: - less than 4-7/8 inches or more than 5-3/8 inches wide across top edge		X	
4. Binding omitted		X	
COLLAR			
a. Top collar full, tight or twisted	X		
b. Collar edge crooked		X	
c. Corners poorly shaped, i.e., angle excessively distorted		X	
d. Undercollar exposed along collar edge for length of 1 inch or more		X	
e. Improperly set to jumper causing puckers or pleats on neck edge of topcollar, undercollar, yoke, or body		X	
f. Stitching of neck seam allowance of yoke and body together on the inside from shoulder seam to shoulder seam across back: - omitted or insecure		X	
- incomplete or ends more than 1 inch from shoulder seam			X
g. Thread floats greater than 1/4 inch		X	
YOKE (front or back)			
a. Left and right sides of yoke not of uniform shape, ie. curved edge of yoke out of symmetry by more than 1/4 inch when jumper is folded in half at center front		X	
b. Short, tight or twisted, causing excessive fullness or distortion on front, back or along armholes	X		
c. Distance along armhole from bottom of yoke to side seam uneven from right side to left by more than 1/4 inch		X	
d. Double stitching runs off yoke		X	
e. Thread floats greater than 1/4 inch		X	
ARMHOLE SEAMS			
a. Armhole lapped over sleeve		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
b. Ends of armhole seam staggered at junction, from center to center of seam by more than 1/2 inch		X	
SIDE AND SLEEVE SEAMS			
Back lapped over front		X	
SLEEVES			
a. Puckered or pleated at armhole		X	
b. Sleeve tight, causing fullness or pleats on front or back yokes or front and back at armhole		X	
SLEEVE AND BOTTOM HEM			
a. Binding tight causing puckering or twist on the outside of jumper		X	
b. Line of stitching irregular by more than 1/8 inch		X	
c. Bottom hem width, including binding, less than 1-3/8 inches or more than 1-5/8 inches.		X	
d. Sleeve hem width less than 2 inches or more than 2-1/4 inches.		X	
e Binding not securely caught on fabric causing binding to pull away from fabric easily		X	
f. Irregular in width by 1/4 inch or more			X
g. Bottom hem edge stretched, bowed or uneven with respect to a straight edge laid from side seam to side seam by more than 1/4 inch		X	
HANGER LOOPS			
a. Tape not specified type or size		X	
b. Omitted		X	
c. Not securely caught in binding seam		X	
d. Placed on front part		X	
e. Loop less than 1-1/8 inches or more than 1-3/8 inches long			X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
LABELS			
a. Omitted, incorrect or illegible		X	
b. Off center of back by more than 1/2 inch			X
c. Combination label less than 3/8 inch or more than 5/8 inch below collar seamline			X
d. Not stitched on one or more sides			X
e. Size and fabric content ticket not as specified or not positioned as specified			X

4.4.2.2 Dimensional examination. The jumpers shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from nominal dimensions and tolerances specified in Table II shall be scored as a size measurement defect.

b. Sleeve lengths uneven by more than 1/2 inch shall be scored as a size measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units for visual and dimensional examinations shall be as follows

	AQL's	Inspection level
For defects applicable in 4.4.2.1:		
Major	1.5	III
Major, Minor A (combined)	6.5	III
Total (Major, Minor A, Minor B combined)	15.0	III
For defects applicable to 4.4.2.2:		
One class	4.0	S-3

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing and marking complies with Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Examine Defect	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size location, sequence or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose taping, loose strapping, inadequate stapling or polyethylene bags improperly sealed.
	Bulging or distorted containers.
Content	Number of items per container is more or less than required. Size shown on item not as specified on shipping container. 1/

1/ For these defects, two shipping containers in the sample shall be examined.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The same unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect illegible of improper size, location sequence or method of application.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C (see 6.2).

5.1.1 Level A. Each jumper shall be folded as follows:

(1) Lay jumper flat, front up (inside out).
(2) Fold sleeves straight across the chest with the sleeve bottoms folded back approximately 6 inches.
(3) Fold the jumper in half by placing one shoulder on top of the other. The folded jumper shall measure approximately 11 1/2 inches.
(4) Fold collar over jumper.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

(5) Fold bottom of jumper up so that the folded length is approximately 15 inches.
(6) Each folded jumper shall be individually packaged in a snug-fitting, flat style clear polyethylene bag of 0.00125 inch thickness (± 20% tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edge of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. Alternately, the final closure to the polyethylene bag may be accomplished by means of a tuck or reverse flap, corner hole not required.

5.1.2 Level C. Jumpers shall be packed to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be Level A, B or C as specified (see 6.2).
5.2.1 Level A. Forty jumpers of one size and length only, packaged as specified in 5.1.1 shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class weather-resistant, variety DW, grade V15c size 3A MIL-B-17757. The fiberboard for the liner shall comform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat one in width, two in length and twenty in depth, with the length of the bags parallel to the end panels of the box. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Forty jumpers of one size and length only, packaged as specified in 5.1.1 shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, of MIL-B-17757. Level A packages shall be packed flat one in width two in length and twenty in depth, with the length of the bags parallel to the end panels of the box. Toward the end of the contract, or when there are less than the required amount per container of the same size mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Jumpers of one size and length only, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification Rules or US Postal Service Manual, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.3.1 Special marking. Polyethylene bagged jumpers shall have the following information legibly printed or stamped in black directly on the bag or on a white paper label inserted within the bag so as to permit ready identification

STOCK NUMBER
NOMENCLATURE
SIZE
LENGTH
QUANTITY

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

* 5.4 Palletization. When specified (see 6.2) jumpers, packed as specified in 5.2 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L or film bonding means P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

* 6. NOTES

6.1 Intended use. The jumpers covered by this specification are intended for use by Navy enlisted men as part of the blue service undress uniform.

6.2 Ordering data. Procurement documents should specify the following

a. Title number and date of this specification.
b. Size and length required (see 1.2)
c. When first article inspection is required the item shall be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity, and testing and approval.
d. Levels of packaging and packing required (see 5.1 and 5.2)
e. When palletization is required (see 5.4)

6.3 Samples and patterns. For access to samples and patterns address the procuring activity issuing the invitation for bids.

* 6.4 Sears Fabric Defect Scales are available from: Sears Roebuck and Company, Department 817,(Attn: BSC 23-29), "Fabric Defect Replica Kit", Sears Tower, Chicago, Ill. 60684

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.


Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8405-N990

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

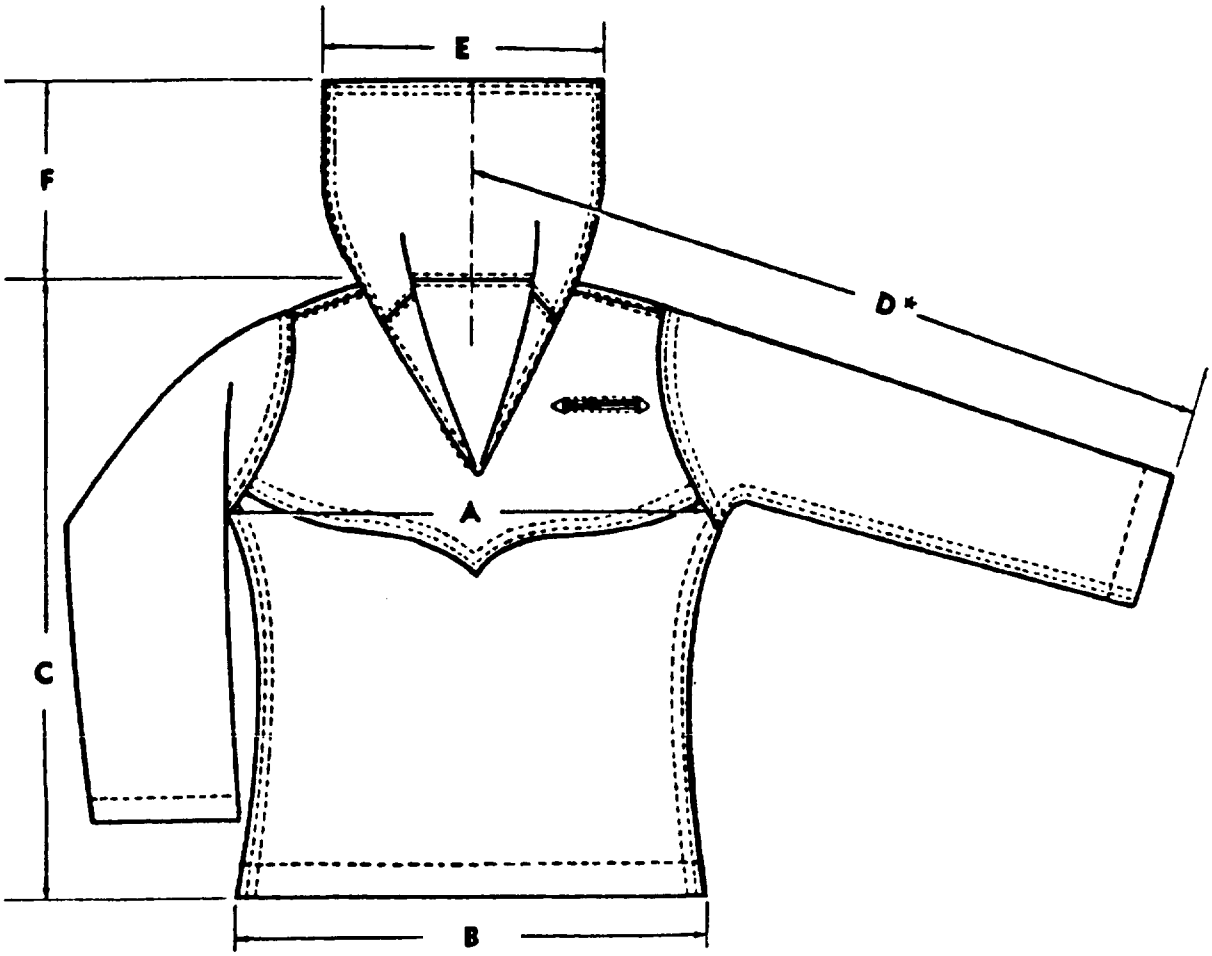

* Sleeve measurement taken from the center back at the collar seam, across shoulder to the bottom of the sleeve.

Figure 1 — JUMPER, MAN'S (BLUE, UNDRESS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide ...gestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and ...d. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was ...rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research Facility
21 Strathmore Road, Code 50
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-J-87036B(NU)	JUMPER, MAN'S, (BLUE UNDRESS)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026/10 26T04:52Z
Check the source to verify that this is the current version before use.