INCH-POUND

MIL-J-87058B(NU)

26 June 1989
SUPERSEDING
MIL-J-87058A(NU)
11 July 1986

MILITARY SPECIFICATION

JACKET, UTILITY, WOMAN'S

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a woman's utility jacket fabricated of polyester/cotton blend poplin treated with a durable water repellent finish.

1.2 Classification. The jacket shall be of one type in the following sizes and lengths:

SIZES

6, 8, 10, 12, 14, 16, 18, 20 and 22

LENGTHS

Short, Regular, Long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified (see 6.2).

SPECIFICATIONS

FEDERAL

V-F-106	- Fasteners, Slide, Interlocking
V-T-276	- Thread, Cotton
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way
DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-371	- Braid, Textile, Tubular
MIL-C-3735	- Cuffs, Knit, Wrist and Ankle, and Cloth, Knitted
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-C-17155	- Cloth, Knitted, Nylon, Fleece
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-43482	- Cloth, Poplin: Cotton and Polyester (Water Repellent)
* MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
* MIL-STD-2073-1	- Department of Defense Materials Procedures for Development and Application of Packaging Requirements
* MIL-STD-2073-2	- Packaging Requirement Codes

* (Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402-0001).

* 2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads

(Applications for copies of color cards should be addressed to the Color Association of the U.S., 343 Lexington Avenue, New York, NY 10016).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide Sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample jackets for first article inspection and approval (see 6.2, and 4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.3.1 Basic material. The basic material shall be a water repellent 50 percent polyester/50 percent cotton blend poplin conforming to Blue 3329 of MIL-C-43482 except that as a limit of acceptability or when no standard sample is available, the dyed finished cloth shall show a minimum of fair colorfastness to light (40 standard fading hours), fair colorfastness to laundering (after 3 cycles), crocking of not less than 3.0D and 2.5W, and the requirement for hydrostatic pressure to dry cleaning does not apply. The piece number for the standard sample is 87154.

3.3.2 Lining. The lining shall be a knitted nylon fleece conforming to type II of MIL-C-17155.

3.3.3 Thread.

* 3.3.3.1 Thread, covered, polyester. The thread shall be cotton-covered or rayon-covered polyester core, dyed shade Navy Blue AT, C.A. 66060 in accordance with the Department of Defense Standard Shades for Sewing Threads, and shall conform to MIL-T-43548 in the following types and sizes:

Use	Ticket Number	Ply
Seaming, stitching and bartacking	50 or 70	2 or 3
Overedging	70	2 or 3

* NOTE: The use of polyester-covered polyester core thread is not allowed.

*3.3.3.2 Thread, cotton. As an alternate, cotton thread conforming to V-T-276 shall be used. The thread shall be dyed Navy Blue AT, C.A. 66060 in accordance with the Department of Defense Standard Shades for Sewing Threads, in the following types and sizes:

Use	Type	Ticket Number	Ply
Seaming and stitching	IC2	0 or 00	3
Overedging	IA3	70	2 or 3
Bartacking	IC2	A	3

* 3.3.3.3 Colorfastness. The dyed thread shall show colorfastness to laundering and light equal to or better than the standard sample when tested as specified in MIL-T-43548 or as an alternate V-T-276. As a limit of acceptability or when no standard sample is available the dyed thread shall show a minimum of "good" colorfastness to laundering and light when tested as specified in MIL-T-43548 or as an alternate V-T-276.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.3.4 Braid. The braid for the hanger loop shall be flat cotton tubular braid conforming to type III, class 1 of MIL-B-371 except that only colorfastness requirements shall be colorfastness to laundering. The color shall be black or shall be dyed to approximate the shade of the basic material. As an alternate, the basic cloth may be used when loop is constructed as specified in Table I.

3.3.5 Cuffs. The knitted wrist cuffs shall conform to type III, class 2, size 2 of MIL-C-3735. The cuffs shall be dyed blue to approximate the shade of the basic material.

* 3.3.6 Labels. Each jacket shall have combination identification/instruction/personal label, a size label, and a removable size ticket conforming to the requirements of 3.3.6.1 to 3.3.6.3. The printing for 3.3.6.1 and 3.3.6.2 shall show fastness to laundering.

* 3.3.6.1 Combination identification/instruction/personal label. The combination label shall conform to type IV, classes 10 and 15 of DDD-L-20, and shall bear the following inscription:

NAME:
SERVICE NO.:
JACKET, UTILITY, WOMAN'S
BASE FABRIC: 50% POLYESTER/50% COTTON
CONTRACT NO.: DLA 100-00-0-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (if other than contractor)

LAUNDERING INSTRUCTIONS

Machine Wash - Hot, DO NOT BLEACH
Tumble Dry - Medium, Remove Promptly
OR
Use NAVEDTRA 414-01-45-81
FORMULA II

NOTE: The words "DO NOT BLEACH" should be in upper case print which is bolder than the remaining text, and should be underlined.

* 3.3.6.2 Size label. The size label shall conform to type VI, class 2 of DDD-L-20, and shall bear the following inscription:

SIZE: 16R (Example)
STOCK NO: 8410-00-000-0000 (Example)

Abbreviations for lengths shall be allowed as follows: "S" for Short, "R" for Regular, and "L" for Long.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.3.6.3 Removable size ticket. Each jacket shall have a commercial type size ticket attached to the outside of the lower left sleeve. The ticket shall be 1-1/2 inches long and 2 inches high, made of a suitable plain white cardboard. The corners of the ticket may be double perforated for ease in tacking. The size (16R - Example) shall be printed or stamped on the upper left hand corner in black or blue ink. The lettering for the size shall be 1/4 inch in height. Abbreviations for lengths shall be as allowed in 3.3.6.2.

3.3.7 Slide fasteners. The slide fasteners for the front opening and breast pockets shall be brass conforming to V-F-106 as follows:

Front - Type IV, style 8, size M, short tab pull. The lengths shall be chosen so that the top stop of the slide fasteners shall be set 1/4 to 1/2 inch from the finished neck seam. The bottom stop of the slide fastener shall be set 4 to 5 inches from the bottom of the jacket.

Breast pockets - Type I, style 7, size L, short tab pull. The length of the finished slide fastener, when measured from stop to stop (outside), shall be 4 inches to 4-1/16 inches for all sizes.

The slide fastener tapes shall approximate the shade of the basic material and shall show good fastness to laundering according to V-F-106. All metal components of the slide fastener shall be fabricated of brass and shall be from the same manufacturer (see 4.4.1).

3.3.7.1 Plastic coil slide fastener. As an alternate to the slide fastener for the pocket opening specified in 3.3.7, a slide fastener manufactured of a continuous monofilament nylon or polyester coil equal to type I, style 7 or 8, size L, short tab pull as specified in V-F-106 may be used. The tape shall be a blend of nylon and cotton or polyester and cotton or polyester. The color shall approximate the shade of the basic material.

3.4 Design. The jacket shall have a slide fastener front closure, fully lined body and sleeves, split shoulder raglan sleeves, two diagonal hand warmer type front pockets, two horizontal slide fastener closure breast pockets and wind resistant knitted cuffs (Figure 1).

3.4.1 Figure. Figure 1 is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

* 3.5 Patterns. Standard patterns will be furnished by the Government to the contractor for use in cutting working patterns (see 6.3). The working patterns shall be identical to the government patterns. Neither the government patterns nor the working patterns shall be altered in any way. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification. The patterns provide a 3/8 inch seam allowance for regular seams, and unless otherwise specified in Table I, seams shall be in accordance with this seam allowance.

3.5.1 Pattern parts. The component parts shall be cut from the material specified in accordance with the following pattern parts:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Material	Nomenclature of Pattern Parts	Cut Parts
Basic material; cloth, poplin, Polyester/cotton	Back	1
	Front, upper	2
	Front, lower	2
	Front, side	2
	Sleeve, back	2
	Sleeve, front	2
	Topcollar	1
	Undercollar	1
	Undercollar interlining	1
	Pocket, breast (inner)	2
	Pocket, breast (outer)	2
	Facing, front	2
	Facing, pocket	2
	Welt, breast pocket	4
	Interlining welts	4
	Interlining, front	2
Lining material; Nylon fleece	Back	1
	Fronts	2
	Sleeve, back	2
	Sleeve, front	2
	Pocket, front	4
Template	Undercollar stitch marker	-

3.6 Construction.

* 3.6.1 Stitch, seam, and stitching types. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used. Seam allowances shall be maintained with seam sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the jacket. Ends of all seams except pockets and sleeve hems, produced by stitch type 401, shall be caught in other seams or stitchings. Pockets and sleeve hems shall have a 1/4 to 3/8 inch long chain. The bight of overedge stitching shall be 3/16 inch. On 515, 516 and 519 stitch types, the 401 safety stitch shall be 1/16 to 1/8 inch from the inner edge of overedge stitch. Unless otherwise specified, edgestitching or topstitching shall be 1/4 to 5/16 inch from the edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks shall be repaired by using 301 stitch type. When ends of overedge stitching of pocket or sleeve hems are not caught in other seams or stitching, the ends shall extend 1/4 to 3/8 inch.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.7 Manufacturing operations requirements. The jackets shall be manufactured in accordance with the operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed provided that the finished jackets are identical to those produced by following the sequence of operations as listed in Table I. Minor modifications shall not alter the appearance, serviceability or dimensional requirements cited in the specification.

3.7.1 Pressing. All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

3.7.2 Shade and size marking. The component parts of the jacket shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any methods may be used except:

(1) Corrosive metal fastening devices. No metal device or sew-on type markings shall be used on polyester/cotton basic material.
(2) Adhesive type tickets which discolor or adhere to the materials upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show through to the outside of the garment as worn. Wherever possible, the numbering shall be covered by the seam allowance.

3.7.3 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:53Z
Check the source to verify that this is the currenversion before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
1.	Cutting a. Cut the jackets in strict accordance with patterns, which show size, shape, placement of pockets, warp directional lines, and notches for proper assembly of all parts. b. Cut all component polyester/cotton parts out of one piece of material, except the breast pockets, pocket facings, hanger loop and interlining, which may be cut from ends. When so cut, the parts shall approximate the shade of the main assembly. c. Cut all component nylon fleece parts from one piece of material, except front pockets and sleeve linings which may be cut from ends. When so cut, the pockets shall approximate the shade of the main assembly. When sleeve linings are cut from ends, they must match each other.					
2.	Replacement of defective component During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 of this specification shall be removed from production and be replaced with non-defective and properly matched components.					
3.	Size and shade marking Mark or ticket components to insure a uniform shade and proper size assembly throughout the jacket, unless otherwise specified.					
4.	Prepare lining a. For purposes of construction, the face and back sides of the fleece lining shall be identified as follows: BACK SIDE - FLEECE (PILE) SURFACE FACE SIDE - UNFLEECED (SMOOTH) SURFACE					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	b. Stitch a cut dart in each front piece at the shoulder as indicated by mark on pattern. Dart shall taper to point approximately 1 inch below cut bottom end of dart.	301	SSa-1	8-10	50	50
	c. Press dart seam allowances open and flat.					
	d. Stitch, face to face, the back sleeves to the back according to notches.	301	SSa-1	8-10	50	50
		or 401			50	70
	e. Stitch, face to face, the front sleeves to the front according to step.	301	SSa-1	8-10	50	50
		0r 401			50	70
	f. Stitch, face to face, shoulder seams and top sleeve seam.	301	SSa-1	8-10	50	50
		or 401			50	70
	g. Stitch, face to face, side seams and underarm sleeve seams in one operation.	301	SSa-1	8-10	50	50
		or 401			50	-
	h. Position front facing pieces on face side of front lining with raw edges even.					
	i. Turn under back edge of facings 1/4 to 5/16 inch and stitch 1/16 inch from folded edge.	301	LSd-1	8-10	50	50
		or 401			50	70
	j. Stitch along front and top edge of facings to front lining 1/8 to 1/4 inch from raw edge.	301	SSa-1	8-10	50	50
		or 401			50	70
5.	Make collar					
	a. Mark undercollar for stitching lines in accordance with template.					
	b. Stitch interlining to undercollar with triangular rows of stitching.	301	SSv-1	8-10	50	50
	c. Stitch undercollar assembly to topcollar, face to face, 1/4 inch from raw edge. Trim corners.	301	SSe-2(a)	8-10	50	50
		or 401			50	50

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	d. Turn collar and work out points. Topstitch outer edge and sides 1/4 to 5/16 inch from folded edge.	301	SSe-2(b)	8-10	50	50
	e. Stitch bottom edges of collar 1/8 to 1/4 inch from raw edge, catching all plies.	301 or 401	SSa-1	8-10	50 50	50 70
6.	Prepare front hand warmer pockets					
*	a. Place pocket facing face to face on outer front pocket, lining up step of facing to marks on front pocket. Stitch 3/8 inch from edge.	301 or 401	LSbj-1	8-10	50 50	50 70
*	b. Fold facing to finished position and topstitch 1/16 to 1/8 inch from folded edge through all plies.	301 or 401	SSa-1	8-10	50 50	50 70
	OR	301 or 401	LSd-1	8-10	50 50	50 70
	As an alternate for operations 6a and 6b- Position face side up, pocket facing piece to face side of pocket with outside edges even. Fold under inner edge of facing 3/8 inch and stitch 1/16 to 1/8 inch from folded edge.					
*	c. Position outer pocket onto lower front matching notches and stitch 3/8 inch from raw edge within notches, establishing pocket opening. Clip seam allowance to but not through stitching at end of seam. DO NOT STITCH PAST NOTCHES.	301 or 401	SSe-2(a)	8-10	50 50	50 70
*	d. Turn lower front and pocket piece to finished position and edge stitch from notch to notch 1/4 inch from finished edge.	301	SSe-2(b)	8-10	50	50
*	e. Position, face to face, front side piece step to inner front pocket piece in accordance with marks on pattern and stitch 3/8 inch from raw edge.	301 or 401	LSs-2(a)	8-10	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*	f. Fold front side piece and inner front pocket piece to finished position. Stay stitch outer straight edge of pocket to front 3/8 to 1/2 inch from raw edge of pocket. Stitch line shall not be exposed when lower and side fronts are assembled.	301 or 401	LSs-2(b)	8-10	50 50	50 70
	OR					
	As an alternate to operations 6e and 6f, position front side piece face up, on face side of inner front pocket piece in accordance with marks on patterns. Fold under inner edge of front side piece 3/8 inch and edge stitch 1/16 to 1/8 inch from folded edge.	301	LSb-1	8-10	50	50
*	g. Position and stitch lower front and side fronts, face to face simultaneously, leaving a pocket opening in accordance with notched opening. Stitching shall start and finish above and below pocket opening 3/8 inch from raw edges. The pocket opening shall measure 6-1/2 (±1/4) inches.	301 or 401	LSq-2(a) and LSa-1	8-10	50 50	50 70
*	h. Fold fronts to finished position and top stitch 1/4 inch from folded edge, above and below pocket opening, matching existing topstitching on pocket opening.	301	LSq-2(b)	8-10	50	50
*	i. Stitch, face to face, around pocket pieces 3/8 inch from raw edges, matching marks on patterns.	301 or 401	SSa-1	8-10	50 50	50 70
	j. Overedge inner and outer pocket pieces.	503 504 or 602	SSa-1	8-10	70	70
	or					
	As an alternate, operations 6i and 6j may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	8-10 (chainstitching)	50 70 (overedging)	70 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
7.	Prepare breast pockets					
	a. Stitch a cut dart in each top front at the shoulder as indicated by marks on pattern. Dart shall taper to a point approximately 1 inch below the cut bottom end of dart. The finished dart shall extend to the top stitch line of the welt pocket. Press darts open and flat.	301	SSa-1	8-10	50	50
	b. Fold breast pocket welt pieces lengthwise with the interlining between the fold and finger press.					
	c. Position prefolded welts on top fronts as indicated by the marks on the patterns. Stitch, forming finished welts 1/4 inch from folded edge, in a suitable length to accommodate a 4 inch long slide fastener and finish in accordance with operation 7m.	301	Similar to	8-10	50	50
		or 401	LSd-1		50	70
	d. Slit between rows of stitching and tongue notch ends. Turn welts to finished position and stitch welt tongues to welt ends as close as possible to the pocket openings.	301	LSb-1	8-10	50	50
	e. Slide fasteners shall be positioned to close towards armhole.					
	f. Position slide fastener on lower welts. Position inner breast pocket piece along lower edge of welt, facing upwards. Stitch, 3/8 inch from raw edge, catching slide fastener tape, inner breast pocket piece and welt.	301	LSq-2(a)	8-10	50	50
		or 401			50	70
	NOTE: Slide fastener chain will be covered by the welt when slide fastener is in the closed position.					
	g. Topstitch front 1/16 inch from folded edge.	301	LSq-2(a)	8-10	50	50
*	h. Position slide fastener on upper welt. Position outer breast pocket piece along upper edge of welt, facing downwards. Stitch 3/8 inch from raw edge, catching slide fastener tape, outer breast pocket, and welt.	301	LSq-2(a)	8-10	50	50
		or 401			50	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*	i. Align the outer and inner breast pocket pieces. Edgestitch remaining three sides of welt opening 1/16 inch from folded edge of seam, forming a rectangular square approximately 1/2 inch in width.	301	Lsq-2(b)	8-10	50	50
*	j. Stitch inner and outer plies of pocket catching tongues, welts, and slide fastener tape ends, 3/8 inch from raw edge.	301 or 401	SSa-1	8-10	50 50	50 70
	k. Overedge pocket pieces together.	503 504 or 602	SSa-1	8-10	70	70
	l. Operation 7j. and 7k. may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	8-10 (Chainstitching) (overedging)	50 70	70 70
	m. Length of the closed slide fastener shall finish 4 to 4-1/16 inches for all sizes. NOTE: Measurement shall be taken from stop to stop.					
	OR					
	The breast pocket opening may be accomplished with a double welt pocket machine which stitches, cuts and turns welts in one operation. (see operation 7b, 7c,and 7d). When this machine is used, the welt piece shall be one piece and may be cut to permit insertion into the machine. The interlining shall be of a suitable material as recommended by the double welt pocket machine manufacturer.					
	n. The length of the pocket opening shall be 4-1/16 to 4-1/4 inches measured from bartack to bartack.					
	OR					
	As an alternate for operations 7b, 7c, 7d, 7e, 7f, 7g, 7h, and 7i, the following operations may be substituted.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*	o. Fold breast pocket welt pieces lengthwise with the interlining between the fold and finger press, stitch through all plies 3/8 inch from the folded edge.	301 or 401	BSa-1	8-10	50 or 50	50 or 70
*	p. With edges even, position slide fastener between welt and face side of inner pocket, stitch through all plies 3/8 inch from folded edge of welt. Position slide fastener between welt and face side of outer pocket, aligning inner and outer pocket pieces at sides and bottom, stitch through all plies 3/8 inch from folded edge of welt. NOTE: Slide fasteners shall be positioned to close towards the armhole.	301	SSa-1	8-10	50	50
*	q. Slit fronts for pocket opening according to marks on pattern, tongue notch ends. Fold under opening 1/4 inch on each side of slit and finger press.					
*	r. Position the outer pocket assembly with welt, face to face, to upper slit opening, with raw edges of slit opening and the welt even. Stitch 1/4 inch from raw edges, forming 1/4 inch welt. The pocket assembly shall be towards bottom of garment.	301	SSa-1	8-10	50	50
*	s. Position the inner pocket assembly with welt, face to face, to lower slit opening, with raw edges of slit opening and the welt even. Stitch 1/4 inch from raw edges forming 1/4 inch welt. The pocket assembly shall be towards the top of the garment.	301	SSa-1	8-10	50	50
*	t. Topstitch lower front 1/16 inch from folded edge of seam.	301	LSq-2(b)	8-10	50	50
*	u. Fold pocket down to finished position, turn in welt tongues and edgestitch remaining three sides of front 1/16 inch from folded edge forming a 1/2 inch wide rectangular square.	301	LSq-2(b)	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
8.	Attach fronts					
	a. Stitch, face to face, upper and lower fronts.	301 or 401	LSq-2(a)	8-10	50 50	50 70
	b. Fold fronts to finished position with the seam allowance on upper fronts. Top stitch upper front 1/4 inch from folded edge.	301 or 401	LSq-2(b)	8-10	50 50	50 70
9.	Make sleeves and join sides					
*	a. Stitch front sleeve to front, face to face, positioning steps in accordance with patterns, and stitching from shoulder 3/8 inch from raw edge to step, continuing 3/16 inch from raw edge to underarm.	301 or 401	LSq-2(a)	8-10	50 50	50 70
*	b. Fold seam allowance towards front and starting at shoulder, topstitching on front 1/4 inch from folded edge, to step break. At step break stitch square angle to within 1/16 inch from folded edge of armhole and continue topstitching 1/16 inch from folded edge.	301	LSq-2(b)	8-10	50	50
	c. Stitch back sleeve to back, face to face, positioning steps in accordance with patterns. Stitch from neck edge to step, 3/8 inch from raw edge; continue stitching 3/16 inch from raw edge.	301 or 401	LSq-2(a)	8-10	50 50	50 70
*	d. Fold seam allowance towards back and starting from neck edge, topstitch 1/4 inch from folded edge, to step break. At step break, stitch square angle to within 1/16 inch from folded edge of armhole, and continue topstitching 1/16 inch from folded edge.	301	LSq-2(b)	8-10	50	50
	e. Position, face to face, back sleeve to assembled front and front sleeve from neck edge to step outlet of front sleeve. Stagger raw edge of back sleeve 3/8 inch from raw edge of front sleeve to extend and form an outlet from step to bottom of front sleeve. Stitch from neck edge to bottom 3/8 inch from raw edge.	301 or 401	LSq-2(a)	8-10	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	f. Fold seam allowance towards back sleeve and top stitch on back sleeve from neck edge to bottom of sleeve, 1/4 from folded edge.	301	LSq-2(b)	8-10	50	50
	g. Stitch underarm and side seams, aligning underarm seams of sleeve with side seam at armhole, face to face, 3/8 inch from raw edge.	301 or 401	SSa-1 and LSq-2(a)	8-10	50 50	50 70
	h. Fold seam allowance towards the back and topstitch the side seams only, 1/4 inch from folded edge, on the back.	301	LSq-2(b)	8-10	50	50
	i. Prepare sleeve hems as indicated by marks on pattern.					
10.	Attach slide fastener					
	a. Position edge of front interlining piece on back side of front extension, adjacent to the center fold line which is indicated by marks on patterns. Stay stitch interlining 1/8 to 3/16 inch from raw edge adjacent to center fold line.	301 or 401	LSbj-1	8-10	50 50	50 70
	b. Fold center fronts as indicated by marks on pattern.					
*	c. Position and center slide fastener chain to center front fold and stitch tape through the front 1/16 to 3/16 inch from edge of slide fastener tape.	301	SSa-1	8-10	50	50
	NOTE: Slide fastener chain will be covered by the welt when slide fastener is in the closed position.					
11.	Bartacks					
	a. Reinforce ends of front pockets and bottom of front slide fastener tape with 1/4 inch long vertical bartacks.	Bartack		20-22 per bartack	50	50
	b. Reinforce ends of breast pockets with 1/2 inch long vertical bartacks.	Bartack		26-28 per bartack	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
12.	Attach label to fleece lining assembly Center label approximately 2 inches below top edge of center back and stitch four sides approximately 1/16 inch from the edges, overlapping end of stitching.	301	LSbj-1	8-10	50	50
13.	Attach lining assembly to outer assembly Stitch, face to face, the lining assembly to the outer assembly along the fronts.	301	SSa-1	8-10	50	50
14.	Attach collar and hanger loop a. Stitch collar to neckline outer assembly, 1/4 inch from raw edge.	301	SSa-1	8-10	50	50
	b. Hanger loop shall conform to paragraph 3.3.4 or shall be made of basic material. When made of basic material, the loop shall be double stitched using a coverstitch on underside or with edges folded together. Width of the hanger loop shall be 1/4 to 3/8 inch.	301 or 406	EFh-1 EFp-2	8-10	70 50	70 50
	c. Center and stitch ends of loop on collar approximately 1/4 inch from raw edge. The loop ends shall be spread apart so as to have a finished free opening of 2 to 2-3/4 inches when measured along neck seam between inside edges of braid. The center of loop shall extend not more than 3/4 inch down form finished neck seam.	301	SSa-1	8-10	50	
	d. Stitch lining assembly to the outer assembly at collar edge, face to face, assuring lining seams are open and flat, stitching 1/4 inch from raw edge. e. Notch curves. Neck seam shall be smooth, flat and free from puckering.	301	SSa-1	8-10	50	50
15.	Attach cuffs and linings to outer assembly a. Fold knitted wrist cuffs in half width wise and overedge stitch the plies together.	503 504 or 602	SSa-1	8-10	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	b. Insert wrist cuffs between inside (face side) of outer sleeve and lining, as indicated by marks on pattern and stitch 1/4 to 3/8 inch from raw edge.	301	SSk-1	8-10	50	50
	OR	515 or 516 or 519	SSa-2	8-10 (Chainstitching)	50	70
	As an alternate, wrist cuff may be overedged and joined to bottom of outer sleeve in one operation, prior to joining the lining.			70 (overedging)	70	
	c. With sleeve bottoms folded inside out, position and fold step outlet and stitch 1/8 inch from raw edge, from bottom of folded hem to 1/2 to 3/4 inch from wrist cuff assembly. Position and fold, face to face, the pressed open underarm seam and stitch 1/8 inch from raw edge from bottom of folded hem to 1/2 to 3/4 inch from wrist cuff assembly.	301	SSa-1	8 - 10	50	50
*	d. Position lining and outer shell underarm seams, notch to notch. Stay stitch approximately 6 inches down from sleeve notch.	Hand or 301	SSa-1	4-8 per tack or 8-10	50	50
	e. As an alternate to operations 15c and 15d:	Bartack		26-28 per bartack	50	50
	(1) With sleeve bottoms folded inside out, secure both sides of sleeve by stitching a 1/2 inch long bartack on each side of sleeve. Each bartack shall be positioned 1-1/2 to 2 inches up from the bottom of the folded sleeve hem.					
*	(2) Position lining and outershell underarm seams, notch to notch. Position two 1/2 inch bartacks, one at notch and one 5-1/2 to 6 inches down from top sleeve notch.	Bartack		26-28 bartack	50	50
	f. Turn lining, sleeves and outer assembly to finished position.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF JACKET

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	g. Stitch outer edge of front facing piece 1/16 inch from folded edge.	301 or 401	Lsd-1	8-10	50	50
16.	Hem Fold hem according to marks on patterns. Fold raw edge under 1/4 to 3/8 inch and stitch 1/8 inch from inner folded edge. Finish hem to measure 7/8 to 1-1/8 inch wide. Turn under front ends at approximately a 45 degree angle, stitching 1/8 inch from inner folded edge.	301	SSl-1	8-10	50	50
17.	Close fronts					
*	Stitch along fronts 1/4 to 3/8 inch from folded edge forming welts over slide fastener.	301	Similar to SSb-1	8-10	50	50
18.	Clean jackets					
	a. Trim all thread ends.					
	b. Remove all loose threads.					
	c. Remove all spots, stains, and shade tickets.					
	NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.					
*	d. Attach removable size ticket on each of the four corners, to the outside of the lower left sleeve.	Hand or Machine		2-4 per tack 6-8 per tack		
19.	Pressing Press neatly with heated iron or pressing machine.					
20.	Fasten jacket Close all slide fasteners.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.8 Sizes and measurements. Sizes and measurements of the finished jackets shall be shown in Table II (see figure 1). Unless otherwise indicated, all measurements and tolerances are expressed in inches.

Table II - Sizes and finished measurements

Size	A Bust	B Sleeve Inseam			C Length		
		Short	Regular	Long	Short	Regular	Long
6	38	16-1/4	17-1/4	18-1/4	26-1/8	27-5/8	29-1/8
8	39	16-1/4	17-1/4	18-1/4	26-1/4	27-3/4	29-1/4
10	40	16-1/4	17-1/4	18-1/4	26-3/8	27-7/8	29-3/8
12	41	16-1/4	17-1/4	18-1/4	26-1/2	28	29-1/2
14	42-1/2	16-1/4	17-1/4	18-1/4	26-5/8	28-1/8	29-5/8
16	44	16-1/4	17-1/4	18-1/4	26-3/4	28-1/4	29-3/4
18	46	16-1/4	17-1/4	18-1/4	26-7/8	28-3/8	29-7/8
20	48	16-1/4	17-1/4	18-1/4	27	28-1/2	30
22	50	16-1/4	17-1/4	18-1/4	27-1/8	28-5/8	30-1/8
Tolerance	± 1	± 1/2	± 1/2	± 1/2	± 3/4	± 3/4	± 3/4

NOTE: All measurements shall be taken with the jacket laid flat and smooth with the front slide fastener completely closed. Refer to Figure 1 for A, B, and C measurements.

A. Bust - Twice the measurement taken across front at base of armhole seam from folded edge to folded edge.

B. Sleeve Inseam - Measurement taken from base of armhole at inseam to bottom of sleeve.

C. Length - Measurement taken along center of back from undercollar seam to bottom of jacket.

3.9 Workmanship. The finished jackets shall conform to the quality established by this specification. The occurence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, the contractor shall furnish a Certificate of Conformance stating that all components of slide fasteners are brass and are furnished by the same contractor (see 3.3.7).

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 thru 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The lot size shall be expressed in units of jackets. The sample unit shall be one finished jacket.

4.4.2.1 Visual examination. The jackets shall be examined for defects in color, design, material, construction, workmanship and marking and the defects classified in accordance with 4.4.2.1.1.

4.4.2.1.1 General and detailed defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES		
a. Any hole, cut, tear, smash, mend, needle chew burn, drill hole or scorched area		
1. On outside	X	
2. On inside		X
*b. Knot or slub exceeding basic material specification		X
c. Snag, misweave, shade bar, coarse yarn, missing yarn, broken yarn, thin place, woven in waste or area of no dye penetration		
1. On outside	X	
2. On inside		X
d. Permanent fold or pleat in cloth caused by seaming or stitching		
1. On outside	X	
SHADED PART		
a. On outside:		
1. Any part shaded (except parts which may be cut from ends)	X	
2. Variation in shade within a part (except parts which may be cut from ends)	X	
3. Part cut from ends badly shaded		X
CLEANNESS		
a. One or more spots or stains on outside		
1. Up to 1/2 inch		X
2. More than 1/2 inch	X	
b. More than 3 thread ends not trimmed to 1/4 inch or less on outside		X
c. More than 5 thread ends not trimmed to 1/2 inch or less on inside		X
d. One or more shade or size tickets not removed		X
e. Any shade or size marking exposed or readily visible on outside of garment (undercollar is considered as outside of garment).		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
COMPONENTS AND ASSEMBLY		
a. Any component not as specified	X	
b. Any operation not as specified (unless otherwise classified herein)		X
c. Any component part or required operation omitted (unless otherwise classified herein)	X	
d. Any component part tight, twisted, distorted, pleated, full, misshaped, or puckered (unless otherwise specified herein)		X
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein).		X
CUTTING		
Any component part not cut in accordance with directional lines indicated on patterns or not in accordance with specification requirements.	X	
PRESSING		
a. Pressing omitted (any specified operation)		X
b. Excess gloss		X
c. Wrinkles, creases or pressing impressions not removed throughout major portion of jacket		X
d. Edge bulky; not pressed		X
SEAMS AND STITCHING		
a. Accuracy of seaming		
1. Seam puckered, pleated, irregular, wavy or edge not fully worked out		X
2. Part of jacket caught in any unrelated operation or stitching	X	
3. Needle perforations visible on outside, more than 1 inch		X
4. End of seam or stitching when not caught in another seam or stitching not securely backtacked or back stitched less than 3/8 inch (excluding attaching label)		X
5. Stitch overlapping ends of thread break less than 1/2 inch		X
6. Not specified color thread used on outside		X
7. End of continuous line of stitching overlapped less than 1/2 inch		X
8. Label stitching not overlapped at end of stitching		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
b. Gage of stitching and seam allowance:		
1. Stitching irregular, not within range specified or varies more than 1/16 inch when no range is specified (score only when condition exists on more than half the length of seam)		X
2. Edge, top or raised stitching sewn too close to edge resulting in damage to cloth	X	
3. Width of seam allowance varies more than 1/16 inch from allowance specified (score only when condition exists on more than 1/2 the length of seam)		X
c. Open seam		
1. On outside:		
(a) - more than 3/4 inch	X	
(b) - up to 3/4 inch inclusive		X
2. On inside:		
(a) - more than 1 inch	X	
(b) - up to 1 inch inclusive		X
d. Runoff, skipped or broken stitches:		
1. On joining seam - when resulting in an open seam use "Open seam" classification		
2. On edge, top or raise stitching - more than 1/4 inch (when not resulting in an open seam)		X
NOTE: One or more broken stitches or two or more continuous skipped or runoff stitches constitutes an open seam. On double stitched seams a seam is considered open when one or both stitches of the seam is opened.		
e. Raw edge:		
1. On outside:		
(a) - more than 3/4 inch	X	
(b) - 1/4 to 3/4 inch inclusive		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
2. On inside:		
(a) - more than 1 inch		X
3. Any raw edge caused by the omission of overedge or serging stitching for a distance of 1 inch or more		X
f. Seam and stitch type:		
1. Not specified seam or stitch type	X	
2. Any line of stitching omitted or insecure		X
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)		X
4. Looper thread on outside	X	
g. Stitch tension:		
1. Loose tension resulting in a loose seam:		
(a) - more than 1 inch	X	
(b) - up to 1 inch inclusive		X
2. Loose tension resulting in loose or tangled loops of lower or top thread		X
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X	
h. Stitches per inch (score only when condition exists on more than 1/2 the length of seam)		
1. More than the maximum specified		X
2. Less than the minimum by two or more stitches		X
i. Bartack, backtack, tack or tacking		
1. Missing, insecure, misplaced, not serving intended purpose or not specified size or type		X
2. Loose stitch tension		X
j. Seam direction		
Any seam not facing direction specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
COLLAR (TOP AND UNDER)		
a. Misshapen or distorted	X	
b. Tight at joining to neck seam causing puckers or pleats on fronts, sleeves or back		X
c. Points uneven in length by:		
1. 1/4 inch to 1/2 inch inclusive		X
2. More than 1/2 inch	X	
d. Collar edge crooked, irregular, or wavy		X
e. Undercollar exposed along collar edge for a length of 1 inch or more		X
f. Interlining tight or twisted causing puckers on undercollar		X
g. Triangular stitching omitted on undercollar	X	
SLEEVES		
a. Sleeve fullness misplaced at armhole		X
b. Sleeve tight at armhole causing puckers on front or back	X	
c. Underarm seam of sleeve staggered more than 3/8 inch with side seam at armhole		X
d. Sleeve lining twisted, tight or short causing a break or twist on the outside	X	
e. Sleeve linings not tacked to sleeve as specified		X
f. Bottom edge of sleeve uneven by:		
1. More than 1/4 to 1/2 inch inclusive		X
2. More than 1/2 inch	X	
POCKETS (breast and lower front)		
a. Pockets set in crookedly or not uniform in size or shape		X
b. Left and right pockets out of horizontal alignment with each other by:		
1. More than 1/4 to 1/2 inch inclusive		X
2. More than 1/2 inch	X	
c. Left and right pockets finish at an unequal distance from armhole (breast pocket) and side seam (front pocket) by:		
1. More than 1/4 to 1/2 inch inclusive		X
2. More than 1/2 inch	X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
d. Welts less than 3/16 inch or more than 5/16 inch in width		X
e. Slide fastener chain visible for more than 1/2 inch on pocket opening when fastener is closed	X	
f. Length of breast pocket not as specified	X	
g. Pocket slide fastener does not close towards armhole	X	
h. Pocket slide fastener staple not securely clinched at end of chain	X	
*i. Closed length of breast pocket less than 4 inches or more than 4-1/4 inches	X	
FRONT CLOSURE		
a. Top ends of slide fastener tape not completely caught in collar seam stitching		X
b. Fastener chain set less than 1/4 inch or more than 1/2 inch from finished neck seam or less than 4 inches or more than 5 inches from bottom of jacket	X	
c. Slide fastener chain visible for more than 1/2 inch on front closure when fastener is closed.	X	
*d. Overlapping each other by more than 1/2 inch in any one area		X
SLIDE FASTENER (GENERAL)		
a. Any part of assembly omitted, bent, broken or otherwise defective	X	
b. Tape set on too loose or too tight, causing bulge, twist or fullness on outside when fastener is closed	X	
c. Stitches too close to chain not permitting slider to pass freely	X	
FRONTS		
a. Seams joining upper and lower fronts out of alignment by:		
1. More than 1/8 to 1/4 inch inclusive		X
2. More than 1/4 inch	X	
b. Length of fronts at closure uneven at neck or bottom edge by:		
1. More than 1/4 to 1/2 inch inclusive		X
2. More than 1/2 inch	X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
c. Front facing twisted or full causing puckering on outside of jacket	X	
DARTS		
a. Not tapered to a point causing bulge on outside		X
b. Corresponding darts unequal in length by more than 1/2 inch		X
c. Not uniformly positioned		X
CUFFS		
a. Omitted or not attached as specified	X	
b. Stretch lacking, i.e., knitting tension too tight		X
c. Run or dropped stitch		X
d. Loose knit		X
e. Mend, thin area or hole		X
f. Not double thickness	X	
g. Not uniform in width		X
h. Extends beyond sleeve opening by more than 7/8 inch		X
BOTTOM HEM		
a. Width less than 7/8 inch or more than 1-1/8 inch		X
b. Irregular in width by 1/4 inch or more		X
c. Twisted, puckered, or pleated		X
LABEL		
a. Missing, incorrect or illegible	X	
b. Not attached as specified, misplaced or stitching through the printing		X
HANGER LOOP		
a. Omitted or ends insecurely caught in neck edge stitching		X
b. Width less than 1/4 inch or more than 3/8 inch		X
c. Length of opening less than 2 inches or more than 2-3/4 inches		X
d. Center of loop extends more than 3/4 inch from finished neck seam		X
e. Misplaced, i.e., off center by more than 1 inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.4.2.2 Dimensional examination.

A. Bust Sleeve inseam Length	Any measurement deviating from the dimensions and tolerances specified Table II shall be scored as a measurement defect.
B. Equal length of sleeves	Sleeve inseams unequal in length by 1/2 inch or more shall be scored as a size measurment defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed as defects per 100 units, for visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
For visual examination in 4.4.2.1		
Major	2.5	II
Total (Major and Minor combined)	15.0	II
For dimensional examination in 4.4.2.2		
One class	4.0	S-3

* 4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 2.5 defects per hundred units in accordance with MIL-STD-105.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. 1/ Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, two shipping containers in the sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:53Z
Check the source to verify that this is the currentversion before use.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the acceptable quality level (AQL) expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each jacket with slide fasteners closed, shall be laid out flat, front down. Fold the sides of the jacket to the center of the back lengthwise and place sleeves lengthwise over the folded sides. Fold jacket in half by bringing bottom edge up to the collar. The completely folded jacket shall measure approximately 15 inches in length by 11-1/2 inches in width. Each folded jacket shall be inserted in a snug-fitting clear polyethylene film bag of 0.0015 inch (+ 20% tolerance) thickness. All seams and closures shall be formed by heat sealing. A 1/4 inch hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required.

5.1.2 Level C. Jackets shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 5.2.1 Level A. Eight (8) jackets, of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to class weather-resistant, type CF, variety DW, grade V15c, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, two in length, one in width, and four in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

* 5.2.2 Level B. Eight (8) jackets, of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed, and reinforced conforming to type CF, class domestic, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, of MIL-B-17757. Level A packages shall be packed flat, two in length, one in width, and four in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Level C. Jackets, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

* 5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

* 5.5 MIL-STD-2073. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

* (This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The jackets are intended to be worn as part of the Navy enlisted women's working uniform.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification
b. Sizes and lengths required (see 1.2)
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quantity, testing and approval of the first article.
e. Levels of packaging and packing required (see 5.1 and 5.2)
f. When palletization is required (see 5.4)
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

* 6.4 Recycled materials. It is encouraged that recycled materials be used when practical as long as it meets the requirements of this specification.

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.6 Subject term (key word) listing.

Cloth, poplin, polyester/cotton
Cloth, poplin, water repellant
Clothing, utility
Jacket, woman's
Jacket, utility

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8410-N703

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

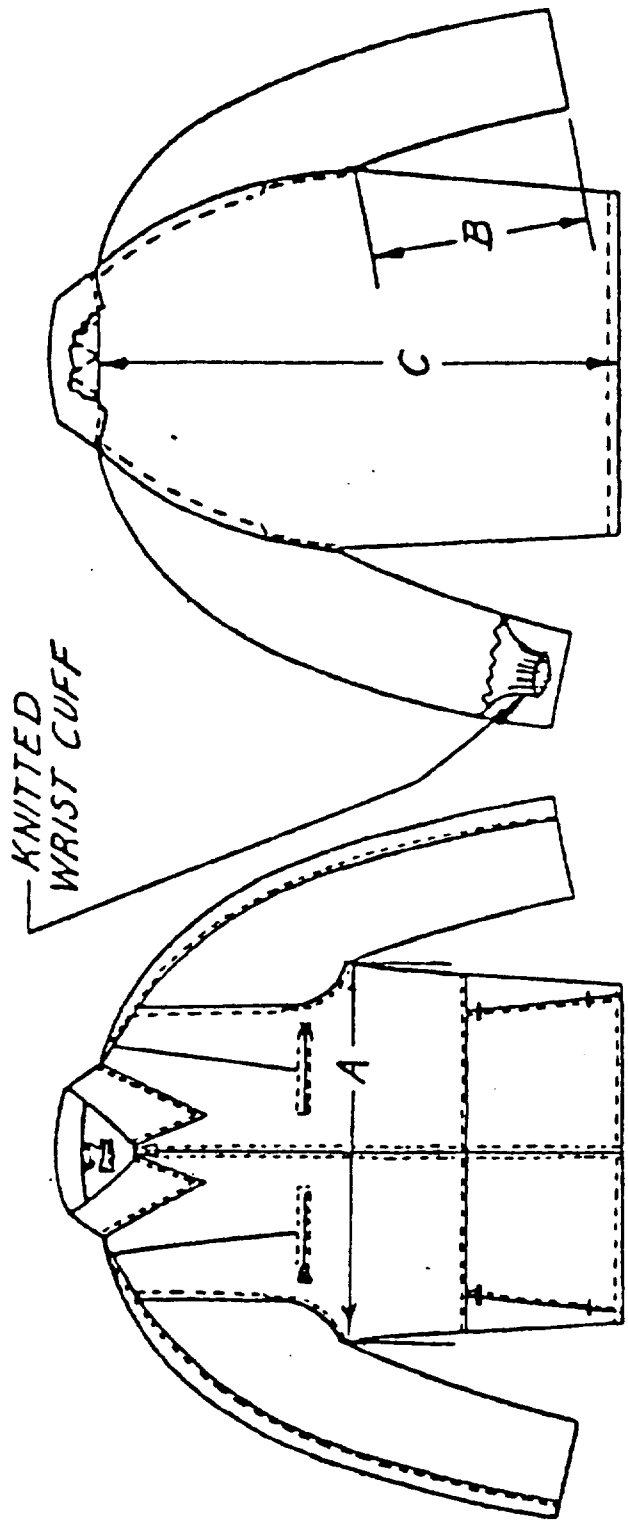


FIGURE 1 JACKET, WOMAN'S, UTILITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-J-87058B(NU)	JACKET, UTILITY, WOMAN'S

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, Code 50
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.