|INCH-POUNDS|

MIL-S-87005D(CG)
13 May 1992
SUPERSEDING
MIL-S-87005C(CG)
3 August 1988

MILITARY SPECIFICATION

SKIRT, WOMAN'S, DRESS (CG)

This specification is approved for use by the United States Coast Guard, Department of Transportation, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a polyester and wool woman's skirt.

1.2 Classification. The skirts shall be of one type and in the following sizes and lengths:

1.2.1 Sizes and lengths.

Sizes	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 20 and 22
Lengths	Short, regular and long

2. APPLICABLE DOCUMENTS

2.1 Government documents

Beneficial comments (recommendation, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, P. O. Box 59, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issue of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50186	- Cloth, Buckram, Woven and Nonwoven
A-A-50198	- Thread, Gimp, Cotton Buttonhole
A-A-50199	- Thread, Polyester Core: Cotton- or Polyester-Covered
A-A-52094	- Thread, Cotton
V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-F-106	- Fastener, Slide, Interlocking
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label, for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-823	- Cloth, Serge, Wool, Wool and Nylon, Polyester and Wool
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-43718	- Cloth, Polyester; Polyester and Cotton; Polyester and Rayon for Pockets
MIL-C-43920	- Cloth, Interlining, Cotton or Synthetic, and Nylon

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-2073-1	- DOD Materials Procedures for Development and Application of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirment Codes

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specification, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. POSTAL MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402-0001.)

2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issue of documents which are DoD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issue of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material for the skirt shall be 11.3 oz. polyester and wool serge cloth conforming to type III, class 3 of MIL-C-823. The shade shall match Blue 3362. The piece number for the standard sample is 80353.

3.3.2 Pocketing and lining. The material for the pockets and waistband lining shall be a twill cloth conforming to class 1 of MIL-C-43718. The color shall be Black 423.

3.3.3 Waistband. The waistband shall be a commerical band using the material stated in 3.3.2 thru 3.3.6.

3.3.4 Buckram. The material for interlining the waistband shall be bleached or unbleached cotton buckram conforming to type II or type V of A-A-50186.

3.3.5 Tape, waistband, non-slip. The woven non-slip tape for the waistband lining assembly shall be constructed of either polyester or polyester/nylon, natural or white in color, with two rows of chloroprene or nitrile rubber threads, woven or stitched to the tape. The width of the completed tape shall be 7/8 inch and shall not shrink more than 2% in the length direction when subjected to the manufacturer's standard procedures for determining dimensional stability to dry-cleaning as appropriate for the end item.

3.3.6 Waistband stabilizer. The material for the waistband stabilizer shall be interlining cloth conforming to type I of MIL-C-43920.

* 3.3.7 Thread. The thread used for seaming and stitching the skirt shall be a polyester core thread conforming to type I of A-A-50199. The color of the thread shall be Black AA, Cable No. 66043 and in the following sizes:

Operation	Ticket No.	Ply
Seaming, stitching and tacking	50, 70	2 or 3
Overedging	70	2 or 3
Buttons	50	2 or 3

3.3.7.1 Thread, cotton. As an alternate to the polyester-core thread, a cotton thread conforming to A-A-52094, type I, may be used. The color shall be the same as specified in 3.3.7 and in the following types and sizes:

Operation	Type	Ticket No.	Ply
Seaming and stitching	IA3	30, 50	3
Tacking and buttonhole	IC2	0	3
Overedging	IA3	70	2
Buttons	IB3	30	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.3.7.2 Colorfastness. The dyed thread shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-276 or A-A-50199. As a limit of acceptability, or when no standard sample is available, the thread shall show a minimum of "good" colorfastness to wet-dry cleaning and light when tested as specified in V-T-276 or A-A-50199.

* 3.3.8 Gimp. The gimp for reinforcing the buttonhole shall conform to type I or II, size No. 8 of A-A-50198. The color of the gimp shall be the same as indicated for thread in 3.3.7.

* 3.3.8.1 Colorfastness. The gimp shall show fastness to dry cleaning equal to or better than the standard sample. As a limit of acceptability, or when no standard sample is available, the colored gimp shall show a minimum of "good" colorfastness to dry cleaning when tested as specified in A-A-50198.

3.3.9 Button, plastic. The button for the waistband closure shall conform to type II, class D, style 20 and 21, 24-line of V-B-871. The color of the button shall be shade Black BT, Cable No. 62001.

3.3.10 Plastic coil slide fastener. The slide fastener shall be manufactured of plastic, type I, style 1a (continuous chain) or 3 (pre-assembled), size LS, automatic lock with bottom stop or bottom staple, with short tab pull conforming to V-F-106. The length of the style 3 slide fastener shall be 8 inches. The tape shall be a blend of nylon and cotton or polyester and cotton or 100% polyester. The complete slide fastener shall not shrink more than 2% when tested as specified in V-F-106 (see 4.4.1). The style 1a (continuous chain) slide fastener requires the application of a slider and bottom stop during production of the skirt.

3.3.10.1 Color. The color of the slide fastener tape shall be black. The plastic coil slider shall be black. The plastic coil shall be black or colorless.

3.3.10.2 Colorfastness. The dyed slide fastener tape shall show colorfastness to dry cleaning equal to or better than the standard sample. As a limit of acceptability, or when no standard sample is available, the tape shall show a minimum of "good" colorfastness to dry cleaning when tested as specified in V-T-106.

3.3.11 Combination label. Each skirt shall have a combination identification, personal, and instruction label conforming to type VI, class 10 and 15 of DDD-L-20. The fastness to dry cleaning requirements of DDD-L-20 shall apply. The label shall bear the following inscription:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

NAME:
SERVICE NO:
SKIRT, WOMAN'S, DRESS (CG)
FIBER CONTENT: Polyester (55)% and Wool (45%)
CONTRACT NO: DLA 100-00-0-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (if other than contractor)

DRY CLEAN ONLY

3.3.11.1 Size label. Each skirt have a size label conforming to type VI, class 2 of DDD-L-20 and bear the following inscription:

SIZE 6R (EXAMPLE)
STOCK NO: 8410-00-000-0000 (EXAMPLE)

NOTE: The lengths: Short, Regular, and Long may be abbreviated as S, R, or L.

3.4 Design. The skirt shall be A-line having four gores, one center front inverted kick pleat, a quarter top pocket on each hip, a left side slide fastener with a waistband button closure, and a two section waistband with seat seam outlet. The bottom of the skirt shall be unhemmed. (See Figure 1).

3.4.1 Figure. Figure 1 is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

3.5 Pattern. Standard patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification. The patterns allow 1/2 inch for all seams, except as otherwise indicated in Table I.

* 3.5.1 List of pattern parts. The component parts of the skirt shall be cut from the materials as specified and in accordance with the number of parts required for the manufacturing process as follows:

Material	Nomenclature of pattern parts	Cut parts
Basic material	Front	2
	Back	2
	Pocket facing	2
	Pocket bearer	2
	Placket	1
	Front and right back waistband	1
	Left back waistband	1
Cloth, twill	Pocket	2

Note: Pattern parts for waistband lining are not provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the skirt. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitching. Edge stitching shall be 1/16 to 1/8 inch from the edge, and topstitching shall be 1/4 inch from the edge. The bight of the overedge stitching shall be 3/16 inch. The guide and knife shall be set to trim only the ravelled ends of the fabric. Double needle stitching shall be 1/4 (± 1/16) inch gauge, with the outer row of stitching 1/16 to 1/8 inch from the finished edge. Buttonholes shall be clean cut and the stitching shall be securely caught in the fabric. The bartacks shall be 3/8 (±1/16) inch in length and 1/8 (±1/32) in width.

3.6.2 Thread breaks and end of seams. End of all seams and stitching when not caught in other seams or stitching shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than 3 stitches or extend 1/2 inch beyond side of label (size label only). The ends of label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be repaired by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked. Thread ends of darts shall be trimmed to a length of 1/2 inch. When automatic dart machine is used, the ends shall be back stitched with not less than 3 stitches and shall be trimmed.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.7 Manufacturing operations requirements. The skirts shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed provided that the finished skirt is identical to those produced by following the sequence of operations as listed in Table I. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification.

3.7.1 Pressing operations. All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.7.2 Abbreviations in Table of Operations. The abbeviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting. a. Cut the skirt in strict accordance with patterns furnished, which shall show size, placement of component parts, directional warp lines for cutting, and notches for proper assembly of parts. Drill holes are permitted for the darts and shall not be closer than 3/8 inch from the end of the dart. b. Cut the component parts of the skirt from the same piece of material, except placket piece and pocket facing which may be cut from ends. The parts from ends shall approximate the shade of the skirt. c. Place fronts and backs with the directional line in the warp direction. The directional line may vary from the warp direction by not more than 1 inch on fronts and backs. Measurement shall be taken from the top and bottom of the directional line on the pattern to the selvage edge of the fabric. The difference between the two measurements shall not exceed the tolerance specified. d. The waistband lining shall be cut of sufficient length to finish as specified in operation 11. The waistband lining shall be of a commerical type using the material specified.				
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 shall be removed from production and replaced with non-defective and properly matched components.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
3.	Marking.					
	a. All parts shall be marked or ticketed to insure a uniform shade and proper assembly throughout the skirt.					
	b. The use of corrosive metal fastening devices or sewn-on tickets shall be prohibited.					
	c. Adhesive tickets which discolor or adhere to the material upon removal of the tickets are prohibited.					
	d. The use of ink pad numbering machine, rubber stamp or pencil is acceptable provided the numbers do not show through the outside of the skirt. Whenever possible, numbers shall be covered by the seam allowance.					
4.	Overedge stitching.					
	a. Overedge stitch all the raw edges of the back parts. Overedge stitch the outseams from bottom of pocket notch to bottom of skirt on fronts, front center seam, kick pleat, top of kick pleat and top and bottom of each panel.	503 or 504 or 602	EFd-1	8-10	70	70
	b. Overedge back edge of pocket bearer to back edge of pocket.	503 or 504 or 602	SSa-1	8-10	70	70
Note:	When knife is used, it should only trim loose threads and not the fabric.					
5.	Attach bearer, facing, and label.					
	a. Position pocket facing on pocket piece, matching notches. Turn front edge under 1/4 inch and stitch facing to pocket, 1/16 inch from folded edge. The front edge does not have to be turned under if it is cut on the selvage.	301 or 401	LSd-1	8-10	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Turn under front raw edge of pocket bearer 1/4 inch, and stitch to pocket 1/16 inch from folded edge. Continue stitching across bottom raw edge.	301	LSd-1	12-14	50	50
	c. Stitch the combination label on all four sides to the bottom of the right pocket. The label shall face the skirt when worn.	301	LSbj-1	12-14	50	50
6.	Make darts. The darts shall be tapered on the inside without twists or puckers. Thread ends at lower end of darts shall not be trimmed closer than 1/2 inch in length. When automatic dart machine is used, the thread ends shall be backstitched.					
	a. Fold and stitch darts as indicated by notches and marks. Drill holes shall not be exposed on the outside of the skirt. When using drill holes, they should be 3/8 inch above bottom point of the dart and covered by the stitching.	301	OSf-1	12-14	50	50
	b. Press folded darts towards the center back respectively.					
7.	Attach pockets to front. *Finished appearance: The edges of the pocket openings shall not be distorted. The openings shall be aligned, uniform in length, and shall measure 7-1/4 to 7-1/2 inches between bartacks. The folded edge of pocket from top bartack to top of skirt shall be edge stitched. The front of the facing shall be set 1/8 inch in back of the front of the skirt.					
	a. Stitch the facing/pocket assembly to the front, face to face, matching notches, 1/4 inch from edge. Turn assembly to finished position with the facing 1/8 inch behind front, and edge stitch pocket opening 1/4 inch from folded edge.	301	SSbe-2(a) and SSbe-2(b)	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Position front edge of pocket onto bearer in accordance with notches and side seams, and topstitch 1/4 inch from top of front to top of pocket opening. Turn and continue edgestitching 1/16 inch from folded edge to top of front.	301	LSd-1	12-14	50	50
	c. Safety stitch around open sides of pocket from folded edge to side seam.	515 or 516 or 519	SSa-1	8-10	50	70
8.	Attach slide fastener.					
	a. When style 3 (pre-assembled) slide fastener is used: The top of the fastener chain shall finish not more than 1/8 inch below the waistband joining seam. The bottom stop shall finish within 1/2 inch of the bottom of the placket.					
	b. When style 1a (continuous chain) slide fastener is used: The coil and tape shall extend at least 1/4 inch into the waistband joining seam, and shall extend to the bottom of the placket. A bottom stop shall be applied within 1/2 inch of the bottom of the placket. The finished length of the slide fasteners from the bottom edge of the bottom stop to the waistband joining seam shall be 8 inches.					
	c. Fold placket piece in half lengthwise, and overedge top, bottom and side of placket piece.	503 or 504 or 602	SSa-1	8-10	70	70
	d. Position left side of slide fastener fastener tape to placket piece, 1/4 inch from overedged edge, and stitch 1/8 inch from tape edge.	301 or 515 or 516 or 519	LSbj-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Fold under seam allowance of left back and position placket piece with slide fastener tape attached to inside of skirt. The folded edge of the back shall be even with the outer edge of the slide fastener tape coil. Stitch placket piece to back, forming a 1/4 inch welt.	301	SSb-1	12-14	50	50
	f. Fold under left pocket bearer 1/2 inch and position slide fastener tape, with inner edge of tape even with overedged edge of bearer and pocket, forming a 1/4 inch welt. The folded edge of the bearer shall be even with the outer edge of the slide fastener coil. Stitch slide fastener tape to bearer, 1/4 inch from folded edge. The slide fastener shall be the same length as stated in operation 8b.	301	SSb-1	12-14	50	50
9.	Join outseams and attach slide fastener stop. a. Stitch left outseam from pocket notch to bottom of skirt. Stitch right outseam from top to bottom of skirt, matching notches.	301	SSa-1	12-14	50	50
	b. Press seams open and flat.					
	c. Attach slider and with the ends of the chain even, staple the fastener together at the bottom with the staple overlapping the chains. It shall be placed within 1/2 inch from bottom of pocket opening.					
	d. Stitch across the bottom of slide fastener tape, catching pocket edge and placket in stitching. The stitching shall extend from the edge stitching of the pocket to the edge stitching of the slide fastener.	301	SSv-1	12-14	50	50
10.	Join fronts and make kick pleat. a. Stitch center front seam together, from top edge of skirt to 1/2 inch below the top of the pleat seam. Press seam open and flat.	301	SSa-1	12-14	50	50
	b. Stitch front kick pleat seam from top of pleat to bottom of skirt matching notches. Press seam open and flat.	301	SSa-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Form and press an inverted center front pleat according to lines on pattern, so that the edges of the pleat touch and the seam allowance of the pleat is centered on the folds. At the top of the pleat, stitch across the full width of the pleat, through the front. Back stitch both ends of the stitching.	301	LSa-1	12-14	50	50
11.	Attach waistband and waistband lining. Finished appearance. The finished waistband shall measure 1 to 1-1/8 inches wide, be edgestitched below the waistband from end to end, and finish smooth and flat without fullness, gathers or pleats. The waistband lining shall be a commercial type using the requirements stated in 3.3.3. The waistband lining shall measure 1-1/2 to 1-3/4 inches wide in the finished skirt. No stitching shall penetrate the rubber thread of the non-slip tape. The waistband lining may be pieced providing the seam is flat and there is not more than one piecing on each skirt. The waistband lining shall terminate approximately 1/4 inch inside of the extension tab. The waistband stabilizer may be 1 inch shorter than the waistband lining at the center back seam.					
	a. Position bottom edge of front and right back waistband to front and right back skirt assembly. Stitch with 3/8 inch seam allowance catching top of slide fastener and top of pockets.	301	SSa-1	12-14	50	50
	b. Position left back waistband on left back skirt and placket assembly with center back edges even. Stitch with a 3/8 inch seam allowance catching top of slide fastener and top of placket.	301	SSa-1	12-14	50	50
	c. Press waistband seam open and flat.					
Note:	The waistband lining may be attached to the waistband prior to setting to skirt.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Turn under top edge of both waistband linings 3/8 inch and stitch to edge of waistband, ensuring finished measurements of waistband width are met.	304 or 404 or 401	LSd-1	12-14	50 50	50 70
12.	Join back seam. a. Stitch the backs, face to face, 1-1/4 inches from raw edge to form the center back seam, from bottom of skirt to top of waistband lining. The waist shall be measured before the center back seam is joined to assure correct waistband measurement.	301 or 401	SSa-1	12-14	50 50	50 70
	b. Press seam open and flat.					
13.	Finish waistband and attach size label. a. Fold waistband lining to the inside and press top edge. The lining shall not be exposed beyond the top of the waistband.					
	b. Fold left back waistband face to face with waistband lining. Stitch even with outside edge of placket. Trim, turn and work out corner.	301	SSa-1	12-14	50	50
	c. Fold waistband tab according to notches face to face, with end folded under 1/4 inch, positioning raw edge of waistband lining under tab. Stitch top and bottom of tab to meet finished measurements. Trim, turn and work out corners.	301	SSa-1	12-14	50	50
	d. Edgestitch the spread open waistband seam 1/16 to 1/8 inch below the joining seam on the skirt, simultaneously catching the waistband lining (with the center back seam allowance folded in), and the top of the pockets. The stitching shall extend across the placket. NOTE: Be sure the front end of the waistband lining of the front and right back waistband is folded under at a 45 degree angle to finish properly.	301	SSao-2(b)	12-14	50	50
	e. Stitch outer edge of left back waistband 1/16 to 1/8 inch from folded edge. The stitching shall be from top of waistband to below waistband lining.	301	SSe-2(b)	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Edgestitch tab of front and right back waistband, 1/16 to 1/8 inch from folded edge. The stitching shall be from the slide fastener stitching along the bottom, front and top of tab and down the tab joining the slide fastener tape stitching. NOTE: Ensure that the waistband lining is positioned under folded edge of tab, and securely caught in the stitching.	301	SSe-2 and SSv-1	12-14	50	50
	g. Stitch the top edge of the size label to the lower edge of waistband lining above the right hip dart. The end of the stitching need not be tacked provided the stitching extends at least 1/2 inch beyond each end of the label. The stitching shall not be through the printing.	301	LSbj-1	12-14	50	50
14.	Bartacking. Finished appearance. The bartacks shall be well made and correctly placed to reinforce points of strain as specified. The bartacks at side pocket openings shall finish at outseams for the bottom tack and even with the pocket opening for the top tack.					
	*a. Bartack front pocket opening with horizontal bartacks at the bottom of opening (catching bottom of fastener tape on left side), and at the top. The top bartack shall be 7-1/4 to 7-1/2 inches up along pocket opening from bottom bartack.	brtck		21-28 per brtck	50	50
15.	Make buttonhole a. Place a 5/8 inch horizontal eyelet end taper bar buttonhole, centered on the extended end of waistband, 1/2 (± 1/16) inch from the end.	Button-hole		42-46 per button-hole	50	50
	b. The stitching shall be securely caught in the fabric, with the purling on the outside, worked over gimp and end of buttonhole securely tacked.					
	c. All thread ends shall be trimmed and buttonhole cleaned.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of Skirt

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
16.	Sew button Mark and sew a 24-line plastic button on outside of left back waistband to correspond with buttonhole.	301 or		14-16 per button	50	50
		101		14-16 per button	50	
		or Hand		4 per button dbl thread incl shank wrapping (7) min	50	
17.	Cleaning a. Trim all thread ends to within 1/4 inch and remove all loose threads inside and out.					
Note:	Care shall be taken when trimming thread ends that damage to the fabric does not result.					
	b. Remove all spots, stains, and marking tickets.					
18.	Press skirt a. Press the entire skirt.					
	b. Remove gloss impressions and marks.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.8 Sizes and measurements Sizes and measurements of finished skirts shall be as shown in Table II (see Figure 1). All measurements are expressed in inches unless otherwise specified.

Table II - Measurements of skirt

Size	(A) Waist	(B) Length of skirt S	R	L	(C) Sweep
6	24	24	26	30	51
7	24-1/4	24	26	30	51-1/2
8	25	24	26	30	52
9	25-1/2	24	26	30	52-1/2
10	26	24	26	30	53
11	26-1/2	24	26	30	53-1/2
12	27	24	26	30	54
13	27 1/2	24	26	30	54 1/2
14	28	24	26	30	55
15	29	24	26	30	56
16	30	24	26	30	57
18	32	24	26	30	58-1/4
20	34	24	26	30	59-1/2
22	36	24	26	30	60-3/4
Tolerance	± 1/2	± 1/4	± 1/4	± 1/4	± 3/8

Measurements shall be taken with slide fastener closed, waistband buttoned and skirts laid flat and smooth.

A. Waist - Twice the measurement taken at center of waistband, from folded edge to folded edge.
B. Length of skirt - Measurement taken along center back from bottom of waistband to bottom unhemmed edge of skirt.
C. Sweep - Twice the measurement taken straight across the unhemmed bottom from folded edge to folded edge with the pleat closed.

3.9 Workmanship The finished skirts shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. The contractor shall furnish a certificate of compliance for the slide fastener requirements of 3.3.10.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be indicated in 4.4.2.3. The sample unit shall be one finished skirt. The lot size shall be expressed in units of skirts.

4.4.2.1 Visual examination. The skirts shall be examined for defects in shade, design, material, construction, and workmanship, and classified in accordance with Table III defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table III - Classification of Defect

Defect	Major	Minor A	Minor B
I. MATERIAL DEFECT AND DAMAGE			
a. Hole, cut tear, smash, mend, burn, drill hole, scorched area, or open place:			
1. On outside (longest dimension in any direction):			
a. - up to 1/4 inch inclusive		X	
b. - more than 1/4 inch	X		
2. On inside (longest dimension in any direction):			
a. - up to 1/4 inch inclusive			X
b. - more than 1/4 inch		X	
b. Knot or slub on outside 1/		X	
c. Misweave, area of no dye penetration, dye streak, missing yarn, broken yarn, visible mend, thin place or shade bar more than 1/2 inch (longest dimension in any direction) on outside	X		
d. Loose yarn, coarse yarn; more than 1 inch (longest dimension in any direction) on outside	X		
e. Woven in waste on outside, visible at 3 feet (longest dimension in any direction):			
1. 1/4 inch up to 1 inch inclusive			X
2. More than 1 inch		X	
f. Permanent fold, pleat or crease in cloth (when caught in seaming or stitching) on outside	X		
g. Needle chew on outside:			
1. Up to 1/2 inch inclusive		X	
2. More than 1/2 inch	X		
II. SHADED PART			
a. Variation in shade within an outside part or between outside parts (except parts which may be cut from ends)	X		
b. Any part cut from ends which does not approximate shade of skirts		X	
c. Any part required to be cut from one piece of material shaded	X		

1/ Knot and slub defects shall be in accordance with basic material requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table III - Classification of Defects (cont'd)

Defect	Major	Minor A	Minor B
III. CLEANNESS			
a. Spot or stain on outside visible at 3 feet (largest dimension in any direction):			
1. Up to 3/8 inch inclusive			X
2. More than 3/8 inch up to 3/4 inch inclusive		X	
3. More than 3/4 inch	X		
b. Three or more thread ends not trimmed to 1/4 inch or less on outside		X	
c. Five or more thread ends not trimmed to 1/2 inch or less on inside			X
d. Two or more shade or size tickets not removed			X
e. Any size or shade marking or residue on outside, score as spot or stain			
f. Loose thread ends not removed from skirt			X
IV. CUTTING			
a. Any component part not cut in accordance with specified patterns, directional lines on patterns or not in accordance with specification requirements	X		
V. COMPONENT AND ASSEMBLY			
a. Any component part omitted or required operation omitted (unless otherwise classified)	X		
b. Any component part twisted, distorted, pleated, mishaped, tight or full (unless otherwise classified)	X		
c. Any component not as specified	X		
d. Any operation not as specified (unless otherwise classified	X		
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified)		X	
VI. PRESSING			
a. Omitted	X		
b. Excess gloss		X	
c. Side, back, or front seam (excluding pleat seam) not pressed open			X
d. Skirt burned or scorched	X		
e. Poorly pressed		X	
f. Permanent crease (other than specified)	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table III - Classification of Defects (cont'd)

Defects	Major	Minor A	Minor B
VII. SEAMS AND STITCHING			
a. Accuracy of seaming:			
1. Seam irregular, twisted, pleated or wavy	X		
2. Seam puckered (score only when on major portion of seam)	X		
3. Any part of skirt caught in an unrelated operation or stitching	X		
4. End of stitching when not caught in other seam or stitching not backtacked as specified		X	
5. Thread break not secured back of break or stitched back of break less than 1/2 inch		X	
6. Ends of a continuous line of stitching not overlapped as specified		X	
7. Not specified color thread or various shades used on outside of skirts	X		
8. Needle perforations visible on outside.		X	
b. Gage of stitching and seam allowance:			
1. Gage irregular or not within range specified or varies more than 1/16 inch when no range is specified (score only when condition exists on more than 1/2 the length of the seam)			X
2. Edge, top or raised stitching sewn too close to edge resulting in damage to cloth	X		
3. Seam allowance not as specified by 1/8 inch or more (score only when condition exists on more than 1/2 the length of the seam)		X	
c. Open Seam (resulting from 2 or more skipped, broken, runoff or missing stitches)			
1. On joining seams;			
a. -Less than 1/4 inch			X
b. -1/4 inch to 1/2 inch inclusive		X	
c. -More than 1/2 inch	X		
2. On overedging:			
a. -Less than 3 inches			X
b. -Three or more inches		X	
3. On label, edge or raised stitching:			
a. -Up to 1/2 inch			X
b. -1/2 inch or more		X	
d. Runoff - Score as an open seam			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table III - Classification of Defects (cont'd)

Defects	Major	Minor A	Minor B
e. Raw edge			
1. On outside:			
a. -Up to 1/8 inch inclusive			X
b. -More than 1/8 inch up to 1/2 inch inclusive		X	
c. -More than 1/2 inch	X		
2. On inside:			
a. -1/2 inch up to 1 inch inclusive			X
b. -More than 1 inch		X	
f. Seam and stitch type:			
1. Not specified seam or stitch type		X	
2. Looper thread of 401 or 406 stitch type on outside	X		
3. Any required line of stitching omitted or insecure	X		
4. Any line of stitching not beginning or ending where specified (unless otherwise classified here in)		X	
g. Broken, missing or skipped stitch on edge, top or raised stitching (score as an open seam)			
h. Stitch tension:			
1. Loose tension resulting in a loose seam			
a. -Up to 1/2 inch inclusive			X
b. -More than 1/2 inch up to 3/4 inch inclusive			X
c. -More than 3/4 inch	X		
2. Loosely exposed loops of lower or top thread on edge, top or raised stitching		X	
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X		
i. Stitches per inch (to be scored only when the condition exists on more than half the length of the seam or stitching)			
1. More than the maximum specified			X
2. Less than the minimum specified (except on overedge stitching and labels)		X	
3. Less than the minimum specified on overedge stitching and labels			X
j. Bartack, tack or tacking			
1. Missing, insecure, misplaced, not serving intended purpose or not specified size or type		X	
2. Loose stitch tension			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table III - Classification of Defects (cont'd)

Defect	Major	Minor A	Minor B
VIII. BUTTONHOLE			
a. Omitted, not specified type or not finished as specified	X		
b. Misplaced or not positioned as specified; out of alignment with button resulting in bulge or twist when buttoned	X		
c. Uncut buttonhole		X	
d. Ragged edge, i.e., yarns or thread ends on inside of buttonhole not trimmed to less than 1/4 inch, incomplete stitching; stitching not securely caught in fabric		X	
e. Broken stitch or two or more skipped stitches			X
f. Stitches per buttonhole less than minimum specified			X
IX. BUTTON			
a. Omitted, broken or defective		X	
b. Misplaced; loose; not attached as specified; insecurely sewn			X
c. Stitching not locked at end of cycle (tug at the thread when accessible to determine if it will ravel)			X
d. Type, size, color or finish not as specified			X
X. LABEL			
a. Not attached or affixed as specified, misplaced, or stitching through the printing			X
b. Missing, incorrect, or illegible	X		
XI. WAISTBAND			
a. Construction:			
1. Fullness, pleats, gathers, or twists on outside of waistband	X		
2. Top of skirt puckered or pleated at joining to waistband	X		
3. Waistband ends poorly shaped		X	
4. Width of waistband not as specified			X
5. Bottom of waistband seam at seat seam out of alignment by more than 1/8 inch		X	
b. Waistband lining:			
1. Width of finished waistband lining not as specified		X	
2. Lining exposed on outside:			X
a. -Up to 1/2 inch inclusive		X	
b. -More than 1/2 inch			
c. Waistband non-slip tape:		X	
1. Not specified type			X
2. Not part of the commerical waistband			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table III - Classification of Defects (cont'd)

Defect	Major	Minor A	Minor B
XII. SKIRT SIDE OPENING			
a. Lower end of placket piece not caught in stitching across welt		X	
b. Placket piece or welt twisted, pleated or tight	X		
c. Placket piece not completely caught in waistband		X	
d. Welt edge stretched		X	
e. Welt stitching irregular		X	
f. Row of stitching along back edge of placket exposed beyond edge of welt when slide fastener is closed		X	
g. Stitching to right or left of slide fastener too close to slide fastener, preventing slider to pass freely	X		
h. Slide fastener tape stitched too loose or too tight, causing placket to bulge when placket is closed	X		
i. Top of slide fastener not extending under waistband		X	
j. Top of fastener tapes not securely caught in waistband joining seam line		X	
k. Slide fastener defective, affecting function	X		
l. Slide fastener chain misplaced (set too high or low)		X	
m. Coil/stops of slide fastener not positioned as specified		X	
XIII. SIDE POCKETS			
a. Facing or bearer not caught in bartack at each end of opening; facing or bearer not extending below bottom bartack and above top bartack	X		
b. Pocketing notched into side seams		X	
c. Bartack not even with outseam at bottom of pocket or not even with opening at top of pocket		X	
XIV. FRONT KICK PLEAT			
a. Stitching at top of pleat not horizontal with pleat		X	
b. Pleat poorly formed, twisted or puckered		X	
XV. DARTS			
a. Twisted or puckered		X	
b. Corresponding darts not positioned uniformly by 1/2 inch or more		X	
c. Ends of darts extending below drill holes not as specified		X	
d. Inside folded edge of dart not turned and pressed as specified			X
e. Thread ends not as specified			X
f. Not securely caught in waistband		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.2.2 Dimensional examination. The skirt shall be examined for defects in accordance with the following:

Any measurements deviating from nominal dimensions and tolerances specified in Table II shall be scored as a measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units for visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
For visual examination in 4.4.2.1		
Major	1.0	III
Major, Minor A (combined)	6.5	III
Total (Major, Minor A, Minor B combined)	15.0	III
For dimensional examination in 4.4.2.2		
One class	4.0	S-3

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units in accordance with MIL-STD-105.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/ Polyethylene film bag vent hole missing or not heat sealed; or a tuck-in or reverse flap closure not used. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C (see 6.2).

5.1.1 Level A. Each skirt shall be folded in thirds across the width, with the pleat inside and then folded in half across the length. The folded skirt shall measure approximately 13 inches in length by 10 inches in width. Each folded skirt shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (+ 20% tolerance). All seams and closures shall be formed by heat sealing. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner vent hole are not required.

5.1.2 Level C. Skirts shall be preserved to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Forty-eight (48) skirts, of one size only, preserved as specified in 5.1 shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A folded skirts shall be stacked flat, one in width, two in length and twenty-four in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Level B. Forty-eight (48) skirts of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A folded skirts shall be stacked flat, one in width, two in length and twenty-four in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Level C. Skirts, preserved as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

* 5.4 Palletization. When specified (see 6.2), item, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means C and D or Film bonding F or G. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type IV; Type V, class 1, size 2; or Type VIII, fabricated from wood groups I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contacting officer.

* 5.5 Packaging requirements and codes. When specified (see 6.2), Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The skirts are intended for wear as part of the dress uniform by female personnel of the Coast Guard.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification
b. Sizes and length required (see 1.2)
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1 and 2.2)
d. When first article sample is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, quality, testing and approval of the first article.
e. Levels of preservation and packing required (see 5.1 and 5.2)
f. When palletization is required (see 5.4)
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.5)

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

6.4 Recycled materials. It is encouraged that recycled materials be used when practical as long as it meets the requirements of this specification.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.6 Subject term (key word) listing.

Cloth, polyester/wool serge
Color, Blue 3362
Uniform, woman's

Custodian:
Coast Guard - CT

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8410-N777

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

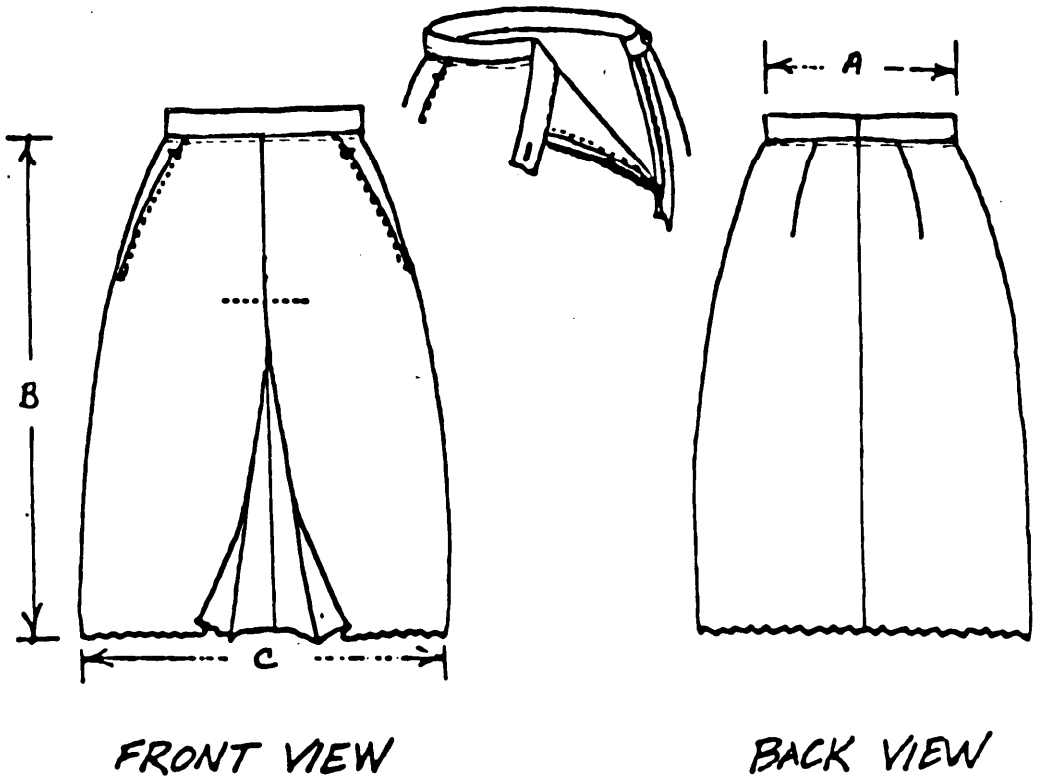


FIG. 1 SKIRT, WOMEN'S DRESS (CG)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-S-87005D(CG)	92 05 13

3. DOCUMENT TITLE
SKIRT, WOMAN'S DRESS (CG)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
CAULFIELD, LOUISE A.	NAVY CLOTHING AND TEXTILE RESEARCH FACILITY	
c. ADDRESS (Include Zip Code) P.O. Box 59 Natick, MA 01760-0001	d. TELEPHONE (Include Area Code) (1) Commercial (508)651-4119 (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD) 92 05 13

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
c. ADDRESS (Include Zip Code)	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198 290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.