MIL-S-87006A(CG)
8 September 1982
SUPERSEDING
MIL-S-87006(CG)
1 March 1976

MILITARY SPECIFICATION

SHIRT, WOMAN'S, POLYESTER/COTTON (CG)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for women's polyester/cotton shirts.

1.2 Classification. The shirts covered by this specification shall be of the following types, classes, and sizes:

Types	Classes
Type I - Short Sleeve	Class 1 - Blue
Type II - Long Sleeve	Class 2 - White

SCHEDULE OF SIZES

Collar	Bust			Sleeve Lengths		
				Long		Short
13	26	28	30	31	33	3 1/2
13 1/2	28	30	32	31	33	3 1/2
14	30	32	34	31	33	3 1/2
14 1/2	32	34	36	31	33	3 1/2
15	34	36	38	31	33	3 1/2
15 1/2	36	38	40	31	33	3 1/2
16	38	40	42	31	33	3 1/2
16 1/2	40	42	44	31	33	3 1/2
17	42	44	46	31	33	3 1/2

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, and deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 2.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button Staple (Plastic)
DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use)
PPP-B-665	- Boxes; Paperboard, Metal Stayed (Including Stay Material)
PPP-B-676	- Boxes, Set-up

MILITARY

MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-21881	- Cloth, Poplin, Polyester and Cotton
MIL-T-43548	- Thread, Polyester, Cotton-Covered and Rayon-Covered
MIL-C-83314	- Cloth, Broadcloth, Polyester/Cotton (Durable Press)

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies shall be addressed to American Trucking Associations, ATTN: Traffic Department, 1616 P Street, N.W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, ILL 60606.)

TECHNICAL MANUAL OF THE AMERICAN
ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

(Application for copies of the AATCC Manual should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, Post Office Box 12215, Durham, N. C. 27709.)

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials.

* 3.3.1 Cloth, broadcloth, polyester and cotton. The polyester/cotton broadcloth used for the shirt shall be shade Blue 1550 for the class 1 shirt and shade White 3060 for the class 2 shirt, and shall conform to MIL-C-83314. As an alternate, the fabric for the class 2 shirt shall be shade White 3013, conforming to type II, class 2 of MIL-C-21881.

* 3.3.2 Fusible interlining. The interlining for the collar, collarstand and long sleeve cuffs shall be a fusible type and the color shall be white. A sample, two yards in length, of the interlining fused to the basic material shall conform to the requirements listed below when tested as specified in 4.4.1.1.

Appearance of fused sample

initial - no evidence of bubbling, color change or bleed through
after 25 launderings - no evidence of bubbling or delamination

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Peel strength

initial - warp Min. 24 oz.
after 25 launderings Min. 16 oz.

Stiffness, inch/lbs (Average of six samples, three tested fusible side up and three tested fusible side down)

initial

warp	Min. 18.0×10^{-4}	Max. 30.0×10^{-4}
filling	Min. 9.0×10^{-4}	Max. 17.0×10^{-4}

After 25 launderings - samples shall retain a minimum of 20% of its original measured stiffness.

In-process test requirements

Appearance of fused sample
-no evidence of bubbling, color change, or bleed through

Peel strength - Minimum 20 oz.

3.3.2.1 Thickness, fusible. The thickness of the fusible interlining should not measure greater than 0.030 inch, when tested as specified in 4.4.1.1.

3.3.3 Buttons, plastic. The buttons shall be plain, 2 hole, size 21-line, shade White BA, Cable No. 62031 and shall conform to type II, class K, Style 25 of V-B-871.

3.3.4 Thread.

3.3.4.1 Thread, polyester, covered. The covered polyester thread used for stitching and seaming shall conform to MIL-T-43548 as follows:

Use	Ticket no.	Ply
General seaming and overedging	70	2 or 3
Buttonhole or button	50	2 or 3

3.3.4.2 Color. The color of the thread shall be white.

3.3.5 Labels.

* 3.3.5.1 Combination label. Each shirt shall have a combination identification and instruction label conforming to type VI, class 15 of DDD-L-20. The label inscription shall show colorfastness to laundering. The combination label shall bear the following inscription:

SHIRT, WOMAN'S, POLYESTER AND COTTON (CG)
65% POLYESTER AND 35% COTTON
CONTRACT NO. DLA100-00-0-0000 (EXAMPLE)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

LAUNDERING INSTRUCTIONS

MACHINE WASH, GENTLE CYCLE OR HAND WASH
USE WARM WATER AND MILD SOAP

DO NOT BLEACH, WRING OR TWIST
USE WARM IRON, IF NECESSARY

* 3.3.5.2 Size label. The shirts shall have a size label conforming to Type IV, class 2 of DDD-L-20. The label shall bear the following inscription:

13N - 28B - 33LS (EXAMPLE)

STOCK NUMBER: 8410-00-000-0000 (EXAMPLE)

NOTE: The neck, bust and sleeve length may be abbreivated as "N", "B", and or "S or LS" respectively. For the Type I shirt, the sleeve length designation shall be omitted.

3.4 Design. The shirts shall be tuck-in style with shoulder front yokes and seven button front closure. Type I shirt shall be short sleeves and Type II shall be long sleeves with a two button cuff.

3.4.1 Figures. The figure is furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.5 Patterns. Standard patterns will be furnished by the Government and unless otherwise indicated in Table I, provide an allowance of 3/8 to 7/16 inch for all joining seams (safety stitch). The standard patterns shall not be altered in any way and are to be used for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns (see 6.3).

3.5.1 List of pattern parts. The component parts of the shirt shall be cut from materials as specified and in accordance with the pattern parts indicated.

Materials	Pattern nomenclature	Cut parts
Cloth, basic	Back	1
	Front (right and left)	2
	Front yoke (right and left)	2
	Collar (top and bottom)	2
	Collar stand	2
	Sleeve (Type I)	2
	Sleeve (Type II)	2
	Cuff (Type II)	2
Cloth, fusing, interlining	Collar	1
	Collar stand	1
	Cuff (Type II)	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.6 Construction.

* 3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Unless otherwise specified, the bight of the overedge stitching shall be 1/8 to 3/16 inch. Where stitch types 515, 516, or 519 are called for to simultaneously stitch and overedge in one operation, the stitching may be performed separately, using stitch types 301 or 401 and 503, 504, or 602. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats or open seams result.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitching shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements. The shirt shall be manufactured in accordance with the operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed provided that the finished shirt is identical to that produced by following the sequence of operations as listed in Table I.

* 3.7.1 Shade and size marking. The component parts shall be marked, ticketed, or bundled to insure a uniform shade and size throughout the shirt. Any method of shade marking may be used except:

(1) Metal fastening devices
(2) Sew-on shade tickets

NOTE: The use of ink pad numbering machines, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and whenever possible, is covered by the seam allowance.

*3.7.2 All fusing of the fusibles to the basic material shall be on a single ply basis (no stacking allowed).

* 3.7.3 The statement "press fusible to various cut parts in accordance with directions of the fusible manufacturer" refers to time, temperature, and pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirts

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
* 1.	Cutting a. Cut shirts in strict accordance with patterns furnished, which shall show size, shape, directional lines, and notches for proper assembly. b. Front, back, collar, and sleeve parts shall be cut from one piece of basic material, except that the underply of the collar and collarstands may be cut from ends. When cut from ends the underply of the collar and collarstands shall approximate the shade of outside parts. c. Left and right fronts may be cut with the selvage as facing back edge (see operation 7a). When fronts are cut from fabric made on shuttleless looms, the facing edge shall be stitched according to operation 7a. d. Fusing of the fusible to the basic material shall not be performed prior to cutting of cut parts.					
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in Section 4 of this specification shall be removed from production and replaced with non-defective and properly matched components.					
*3.	Shade and size marking. Mark, ticket, or bundle all parts to insure a uniform shade and size throughout the shirt (see 3.7.1).					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Make collar.					
	a. Position fusible to back side of topcollar. Press fusible to topcollar in accordance with direction of the fusible manufacturer.					
	b. Stitch topcollar and undercollar together, face to face, around top and side edges 1/8 to 3/16 inch from raw edges.	301	SSe-2(e)	10-12	70	70
	c. Turn to finished position, working out points.					
	d. Topstitch 1/4 inch from folded edges.	301	SSe-2(b)	10-12	70	70
*5.	Make collarstand and attach collar.					
	a. Position fusible to backside of top collarstand. Press fusible to top collarstand in accordance with directions of the fusible manufacturer.					
	b. Place collar between undercollar and top collarstands, face to face, as indicated by notches on pattern and stitch from end to end along top edge of collar stand, 1/8 to 3/16 from edge. Collarstand with fusing shall face the inside of the shirt.	301	SSq-2(a)	10-12	70	70
	c. Fold collarstand to finished position and topstitch 1/16 inch from folded edge, continuing around the curved ends of the collarstand.	301	SSq-2(b)	10-12	70	70
	OR					
	d. The curved ends of the stand may be topstitched when performing operation 11b.	301	SSe-1	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*5.	Make collarstand and attach collar. (cont'd)					
	e. Fold under bottom edge of undercollar stand 1/4 inch and stitch 1/16 inch from folded edge.	301	EFa-1	10-12	70	70
	f. The finished collar shall measure as follows: - Width at center back - 1 1/2 (± 1/8) inches - Length of points - 4 1/4 ± 1/4) inches - Points shall be equal in length					
	g. Stamp the size and stock number as specified in 3.3.5.2, centered on the inside of the collarstand.					
6.	Join fronts to yokes.					
	a. Shirt fronts between notches.	301	OSa-1	10-12	70	70
	b. Join, face to face, the shirred fronts to yokes, with notches matching, across width of yoke, 5/16 to 3/8 inch from rae edge, simultaneously stitching and overedging in one operation.	515 516 or 519	LSq-2(a) and SSa-2	8-10	70	70
	c. As an alternate, fronts may be shirred between notches and joined to yokes in one operation.					
	d. Turn seam allowance upwards and topstitch across yoke 3/16 to 1/4 inch from turned edge.	301	EFa-1	10-12	70	70
7.	Prepare fronts.					
	a. If selvage edge in not utilized, turn under raw edge of facing, 3/8 inch and stitch 1/4 inch from edge.	301	EFa-1	10-12	70	70
	b. Place combination identification and instruction label on the outside of left front so that on the finished shirt the bottom of the label is 5/8 to 3/4	301	LSbj-1	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Prepare fronts. (cont'd) inch from the hemmed bottom and the side of the label is 1 1/2 to 1 3/4 inches from the front folded edge. Stitch all four sides 3/16 inch from the edge of label.					
8.	Join shoulders. a. Join the back to front yokes, face to face, 5/16 to 3/8 inch from raw edge, simultaneously stitching and overedging in one operation.	515 516 or 519	SSa-2	8-10	70	70
9.	Attach sleeves. a. Join sleeve to armhole, 5/16 to 3/8 inch from raw edge, with shoulder seam folded towards back, simultaneously stitching and overedging in one operation.	515 516 or 519	SSa-2	8-10	70	70
10.	Join side and sleeve seams. a. Join side and sleeve seams, 5/16 to 3/8 inch from raw edge, matching the sleeve joining seam, simultaneously stitching and overedging in one operation.	515 516, or 519.	SSa-2	8-10	70	70
11.	Attach collar stand to neckline. a. Stitch bottom edge of top collarstand with fusible to neck edge 1/4 inch from raw edge according to notches.	301	SSq-2(a)	10-12	70	70
	b. Turn to finished position and topstitch 1/16 inch from folded edge through all plies to undercollar stand and continue around the front curved ends of the collarstand, if not previously stitched (see operation 5d).	301	Similar to SSq-2(b)	10-12	70	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
12.	Make cuffed hem (Type I shirt).					
	a. Fold bottom of sleeve opening inwards twice, in accordance with notches, and stitch periphery of opening 1/4 (± 1/16) inch from folded edge.	301	EFb-1	10-12	70	70
	b. Turn cuffed hem to finished position and press. Finished hem shall measure 1 1/4 (± 1/8) inches in width.					
13.	Make cuff (Type II shirt).					
	a. Position fusible on back of cuff so that when fused it will be against outer fold of the cuff. Press fusible in accordance with direction of fusible manufacturer.					
	b. Fold cuff lengthwise and stitch the two sides face to face 1/4 to 5/16 inch from raw edge.	301	SSa-1	10-12	70	70
	c. Turn to finished position and force out points.					
14.	Set in cuffs (Type II shirt).					
	a. Shirr bottom of sleeve opening between notches.	301	OSa-1	10-12	70	70
	b. Join, face to face, cuff to shirred part of sleeve opening, 1/4 to 5/16 inch from raw edge, with the fused side against sleeve.	301	SSa-1	10-12	70	70
	c. Overedge raw edge of sleeve opening.	503 or 504 or 602	SSa-1	8-10	70	70
	d. Operations a, b, and c may be done in one operation.	515,516 or 519	SSa-2	8-10	70	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
14.	Set in cuffs (Type II shirt)(cont'd)					
	e. Turn cuff to finished position and fold bottom of sleeve opening between cuffs 1/4 to 5/16 inch and stitch 1/8 to 3/16 inch from fold edge starting 1/4 inch from buttonhole side of cuff and ending 1/4 inch past cuff at button side.	301	EFa-1	10-12	70	70
	f. Turn cuff inside out again and form a 1/4 to 3/8 inch pleat by placing a 1/4 inch tack across seam allowance.	301	tack	4-6 stitches per tack	70	70
	g. Turn cuff to finished position. The cuff shall measure 2 3/4 (± 1/4) inches wide.					
15.	Hem shirt bottom.					
	a. Overedge bottom edge of shirt.	503 or 504 or 602	EFd-1	8-10	70	70
	b. Fold back bottom of facings in accordance with notches, face to face, and stitch across width of facing 3/8 (± 1/8) inch from bottom edge. Turn to finished position.	301	SSe-2(a)	10-12	70	70
	c. Turn up bottom edge of shirt forming a 3/8 to 1/2 inch hem and stitch entire bottom edge of shirt, 1/4 to 5/16 inch from turned bottom edge of shirt.	301	EFa-1 and SSe-2(b)	10-12	70	70
16.	Buttonholes.					
	a. Buttonholes shall be 5/8 inch long, straight style, barred at both ends and stitched through the facing.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction on shirts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
16.	Buttonholes. (cont'd) b. Place one horizontal buttonhole in right side of collarstand as indicated by pattern marks.	Buttonhole		42-46 per buttonhole including tacks	50	50
	c. Place six vertical buttonholes on the right front 5/8 (± 1/8) inch from right front edge as indicated by pattern marks.	Buttonhole		42-46 per buttonhole including tacks	50	50
	d. Place two horizontal buttonholes on each cuff as marked on patterns (Type II shirt only).	Buttonhole		42-46 per buttonhole including tacks	50	50
17.	Buttons. a. Stitch seven buttons on each left front through facings, 5/8 (± 1/8) inch from front edge to correspond with center of buttonholes, when buttons of fronts are aligned.	101 or 301		20-24 or 14-16 per button	50 50	50
	b. Position and attach, 1/2 (± 1/8) inch from each side of cuff, two buttons to match corresponding buttonholes when bottom edges of cuff are aligned (Type II only).	101 or 301		20-24 per 14-16 per button	50 50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
18.	Cleaning and pressing. a. Clean, trim and remove all loose thread ends. b. Remove all spots and stains. c. Remove all shade tickets. d. Press entire shirt neatly. e. Button shirt.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. The sizes and measurements for the finished shirts shall be as shown in Table II. All measurements are expressed in inches.

Table II - Sizes and measurements

A Collar	B Bust (Buttoned)			C Center Back Length	Sleeve Length Long		Sleeve Length Short
13	32	34	36	25 5/8	31	33	3 1/2
13 1/2	34	36	38	25 13/16	31	33	3 1/2
14	36	38	40	26	31	33	3 1/2
14 1/2	38	40	42	26 3/16	31	33	3 1/2
15	40	42	44	26 3/8	31	33	3 1/2
15 1/2	42	44	46	26 9/16	31	33	3 1/2
16	44	46	48	26 3/4	31	33	3 1/2
16 1/2	46	48	50	26 15/16	31	33	3 1/2
17	48	50	52	27 1/8	31	33	3 1/2
Tol ± 1/8	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/4

Letters A, B, and C refer to figure 1 except where otherwise specified. Shirts shall be fully buttoned, laid flat, and smoothed out.

A. Collar - Measure from center of collar button to front cut-end of buttonhole with collar in flat position.
B. Bust - Twice the measurement taken from folded edge to folded edge at base of armhole.
C. Center back length - Measurement taken at center back from collar setting seam to bottom edge of shirt.

Sleeve length

a. Short sleeve - Measurement taken along inseam from underarm seam to bottom edge of sleeve.
b. Long sleeve - Measurement taken from center back of collar stand seam, across shoulder, along outer folded edge of sleeve to bottom edge of cuff.

3.9 Workmanship. The finished shirt shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or puchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classfied as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in the specification or applicable purchase documents. In addition, testing shall be performed on the component listed in Table III for the characteristic noted. Whenever applicable, tests shall be conducted in accordance with method prescribed in FED-STD-191. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final result.

4.4.1.1 Sampling for testing. Unless otherwise specified, the test sample shall be two sample units, regardless of end item lot size. The lot size shall be unacceptable if any unit fails to meet any test requirement specified. The sample unit for testing the fused cloth shall correspond to the area which is intended to be fused in 4.4.2.1. All fused samples for Table III testing shall be performed on the end item manufacturer's equipment.

Table III - Component Testing

Characteristic	Requirement paragraph	Test method
Stiffness	3.3.2	
Initial		5206
After 25 launderings		AATCC-124-1978 1/ and 5206
Peel strength	3.3.2	
Initial		4.4.1.2
After 25 launderings		AATCC-124-1978 1/ and 4.4.1.2
Appearance of fused sample	3.3.2	
Initial		Visual
After 25 launderings		AATCC-124-1978 1/ and Visual
Thickness	3.3.2.1	Micrometer Caliper 2/

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

1/ One 15 X 15 inch specimen shall be laundered, wash temperature shall be 140° ± 5°F, drying shall be performed only after the 25th washing and the evaluation portion of the AATCC test method is not applicable. Pressing of the samples prior to evaluation is prohibited.
2/ Only the fusible interlining itself shall be measured for this characteristic.

4.4.1.2 Apparatus and procedure for peel strength testing. The apparatus to be used for this test shall be a commercial type spring scale accurate to 0.5 oz. The procedure to be followed in performing the test shall be as follows:

(1) Three 1 X 8 inch wide strips parallel to the warp direction shall be cut (one each from the right, middle and left side of the sample) for peel strength testing.
(2) Separate the fusible from the basic fabric at the end of the 1 inch wide strips for a distance of 2 inches.
(3) Secure the end of the basic fabric to a lightweight clamp-like holder 1 inch or more in width and approximately 1.0 ounce in weight. Hang the clamp to the end of the spring scale.
(4) Position the fusible in another clamp 1 inch or more in width and pull the fusible downwards in a vertical direction with a steady continuous motion until complete separation of the fusible from the sample. Minimum peel strength reading shall be taken visually from the spring scale. Failure of any individual strip shall indicate failure of the sample.

NOTE: Care shall be taken not to jerk the fabric during the testing.

4.4.2 In-process inspection.

4.4.2.1 Sample size. The size of the fused check sample shall correspond to the total area covered by the collars, collar stand or cuffs which are fused at one time of the press.

4.4.2.2 Number of check samples. One check sample (see 4.4.2.1) shall be prepared following fusing of every 400 collars, collarstands or cuffs, as applicable, and tested for the characteristics in 4.4.2.3 and 4.4.2.4.

4.4.2.3 Appearance of the fused check sample. Each check sample shall be visually inspected for color change, bleed through and bubbling. If there is any evidence of these conditions present, the previously fused 400 collars, collarstands or cuffs, shall be inspected for the above conditions. Any collar, collarstands or cuffs exhibiting one of these conditions shall be removed from the lot.

4.4.2.4 Peel strength. The method of testing shall be as specified in 4.4.1.2. If the check sample fails the peel strength test, the previously 400 fused collars, collarstands or cuffs and check sample shall be re-fused after the fault has been corrected. If the check sample fails a second time, the 400 collars, collarstands or cuffs shall be rejected.

4.4.3 Examination of the end item. Examination of the end item shall be in accordance with 4.4.3.1 and 4.4.3.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.3.3. The sample unit shall be one shirt. The lot size shall be expressed in units of shirts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.3.1 Visual examination. The shirts shall be visually examined for the following defects:

Defect	Classification Major	Minor A	Minor B
MATERIAL DEFECTS AND WORKMANSHIP DAMAGES			
a. Hole, cut, tear, smash, mend, needle chew, burn, drill hole, scorched area, or open place:			
1. On outside	X		
2. On inside (longest dimension in any direction):			
(a) -up to 1/4 inch inclusive			X
(b) -more than 1/4 inch		X	
b. Missing yarn, broken yarn, thin place, shade bar, misweave, woven in waste, loose yarn or snagged thread - on outside	X		
c. Knot or slub in excess of maximum limit specified in the reference basic cloth specification			X
d. Permanent crease in cloth (when crease is caught in seaming or stitching) - on outside	X		
NOTE: Defects b and c shall not be scored on the underply of the collar or when they occur below bottom front button on front of shirt.			
SHADED PARTS			
a. Outside part shaded, except under ply of collar	X		
b. Under ply of collar and collarstands do not approximate shade of outside parts			X
c. Variation in shade within an outside part	X		
CLEANNESS			
a. Spot or stain on outside (except undercollar):			
1. Grease, ink, or oil with dirt	X		
2. All others, 1/4 inch or more in longest dimension		X	
3. All others, up to 1/4 inch in longest dimension			X
b. Two or more shade or size tickets not removed			X
c. Any shade or size marking visible on outside	X		
d. Three or more thread ends not trimmed to 1/4 inch or less			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
COMPONENTS AND ASSEMBLY			
a. Any component part or operation omitted (unless otherwise classified herein)	X		
b. Any component not as specified (type, size, color,etc)	X		
c. Any component part tight, twisted, distorted, pleated or full, seriously affecting appearance (unless otherwise classified herein)		X	
d. Any operation not as specified (unless otherwise classified herein)			X
CUTTING			
Any component part not cut in conformance with specification requirements	X		
PRESSING			
a. Pressing omitted (entire shirt)		X	
b. Poorly pressed			X
SEAMS AND STITCHING			
a. Accuracy of seaming:			
1. Seam badly puckered except where shirred (score only when on major portion of seam)			X
2. Seam badly twisted, irregular, pleated or wavy		X	
3. Part of shirt caught in any unrelated operation or stitching		X	
4. End of stitching when not caught in another seam or stitching backtacked less than 3/8 inch			X
5. Ends of a continuous line of stitching overlapped less than 1/2 inch		X	
6. Varying shade of thread used on outside of same shirt	X		
7. Thread breaks secured by stitching back of the break less than 1/2 inch			X
8. Any turned seam not properly forced out (unless otherwise classified herein)		X	
b. Gauge of stitching and seam allowance:			
1. Irregular or not within range specified (score only when condition exists on major portion of seam or stitching)			X
2. Seam allowance not as specified		X	
3. Edge or top stitching too close to edge resulting in damage to cloth	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
SEAMS AND STITCHING (cont'd)			
c. Open seams:			
1. All seams:			
(a) -up to 3/8 inch (inclusive)			X
(b) -more than 3/8 inch up to 3/4 inch (inclusive)		X	
(c) -more than 3/4 inch	X		
NOTE: A safety-stitched seam shall be considered open when either the inside stitch or the overedging is broken. A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped or runoff stitches occur.			
d. Runoff, broken or skipped stitches:			
1. On joining seam, score as open seam			
2. Edge or raised stitching (when not resulting in an open seam):			
(a) -up to 1/2 inch inclusive			X
(b) -more than 1/2 inch		X	
3. On overedge stitching, more than 1/2 inch			X
e. Raw edge:			
1. On outside:			
(a) -up to 3/8 inch inclusive			X
(b) -more than 3/8 inch		X	
2. On inside:			
(a) -more than 2 inches		X	
(b) -1/2 inch up to 2 inches			X
f. Seam and stitch type:			
1. Not specified seam or stitch type		X	
2. Any required line of stitching omitted		X	
3. Any line of stitching not beginning or ending where specified			X
4. Any seam not lapped or finished as specified		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
SEAMS AND STITCHING (cont'd)			
g. Stitch tension:			
1. Loose tension resulting in a loose seam	X		
2. Loose tension on top or edge stitching resulting in exposed loose thread			X
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X		
h. Stitches per inch (score only when condition exists on more than half the length of seam or stitching):			
1. Less than the minimum specified (except on label stitching and hem overedging)		X	
2. More than the maximum specified			X
3. Label stitching and hem overedging:			
-one or more stitches less than the minimum specified			X
BUTTONHOLES			
a. Omitted, added, not specified type or not finished as specified	X		
b. Misplaced or not positioned as specified	X		
c. Ragged edge; incomplete stitching; stitching not securely caught in fabric or finished cut length not as specified		X	
d. Broken stitch or two or more skipped stitches		X	
e. Buttonhole stitching extending beyond bartack; stitches per buttonhole less than 42 per buttonhole including tack			X
BUTTONS			
a. Omitted, broken, defective, misplaced, not positioned or attached as specified or insecurely sewn		X	
b. Not specified size, type, or color			X
c. Stitching not locked at end of cycle (tug at loose end of thread when accessible to determine if it will ravel)			X
d. Stitching not caught through facing			X
COLLAR			
a. Any pleat, pucker, or crease:			
1. On top ply of collar		X	
2. On under ply of collar			X
b. Collar edge irregular or curled		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
COLLAR (cont'd)			
c. Upper ply of collar exposed beyond edge of topcollar more than 1/16 inch for a distance of more than 1 inch		X	
d. Width of collar at center back not 1 1/2 (± 1/8) inches		X	
e. Ends of collar or shirt front corners not securely caught in joining seam to collarstand	X		
f. Collar not equal in length by more than 1/4 inch (with collar turned up, measure from bottom front edge of collar to shoulder seam)		X	
g. Collar points:			
1. Points uneven in length by:			
(a) -1/8 to 3/8 inch inclusive		X	
(b) -more than 3/8 inch	X		
2. Points bulky, poorly shaped, not of uniform shape or not properly forced out		X	
3. Length of points less than 4 inches or more than 4 1/2 inches		X	
COLLARSTAND			
a. Tight at joining to neckline causing puckers or pleats on front or back		X	
b. Width of collarstand at center back less than 1 3/8 inches or more than 1 5/8 inches		X	
FRONTS			
a. Closure			
1. Buttons and buttonholes out of alignment causing a noticeable bulge on fronts when buttoned		X	
2. Length of fronts uneven at bottom when buttoned by:			
(a) -3/8 to 3/4 inch inclusive			X
(b) -more than 3/4 inch		X	
3. Length of fronts uneven at neckline when buttoned by 1/4 inch or more		X	
b. Front buttonholes (position):			
1. Not positioned as indicated by pattern marks		X	
2. Out of vertical alignment by 3/16 inch or more		X	
3. Positioned less than 1/2 inch or more than 3/4 inch from center of buttonhole to finished front edge		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
FRONTS (cont'd)			
c. Front button (position):			
-One or more buttons positioned less than 1/2 inch or more than 3/4 inch from front edge			X
d. Front facings:			
1. Inner raw edge not turned and stitched when selvage is not utilized		X	
2. Neck edge not completely caught in collar seam	X		
SLEEVE			
a. Setting:			
1. Reversed, i.e., left sleeve in right armhole; right sleeve in left armhole	X		
2. Sleeve tight at armhole, causing pleats or excessive puckers on front, back or sleeve		X	
3. Ends of armhole seam staggered at side seam by:			
(a) -1/4 inch to 1/2 inch inclusive			X
(b) -more than 1/2 inch		X	
b. Sleeve hem (Type I shirt)			
1. Sleeve puckered or pleated in stitching of hem, seriously affecting appearance	X		
2. Hem twisted, puckered, or pleated, seriously affecting appearance	X		
3. Sleeve hem less than 1 1/8 inches or more than 1 3/8 inches			X
4. Sleeve hem irregular in width by 3/16 inch or more			X
c. Cuffs (Type II shirt)			
1. Reversed, i.e., buttonhole on underside and button on top side	X		
2. Cuff measurement not as specified		X	
3. Irregular in width by more than 3/16 inch			X
4. Buttonholes not positioned as specified			X
5. Buttons:			
(a) less than 3/8 inch or more than 5/8 inch from side edge of cuff			X
(b) Not matching corresponding buttonholes when button cuff edges are aligned, causing pucker on cuff			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
LABELS			
a. Combination label:			
1. Missing, incorrect, or illegible		X	
2. Not positioned as specified			X
3. Not stitched on one or more sides			X
FUSIBLE			
a. Omitted, or twisted causing puckers or pleat on outside of collar, collarstand or cuffs	X		
b. Any evidence of bleed through, bubbling or color change	X		

4.4.2.2 Dimensional examination. The shirt shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from the nominal dimensions and tolerances in Table II shall be scored as a measurement defect.
b. Sleeve lengths uneven by 1/2 inch or more shall be scored as a size measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units (DHU) shall be as follows:

	AQL's	Inspection level
For visual examination in 4.4.2.1		
Major	1.0	III
Major, Minor A (combined)	10.0	III
Total (Major, Minor A, Minor B combined)	15.0	III
For dimensional examination in 4.4.2.2		
One class	4.0	S-3

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling; bulging or distorted containers; open and non-continuous heat sealed seams and closure of polyethylene bag. 1/; alternative closure of polyethylene bag not provided with tuck or reverse flap. 1/; ommision of vent hole in polyethylene bag. 1/; incorrectly fabricated bag. 1/.
Content	Number of shirts per intermediate package is more or less than required. 1/
	Number of intermediate packages per shipping container is more or less than required. 1/
	Size shown on shirts not as specified on intermediate package of shipping container. 1/

1/ When applicable.
2/ For these defects, two shipping containers in the sample shall be examined.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each fully buttoned shirt shall be folded in accordance with standard commercial practice to approximate dimensions of 14 inches in length by 10 inches in width. The folded shirt shall be secured with stainless steel, tin or nickel plated brass pins, aluminum clips or plastic fasteners. Each shirt shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (± 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. As an alternate, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap in which a heat seal closure and corner hole are not required.

5.1.1.1 Intermediate packaging. Five shirts of one type, class, and size only, and packaged as specified in 5.1.1, shall be reversed end for end and placed five in depth with the top shirt inverted in a set-up paperboard box conforming to type II, variety I, class A, style 4 of PPP-B-676 or a metal stayed box conforming to style B of PPP-B-665. Outside dimensions of the set-up or metal stayed box, cover included, shall be 14 3/4 inches in length, 11 1/2 inches in width and 3 3/4 inches in depth. The depth of the cover shall be 1 inch.

5.1.2 Level C. Shirts shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A. Forty (40) shirts (8 set-up boxes of 5 shirts each) of one type, class, and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed, and reinforced conforming to class weather-resistant, type CF, variety DW, grade V15c, size 3A of MIL-B-17757. The liner shall be type CF, class water-resistant, in accordance with the requirements of MIL-B-17757. Place two stacks of 4 set-up boxes, each flat in the container, with the length of the set-up boxes parallel to the end panels of the container. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

* 5.2.2 Level B. Forty (40) shirts (8 set-up boxes of 5 shirts each) of one type, class, and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed, and reinforced conforming to class domestic, type CF, variety DW, grade 275, size 3A of MIL-B-17757. The liner shall be type CF, class domestic, in accordance with the requirements of MIL-B-17757. Place two stacks of 4 set-up boxes, each flat in the container, with the length of the set-up boxes parallel to the end panels of the container. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C. Shirts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bags. The polyethylene bags, as specified in 5.1.1, shall have the stock number of the item and size, legibly printed or stamped in black block letters directly on the bag across the center face or on a white paper label which shall be inserted within the bag so as to permit ready identification.

5.3.2 Label, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The shirts are intended for wear by female personnel of the Coast Guard.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Type, class, and size required (see 1.2).
c. Levels of packaging and packing required (see 5.1 and 5.2).
d. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
e. When a first article inspection is required, the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU


User Activity:
Navy - CG

Preparing Activity:
Navy - NU


Project No. 8410-N517

☆ U.S. GOVERNMENT PRINTING OFFICE: 1982—505-022/4703


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

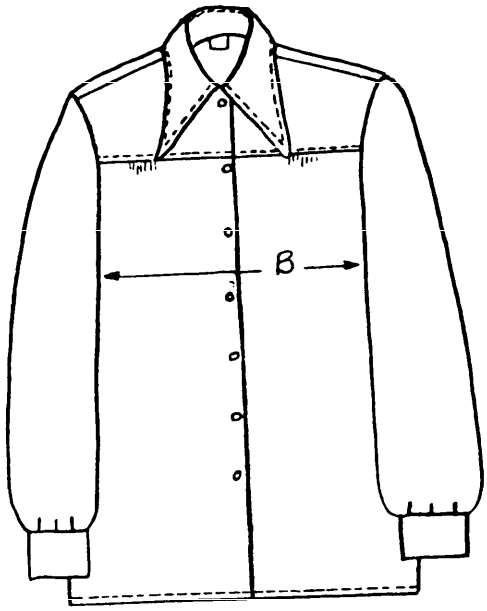


FRONT

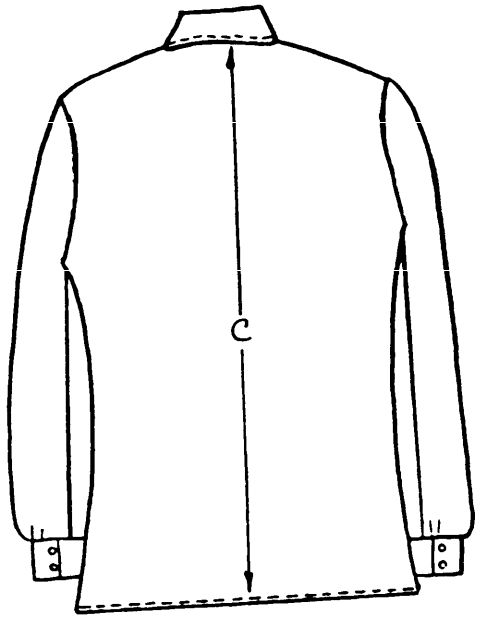

BACK

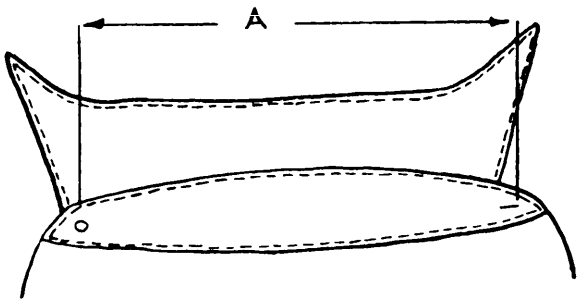

COLLAR

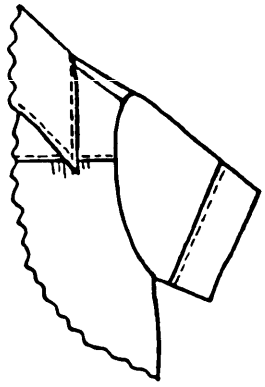

SHORT SLEEVE

FIGURE 1

SHIRT, WOMAN'S, POLYESTER/COTTON (CG)

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-87006A(CG) Shirt, Woman's, Polyester/Cotton (CG)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer In Charge
Navy Clothing and Textile Research Facility
21 Strathmore Road
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.