MIL-S-87013D(CG)
3 August 1988
SUPERSEDING
MIL-S-87013C(CG)
22 September 1982

MILITARY SPECIFICATION

# SLACKS, WOMEN'S, UNDRESS

*This specification is approved for use by the United States Coast Guard, and Department of Transportation, and is available for use by all Departments and Agencies.

## 1. SCOPE

1.1 Scope. This specification covers the requirements for women's slacks fabricated from a polyester/cotton fabric.

1.2 Classification. The slacks shall be of one type in the following sizes and lengths (see 6.2).

1.2.1 Sizes. 6, 8, 10, 12, 14, 16, 18, 20, and 22.

1.2.2 Lengths. Short, regular, long, and extra long.

## 2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement there to, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

* DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* SPECIFICATIONS

FEDERAL

| | |
|---|---|
| V-B-871 | -Button, Sewing Hole, and Button, Staple (Plastic) |
| V-F-106 | -Fasteners, Slide, Interlocking |
| V-T-276 | -Thread, Cotton |
| V-T-280 | -Thread, Cotton, Gimp, Buttonhole |
| V-T-295 | -Thread, Nylon |
| NN-P-71 | -Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial) |
| CCC-C-438 | -Cloth, Buckram, Cotton |
| DDD-L-20 | -Label; for Clothing, Equipage, and Tentage (General Use) |

MILITARY

| | |
|---|---|
| MIL-P-15011 | -Pallet, Material Handling, Wood, Post Construction, 4 Way Entry |
| MIL-B-17757 | -Boxes, Shipping, Fiberboard (Modular Sizes) |
| MIL-C-29127 | -Cloth, Twill, Polyester/Cotton (Crease-Resistant Finish) |
| MIL-T-43548 | -Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered |
| MIL-C-43718 | -Cloth, Polyester; Polyester and Cotton; Polyester and Rayon, for Pockets |
| MIL-C-43920 | -Cloth, Interlining, Cotton or Synthetic and Nylon |

* STANDARDS

FEDERAL

| | |
|---|---|
| FED-STD-751 | -Stitches, Seams, and Stitchings |

MILITARY

| | |
|---|---|
| MIL-STD-105 | -Sampling Procedures and Tables for Inspection by Attributes |
| MIL-STD-129 | -Marking for Shipment and Storage |
| MIL-STD-147 | -Palletized Unit Loads |

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

following information:

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402-0001).

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Buttons

Department of Defense Standard Shades for Sewing Threads

(Application for copies of color cards should be addressed to the Color Association of the U.S., 343 Lexington Avenue, New York, NY 10016).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, Inc., Attn: Traffic Department, 1616 P Street, NW, Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606-5808).

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2) the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials.

* 3.3.1 Basic material. The basic cloth shall be a polyester/cotton crease-resistant finish twill, shade Blue 3362, conforming to class 1 of MIL-C-29127. The piece number shall be 78349.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.2 Pockets and linings. The material for the pocket, waistband lining and left fly lining shall be a twill cloth conforming to class 1 of MIL-C-43718. The color shall be black 423.

* 3.3.3 Buckram. The material for interlining waistbands shall be cotton buckram conforming to type II, class 1 or type IV, class 1 of CCC-C-438. The color shall be white, bleached, unbleached, or black for the slacks.

* 3.3.4 Waistband stabilizer. The material for the waistband stabilizer shall be interlining cloth conforming to type I of MIL-C-43920.

3.3.5 Thread.

* 3.3.5.1 Thread, polyester, covered. The thread used for stitching and seaming the slacks shall be polyester core thread conforming to the requirements of MIL-T-43548 except that the use of polyester-covered polyester core thread is not allowed. The thread shall be shade Black AA, Cable No. 66043 conforming to the Department of Defense Standard Shades for Sewing Threads and in the following sizes:

| Operation | Ticket No. | Ply |
|---|---|---|
| Seaming, stitching and tacking | 50, 70 | 2 or 3 |
| Button sewing | 16, 24 | 2 or 3 |
| Bartacks and buttonhole | 50 | 2 or 3 |

* 3.3.5.2 Thread, cotton. As an alternate to the polyester core thread, a cotton thread conforming to V-T-276, type I, may be used. The color shall be the same as specified above in the following types and sizes.

| Operation | Type | Ticket No. | Ply |
|---|---|---|---|
| Seaming and stitching | IA3 | 30, 50 | 3 |
| Overedging | IA3 | 70 | 2 |
| Bartacking, and buttonhole | IC2 | 0 | 3 |

3.3.5.3 Automatic button sewing. If an automatic machine which sews and shanks (wraps) the buttons in one operation is used, the thread shall be waxed nylon monocord special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per pound of 2150 yards, and shall be tested for these requirements and for colorfastness (3.3.5.5) in accordance with test methods V-T-295.

* 3.3.5.4 Automatic pocket machine. When an automatic pocket machine using a 101 stitch type is used, the thread shall be type IC2, ticket No. A, 3 ply conforming to V-T-276. When an automatic pocket machine using a 301 stitch type is used, the thread shall be ticket No. 50, 2 or 3 ply conforming to MIL-T-43548. The color shall be as stated in 3.3.5.1.



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

* 3.3.5.5 Colorfastness. The dyed threads shall show colorfastness to laundering and light equal to or better than the standard sample when tested as specified in V-T-276 or MIL-T-43548. As a limit of acceptability or when no standard sample is available, the thread shall show a minimum of "good" colorfastness to laundering and light when tested as specified in MIL-T-43548.

3.3.6 Gimp. The gimp for reinforcing buttonholes shall be cotton, No. 8 conforming to type I or II of V-T-280. The color shall match Black shade AA, Cable No. 66043 in accordance with the Department of Defense Standard Shades for Sewing Threads.

* 3.3.6.1 Colorfastness. The colored gimp shall show fastness to laundering equal to or better than standard sample. As a limit of acceptability or when no standard sample is available, the colored gimp shall show a minimum of "good" colorfastness to laundering.

3.3.7 Slide fasteners. The slide fasteners shall conform to either 3.3.7.1 or 3.3.7.2.

3.3.7.1 Slide fasteners, metal. The slide fastener shall conform to type I, style 3 (pre-assembled), short tab pull, size LS, of V-F-106, except that the salt spray test shall not be required. All metal components of the slide fastener shall be fabricated from brass and from the same supplier (see 4.4.1). The tape shall be cotton or synthetic or a combination.

3.3.7.2 Plastic coil slide fasteners. The slide fastener shall be type I, style 1a (continuous chain) or 3 (pre-assembled), size LS of V-F-106. The tape shall be woven from 100% polyester or blends of nylon/cotton, polyester/cotton, or polyester/rayon. The slide fastener chain shall be a continuous monofilament nylon or polyester coil. The slide shall have an automatic lock with a short tab pull (see 4.4.1). A closed end stop or a staple stop is required for the style 3, and shall be applied to the style 1a. The complete slide fastener shall not shrink more than 2 percent when tested as specified in V-F-106 (see 6.4).

* 3.3.7.3 Color. The color of the slide fastener tape shall approximate the shade of the basic material. The plastic coil may be colorless or approximate the shade of the basic material. The metal components will be brass colored.

* 3.3.7.4 Colorfastness. The dyed slide fastener tape shall show colorfastness to laundering equal to or better than the standard sample when tested as specified in V-F-106. As a limit of acceptability or when no standard sample is available, the tape shall show a minimum of "good" colorfastness when tested as specified in V-F-106.

3.3.8 Label.

* 3.3.8.1 Combination label. Each pair of slacks shall have a combination identification, instruction and personal label conforming to type VI, class 10 and 15 of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply. The inscription shall be as follows:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

NAME:
SERVICE NO.:
SLACKS, WOMEN'S, UNDRESS
FIBER CONTENT: Polyester(50%)/Cotton(50%) (Example)
CONTRACT NO.: DLA 100-00-0-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (if other than contractor)

Machine Wash - Warm Water
Tumble Dry - Gentle
Remove Promptly

* 3.3.8.2 Size label. The size label for the slacks shall conform to type VI, class 2 and shall bear the following inscription:

Size 14R (Example)
Stock No.: 8410-00-000-0000 (Example)

Note: The lengths (Short, Regular, Long, and X-Long) may be abbreviated as S, R, L, or XL.

3.3.9 Hook and eye. The hook and eye shall be nickle plated finish, North and Judd (Hook Flex H-49, K-50, H-89, and E-90); Universal Button Co., (Talon #3, #7, and #8 hook with #8 eye or #85 eye); Akim Co. or Patwin, Inc., Junior Series, type JB; Stimpson (P-536; D-4086, D-4457); Rau (0A50, 0X 1256, 080415); Patwin, Inc. (Slim-Slak with MB eye, and Slik-Slak) or functionally interchangeable equivalent (see 6.5).

* 3.3.10 Button. The button for the left hip pocket shall be type II, class D, style 4, 22-line conforming to V-B-871. The color of the button shall be Black BT, Cable No. 62001, in accordance with the DOD Standard Shades for Buttons.

3.4 Design. The slacks shall have front and back waist darts, quarter top pockets on each front at hips, two section waistband with seat seam outlet, front closure slide fastener and two double welt style pockets on backs. The legs shall be flared and unhemmed (see figure 1).

3.4.1 Figures. The figures are furnished for information purposes only. When inconsistencies exist between the specification and the figures, the specification shall govern.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow 5/16 inch seam allowance for all seams, except as otherwise indicated in Table II. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way except that additional notches for use during construction are allowed on the working patterns.

3.5.1 List of pattern parts. The component parts of the slacks shall be cut from materials as specified and in accordance with the pattern parts required for the manufacturing process as follows:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - List of Pattern Parts

| MATERIAL | NOMENCLATURE OF PATTERN PARTS | CUT PARTS |
|---|---|---|
| Basic Material | Front | 2 |
| | Back | 2 |
| | Waistband | 2 |
| | Side pocket bearer | 2 |
| | Side pocket facing | 2 |
| | Hip pocket bearer | 2 |
| | Hip pocket narrow facing | 2 |
| | Left fly | 1 |
| | Right fly facing | 1 |
| | Right fly interlining | 1 |
| Cloth, twill cloth | Side pocket | 2 |
| | Hip pocket | 2 |
| | Left fly lining | 1 |

*Note: Patterns are not furnished for belt loops, waistband lining, waistband stabilizer, and waistband interlining (buckram). See Table II, operation 1 for their requirements.

3.6 Construction.

* 3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in Table II shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation any one of them may be used. Seam allowances shall be maintained with seam sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the slacks. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. Edgestitching and topstitching shall be 1/16 to 1/8 inch from folded edge except as otherwise specified. The bight of the overedge stitching shall be 3/16 inch. The guide and knife (when permitted) shall be set to trim only the ravelled ends of the fabric. The use of a trimming knife in the overedging of the right fly in operations 4b. and 9b. is prohibited. The buttonhole shall be cut clean and the stitching shall be securely caught in the fabric. Bartacks shall be 3/8 ($\pm$1/16) inch in length and the width shall be 1/8 ($\pm$1/32) inch.

3.6.1.1 Stitches per inch. The minimum number of stitches per inch shall be as specified in Table II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.6.1.2 Thread breaks and ends of seams. Ends of all seams and stitching when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be repaired by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type (except on seat seam) may be repaired by using 301 stitch type. The seat seam must be resewn. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked. Thread ends of darts shall be trimmed to a length of 1/2 inch. When an automatic dart machine is used, the ends shall be back stitched with not less than 3 stitches and shall be trimmed. A 1/2 inch chain shall extend from the end of 401 stitching at the outseams and inseams.

3.7 Buttonhole. The buttonhole shall be an eyelet-end, cut after, taper-bar type worked over gimp with the end securely tacked. The finished cut length shall be 5/8 to 3/4 inch. The purling shall finish toward the outside of the slacks.

* 3.8 Shade and size marking. The component parts shall be marked or ticketed to insure a uniform shade and size throughout the slacks. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on shade tickets.
(c) Adhesive type tickets, which leave traces of paper or adhesive on material after removal of tickets.

3.9 Manufacturing operations requirements. The slacks shall be manufactured in accordance with operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations provided the finished slacks are identical to that produced by following the sequence listed in Table II.

3.9.1 Pressing. All pressing required in Table II shall be performed with a heated pressing iron or machine.

3.9.2 Abbreviations in table of operations. The abbreviations used in Table II are as follows:

| | | |
|---|---|---|
| Stch | - | stitch |
| in | - | inch |
| Ndl | - | Needle |
| Bob | - | Bobbin |
| Lpr | - | Looper |
| Mchne | - | Machine |
| Brtck | - | Bartack |
| Comrcl | - | Commerical |
| smlar | - | similar |
| Btnhl | - | Buttonhole |
| incl | - | including |
| dbl | - | double |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| 1. | Cutting | | | | | |
| | a. Cut the slacks in strict accordance with patterns furnished, which show size, placement of component parts, directional lines for cutting, drill marks (for finished length of darts) and notches for proper assembling of parts. | | | | | |
| | b. Cut all basic material parts of the slacks out of one piece of material, except right fly facing and left fly, including right fly interlining, pocket facings, hip pocket bearer, and belt loops, which may be cut from ends. Parts cut from ends shall approximate the shade of slacks. | | | | | |
| | c. Place fronts and backs so that the directional line is in the warp direction. The directional line may vary from the warp direction by not more than 1 inch on fronts and backs. Measurements shall be taken from the top and bottom of the directional line on the pattern to the selvage edge of the fabric. The difference between the two measurements shall not exceed the tolerance specified. | | | | | |
| | d. The belt loops shall be cut of sufficient width to finish 5/8 to 3/4 inch wide and comply with operation 13. | | | | | |
| | NOTE: The cut width of the belt loops will vary depending on which option of operation 13 is used. | | | | | |
| * | e. The waistband lining, stabilizer, and waistband interlining (buckram) shall be cut of sufficient width to finish as specified in operation 14. The waistband linings (curtain) may be a commercial type using the materials specified in 3.3.3 and 3.3.4. | | | | | |
| * | f. Cut pockets in the warp or filling direction. Cut as many as possible in the warp direction. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| 2. | Shade marking<br>a. All parts of the basic material shall be marked or ticketed to insure a uniform shade and proper assembly throughout the slacks except parts cut from the ends.<br><br>b. The use of corrosive metal fastening devices or sewn-on tickets for shade marking is prohibited.<br><br>c. The use of an ink pad numbering machine, rubber stamp, or pencil is acceptable provided the numbers do not show on the outside of the slacks and whenever possible, numbers shall be covered by the seam allowance. | | | | | |
| 3. | Replacement of defective components<br>During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched components. | | | | | |
| 4. | Overedge stitching | | | | | |
| * | a. Overedge stitch the raw edges of outseams, inseams, and top edge of fronts and backs, bottom edge of each leg and left front edge of foreparts. | 503 or 504 or 602 | EFd-1 | 8-10 | 70 | 70 |
| * | b. Overedge stitch the raw edges of crotch seam, seat seam and back edge of left fly. The back edge of the left fly may be overedged to fastener tape (see operation 9b). This operation is to be performed without the use of a trimming knife. | 503 or 504 or 602 | EFd-1 | 8-10 | 70 | 70 |
| * | c. Overedge stitch back edge of side pockets. | 503 or 504 or 602 | EFd-1 | 8-10 | 70 | 70 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| * | d. Overedge the back edge of the right fly facing and right fly interlining together. | 503 or 504 or 602 | EFd-1 | 8-10 | 70 | 70 |
| * | e. Overedge the right end of waistband. (See operation 15b). | 503 or 504 or 602 | EFd-1 | 8-10 | 70 | 70 |
| | NOTE: When a knife is allowed on serging machine the gauge shall be set so that the ravelled ends are trimmed but the edge of the fabric is not cut off. | | | | | |
| 5. | Make darts<br>The darts shall be tapered on the inside without twists or puckers. Thread ends at lower end of darts shall not be trimmed closer than 1/2 inch in length or when automatic dart machine is used the thread ends at lower end of dart shall be backstitched. | | | | | |
| | a. Fold and stitch darts as indicated by marks on patterns. | 301 or automatic dart machine | OSf-1 | 10-14 | 50 | 50 |
| | b. Press folded darts toward the center front and center back respectively. | | | | | |
| 6. | Attach side pocket facings, side pocket bearer, and label<br>a. Place facings and pocket bearers on pocketing according to marks on pattern. | | | | | |
| | b. Turn under back raw edges of facings and bearers 1/4 to 5/16 inch and stitch 1/16 inch from folded edge. Continue stitching across bottom raw edge. Facing with selvage edge need not be turned under. | 301 | LSd-1 and LSa-1 | 10-14 | 50 | 50 |
| | c. Stitch the combination label on all four sides to the outside bottom of the right side pocketing so the label shall face the slacks when worn. | 301 | LSbj-1 | 10-14 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| 7. | Attach side pockets | | | | | |
| | a. Seam raw edge of pocket facing and pocketing to each front 1/2 (± 1/16) inch from edge stopping at step of pocketing. Notch bottom of seam at step through all plies including outseam allowance of foreparts. Notching shall not extend beyond the width of outseam. | 301 | SSe-2(a) | 10-14 | 50 | 50 |
| | b. Turn pocket to the inside and edgestitch 1/4 to 3/8 inch from folded edge. Stitching shall extend from top raw edge of slacks to bottom bartack (see oper. 21d). | 301 | SSbe-2 (inverted) | 10-14 | 50 | 50 |
| 8. | Hanging side pockets | | | | | |
| | a. Align edge of pocket opening with notch of pocket bearer and with edges of pocket even at bottom of opening at outseam and mark fold of pocket. Trim end of facing at each lower pocket opening, eliminating bulk. Turn and fold pocketing, face side out. Seam bottom and rounded sides 3/16 to 1/4 inch from raw edge according to mark. | 301 or 401 | SSae-2(a) | 10-14 | 50<br>50 | 50<br>70 |
| | b. Turn pocket to finished position and edge stitch 1/4 to 5/16 inch enclosing raw edges in the seaming. | 301 | SSae-2(b) | 10-14 | 50 | 50 |
| | c. Place pocket opening on each bearer and attach with one row of edgestitching, 1/16 inch from edge. The edgestitching shall extend from top raw edge of slacks to the upper bartack. (See operation 21d). The finished opening shall measure 5 3/8 to 5 5/8 inches for all sizes. | 301 | LSbj-1 | 10-14 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| 9. | Make flies | | | | | |
| * | a. When style 3 (pre-assembled) slide fastener is used: Double stitch back edge of fastener tape to right fly facing and right fly interlining through both plies. The edge of the chain shall be 1/2 to 5/8 inch from front edge on the finished fly at top, tapering to 1/4 to 3/8 inch at bottom. the bottom stop shall finish at the fly notch. The top stop shall be placed no further than 1/4 inch from waistband joining seam (figure 2, illustration A). | 301 or 401 | SSau-2 | 10-14 | 50<br>50 | 50<br>70 |
| * | b. When style 1a (continuous chain) slide fastener is used: Double stitch back edge of fastener tape to right fly facing and right fly interlining through both plies. The edge of the chain shall be 1/2 to 5/8 inch from front edge on the finished fly at top, tapering to 1/4 to 3/8 inch at bottom. The coil shall extent past the fly notch at the bottom, and extend into the waistband at the top. The coil may be clipped below the fly notch to enable slider to be put on following center front seaming. (figure 2, illustration A). | 301 or 401 | SSau-2 | 10-14 | 50<br>50 | 50<br>70 |
| * | c. Seam fastener tape to back edge of left fly, with the bottom end of scoops not more than 1/2 inch above the fly notch, after fasteners are cut and scoops removed (figure 2, illustration B). As an alternate it may be overedged (see 4b). When stitch type 503 or 504 are used a trimming knife is not allowed. | 301 or<br>503 or<br>504 or<br>602 | SSa-1 | 10-14 | 50<br>70<br>70 | 50<br>70<br>70 |
| * | d. Seam the left fly lining to the front edge of the left fly to within 1 ±1/4 inches from top of fly, turn to final position, and stitch 1/16 to 1/8 inch from edge (figure 2, illustrations C and D). | 301 or<br>401 and<br>301 | SSe-2(a)<br><br>SSe-2(b) | 10-14<br><br>10-14 | 50<br>50<br>50 | 50<br>70<br>50 |
| 10. | Sew on right and left flies | | | | | |
| | a. Sew left fly to left front with notches matching, catching fastener tape in the seam (figure 2, illustration F). | 301 | SSa-1 | 10-14 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| | b. The end of the left fly lining shall extend beyond inseam not less than 1/2 inch. | | | | | |
| | c. Sew right fly assembly to right front with notches matching (figure 2, illustration G). | 301 | SSa-1 | 10-14 | 50 | 50 |
| | d. Turn right fly to the inside with seam 1/16 to 1/8 inch back of folded edge and press front edge flat without damage to slide fastener chain of style 3 slide fastener, (figure 2, illustration H). | | | | | |
| | e. Left fly seam may be pressed open and flat with the fastener tape facing the side seam. | | | | | |
| 11. | Make hip pockets<br>Finished appearance. The pockets shall be uniform in width and shall finish 6 1/4 (± 1/4) inches deep. Ends of openings where the cord facings are turned shall be neatly finished without raw edges or pleats. The right and left pockets shall be not less than 1/2 inch into the waistband and be caught in the bottom stitching of the waistband. The pocket openings shall finish not less than 5 1/4 (± 1/8) inches. | | | | | |
| | a. (1) Turn in raw edge of hip pocket bearer, center piece on pocket at notches as indicated on the pattern and stitch. When facing is cut on selvage, the edge need not be turned in (figure 3, illustration A). | 301 | LSd-1 | 10-14 | 50 | 50 |
| | * (2) Position narrow facing on outside of slack according to marks on pattern with the pocket assembly placed on the underside of the slack (as indicated by solid line on pattern) and stitch with two rows of stitching (figure 3, illustration B). | 301 | SSv-2 | 10-14 | 50 | 50 |
| | (3) Cut opening between two rows of stitching through all plies. Turn facing through opening and raise stitch, forming a 1/8 to 3/16 inch cord on lower edge of opening (figure 3, illustrations C, D, and E). | 301 | SSe-2 shows finished seam | 10-14 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| | (4) Turn in raw edge of narrow facing piece and seam to pocket. When cord facing piece is cut with selvage, the edge need not be turned in (figure 3, illustration E). | 301 | LSd-1 | 10-14 | 50 | 50 |
| | (5) Fold pocket, seam side edges and turn (figure 3, illustration F). | 301 or 401 | SSe-2(a) | 10-14 | 50<br>50 | 50<br>70 |
| | (6) Smooth out pocket and single stitch sides 3/16 to 1/4 inch from edges. Stitching may extend across bottom folded edge of pocket. The ends of the narrow facing and the bearer shall be caught in the edge stitching only (figure 3, illustration G). | 301 | SSe-2(b) | 10-14 | 50 | 50 |
| | (7) Form a 1/8 to 3/16 inch cord with the facing on upper edge of pocket opening and raise stitch the seam through all plies, closing the top of the pocket (figure 3, illustration H). | 301 | SSbe-2 | 10-14 | 50 | 50 |
| * | (8) Bartack ends of pocket opening through cord, bearer, and pocket. | Bartack | | 21-28 per bartack | 50 | 50 |
| | or | | | | | |
| * | (9) Operations (2) and (3) above may be accomplished with a double piped pocket machine which stitches, cuts and turns piped edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine. The machine manufacturer's recommended pocket stay material may be used. The joining seam of the bottom piping piece shall be raise stitched through back and piping piece and the joining seam of the top piping piece shall be raised through all plies in the closing of the top of pocket. Ends of pocket opening shall be securely bartacked. | 101 and 301 | | 10-14 | 50<br>50 | <br>50 |
| 12. | Join outseams | | | | | |
| * | a. Match notches of front and back at outseams and join 1/2 (± 1/16) inch from edge, except free edge of pocketing shall not be caught in the seaming. | 301 or 401 | SSa-1 | 10-14 | 50<br>50 | 50<br>70 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| * | b. Press outseams open and flat, positioning back overedged edge of pockets even with the edge of the back outseam allowance and stitch 1/8 to 1/4 inch from the edge. | 301 | SSa-1 | 10-14 | 50 | 50 |
| 13. | Make belt loops (see operation 1d) | | | | | |
| | a. (1) Make loops by folding a piece of the basic material to center with the edges abutted and double stitched not less than 1/4 inch gage with a covering stitch on the underside. | 406 | EFh-1 | 10-14 | 50 | 70 |
| | or | | | | | |
| | (2) Seam loop pieces, turn, smooth out, and flatten. The seam shall not be exposed on th side edge of the loop. | 301 | EFu-1 | 10-14 | 50 | 50 |
| | or | | | | | |
| | (3) Make loops by abutting folded edges and stitch with the line of stitching covering the abutted edges. The stitching shall not show through to the outside. | 105 | EFae-1 | 10-14 | 50 | |
| 14. | Make waistband linings | | | | | |
| | * Finished appearance. The waistband lining shall be made of the twill cloth and interlined with buckram and stabilizer. The waistband lining shall measure not less than 1 7/8 inches wide. The waistband stabilizer may be 1 inch shorter than the waistband lining at the seat seam. | | | | | |
| * | a. Overlap twill cloth (lining) on buckram (interlining) 3/4 inch and stitch, 1/8 to 3/16 inch from edge of twill cloth. Fold twill cloth over buckram and press. Position waistband stabilizer to the opposite remaining edge of buckram and stitch 1/2 inch from the edge. | 101 or<br>301 or<br>401 | LSa-1 | 8-10 | 50<br>50<br>50 | <br>50<br>70 |
| * | b. A commercial waistband conforming to the specified requirements may be used. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| 15. | Seam waistband and set belt loops<br>Finished appearance. The waistband shall finish smooth and flat without fullness, gathers or pleats. The waistband shall have the belt loops positioned with the ends (except the back center loop) inserted not less than 1/2 inch at bottom of waistband and caught in the stitching. The belt loops, when finished, shall be smooth and flat, and the waistband shall finish 1 3/4 (± 1/8) inches wide.<br><br>a. There shall be five loops for sizes up to and including size 12; and seven loops for size 14 and above. The loops shall be positioned as follows:<br><br>(1) One on each front centered between side seam and front.<br>(2) One adjacent to each side seam on backs of slacks.<br>(3) One on waistband with center of loop aligned with seat seam (see operations 22b and c).<br>(4) The extra two loops for larger sizes shall be positioned, one on each back centered between side seams and center back seam. | | | | | |
| * | b. Seam bottom edge of waistband to top edge of slacks, catching the ends of belt loops in position except center back loop. The right end of the waistband shall be overedge stitched and even with the back edge of the right fly. | 301 or<br>401 and<br>502 or<br>503 or<br>602 | SSa-1<br><br>EFd-1 | 10-14<br><br>8-10 | 50<br>50<br>70 | 50<br>70<br>70 |
| * | c. Press waistband seam open and flat. | | | | | |
| 16. | Seam waistband lining<br>Finished appearance. The hook and eye shall be attached to the waistband so that when both parts are engaged, the closure shall not bulge, twist, pucker, or be distorted. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| * | a. Seam top edge of waistband lining to top edge of waistband (right side) with the end of the lining even with the seam joining right fly to slacks, catching top edge of stabilizer and catching top ends of belt loops inserted not less than 1/2 inch between waistband and lining. | 301 or 401 | SSa-1 | 10-14 | 50<br>50 | 50<br>70 |
| * | b. (1) Seam top edge of waistband lining to top edge of waistband (left side) with the end of fly lining turned back and caught in the seaming and with the stitching continued across the end of the waistband, catching the left fly lining, top edge of stabilizer, and belt loops as described. | 301 or 401 | SSa-1 | 10-14 | 50<br>50 | 50<br>70 |
| | or | | | | | |
| * | (2) Join waistband lining to waistband by inserting the top edge of the waistband between the waistband lining and the buckram (with stabilizer), with the top edge of the lining turned in and seam with a row of simulated hand felled stitching. The front ends of the waistband shall be finished as specified above. | 404 | LSb-1 except buckram shall be on the underside | 10-14 | 50 | 50 |
| | (3) When imitation hand felling is used, the belt loops (except center back loop) shall be stitched to the seam allowance of waistband prior to felling the lining to the waistband. | 301 | SSa-1 | 10-14 | 50 | 50 |
| | c. Attach the hook through right waistband at center (1/4 inch tolerance permitted) with the rolled edge of hook aligned with slide fastener scoops. Attach through a suitable reinforcement. | | | | | |
| | d. Attach the eye through left waistband at center and aligned with slide fastener scoops, to correspond with hook on right waistband. Attach through a suitable reinforcement. | | | | | |
| | e. Turn back end of waistband in line with the front folded edge of right fly and stitch across top of waistband the width of fly. | 301 | SSa-1 | 10-14 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| | f. Trim corners of waistband at right and left flies, turn and work out points.<br><br>NOTE: A machine that automatically attaches the hooks and eyes, and feeds reinforcement pieces may be used. | | | | | |
| 17. | Finished right and left flies<br>Finished appearance. The top corner of the left fly shall be neatly and completely forced out. The left fly lining shall lie smooth and flat without pleats. Top of the right fly shall finish smooth and flat. The finished seaming of the right fly shall be uniform in width and the fly smooth and flat, without gathers or pleats with the joining seam not exposed on outside of finished slacks. The base of the fly shall be so finished as to avoid twisting, pleating, or puckering. The crotch and seat seams shall be spread open when the left fly lining is stitched. | | | | | |
| | a. Smooth out the left fly lining and edgestitch 1/16 to 1/8 inch from front edge. Continue stitching across top edge of waistband to back edge of left fly lining (figure 4, illustration J). | 301 | SSe-2 shows finished seam | 10-14 | 50 | 50 |
| | b. Turn in back edge of left fly lining and raise stitch seam of fly through front, fastener tape and fly lining with stitching continued to top of waistband. The finished edge stitching shall be 1/16 to 1/8 inch from the back edge of the slide fastener scoops (figure 4, illustration J). | 301 | LSq-2 shows finished seam | 10-14 | 50 | 50 |
| * | c. Smooth out right fly with the front joining seam 1/16 to 1/8 inch back of the folded edge of forepart and seam the back edge through front, interlining and fly, 1 1/4 (± 1/8) inches from front edge with stitching continued to top of waistband (figure 4, illustration K), forming the "j" stitching. | 301 | SSa-1 | 10-14 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| 18. | Join inseams | | | | | |
| * | a. Match notches at front and back inseams and stitch 1/2 (± 1/16) inch from the edge. | 301 or 401 | SSa-1 | 10-14 | 50<br>50 | 50<br>70 |
| | b. Press inseams open and flat. | | | | | |
| 19. | Measure waist and join seat seam<br>Finished appearance. The seat seam shall be joined with proper tension resulting in sufficient elasticity of seam to meet strain encountered in sitting or stooping. The waist shall be measured before seat seam is joined to assure correct waist size. The base of the right fly shall cover the left fly on outside when finished. | | | | | |
| * | a. Join the seat seam with a double needle seat seamer, with the two rows of stitching 1/64 to 1/32 inch apart, from base of fly and continue the stitching completely across waistband lining so that the top of the seat seam is perpendicular to the waistband lining and the waistband joining seam. The inseams shall not be out of alignment by more than 3/8 inch. The seat seam allowance shall be 1/2 inch and taper to include a 7/8 inch outlet at the top. | 401 | SSa-2 | 8-10 each needle | 50 | 70 |
| | b. Press open the seat seam from fly tack including waistband lining. | | | | | |
| 20. | Assemble fasteners (style 1a).<br>Attach slider and with the ends of the chain even, staple the fastener together at the bottom with the staple overlapping the coil. The staple shall be placed within 1/2 inch from the notch. | | | | | |
| 21. | Finish waistband<br>Finished appearance. The finished waistband shall be uniform in width and the linings smooth without twisting, pleating, and puckering. The lining shall not be exposed beyond the top of waistband. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| | a. Turn seam allowance toward waistband and raise stitch waistband 1/16 to 1/8 inch from waistband joining seam, through waistband, waistband lining, beltloops, and top of pockets properly positioned and smooth. The stitching shall extend to, but not beyond, the back edge of right and left flies. | 301 | LSq-2 shows finished seam | 10-14 | 50 | 50 |
| 22. | Stitch left fly lining extension piece and bartacks | | | | | |
| | a. Spread crotch and seat seams open, and turn in raw edges of left fly lining extension piece and seam to each side of seam allowance (figure 4, illustration L). | 301 | SSac-3 (b)(c)(d) | 10-14 | 50 | 50 |
| | b. The end of the right fly and the left fly shall be caught in the stitching of the seam allowance. | | | | | |
| * | c. Place a bartack at base of fly at the junction of the crotch seam and fly in line with the right fly stitching; or the bartack may be horizontal (figure 4, illustration M). | Bartack | | 21-28 per bartack | 50 | 50 |
| * | d. Bartack lower and upper side pocket opening. The stitching, operation 8c, shall not extend beyond bartacks. | Bartack | | 21-28 per bartack | 50 | 50 |
| * | e. Bartack inside of the slack thru the left and right fly assembly adjacent to the "j" portion of the fly. Position the bartack to relieve the tension placed upon the bottom stop (approximately 3/4 inch from the base of the fly bartack at 45 degrees from the horizontal). | Bartack | | 21-28 per bartack | 50 | 50 |
| 23. | Set back center loop | | | | | |
| | a. Turn in top and bottom edges of loop and center it over the seat seam with the top folded edge in line with the top edge of waistband and bartack top and bottom ends of loop 1/16 to 1/8 inch from turned edges. The belt loop opening shall finish 1 3/4 (± 1/8) inches in the length measured from bartack to bartack. | Bartack | | 21-28 per bartack | 50 | 50 |
| | or | | | | | |



Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:52Z
Check the source to verify that this is the currentversion before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl | Thread Bob/ Lpr |
|---|---|---|---|---|---|---|
| * | b. Position one end of belt loop over seat seam with the end of loop overlapping waistband 1/4 to 3/8 inch and bartack loop to waistband 1/16 to 1/8 from raw end of loop. Turn loop to finished position with the top folded edge even (± 1/8 inch tolerance) with the top edge of waistband. | Bartack | | 21-28 per bartack | 50 | 50 |
| * | c. Turn in bottom end of loop and bartack 1/16 to 1/8 inch from turned edge. Belt loop opening shall finish 1 3/4 (± 1/8) inches in length measured from bartack to top folded edge. | Bartack | | 21-28 per bartack | 50 | 50 |
| 24. | Make buttonhole<br>Make a vertical buttonhole in the center of left hip pocket with the inside edge of eyelet 3/16 to 5/16 inch below the joining seam of cord edge. | Button-hole | | 52-54 per button-hole including tack | 50 | 50 |
| 25. | Size label<br>Seam the size label on the lower edge of the waistband lining above the right hip pocket. The end of the stitching need not be tacked providing the stitching extends at least 1/2 inch beyond each end of the label. | 301 | LSa-1 | 10-14 | 50 | 50 |
| 26. | Sew on button<br>a. Button position shall be marked or gaged and properly aligned with bottonhole. | | | | | |
| | b. Position a button on the bearer of the left hip pocket through all plies to correspond with buttonhole in pocket. | 101 or | | 14-16 per button | 50 | |
| | | 301 | | 14-16 per button | 50 | 50 |
| 27. | Cleaning<br>a. All ends of stitching shall be trimmed and loose threads removed from slacks. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF SLACKS

| No. | Operation | Stch Type | Seam/ Stch type | Stch/ in | Thread Ndl Bob/ Lpr |
|---|---|---|---|---|---|
| | b. All spots and stains shall be removed. Shade tickets shall be removed without injury to the material. | | | | |
| * | NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result. | | | | |
| 28. | Press slacks<br>a. The tops, including fly and pockets shall be pressed smooth. | | | | |
| | b. The legs shall be pressed smooth and creased in the center with the seams matching at the bottom and in the crotch; or the inseams in the crotch may be slightly back of the outseam. | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.10 Sizes and measurements. Unless otherwise specified, finished measurements of slacks shall be listed in Table III. All measurements and tolerances are expressed in inches.

Table III - Sizes and measurements

| | (A) | (B) | (C) Length inseam | | | | (D) | (E) |
|---|---|---|---|---|---|---|---|---|
| Size | Waist | Hips | Short | Regular | Long | X-Long | Knee | Bottom |
| 6 | 23 1/2 | 36 | 30 | 32 | 34 | 36 | 18 3/4 | 21 1/4 |
| 8 | 24 1/2 | 37 | 30 | 32 | 34 | 36 | 19 | 21 1/2 |
| 10 | 25 1/2 | 38 | 30 | 32 | 34 | 36 | 19 1/4 | 21 3/4 |
| 12 | 27 | 39 1/2 | 30 | 32 | 34 | 36 | 19 1/2 | 22 |
| 14 | 28 1/2 | 41 | 30 | 32 | 34 | 36 | 19 3/4 | 22 1/4 |
| 16 | 30 | 42 1/2 | 30 | 32 | 34 | 36 | 20 | 22 1/2 |
| 18 | 32 | 44 1/2 | 30 | 32 | 34 | 36 | 20 1/4 | 22 3/4 |
| 20 | 34 | 46 1/2 | 30 | 32 | 34 | 36 | 20 1/2 | 23 |
| 22 | 36 | 48 1/2 | 30 | 32 | 34 | 36 | 20 3/4 | 23 1/4 |
| Tolerance | ± 1/2 | ± 1/2 | ± 1/2 | ± 1/2 | ± 1/2 | ± 1/2 | ± 1/2 | ± 1/2 |

NOTE: Waist and hip measurement of the slacks shall be taken with slide fastener fully closed and waistband fastened. All measurements shall be taken with slacks smooth and flat. A, B, C, D, and E refer to figure 1.

(A) Waist - Twice the measurement taken in center of waistband from folded edge to folded edge.

(B) Hips - Twice the measurement taken from folded edge to folded edge, one inch above fly bartack.

(C) Inseam - Length measurement taken along inseam from crotch seam to finished bottom of legs.

(D) Knee - Twice the measurement taken from folded edge to folded edge across the width of slack leg at a point up from finished bottom of leg as follows: Short - 16 (± 1/4) inches; Regular - 17 (± 1/4) inches; Long - 18 (± 1/4) inches; X-Long - 19 (± 1/4) inches.

(E) Bottom - Twice the measurement taken from folded edge to folded edge across finished bottom of leg.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.11 Workmanship. The finished slacks shall conform to the quality and grade of product established by this specificaton. The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

4. QUALITY ASSUANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specificed in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First artcle inspection. When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, drawings, and standards unless otherwise amended, excluded, modified or qualified in this specification or applicable purchase document. A certificate of compliance will be acceptable for the plastic coil slide fastener requirements of 3.3.7.2. In addition, the requirements that all metal components of the slide fastener be of brass and have been furnished by one supplier shall be accepted on a certificate of compliance (see 3.3.7.1).



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

* 4.4.2 End item examination. Sampling and examination of the end item shall be performed in accordance with 4.4.2.1 and 4.4.2.2. The appliable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The lot size shall be expressed in units of pair of slacks.

* 4.4.2.1 Visual examination. The slacks shall be examined for defects in color, design, material, construction, workmanship, and marking and the defects classified in accordance with the following list.

| Defect | Classification | | |
|---|---|---|---|
| | Major | Minor | |
| | | A | B |
| I. MATERIAL DEFECT AND DAMAGE. | | | |
| a. Any hole, cut, tear, smash, burn, drill hole, run, scorched area or open place: | | | |
| 1. On outside (longest dimension in any direction): | | | |
| a. - up to 1/4 inch inclusive | | X | |
| b. - more than 1/4 inch | X | | |
| 2. On inside (longest dimension in any direction): | | | |
| a. - up to 1/4 inch inclusive | | | X |
| b. - more than 1/4 inch | | X | |
| b. Knot or slub on out side 1/ | | X | |
| c. Misweave, area of no dye penetration, dye streak, missing yarn, broken yarn, visible mend, thin place, or shade bar more than 1/2 inch (longest dimension in any direction) on outside. | X | | |
| d. Loose yarn, coarse yarn; more than 1 inch (longest dimension in any direction) on outside. | X | | |
| e. Woven in waste on outside visible at 3 feet (longest dimension in any direction): | | | |
| 1. 1/4 inch up to 1 inch inclusive | | | X |
| 2. More than 1 inch | | X | |
| f. Permanent fold, pleat, or crease in cloth (when caught in seaming or stitching) on outside. | X | | |
| g. Needle chew on outside (longest dimension in any direction) | | | |
| 1. Up to 1/2 inch inclusive | | X | |
| 2. More than 1/2 inch | X | | |

1/Knot and slub defects shall be in accordance with the basic material requirements



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

| Defect | Classification | | |
|---|---|---|---|
| | Major | Minor A | Minor B |
| II. SHADED PART. | | | |
| a. On outside: | | | |
| 1. Variation in shade with a part or between parts (except parts which may be cut from ends) | X | | |
| 2. Parts cut from ends badly shaded or unevenly shaded. | | | X |
| III. PRESSING. | | | |
| a. Omitted or poorly pressed. | X | | |
| b. Legs not pressed seam on seam at bottom or knee by by more than 3/4 inch. | | X | |
| c. Seam not pressed open (to be scored only when condition exists on major portion of seam) | | | X |
| IV. CLEANNESS. | | | |
| a. Any spot or stain on outside visible at 3 feet (largest dimension in any direction): | | | |
| 1. Up to 3/8 inch inclusive | | | X |
| 2. More than 3/8 inch up to 3/4 inch inclusive | | X | |
| 3. More than 3/4 inch | X | | |
| b. More than 3 thread ends not trimmed to 1/4 inch or less on outside. | | X | |
| c. More than 5 thread ends not trimmed to 1/2 inch or less on inside. | | | X |
| d. Two or more shade or size marking or tickets not removed. | | | X |
| e. Any size or shade marking or residue on outside, score as spot or stain. | | | |
| f. Loose thread ends not removed from slacks. | | | X |
| V. COMPONENT AND ASSEMBLY. | | | |
| a. Any component part or operation omitted (unless otherwise classified herein). | X | | |
| b. Any component not as specified. | X | | |
| c. Any component part tight, twisted, distorted, pleated, or full (unless otherwise specified herein). | X | | |
| d. Any operation not as specified (unless otherwise classified herein). | X | | |
| e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein). | | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

| Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|
| VI. CUTTING. | | | |
| a. Any component part not cut in accordance with specified pattern or directional lines on patterns, or not in accordance with specification requirements. | X | | |
| VII. SEAMS AND STITCHING. | | | |
| a. Accuracy of seaming: | | | |
| 1. Seams puckered, pleated, or twisted on outside. | X | | |
| 2. Seam irregular or wavy (unless otherwise classified herein). | X | | |
| 3. Any part of slacks caught in an unrelated operation or stitching (unless otherwise classified herein). | X | | |
| 4. Ends of all seams and stitching when not caught in other seams or stitchings not backtacked. | | X | |
| 5. Ends of a continuous line of stitching overlapped less than 1/2 inch. | | X | |
| 6. Thread breaks secured by stitching back of the break less than 1/2 inch. | | X | |
| 7. Wrong or varying shades of thread used on outside. | X | | |
| 8. Needle perforations visible on outside. | | X | |
| b. Gage of stitching: | | | |
| 1. Gage irregular or not within range specified (score only when condition exists on more than 1/2 the length of the seam). | | | X |
| 2. Edge or raised stitching sewn too close to edge, resulting in damage to cloth. | X | | |
| 3. Seam allowance not as specified or varies more than 1/8 inch. | | X | |
| c. Open seam (resulting from 2 or more skipped, broken, runoff, or missing stitches): | | | |
| 1. On joining seams | | | |
| a. -Less than 1/4 inch | | | X |
| b. -1/4 inch to 1/2 inch | | X | |
| c. -More than 1/2 inch | X | | |
| 2. On overedging | | | |
| a. -Less than 3 inches | | | X |
| b. -More than 3 inches | | X | |
| 3. On label, edge or raised stitching | | | |
| a. -Up to 1/2 inch | | | X |
| b. -More than 1/2 inch | | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

| Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|
| d. Raw edge: | | | |
| 1. On outside | | | |
| a. Up to 1/8 inch | | | X |
| b. More than 1/8 inch up to 1/2 inch inclusive | | X | |
| c. More than 1/2 inch | X | | |
| 2. On inside | | | |
| a. 1/2 inch to 1 inch inclusive | | | X |
| b. More than 1 inch | | X | |
| e. Runoff: (score as an open seam) | | | |
| f. Seam and stitch type: | | | |
| 1. Not specified seam or stitch type | | X | |
| 2. Looper thread of 401 stitch type on outside | X | | |
| 3. Any line of stitching omitted | X | | |
| 4. Any line of stitching not beginning or ending where specified (unless otherwise classified herein) | | | X |
| g. Broken, missing, or skipped stitches on edge or raised stitching: (score as an open seam) | | | |
| h. Stitch tension: | | | |
| 1. Loose tension resulting in a loose seam | | | |
| a. -Up to 1/2 inch inclusive | | | X |
| b. -More than 1/2 inch up to 3/4 inch inclusive | | X | |
| c. -More than 3/4 inch. | X | | |
| 2. Loose tension on raised or edge stitching resulting in exposed loose thread | | X | |
| 3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching) | X | | |
| i. Stitches per inch (to be scored only when the condition exists on the major portion of seam or stitching): | | | |
| 1. Less than the minimum specified (except on overedge stitching and labels) | | X | |
| 2. Less than the minimum specified on overedge stitching and labels | | | X |
| 3. More than the maximum specified | | | X |
| VIII. BARTACK OR TACK. | | | |
| a. Missing, insecure, misplaced, not serving purpose, or not specified size or type | | X | |
| b. Loose stitch tension | | | X |



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

| Defect | Classification | | |
|---|---|---|---|
| | Major | Minor A | Minor B |
| IX. WAISTBAND (outside of slacks). | | | |
| a. Construction: | | | |
| 1. Fullness, pleats, gathers, or twists on outside of waistband | X | | |
| 2. Top of slacks puckered or pleated at joining to waistband | X | | |
| 3. Waistband end(s) poorly shaped | | X | |
| 4. Width of waistband not as specified | | | X |
| 5. Bottom of waistband seam at seat seam, out of alignment by more than 1/8 inch | | X | |
| 6. Waistband stitching varying more than 1/8 inch | | | X |
| b. Waistband lining: | | | |
| 1. Width of finished waistband lining not as specified | | X | |
| 2. Lining exposed on outside | | | |
| a. -Up to 1 inch inclusive | | | X |
| b. -More than 1 inch | | X | |
| c. Waistband hook and eye: | | | |
| 1. Not aligned causing distortion | X | | |
| 2. Missing or not properly clinched | | X | |
| 3. Damaged affecting function or not securely attached | X | | |
| 4. Not positioned as specified causing bulge, twist, distortion, or puckers on outside | X | | |
| X. BELT LOOP. | | | |
| a. Omitted or covering stitch on outside | | X | |
| b. Set at an angle (more than 3/16 inch off perpendicular) insecure, not attached as specified, length too short constricting waistband, width not as specified, or poorly shaped | | | X |
| c. Misplaced by more than 3/4 inch, length too long causing gap of material to extend more than 1/8 inch above waistband, or finished length more than 1/4 inch longer than specified | | | X |
| d. Finished length shorter than specified | | | X |
| e. Turn under of loop not trimmed as specified or not trimmed to 1/2 inch when no requirement is specified | | | X |
| f. Bottom end of one or more loops (except center-back loop) not securely caught in waist seam | | X | |
| g. Center back loop not on seat seam | | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

| Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|
| XI. FRONT OPENING. | | | |
| a. Length of fly uneven at top: (examination to be performed with slide fastener closed and hook and eye unfastened): | | | |
| 1. By more than 1/2 inch | | X | |
| 2. By more than 1/4 inch up to 1/2 inch inclusive | | | X |
| b. Right fly exposed beyond front edge, seam joining left fly to front exposed when fly is closed, or right fly more than 1/4 inch inward from front edge. | | | X |
| c. Stitching on right fly irregular or not positioned as specified or not terminated where specified | | | X |
| d. Raw edge of left fly extension not turned under, or the turned edge not stitched to edge of crotch seam allowance. | | | X |
| XII. SLIDE FASTENER. | | | |
| Operate slider on coil twice, opening and closing the length of coil and locking slider each time. | | | |
| a. Slide pull becomes detached or slider disengages from either row of coils | X | | |
| b. Coil becomes unmeshed or does not mesh properly | X | | |
| c. Any component missing or not properly assembled | X | | |
| d. Slider lock does not retain slider when pull is in down position or non-automatic lock or when pull is released on automatic lock, when the open coil above the slider is lightly pulled apart | X | | |
| e. Slider binds, catches, or sticks at any point or does not function properly | X | | |
| f. Fastener is not type, size, style, or finish specified | X | | |
| g. Chain (scoops) installed upside down | X | | |
| h. Cut, tear, or hole in slide fastener tape | | X | |
| i. Stitching too close to metal edge not permitting slider to pass freely | X | | |
| j. Tape set too loose or too tight causing bulge, twist, or fullness in closed fly on top end of tape; tape not caught as specified; or staple not securely clinched at bottom of chain, or slide fastener chain misplaced (set too high or low) or tape not attached as specified | | X | |
| k. Edge of chain not positioned within specified range at top or bottom from finished edge of left fly or end of metal scoops uneven at top by more than 3/16 inch | | | X |
| l. Slide fastener stop too high by 1/2 inch or more | | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

| Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|
| XIII. POCKET. | | | |
| a. Any one pocket out of alignment by (at any point when measured from the waistband seam): | | | |
| 1. More than 1/2 inch | X | | |
| 2. More than 3/8 inch up to 1/2 inch inclusive | | X | |
| 3. More than 1/4 inch up to 3/8 inch inclusive | | | X |
| b. Pocket set on higher or lower than companion pocket by (when measured from the waistband seam): | | | |
| 1. More than 1/2 inch | X | | |
| 2. More than 3/8 inch up to 1/2 inch inclusive | | X | |
| 3. More than 1/4 inch up to 3/8 inch inclusive | | | X |
| c. General (all): | | | |
| 1. Notch exposed at pocket opening | X | | |
| 2. Top of pocketing not securely inserted under waistband | | X | |
| 3. Top of pocketing not evenly inserted under waistband causing bulge or distortion on outside | | X | |
| 4. Length of pocket opening not as specified | | X | |
| 5. Pocket opening gapped by 1/4 inch or more | | | X |
| 6. Depth of pocket not as specified | | | X |
| 7. Pocketing caught in unrelated stitching | | | X |
| 8. Raw edge or unfinished seam on inside of twill cloth side and rear pockets (not finished seam) | | | X |
| d. Side pocket: | | | |
| 1. Facing or bear not caught in bartack at each end of opening; facing or bearer not extending below bottom bartack and above top bartack | X | | |
| 2. Facing exposed on outside | | X | |
| 3. Pocketing notched more than 1/4 inch beyond width of outseam allowance on the underside | | | X |
| 4. Bartack extends beyond outseam, less than 1/16 inch or more than 1/8 inch | | | |
| e. Hip pocket (cord or welt type): | | | |
| 1. Cord or welt not specified width or varies in width by more than 1/16 inch | | X | |
| 2. Stitching of pocket opening at top edge not through reinforcement piece for a distance of 1/2 inch or more (welt construction only) | | | X |
| 3. Reinforcement piece visible at top edge of pocket opening (welt construction only) | | | X |
| 4. Pocketing material or white threads visible on outside | | | X |
| 5. End of cord, bearer, or welt not caught in the edge stitching of pocketing | | | X |
| 6. Inside end of pockets at bartack not equidistant from center back seam by more than 1/2 inch | | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

| Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|
| XIV. DARTS. | | | |
| a. Ends of darts not properly tapered, causing a noticeable bulge or fullness | | X | |
| b. Corresponding darts not uniform in length by 3/4 inch or more, or stitched less than specified below drill hole | | X | |
| c. Inside folded edge of back darts not turned toward the seat seam | | | X |
| d. Not securely caught in waistband | | | X |
| e. Thread ends at lower end of dart trimmed closer than 1/2 inch (except when automatic dart machine is used) | | | X |
| f. Incomplete | | | X |
| XV. SEAMS. | | | |
| a. Seat seam outlet omitted or less than specified by more than 1/2 inch on total width of both seams | | | X |
| b. Crotch seam stitching more than 1/4 inch above bartack at base of fly | | | X |
| c. Inseam staggered at crotch more than specified (center to center) or crotch and seat seam staggered at inseam more than specified (center to center) | | X | |
| XVI. LEG BOTTOM. | | | |
| a. Not finished as specified | | X | |
| XVII. LABEL. | | | |
| a. Not attached as specified, misplaced, or stitching through the printing | | | X |
| b. Missing, incorrect, or illegible: | | | |
| 1. Identification, instruction, and personal label | X | | |
| 2. Size label | | X | |
| XVIII. BUTTON. | | | |
| a. Missing, broken, misplaced, not as specified, insecurely sewn, or defective (sharp, rough, cracked, or split edge; has scratch, dent, blemish, or imbedded foreign matter; or is badly shaded) | | | X |
| b. Any part of slack pleated or puckered by button attachment | | | X |
| c. Stitching not locked at end of cycle (tug at loose end of thread, when accessible, to determine whether it will ravel) | | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4500.

| Defect | Classification Major | Minor A | Minor B |
|---|---|---|---|
| XIX. BUTTONHOLE. | | | |
| a. Omitted, added, not specified type, or not finished as specified | X | | |
| b. Misplaced resulting in bulge or twist when buttoned | X | | |
| c. Gimp omitted, uncut buttonhole, end of gimp not pulled through to underside, incomplete stitching, or stitching not securely caught in fabric | | | X |
| d. Ragged edge, broken stitch, or two or more skipped stitches: | | | |
| 1. On outside | | X | |
| 2. On inside | | | X |
| e. Buttonhole stitching extending beyond bartack or stitches per buttonhole not as specified: | | | |
| 1. On outside | | X | |
| 2. On inside | | | X |
| f. Finished cut length not as specified | | | X |
| g. Purling not on side specified | | | X |

4.4.2.2 Dimenisional examination. The slacks shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from nominal dimensions and tolerances specified in Table III shall be scored as a size measurement defect.

4.4.2.3 Inspection levels and acceptable quality level. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units for visual and dimensional examinations shall be as follows:

| | AQL's | Inspection level |
|---|---|---|
| For visual examination in 4.4.2.1 | | |
| Major | 1.0 | III |
| Major, Minor A (combined) | 6.5 | III |
| Total (Major, Minor B combined) | 15.0 | III |
| For dimensional examination in 4.4.2.2 | | |
| One class | 4.0 | S-3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.3 Packaging inspection. An examination shall be made to determine that packaging, packing, and marking comply with section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and AQL shall be 2.5 defects per hundred units.

| Examine | Defect |
|---|---|
| Marking (interior and exterior) | Omitted, incorrect, illegible, of improper size location, sequence, or method of application. |
| Materials | Any component missing, damaged or not as specified. |
| Workmanship | Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling. Distorted or bulging containers. |
| Content | Open and non-continuous heat sealed seams and closure of polyethylene bag. 1/ Alternate closure of polyethylene bag not provided with tuck or reverse flap. 1/ Omission of vent hole in polyethylene bag. 1/ Number per shipping container not as specified. |

1/ For these defects, one intermediate package from each shipping container in sample shall be examined.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

| Examine | Defects |
|---|---|
| Finished dimensions | Length, width, or height exceeds specified maximum requirements. |
| Palletization | Pallet pattern not as specified.<br>Interlocking of loads not as specified.<br>Load not bonded with required straps as specified. |
| Weight | Exceeds maximum load limits. |
| Marking | Omitted; incorrect; illegible; of improper size, location, sequence, or method of application. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of slacks shall be neatly folded so that the garment measures approximately 11-1/2 by 15 inches. Each pair of folded slacks shall be inserted in a snug-fitting flat clear polyethylene film bag of 0.00125 inch thickness (± 20% tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other. The final closure of the bag shall be heat sealed with th seam made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner vent hole are not required.

5.1.2 Level C. Slacks shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Fourteen (14) pairs of slacks, of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed, and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be stacked two in length, one in width and seven in depth within the shipping container. Each container shall have the contents completely covered on top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Level B. Fourteen (14) pairs of slacks, of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container, assembled, closed, and reinforced conforming to type CF, class domestic, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to class domestic, type CF, of MIL-B-17757. Level A packages shall be stacked two in length, one in width and seven in depth within the shipping container. Each container shall have the contents completely covered on top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Level C. Slacks, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules as applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER:
NOMENCLATURE:
SIZE:
QUANTITY:

* 5.4 Palletization. When specified (see 6.2), item, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type IA of MIL-STD-147. Each prepared load shall be banded with primary and secondary straps in accordance with the banding means C, K and L, or O or P. Pallet patterns shall be in accordance with the apendix of MIL-STD-147. The pallet shall be 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 wood group I, II, III or IV, Grade A of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns spescified in MIL-STD-147, the pallet pattern used shall first be approved by the contacting officer.

6. NOTES

6.1 Intended use. The slacks are intended for wear by female personnel of the Coast Guard.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes and lengths required (see 1.2).
(c) When first article is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, quantity, and testing and approval of the first article.
(d) Selection for applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When palletization is required (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring office issuing the invitation for bids (see 3.1 and 3.5).

6.4 Shrinkage of slide fastener. Experience has shown that slide fasteners containing a durable press finish will meet the shrinkage requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

6.5 Equal item. Prior to the use of an "interchangeable" item, the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency.

* 6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.7 Subject term (key word) listing.
Cloth, crease-resistant finish
Slacks, Coast Guard
Slacks, polyester and cotton
Slacks, woman's, undress
Twill, polyester and cotton

Custodian:
Navy - NU

Review Activity:
Navy - CG
DLA - CT

Preparing activity:
Navy - NU

Project No. 8410-N633



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.


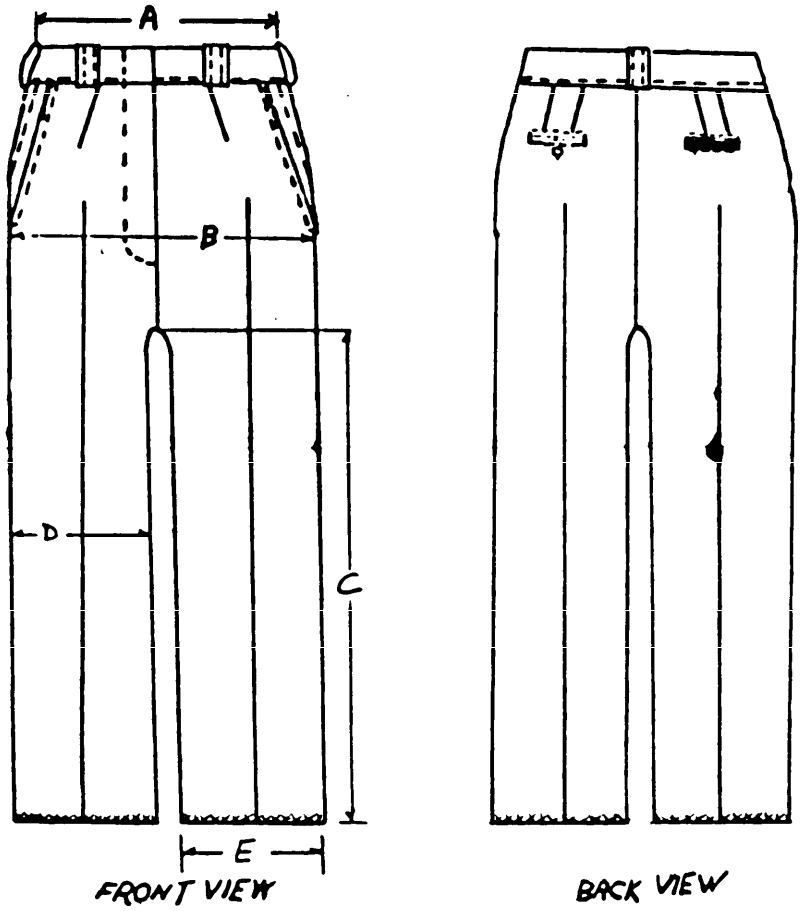



FIG 1 - SLACKS, WOMAN'S, UNDRESS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

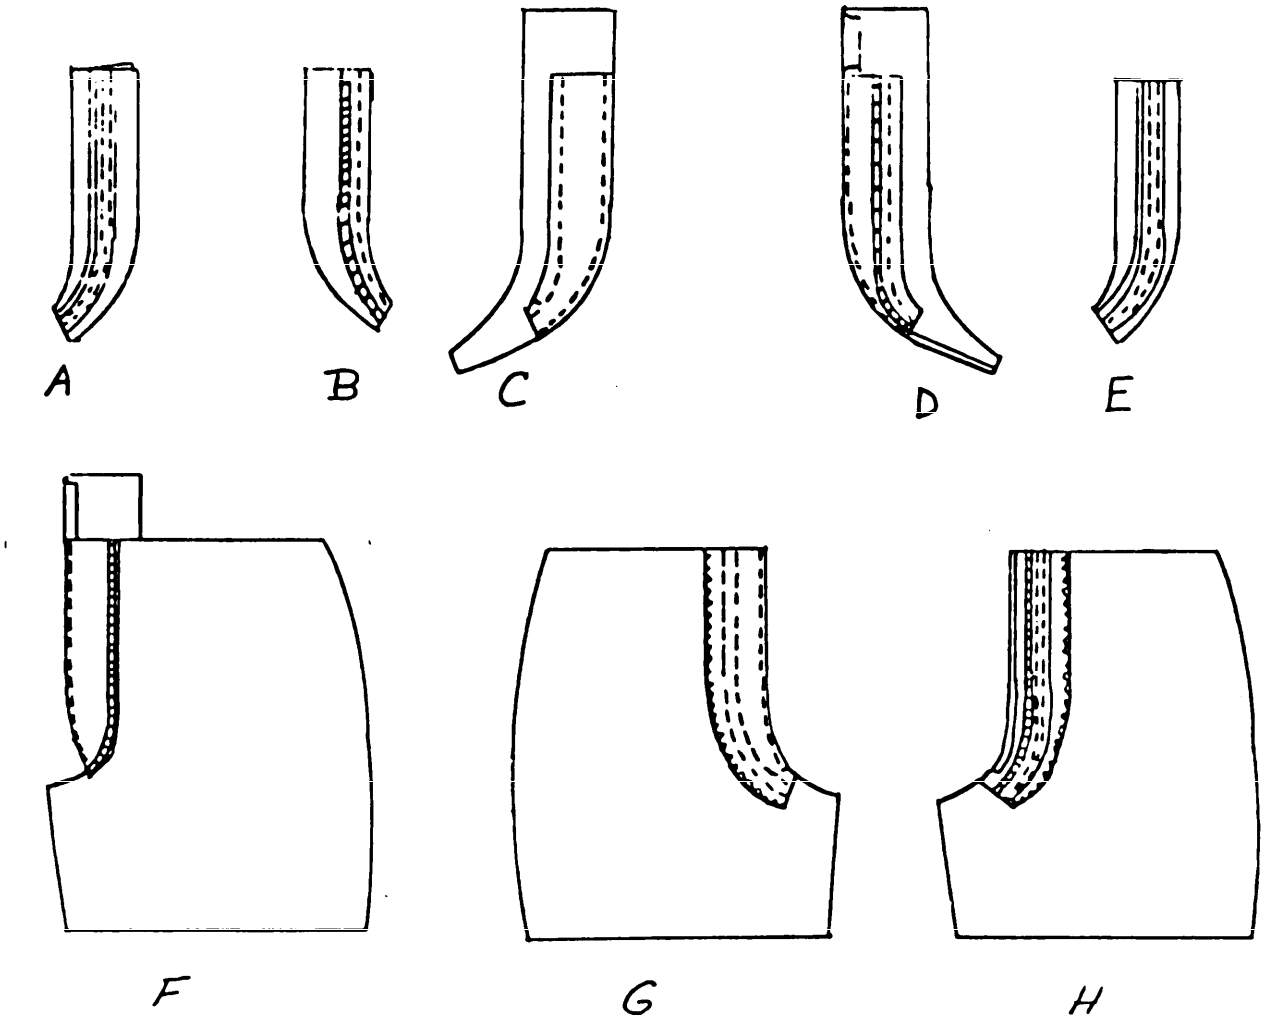


FLY (RIGHT AND LEFT)

A - DOUBLE STITCH FASTENER TAPE TO RIGHT FLY THROUGH LINING
B - SEAM FASTENER TAPE TO LEFT FLY
C & D - SEAM LINING TO LEFT FLY, TURN AND RAISE STITCH
E - OVEREDGE RIGHT FLY
F - JOIN LEFT FLY TO SLACKS
G & H - JOIN RIGHT FLY TO SLACKS AND PRESS

FIGURE 2



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

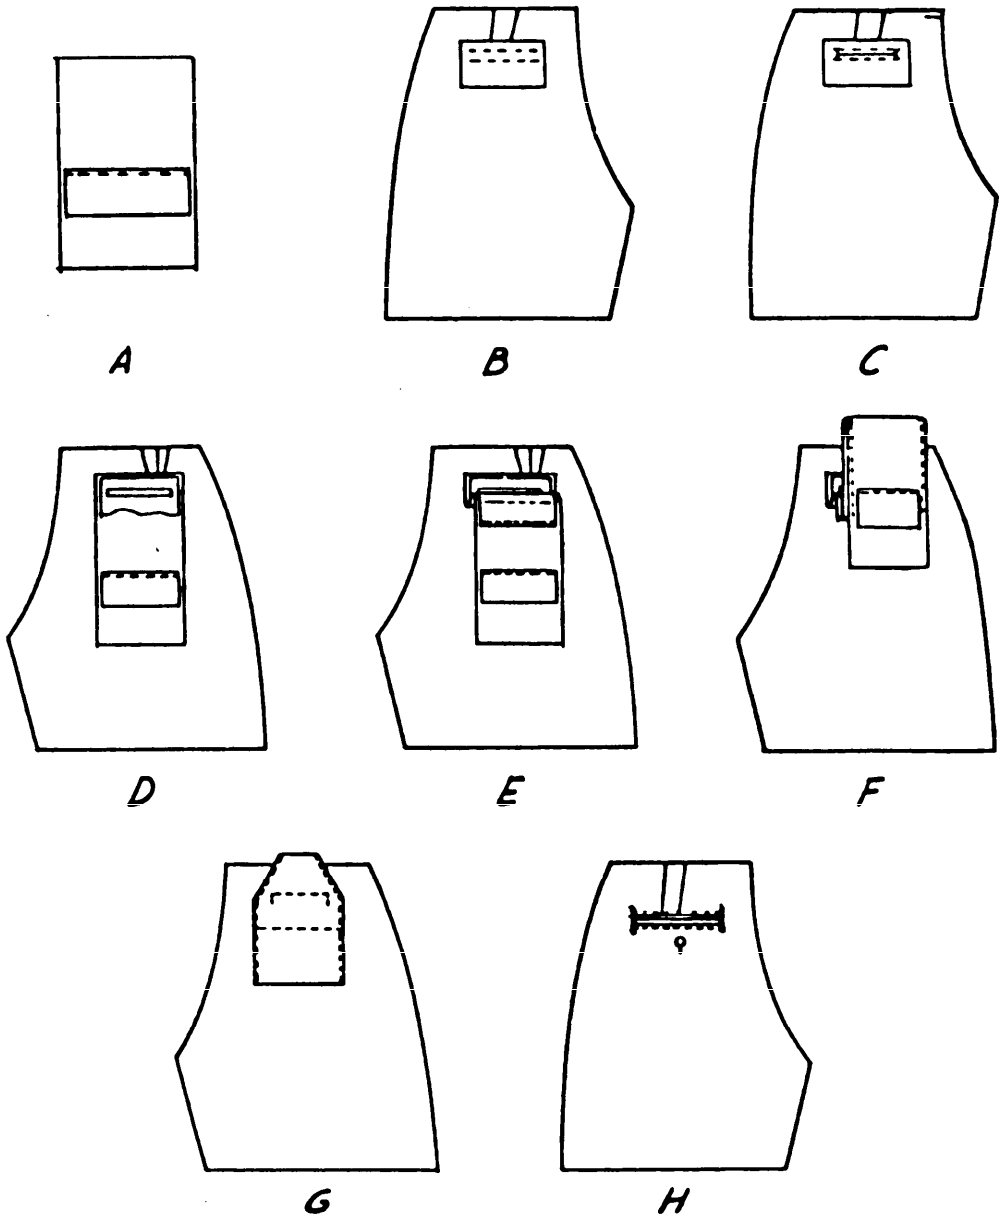



FIG. 3 HIP POCKET

A - BEARER ON POCKET
B - CORD FACING PIECE ON OUTSIDE OF SLACKS
C - CUT THROUGH CORD PIECE AND NOTCH
D - CORD PIECE TURNED INSIDE
E - MAKE CORD
F - POCKET PULLED THROUGH AND CLOSED
G - POCKET PULLED THROUGH TO INSIDE & TOP STITCHED ON SIDES
H - TOP POCKET OPENING STITCHED THROUGH POCKET AND FACING PIECE



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

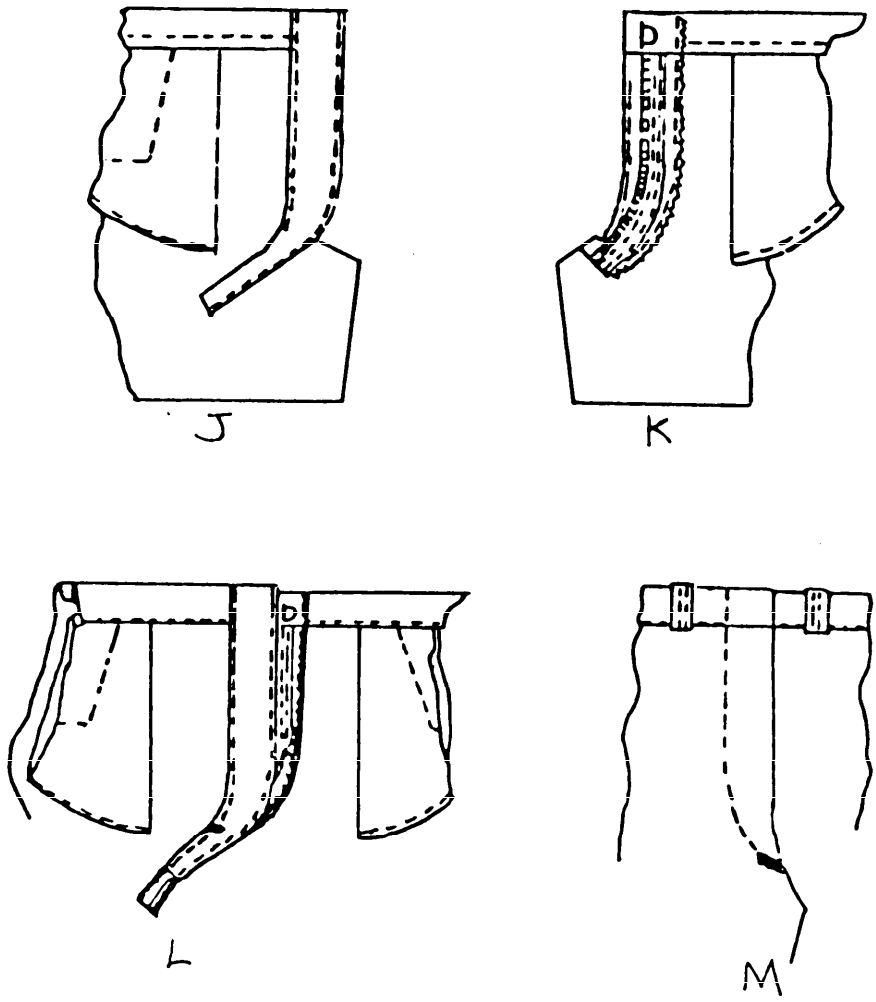



FIG. 4 FLY (RIGHT AND LEFT)
(HOOK AND EYE FLY WITH SLIDE FASTENER)

J - RAISE STITCH LEFT FLY CATCHING LINING
K - RAISE STITCH BACK EDGE OF RIGHT FLY THROUGH SLACKS
L - FINISH END OF LEFT FLY LINING
M - BARTACK BASE OF FINISHED FLY



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, Natick, Mass. 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-S-87013D(CG) | SLACKS, WOMEN'S, UNDRESS |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ USER |
| | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

**5. PROBLEM AREAS**

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

**6. REMARKS**

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.