MILITARY SPECIFICATION

SHIRT, WOMAN'S, DRESS, WHITE (SHORT SLEEVE)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a woman's short sleeve dress shirt, with shoulder epaulets, made of a polyester/cotton blend material.

1.2 Classification. The shirt shall be of one type in the following sizes (see 6.2).

Schedule of sizes

Bust	Neck
32	12,13
34	12,13,14,15
36	13,14,15
38	13,14,15,16
40	14,15,16
42	16

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Appearance of typed samples 1/

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

SPECIFICATIONS

* FEDERAL

V-B-871	- Button, Sewing Hole and Button, Staple, (Plastic)
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label; for Clothing, Equipage and Tentage (General Use)

* MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-21881	- Cloth, Poplin, Polyester and Cotton
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-covered
MIL-P-55010	- Plastic, Sheet, Polyethylene Terephthalate

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issue of documents which are DoD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue ot the nongovernment documents which is current on the date of the solicitation.

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads
Department of Defense Standard Shades for Buttons

(Application for copies shall be addressed to the Color Association of the United States, 24 East 38th Street, New York, N.Y. 10016)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Method No. 124-1984 Appearance of Durable Press Fabrics After Repeated Home Laundering

(Application for copies should be addressed to the AATCC National Headquarters, P.O. Box 12215, Research Triangle Park, NC 27709.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606-5808).

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supercede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material shall be a polyster/cotton blend poplin, White Shade No. 3013, conforming to type II, class 2 of MIL-C-21881.

* 3.3.2 Fusible interlining. The top collar, top collarstand, top epaulets and top pocket flaps shall be fused. A fused sample consisting of the fusible and basic material shall conform to the requirements specified below when tested in 4.4.1. The color shall be white.

Component testing requirements

Appearance of fused sample
  Initial - no evidence of bubbling, color change, or bleed through
  After 25 washings - no evidence of bubbling or delamination

Stiffness, inch lbs x 10-4 (Average of six samples: three tested fusible side up and three tested fusible side down)
  Initial
    Warp Minimum 13.0 Maximum 38.0
    Filling Minimum 6.0 Maximum 22.0
  After 25 washings - samples shall retain a minimum of 20% of the original stiffness

Peel strength 1/
  Initial Minimum 24 oz.
  After 25 washings Minimum 16 oz.

In-process testing requirements

Appearance of fused sample - no evidence of bubbling, color change or bleed through

Peel strength 1/ Minimum 20 oz.

1/ When a nonwoven fusible is used, the item will be accepted if the fusible either splits from itself rather than separates from the outershell material or if it begins to separate from the outershell material higher than the minimum peel strength and then splits from itself.

3.3.2.1 Thickness, fusible. The thickness of the fusible interlining shall not measure greater than 0.030 inch when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.3.3 Buttons, plastic. The plastic buttons used for the fronts, pocket flap closures and shoulder epaulets shall be size 21 line and shall conform to type II, class k, style 25, of V-B-871; white cable no. 62031 in accordance with the Department of Defense Standard Shades for Buttons.

* 3.3.4 Collar stay The collar stay shall be of the special slotted type and shall be made from polyethylene terephthalate plastic sheet conforming to MIL-P-55010, except the thickness shall be 0.009 ± 0.0015 inch, the color shall be natural (clear or opaque) and the transparency and optical properties shall not apply. The stay shall measure not less than 1/4 inch or more than 3/8 inch wide and 2 1/8 to 2 3/4 inches in length when tested as specified in 4.4.1. Both ends shall be round, pointed, cut on an angle or any combination thereof. When other than round, points shall be rounded. The slotted portion shall be especially designed to accommodate collar insignia (see 6.4). The slot shall be toward the collarstand in the finished shirt.

3.3.5 Thread, polyester covered. The polyester covered thread for seaming and stitching the shirt as noted below shall conform to MIL-T-43548. The color of the thread shall conform to shade white AH, cable no. 66050 in accordance with the Department of Defense Standard Shades for Sewing Threads. The use of polyester covered polyester core thread is not allowed.

Use	Ticket No.	Ply
General seaming and overedging	70	2 or 3
Button and buttonhole	50	2 or 3

3.3.5.1 Colorfastness. The thread shall show discoloration to light and laundering equal to or better than the standard sample when tested as specified in MIL-T-43548. As a limit of acceptability, or when no standard sample is available, the thread shall show a minimum of "good" discoloration to light and laundering when tested as specified in MIL-T-43548.

3.3.6 Combination label. Each shirt shall have a combination identification, instruction and personal label conforming to type VI, classes 10 and 15 of DDD-L-20. The marking shall show colorfastness to laundering. The inscription and format shall be as follows:

NAME:
SERVICE NO:
SHIRT, WOMAN'S, DRESS, WHITE (SHORT-SLEEVE)
FIBER CONTENT: POLYESTER (65%) - COTTON (35%)
CONTRACT NO: DLA 100-00-0-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (if other than the contractor)

LAUNDERING INSTRUCTIONS

Machine Wash, Hot Water
Tumble Dry, Medium Heat
Remove Immediately

or

Use NAVEDTRA 414-01-45-81, Navy Formula I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.6.1 Size label. Each shirt shall have a size label conforming to type IV or VI, class 2 of DDD-L-20. The inscription shall be as follows:

34B - 15 N - (Example)
STOCK NUMBER - 8410-00-000-0000 (Example)

Note: The bust and neck may be abbreviated as "B" and "N" as shown above.

3.4 Design. The short sleeve shirt shall be of a two-piece princess style front and a one piece back, seven (7) button front closure, breast patch pockets with buttoned down flaps, a convertible collar with collar stays and two (2) shoulder epaulets. (see figures 1 and 2). The topcollar, top collarstand, top epaulets and top pocket flaps shall be fused.

3.4.1 Figures. Figures 1 and 2 are furnished for information purposes only. To the extent of any inconsistencies between the specification and the figures, the specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on the working patterns. The patterns provide an allowance of 1/4 inch for all seams except for the front seam which shall be 3/8 inch. Unless otherwise indicated in Table I, seams shall be in accordance with these seam allowances.

* 3.5.1 Pattern parts. The component parts shall be cut from the material as specified and in accordance with the following list of pattern parts:

Material	Pattern Parts	Cut Parts
Basic material	Back	1
	Center fronts	2
	Side fronts	2
	Collar	2
	Collarstand	2
	Collar stay	2
	Sleeve	2
	Pocket	2
	Pocket flap	4
	Epaulets	4
Cloth, interlining, fusible	Pocket flap interlining	2
	Collar interlining	1
	Collarstand interlining	1
	Epaulet interlining	2
Templates	Template finished pocket	-
	Template finished flap	-
	Template, buttonhole marker	-

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

3.6 Construction.

* 3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types, as specified in Table I shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitchings are given for the same operation, any one of them may be used. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, or puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the shirt. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. Top stitching and edge stitching shall be 1/16 to 1/8 inch from the edge. The bite of the overedge stitching shall be a minimum of 3/16 inch.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches. Skipped stitches or thread breaks may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked.

3.6.4 Buttonholes. The buttonholes shall be straight style with both ends securely barred. The finished cut length shall be 5/8 to 11/16 inch.

3.7 Manufacturing operations requirements. The shirts shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished shirts are identical to that produced by following the sequence as listed in Table I.

3.7.1 Pressing operations. All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

3.7.2 Fusing. All fusing of the fusible to the basic material shall be on a single ply basis (no stacking allowed).

3.7.3 Pressing of fusible. The statement "press fusible to various cut parts in accordance with the fusible manufacturer's recommendation" refers to time, temperature and pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

NOTE: Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
1.	Cutting a. All components of the basic cloth shall be cut in strict accordance with patterns furnished, which show size, shape, placement of pockets and flaps, directional lines for cutting and notches for proper assembly of all parts. b. Cut the components from one piece of material, except for the undercollar and underply pieces for epaulets and underply pieces for pocket flaps which may be cut from ends. Parts cut from ends shall approximate the shade of the main assembly. c. The component parts cut from the basic poplin cloth shall finish with the face side of the material on the outside.					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched material.					
3.	Shade and size markings a. All parts shall be marked or ticketed to insure proper shade and size identification, except parts cut from ends. b. The use of corrosive metal fastening devices or machine sewn-on tickets shall be prohibited. c. The use of ink pad numbering machine, rubber stamp, or pencil will be permitted provided the numbers do not show through the outside of the garment and the numbers are covered by the seam allowance.					
4.	Attach center fronts to side fronts a. Join each center front to each side front face to face according to notches.	301 or 401	SSa-1	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
	b. Overedge stitch the edges together.	503 or 504 or 602	SSa-1	8-12	70	70
	or					
	c. Operations 4a and 4b may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 519	SSa-2	8-12	70	70
	d. Turn seam allowance towards center front and topstitch 3/16 inch from the folded edge.	301	LSq-2(b)	10-12	70	70
	e. Overedge stitch outer raw edge of center fronts and shoulder edges which shall form the facings as specified in operation 13.	502 or 503 or 504	EFd-1	8-12	70	70
5.	Assemble breast pockets and attach to fronts					
	a. Overedge stitch the top raw edge of pocket pieces. Fold the top edge of pocket as indicated by pattern marks forming the hem.	502 or 503 or 504	EFd-1	8-12	70	70
	b. The pockets may be creased on an edge creasing machine to insure uniformity of size and shape before stitching to the shirt.					
	c. Folding in raw edges, set pockets to shirt according to marks on patterns, edgestitching 1/16 inch from folded edge along the bottom and sides.	301	LSd-1	10-12	70	70
	d. Backstitch 3/4 inch each end of pocket openings with the backstitching superimposed upon pocket stitching.	301	Similar to LSd-2	10-12	70	70
	or					
	e. The top corners of the pocket may be tacked with a triangle stitching . The base of the triangle (1/8 to 3/16 inches long) shall be at the top of the pocket with the apex 1/2 to 3/4 inches below the top of the pocket.	301	Similar to LSd-2	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
	f. The finished pockets shall measure 4 3/4 (± 1/8) inches in vertical length and 4 1/4 (±1/16) inches in width for all sizes.					
	NOTE: The finished pocket shall be checked for size and uniformity against the pocket template.					
6.	Assemble pocket flaps and attach to fronts					
	a. Center fusible interlining to backside of outer ply of pocket flap.					
	b. Press fusible interlining to top ply of pocket flap in accordance with the directions of the fusible manufacturer.					
	c. With the top and underply pieces of pocket flaps positioned face to face, stitch along the sides and pointed edges 1/4 (± 1/16) inch from the raw edges.	301	SSe-2(a)	10-12	70	70
	d. Turn pocket flap to finished position, working corners, points and seams out smooth and flat to edges.					
	e. Topstitch 1/16 inch from the folded edges along the sides and pointed bottom edge.	301	SSe-2(b)	10-12	70	70
	f. Position pocket flaps to fronts with the raw edge 1/2 (± 1/16) inch above top edge of finished pockets and stitch 1/8 to 3/16 inch from the raw edge.	301	LSbk-2(a)	10-12	70	70
	g. Turn pocket flaps down and topstitch 5/16 inch from the folded edge. The raw edge of the pocket flaps shall not be exposed.	301	LSbk-2(b)	10-12	70	70
	h. The finished pocket flaps shall measure 4 3/8 (± 1/16) inches in width, 2 (± 1/16) inches in vertical length at center point and 1-3/8 (± 1/16) inches in vertical length at the sides for all sizes. NOTE: The finished flap shall be checked for size and uniformity against the flap template.					
7.	Close shoulders					
	a. Join fronts to back at shoulders, face to face.	301 or 401	SSa-1	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
	b. Overedge stitch the edges together.	503 or 504 or 602	SSa-1	8-12	70	70
	c. Operations 7a and 7b may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 519	SSa-2	8-12	70	70
	d. Press seam flat with seam allowance toward the back.					
8.	Assemble shoulder epaulets					
	a. Center fusible interlining to backside of top ply of epaulet.					
	b. Press fusible interlining to top ply of epaulet in accordance with the directions of the fusible manufacturer.					
	c. With the top and underply pieces of epaulets positioned face to face, stitch along the sides and pointed edge 5/16 to 3/8 inch from the raw edges.	301	SSe-2(a)	10-12	70	70
	d. Trim corners, work out points and turn inside out to finished position.					
	e. Stitch 1/16 inch from the folded sides and pointed edge of epaulets.	301	SSe-2(b)	10-12	70	70
9.	Set sleeves to armholes and attach epaulets					
	*a. Position assembled epaulets so that the center of the back (squared) end of epaulet is 1/4 (±1/16) inch forward of the shoulder seam, with the pointed end positioned 1/4 to 3/8 inch below the raw edge of neckline. Back end of epaulet shall be trimmed to match armhole.					
	b. Stitch the sleeves to the armholes according to marks on patterns, simultaneously catching back end of epaulet.	301 or 401	SSa-2	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
	c. Overedge stitch the raw edges together.	503 504 or 602	SSa-1	8-12	70	70
	or					
	d. Operations 9b and 9c may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	8-12	70	70
	e. The shoulder epaulets shall finish face side up and with the shorter straight edge towards the front of the shirt.					
	f. The width of the finished epaulets shall measure as follows: 1 1/2 (±1/8) inches at buttonhole 1 3/4 (±1/8) inches at armhole seam					
10.	Join side seams and underarm seams					
	a. Stitch raw edges of sides and underarms face to face. The armhole seams shall be folded towards the bottom of the sleeve.	301 or 401	SSa-1	10-12	70	70
	b. Overedge stitch the edges together.	503 504 or 602	SSa-1	8-12	70	70
	or					
	c. Operations 10a and 10b may be performed in one operation by simultaneously stitching and overedging. NOTE: Side and underarm seams shall be staggered not more than 1/4 inch.	515 516 or 519	SSa-2	8-12	70	70
11.	Hem sleeves					
	With the sleeve inseams folded towards the back, turn up the bottom edge of sleeves as indicated by pattern marks, with the raw edge folded under to the inside of sleeve and stitch 1/16 to 1/8 inch from the turned edge. The finished hem shall measure 1 3/8 to 1 1/2 inch in width.	301	EFb-1	10-12	70	70
	NOTE: The hemming of sleeve may be performed before or after joining of underarm seam. When sleeve is hemmed prior to joining underarm seams, end of seam shall be backtacked not less than 3/8 inch, or a horizontal bartack shall be placed across seam allowance, at the end of the underarm seam 3/16 to 1/4 inch from bottom of sleeve.	301 or bartack	SSa-1	10-12 21-28 stchs/ bartack	70 70	70 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

of compliance. Where certificates of compliance are / 1.2 Certificate

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
*12.	Assemble collar					
	a. Superimpose collar stay onto inside of undercollar and stitch collar stay tunnel according to marks on pattern for stay placement. Insert the special slotted stay so that the bottom of the slotted portion finishes 1 1/2 inches from the point of the finished collar.	301	SSv-2	10-12	70	-
	or					
	b. Spot laminate both ends of the special slotted stay positioned with the slotted stay as specified in operation above.					
	or					
	c. The special slotted stay may be stitched down the center of the stay, positioned as above. The end of the stitching shall extend beyond the ends of the stay by more than 3 stitches.	301	SSv-2	10-12	70	70
	d. Center fusible interlining to back of topcollar.					
	e. Press fusible interlining to back of topcollar in accordance with the directions of the fusible manufacturer.					
	f. Join the collar together with the topcollar and undercollar pieces face to face, and with collar stay material superimposed against the undercollar. Stitch together along outside edges 1/4 inch from the raw edge.	301 or 401	SSe-2(a)	10-12	70	70
	g. Trim corners, turn to finished position working out points.					
	h. Topstitch around the top side edges of collar, 3/16 inch from the folded edge. The stay shall not be caught in the topstitching.	301	SSe-2(b)	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
	i. Center fusible interlining to back of top collarstand. Press fusible interlining in accordance with the directions of the fusible manufacturer.					
	j. Insert collar leaf assembly between face sides of collarstands according to notches and stitch 3/8 inch from raw edges.	301	SSe-2(a)	10-12	70	70
	k. Turn to finished position and edgestitch 1/16 inch from folded edge.	301	SSe-2(b)	10-12	70	70
13.	Attach collar to shirt a. Fold back the left and right center fronts at notches to form a facing.					
	b. Insert collarstand between the front and facing and stitch from notch on neck edge for approximately 3 1/2 inches, finishing 3/4 inch from the shoulder seam. Stitching shall be 1/4 inch from the raw edge. At these points, clip through seam allowance, being careful not to damage sewn seam.	301	SSa-1	10-12	70	70
	c. Stitch inside ply of collarstand to neckline between clips made by the operator, with the stitching 1/4 inch from raw edge. Turn seam allowance into collarstand.	301	Similar to BSg-2(a)	10-12	70	70
	d. Turn facings to finished position.					
	e. Turn under raw edge of top collarstand and topstitch through all plies 1/16 inch from the turned edge, from clip to clip simultaneously catching the edge of the facing.	301	Similar to BSg-2(b)	10-12	70	70
	f. Position ends of the facing even with the edges of the shoulder seam allowance and tack stitch to seam allowance. Note: the tacking shall not be exposed on the outside of the shirt.	301	SSa-1	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
	g. The finished collar shall measure as follows: - Width at center back (measurement taken from top of collarstand to edge of collar) 1 3/4 (± 1/8) inches. - Length of points (measurement taken from base of collarstand to points of collar 3 1/4 (± 1/8) inches. -Length of points shall not vary more than 1/16 inch. h. Stamp the size label inscription as specified in 3.3.6.1 inside center back of collarstand. There shall be no evidence of the printing visible on outside of finished collar as worn. or i. Simultaneously center and catch the size label in the top collarstand stitching with operation 13e. NOTE: There shall be no evidence of the collar stay protruding into the fold of the finished top collar.					
14.	Hem bottom of shirt a. Overedge entire bottom edge of shirt with the side seams folded toward the back.	503 or 504 or 602	EFd-1	8-12	70	70
15.	Make buttonholes a. Make six (6) vertical buttonholes through right front, 3/4 (± 1/16) inch from folded edge and positioned in accordance with the buttonhole marker template. The template shall be used only on the completely assembled shirt.	Button - hole		42-46 per buttonhole including tack	50	50
	b. Make one vertical buttonhole in each pocket flap as indicated by finished pocket flap template, with the inside cut of the buttonhole to finish 1/2 (± 1/16) inch from the pointed edge.	Button - hole		42-46 per buttonhole including tack	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
	c. Make one horizontal buttonhole at top right front, as indicated by mark on template with the inside cut edge of the buttonhole to finish 5/8 (±1/16) inch from the finished front edge.	Button-hole		42-46 per buttonhole including tack	50	50
	d. Make one horizontal buttonhole centered in each shoulder epaulet with the inside cut of the buttonhole to finish 5/16 (± 1/16) inch from the pointed edge.	Button-hole	-	42-46 per buttonhole including tack	50	50
16.	Attach buttons					
	*a. Sew six (6) buttons securely to left front through all plies with the center of each button 3/4 (±1/8) inch from the front edge. Each button shall be positioned in the center of the corresponding buttonhole.	101	-	20-22 per button	50	-
		or				
		301	-	14-16 per button	50	50
	b. Sew one button through each pocket piece so that when the pocket and flap are buttoned, the button shall finish at the center of the buttonhole. NOTE: The button shall be sewn through all plies of the pocket hem.	101	-	20-22 per button	50	-
		or				
		301	-	14-16 per button	50	50
	*c. Sew one button through each shoulder, 1/4 (±1/16) inch forward of the shoulder seam, through all plies, to correspond with buttonhole in epaulet, so that when buttoned and in the finished position, the button shall finish at the end of the buttonhole nearest to the pointed end of the epaulet. There shall be no slack in the epaulet when buttoned. The epaulet shall lay smooth and flat along the shoulder area, with no bulging or distortion. The point may not extend beyond the collar seam.	101	-	20-22 per button	50	-
		or				
		301	-	14-16 per button	50	50
	*d. Sew one button to top left front through all plies 5/8 (± 1/8) inch from the finished front edge to correspond with the buttonhole at the top right front as indicated by mark on template. The button shall be positioned to the left of center of the buttonhole.	101	-	20-22 per button	50	-
		or				
		301	-	14-16 per button	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch/ in	Thread Ndl	Thread Bob/ Lpr
Note:	The buttons shall align evenly with corresponding buttonholes, so as to assure a neat and smooth closure.					
17.	Attach combination label (see 3.3.6) a. Center and stitch combination label to left front facing on inside of shirt around all four sides, 1/8 to 3/16 inch from the edge. The label shall finish face side up, with the top edge parallel to the folded front edge of facing and the side edge approximately 1 to 2 inches from the bottom edge of shirt. All of the printing shall be clearly visible. or b. The bottom edge of label may be simultaneously caught in the overedging of the center fronts specified in operation 4e. The remaining sides and top of the label shall be stitched as specified in operation 17a.	301	LSbj-1	10-12	70	70
18.	Clean shirt a. Trim all thread ends. NOTE: Care shall be taken when triming to ensure that damage to the fabric does not result. b. Remove all loose threads. c. Remove all spots, stains and size markings.					
19.	Press and prepare for packaging a. Press shirt with a heated pressing iron or machine. b. Button shirt and fold for packaging.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

gauge safety stitch

3.8 Sizes and measurements. The finished buttoned shirt shall conform to the dimensions specified in Table II. All measurements are expressed in inches.

Table II - Sizes and finished measurements

Ticket Size		A	B	C	D
		Bust	Length	Sleeve length	Collar
Bust	Collar				
32	12	37-3/4	27-1/8	4 1/4	12-1/2
32	13	37-3/4	27-1/2	4 1/4	13-1/2
34	12	39-3/4	27-1/8	4 1/4	12-1/2
34	13	39-3/4	27-1/2	4 1/4	13-1/2
34	14	39-3/4	27-7/8	4 1/4	14-1/2
34	15	39-3/4	28-1/4	4 1/4	15-1/2
36	13	41-3/4	27-1/2	4 1/4	13-1/2
36	14	41-3/4	27-7/8	4 1/4	14-1/2
36	15	41-3/4	28-1/4	4 1/4	15-1/2
38	13	43-3/4	27-1/2	4 1/4	13-1/2
38	14	43-3/4	27-7/8	4 1/4	14-1/2
38	15	43-3/4	28-1/4	4 1/4	15-1/2
38	16	43-3/4	28-5/8	4 1/4	16-1/2
40	14	45-3/4	27-7/8	4 1/4	14-1/2
40	15	45-3/4	28-1/4	4 1/4	15-1/2
40	16	45-3/4	28-5/8	4 1/4	16-1/2
42	16	47-3/4	28-5/8	4 1/4	16-1/2
Tolerances		±1/2	±1/2	±1/4	-1/2, +1/4

NOTE: A, B, C, and D refer to figures 1 and 2. A, B, and C measurements shall be taken with the shirt buttoned, laid flat and smooth.

A. Bust. Twice the measurement taken across the front at the base of the armhole from folded edge to folded edge.

B. Back length. Back length shall be taken along the center of the back from undercollar seam to bottom edge of shirt.

C. Sleeve length. Measurement shall be taken along inseam, from underarm seam to bottom edge of sleeve.

D. Collar. Measurement shall be taken from center of collar button to front cut edge of buttonhole, with the collar in a flat position.

3.9 Workmanship. The finished shirts shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected as specified for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, testing shall be performed on the components listed in Table III for characteristics noted. The contractor shall furnish a certificate of compliance for the color and thickness requirements for the fusible as required in 3.3.2 and 3.3.2.1 and the collar stay requirements of 3.3.4. All requirements are applicable to the sample unit. Whenever applicable, tests shall be in accordance with methods prescribed in FED-STD-191. All test reports shall contain the individual values utilized in expressing the final results. The lot shall be unacceptable if one or more units fail to meet any test requirements specified. All fused samples for Table III testing shall be fused on the end item manufacturer's equipment. Two sample units shall be taken regardless of end item lot size. The sample unit shall be expressed as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

specified herein. Unless otherwise specified, the issues of these the extent

Material	Sample unit for testing
Basic material and fusible interlining fused together	a 15 x 15 sample

Table III - Component Testing

Component	Characteristic	Requirement Paragraph	Test Method
Fusible interlining	Stiffness	3.3.2	
	Initial		5206
	After 25 launderings		AATCC-124-1984 1/ and 5206
	Peel strength	3.3.2	
	Initial		5951
	After 25 launderings		AATCC 124-1984 1/ and 5951
	Appearance of fused sample	3.3.2	
	Initial		Visual
	After 25 launderings		AATCC 124-1984 1/ and Visual

1/ One 15 x 15 inch specimen shall be laundered. Wash temperature shall be 140 ± 5 degrees F (60 ± 3 degrees C). Drying shall be performed only after the 25th washing. The evaluation portion of the AATCC test method is not applicable. Pressing of the sample prior to evaluation is prohibited.

4.4.1.2. In-process inspection.

4.4.1.2.1 Sample size. The size of the fused check sample shall correspond to the total area covered by the collar, collarstand, epaulets, and pocket flaps which are fused at one time on the press.

4.4.1.2.2 Number of check samples. One check sample (see 4.4.1.2.1) shall be prepared following fusing of every 1000 collars, collarstands, epaulets or pocket flaps as applicable, and tested for the characteristics in 4.4.1.2.3 and 4.4.1.2.4.

4.4.1.2.3 Appearance of the fused check sample. Each check sample shall be visually inspected for color change, bleed through and bubbling. If there is any evidence of these conditions present, the previously fused 1000 collars, collarstands, epaulets, or pocket flaps shall be inspected for the above conditions. Any sample units exhibiting any of these conditions shall be removed from the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.1.2.4 Peel strength. The method of testing shall be as specified in 4.4.1.2.4.1. If the check sample fails the peel strength test, the previously 1000 fused collars, collarstands, epaulets, or pocket flaps and check sample shall be re-fused after the fault has been corrected. If the check sample fails a second time, the 1000 collars, collarstands, epaulets, or pocket flaps shall be rejected.

4.4.1.2.4.1 Apparatus and procedure for in-process peel strength testing. The apparatus to be used for this test shall be a commercial type spring scale accurate to 0.5 Oz. The procedure to be followed in performing the test shall be as follows:

(1) Three 1 x 8 inch wide strips parallel to the warp direction shall be cut from right, middle and left side of the check sample for peel strength testing.
(2) Separate the fusible from the basic fabric at the end of the 1 inch wide strips for a distance of 2 inches.
(3) Secure the end of the basic fabric to a lightweight clamp-like holder 1 inch or more in width and approximately 1.0 ounce in weight. Hang the clamp to the end of the spring scale.
(4) Position the fusible in another clamp 1 inch or more in width and approximately 1.0 ounce in weight and pull the fusible downwards in a vertical direction with a steady continuous motion (motion to be exerted by hand) until complete separation of the fusible from the samples. Minimum peel strength reading shall be taken visually from the spring scale. Failure of any individual strip shall indicate failure of the check sample.

Note: Care shall be taken not to jerk the fabric during the testing.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL'S), shall be as indicated in 4.4.2.3. The sample unit shall be one finished shirt. The lot size shall be expressed in units of one shirt.

4.4.2.1 Visual examination. The shirt shall be examined for defects in design, material, construction, workmanship and marking and the defects classified in accordance with the list below. The terms "outside" and "inside" as used throughout this examination are defined as follows:

Outside Any part of shirt that is visible when the completely buttoned and closed shirt is examined.

Inside Any part of shirt that is not visible when the completely buttoned and closed shirt is examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
I MATERIAL DEFECT AND DAMAGE			
a. Any hole (including drill hole, cut, tear, smash, burn, or scorched area:			
1. On outside	X		
2. On inside (longest dimensions in any direction):			
(a) Up to 1/4 inch inclusive			X
(b) More than 1/4 inch		X	
b. Misweave, missing yarn, broken yarn, visible mend, or thin place, on outside 1/	X		
c. Loose yarn, snagged thread, or woven in waste 1/		X	
d. Embedded crease of a permanent nature in cloth	X		
e. Needle chew on outside (largest dimension in direction):			
1. Up to and including 1/2 inch		X	
2. More than 1/2 inch	X		
f. Knot or slub on outside: 2/			
Knots or slubs that exceed basic fabric requirements		X	
1/ This defect shall not be scored on the undercollar, underflaps, or under ply of shoulder epaulets.			
2/ For these defects, use the Sears Fabric Defect Scale (see 6.4) and the zones as shown in Figures 1 and 2.			
II SHADED PART			
a. Any component part required to be cut from one piece, shaded	X		
b. Variation in shade within an outside part or between outside parts	X		
c. Under collar, under collarstand, underply of epaulets, or pocket underflaps do not approximate the shade of the shirt			X
III CLEANNESS			
a. Spot or stain on outside 1/			
1. Any spot or stain in Zone X	X		
2. Any spot or stain in Zone Y larger than 1/4 inch in longest direction	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
b. Three or more thread ends not trimmed to 1/4 inch or less on outside		X	
c. Five or more thread ends not trimmed to 1/4 inch or less on inside			X
d. Two or more shade or size tickets not removed			X
e. Any shade or size markings visible on outside	X		
f. Any spot or stain on inside visible on outside		X	
1/ For these defects, use the zone areas as shown in Figures 1 and 2.			
IV CUTTING			
a. Any component part not cut in conformance with specification requirement	X		
b. Face of fabric not on outside	X		
V COMPONENT AND ASSEMBLY			
a. Any component part or required operation omitted (unless otherwise classified herein)	X		
b. Any component part twisted, distorted, pleated, misshaped, tight, or full (unless otherwise classified herein)		X	
c. Any component not as specified (type, size, color, etc.)	X		
d. Any operation not performed as specified (unless otherwise classified herein)	X		
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X	
VI PRESSING			
a. Omitted		X	
b. Burned or scorched	X		
c. Pressing excessive, forming gloss on outside		X	
VII SEAMS AND STITCHING			
a. Accuracy of seaming			
1. Seam irregular, twisted, pleated, or wavy on outside	X		
2. Seam puckered (score only when on major portion of seam)			X
3. Any part of shirt caught in an unrelated operation or stitching		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Classification Defect	Major	Minor A	 B
4. End of stitching, when not caught in other seams or stitching, backtacked less than 3/8 inch			X
5. Thread break secured by stitching back of the break less than 1/2 inch			X
6. Ends of a continuous line of stitching overlapped less than 1/2 inch			X
7. Wrong or varying shades of thread used on outside	X		
b. Gauge of stitching and seam allowance:			
1. Gauge irregular or not within range specified			X
2. Top stitching sewn too close to edge, resulting in damage to cloth	X		
3. Seam allowance not as specified		X	
c. Open seam:(resulting from 2 or more skipped, broken, run-off, or missing stitches)			
1. On all seams except label stitching			
(a) Up to 1/4 inch inclusive			X
(b) More than 1/4 inch up to and including 1/2 inch		X	
(c) More than 1/2 inch	X		
2. Label stitching			X
NOTE: A safety-stitch seam shall be considered open when either the inside stitch or the overedging is broken. A seam shall be classified as open when one or more stitches joining a seam are broken or runoff, or when two or more continuous skipped stitches occur.			
d. Runoff:			
1. On joining seam, score as open seam			
2. Top stitching (when not resulting in an open seam):			
(a) Up to and including 1/2 inch			X
(b) More than 1/2 inch		X	
e. Raw edge:			
1. On outside:			
(a) Up to and including 1/8 inch			X
(b) 1/8 inch to 1/2 inch inclusive		X	
(c) More than 1/2 inch	X		

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
2. On inside:			
(a) 1/2 inch to 1 inch inclusive			X
(b) More than 1 inch		X	
f. Seam and stitch type:			
1. Not specified seam or stitch type		X	
2. Any required line of stitching omitted	X		
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Any seam not lapped or finished as specified		X	
g. Broken, missing, or skipped stitches on top stitching (when seam is seamed, turned, and stitched):			
1. 1/4 inch up to and including 1/2 inch			X
2. More than 1/2 inch		X	
h. Stitch tension:			
1. Loose tension resulting in a loose seam	X		
- Up to 1/2 inch inclusive			X
- More than 1/2 inch up to 3/4 inch inclusive		X	
- More than 3/4 inch	X		
2. Loose tension on top stitching, resulting in exposed loose thread			X
3. Tight tension (stitches break when strain is applied in direction of seam or stitching)	X		
4. Tight tension (top & bottom thread loop not uniform)		X	
i. Stitches per inch (to be scored only when the condition exists on more than half the length of seam or stitching):			
1. Less than the minimum		X	
2. More than the maximum			X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
VIII BUTTONHOLE			
a. Omitted	X		
b. Not specified type or size		X	
c. Misplaced, not positioned as specified		X	
d. Ragged edge, incomplete stitching, stitching not securely caught in fabric		X	
e. Three or more broken stitches or three or more skipped stitches in one or more buttonholes		X	
f. Buttonhole stitching extending beyond bartack; stitches per buttonhole less than minimum specified			X
g. Finished cut length not as specified			X
h. Uncut or partially cut buttonhole		X	
IX BUTTON - One or more			
a. Missing, broken, defective, misplaced, not positioned or attached as specified, or insecurely sewn		X	
b. Not specified type, size, or color		X	
c. Stitching on one or more not locked at end of cycle (tug at the loose end of the thread when accessible to determine if it will ravel)		X	
*d. Stitching not caught through all plies			X
X COLLAR			
a. Any pleat, pucker, or crease			
1. On topcollar piece	X		
2. On undercollar piece		X	
b. Collar points uneven in length by:			
1. 1/8 inch up to and including 1/4 inch			X
2. More than 1/4 inch up to and including 3/8 inch		X	
3. More than 3/8 inch	X		
c. Twisted, not smooth, too full, short, or tight causing collar to turn out	X		
d. Edge of collar not properly forced out, i.e., having a fold of:			
1. 1/16 inch up to and including 1/8 inch in depth			X
2. More than 1/8 inch in depth		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

Defect	Classification Major	Minor A	Minor B
e. One or both collar stays missing	X		
f. One or both collar stays misplaced		X	
g. Edge of undercollar exposed beyond edge of top collar:			
1. 1/16 inch or more for a distance of 2 inches or more	X		
2. Less than 1/16 inch for a distance or 2 inches or more		X	
h. Width of collar at center back less than 1-5/8 inches or more than 1-7/8 inches		X	
i. Collar points measure less then 3 1/8 inches or more then 3 3/8 inches		X	
*j. Any evidence of the collar stay or reinforcement material protruding into the fold of the finished topcollar	X		
XI POCKETS OR FLAPS			
a. Not uniform in size or shape - any measurement varying from pocket to pocket or flap to flap:			
1. 1/4 inch up to and including 3/8 inch		X	
2. More than 3/8 inch	X		
b. Out of alignment at any point from pocket to pocket or flap to flap by: (Determination may be made by a straight edge)			
1. 1/4 inch up to and including 3/8 inch			X
2. More than 3/8 inch up to and including 1/2 inch		X	
3. More than 1/2 inch	X		
*c. Pocket or flap not according to template on any side by:			
1. More than 1/8 inch up to and including 3/16 inch			X
2. 1/4 inch or more		X	
*d. Unbalanced positioning between pockets to center front (measurement taken from side edge of pocket to center of buttonhole)			
1. 1/4 inch up to and including 3/8 inch			X
2. More than 3/8 inch up to and including 1/2 inch		X	
3. More than 1/2 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Classification Defect	Major	Minor A	Minor B
XII POCKET(S)			
a. Pocket edge(s) not parallel to front edge of shirt by:			
1. 3/16 inch up to and including 1/4 inch			X
2. More than 1/4 inch up to and including 3/8 inch		X	
3. More than 3/8 inch	X		
b. Edge of pocket pleated or twisted			X
c. Width of pocket less than 4-3/16 inches or more than 4-5/16 inches		X	
d. Vertical length of pocket less than 4-5/8 inches or more than 4-7/8 inches		X	
e. Pocket hem not overedged			X
f. Pocket not according to template on any side by:			
1. More than 1/8 inch up to and including 3/16 inch.			X
2. 1/4 inch or more		X	
XIII FLAP(S)			
a. Width of pocket flap less than 4-5/16 inches or more than 4-7/16 inches		X	
b. Vertical length of pocket flap at center less than 1-15/16 inches or more than 2-1/16 inches		X	
c. Vertical length of pocket flap at sides less than 1-5/16 inches or more than 1-7/16 inches		X	
d. Pocket exposed beyond end of flap by 1/8 inch or more w/flap unbuttoned		X	
e. Fabric threads visible after attachment of flap		X	
XIV FRONTS			
a. Any button out of alignment with corresponding buttonhole, causing a noticeable bulge		X	
b. Lengths of fronts uneven at bottom when buttoned:			
1. 3/8 inch up to 3/4 inch inclusive			X
2. More than 3/4 inch		X	
XV ARMHOLE AND SLEEVE			
a. Setting:			
1. Sleeve tight at armhole, causing pleats or excessive puckers on front, back, or sleeve		X	
2. Sleeves reversed, i.e., left sleeve in right armhole; right sleeve in left armhole	X		
3. End of side and underarm seams not staggered as specified			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
XVI SLEEVE HEM			
a. Hem twisted, pleated, or puckered		X	
b. Width not as specified		X	
c. Irregular in width by 1/4 inch or more		X	
d. Not bartacked when applicable		X	
XVII LABEL OR MARKING			
a. Not attached or affixed as specified, misplaced, or stitching through the printing		X	
b. Missing, incorrect, illegible, or strike through	X		
XVIII SHOULDER EPAULETS			
a. Not positioned as specified or attached crookedly		X	
*b. Not smooth and flat along shoulder area, affecting appearance			X
c. Width of finished epaulet less than 1-3/8 or more than 1-5/8 at buttonhole.		X	
d. Width of finished epaulet less than 1-5/8 inches or more than 1-7/8 inches at armhole seam		X	
*e. Epaulet tight, loose, or badly distorted when buttoned		X	
*f. Back (squared) end of epaulet center positioned less than 3/16 inch or more than 5/16 inch before shoulder seam.		X	
XIX FUSIBLE			
a. Omitted	X		
b. Twisted causing puckers or pleats on outside of shirt	X		
c. Any evidence of bleed through, delamination (such as bubbling), or color change	X		
d. Applied in incorrect location (i.e., to underflap in lieu of top flap as required)	X		
XX BARTACK OR TACK - One or more			
a. Missing, insecure, misplaced, not specified size or type, or not serving intended purpose:			
1. Bartack for attachment		X	
2. Bartack for reinforcement			X
b. Loose stitch tension			X

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.2.2. Dimensional examination. The shirt shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from the dimensions and tolerances specified in Table II shall be scored as a size measurement defect.

b. Sleeves uneven in length by 1/2 inch or more shall be scored as a size measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and acceptable quality levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

	AQL	Inspection level
For defects applicable to 4.4.2.1		III
Major	1.5	
Major and minor A	6.5	
Major, Minor A and Minor B (combined)	15.0	
For defects applicable to 4.4.2.2		
One class	4.0	S-3

* 4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing and marking comply with the section 5 requirements of this specification. The sample unit shall be one shipping container fully prepared for delivery. Examination for closure defects listed below shall be made. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper location, sequence or method of application. Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as; incomplete closure of container flaps, loose strapping, inadequate stapling or improper taping. Bulged or distorted container. Open and non-continuous heat sealed seams of polyethylene bag or incorrectly fabricated bag
Content	Number of shirts per shipping container more or less than specified. 1/

1/ For this defect, one container in the sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Level A. Each fully buttoned shirt shall be neatly folded to measure approximately 14 inches by 10 inches. The folded shirt shall be secured with stainless steel (AISI type 304 or 316) pins, aluminum clips or plastic fasteners. Each shirt shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (+ 25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape.

5.1.2 Level C. Shirts shall be packed to afford adequate protection against deterioration and physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be Level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 5.2.1 Level A. Thirty-four (34) shirts of one class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, grade V15c, variety DW, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat two in length, one in width, and seventeen in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

* 5.2.2 Level B. Thirty-four (34) shirts of one class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, grade 200, variety DW, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat two in length, one in width, and seventeen in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Commercial. Shirts packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Palletization. When specified (see 6.2), shirts, packed as specified shall be palletized on a 4-way entry pallet in accordance with load type IA of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means C, K and L, or O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII fabricated from wood groups I, II, III, or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected be reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.4.1 Polythylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

SHIRT, WOMAN'S, DRESS, WHITE (SHORT SLEEVE)
STOCK NO:
SIZE:
QUANTITY:

6. NOTES

6.1 Intended use. The shirts are intended for wear by female military personnel of the Department of the Navy.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When first article inspection is required, the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval. (see 3.2)
(e) When palletization is required (see 5.3).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids. (see 3.1 and 3.5)

6.4 References.
(a) Sears Fabric Defect Scales are available from: Sears Roebuck and Company, Department 733Q, "Sears Defect Kit", Sears Tower, Chicago, IL 60684
(b) Slotted collar stays designed especially for use with military insignia (style DPSS) are available from: National Flexway Co. 1040 Avenue of the Americas, New York, N.Y. 10018

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

*6.6 Subject term (key word) listing:
Epaulets
Interlining, Fusible
Poplin, Polyester/Cotton
Sleeve, Short
Shirt, Woman's, Dress


Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8410-N665

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

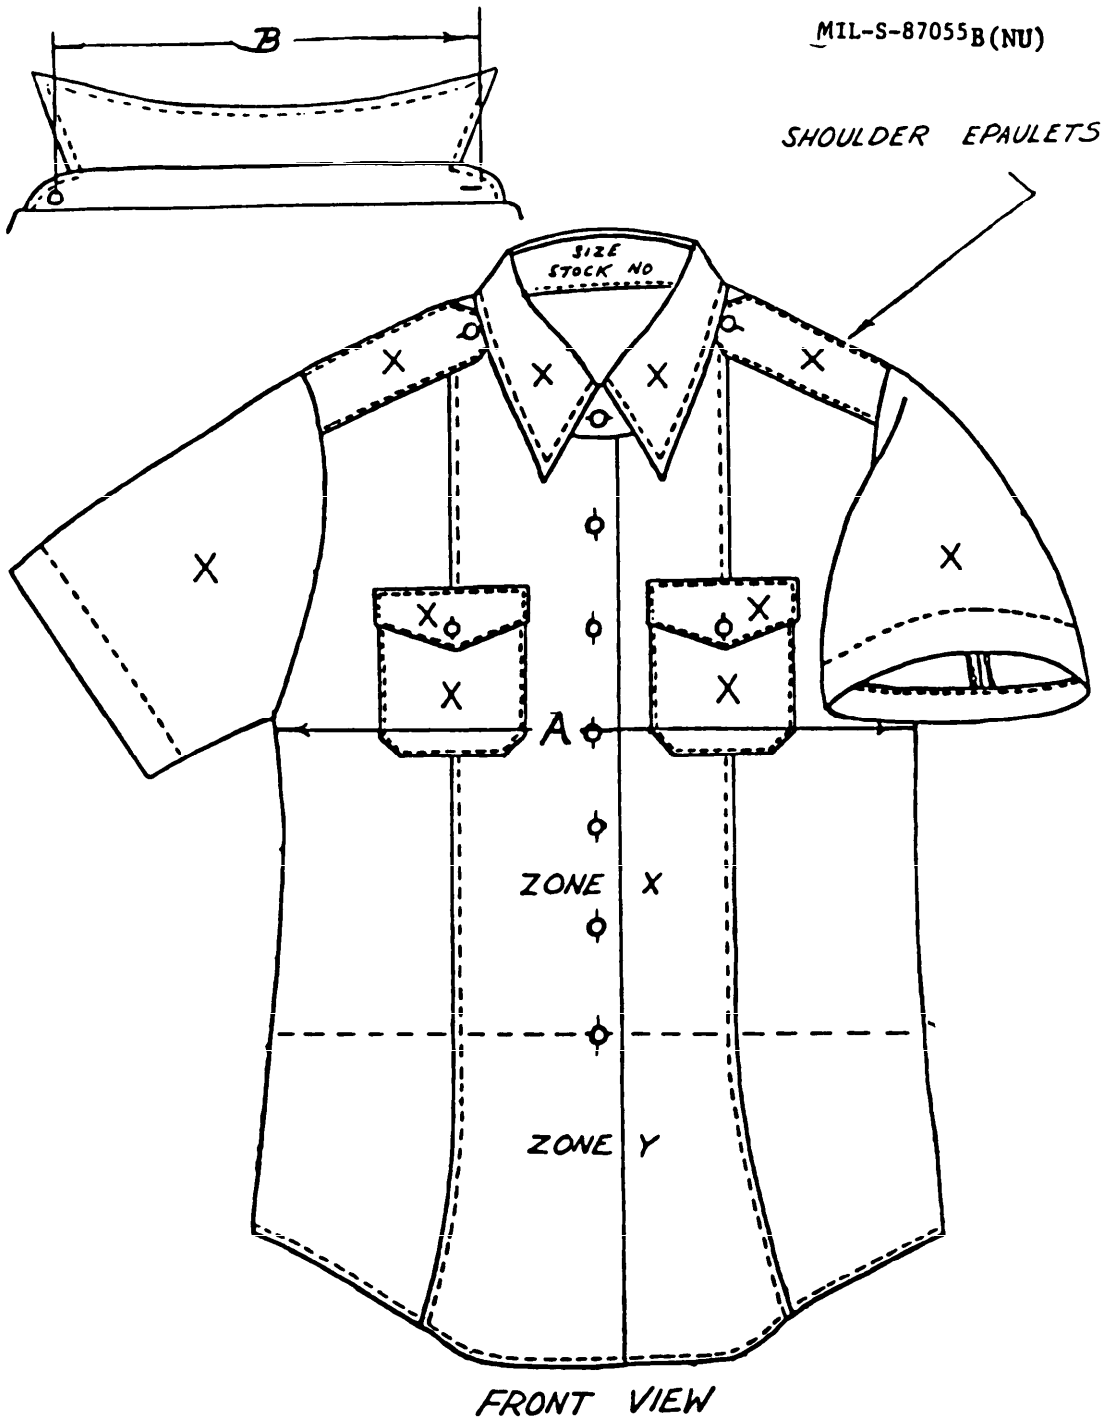

FRONT VIEW

ZONES X AND Y (DEFECT AREAS) SHALL APPLY ONLY TO THE OUTSIDE FRONT AND BACK AS ILLUSTRATED

FIG. 1 - SHIRT, WOMAN'S, DRESS, WHITE (SHORT SLEEVES)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

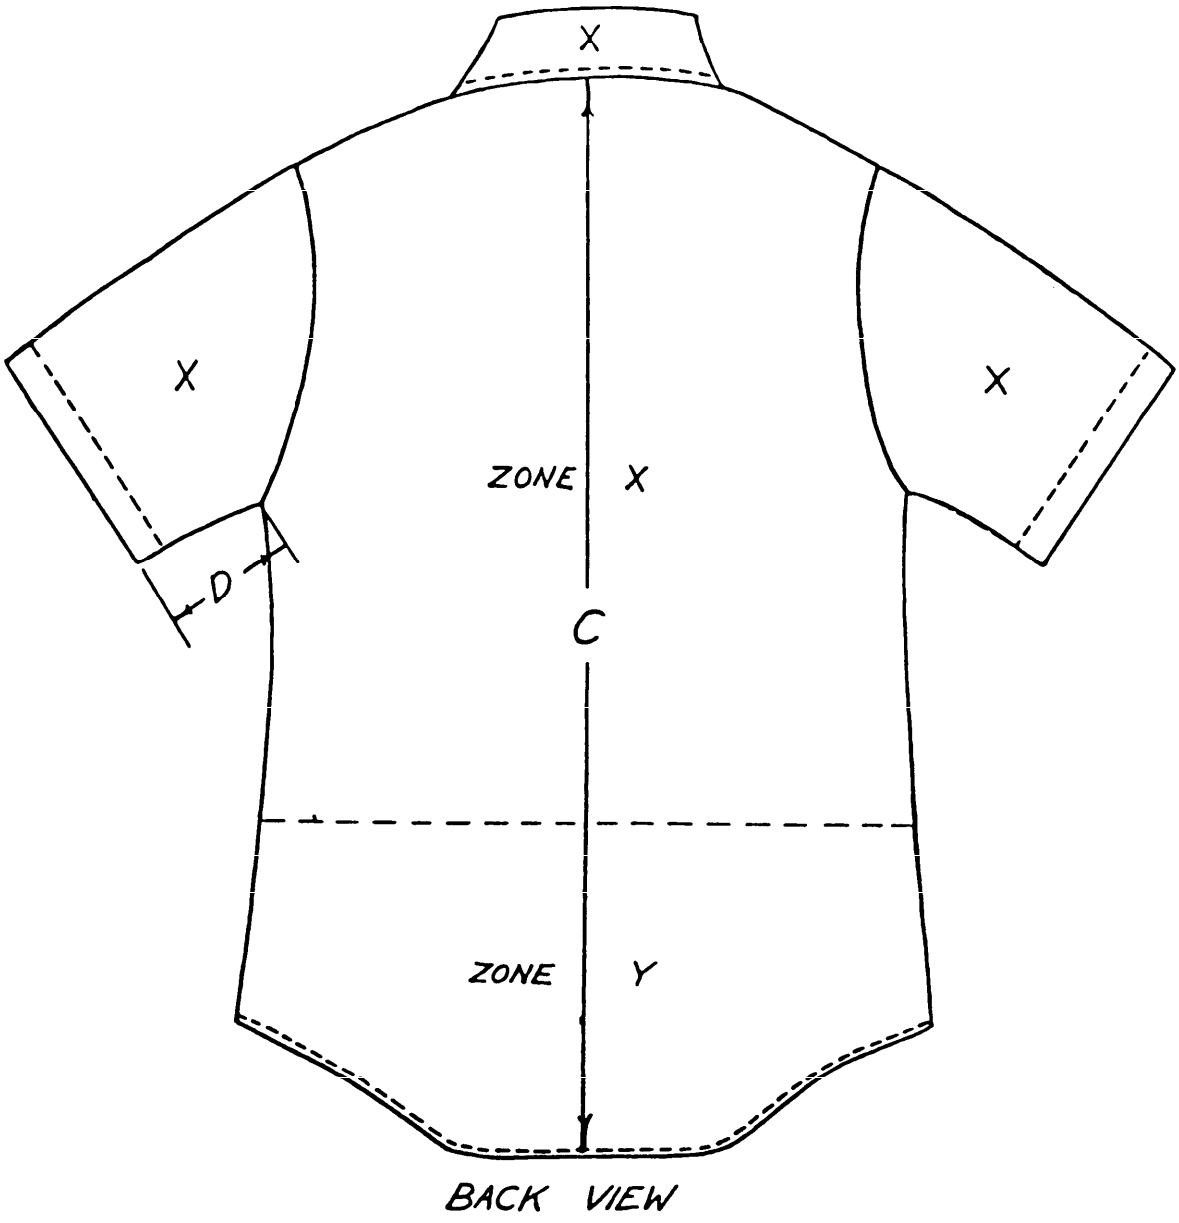


FIG. 2 - SHIRT, WOMAN'S, DRESS, WHITE (SHORT SLEEVES)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research
Facility
21 Strathmore Road
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-87055B(NU)	SHIRT, WOMAN'S, DRESS, WHITE (SHORT SLEEVE)

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.