MIL-S-87056A(NU)
27 November 1985
SUPERSEDING
MIL-S-87056(NU)
16 November 1978

MILITARY SPECIFICATION

SHIRT, WOMAN'S DRESS BLUE (LONG SLEEVE)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a woman's long sleeve dress shirt, made of a polyester/wool tropical material.

1.2 Classification. The shirt shall be of one type and class, and procured in the following sizes and sleeve lengths(see 6.2):

Class 2 - Without shoulder epaulets

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

1.2.1 Sizes.

1.2.1.1 Bust. 32, 34, 36, 38, 40 and 42.

1.2.1.2 Neck. 12, 13, 14, 15 and 16.

1.2.1.3 Sleeve lengths: 29, 30, 32 and 34.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

SPECIFICATIONS

FEDERAL

NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way
DDD-L-20	- Label; for Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17143	- Button, Insignia (Anchor, Plastic, Black)
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-24910	- Cloth, Tropical: Polyester/Wool
MIL-T-43548	- Thread, Polyester, Cotton-Covered and Rayon-Covered
MIL-C-43594	- Cloth, Interlining, Polyester
MIL-P-55010	- Plastic, Sheet, Polyethylene Terephthalate

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Load

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of the Manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Shades for Buttons - 1966

Standard Shades for Threads - 1968

(Application for copies of color cards should be addressed to The Color Association of the U.S., 24 E. 38th Street, New York, NY 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material shall be a polyester/wool tropical material conforming to MIL-C-24910.

3.3.2 Thread.

3.3.2.1 Thread, polyester, covered. The thread for seaming and stitching the shirt shall be a polyester covered thread, shade Black, A.A., 66043, conforming to MIL-T-43548. In Table I, where seaming or overedging is specified, use Ticket No. 70, two or three ply, and where button and buttonhole stitching is specified, use Ticket No. 50, two or three ply.

3.3.2.2 Colorfastness. The dyed thread of 3.3.2.1 shall show fastness to light and laundering equal to or better than the standard sample when tested as specified in MIL-T-43548. When no standard sample is available, the dyed thread in 3.3.2.1 shall show a minimum of "good" fastness to light and laundering when tested as specified in MIL-T-43548.

3.3.3 Buttons, plastic. The plastic buttons used for the fronts, cuffs, and pocket flap closures shall be a 25-line anchor insignia type conforming to Class 1 of MIL-B-17143.

3.3.4 Label.

3.3.4.1 Combination label. Each shirt shall have a combination identification, instruction and personal label conforming to Type VI, classes 10 and 15 of DDD-L-20. The marking shall show colorfastness to laundering. The inscription and format shall be as follows:

NAME:
SERVICE NO:
SHIRT, WOMAN'S, DRESS, BLUE (LONG-SLEEVE)
FIBER CONTENT: 75% POLYESTER/25% WOOL
CONTRACT NO: DLA 100-00-0-0000 (Example)
NAME OF CONTRACTOR:

LAUNDERING INSTRUCTIONS
Machine Wash, Permanent Press Cycle,
Warm Water (120 degrees F Max.) DO NOT BLEACH
Tumble Dry, Medium Heat-Remove Immediately
May Also Be Dry Cleaned
Or
Follow NAVEDTRA Manual 414-01-45-81
Formula III

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

(1) Two loops on front of skirt, each one 1/4

3.3.4.2 Size label. Each shirt shall have a size label conforming to Type VI, Class 2 of DDD-L-20. The inscription shall be as follows:

34B - 15 N - 29 S (Example)
STOCK NUMBER - 8410-00-000-0000 (Example)

Note: The bust, neck and sleeve length may be abbreviated as "B", "N" and "S" as shown above.

3.3.5 Interlining, polyester. The material to be used for interlining the collarband, collar, pocket flaps, and cuffs shall be a polyester interlining conforming to MIL-C-43594. The color shall be Black.

3.3.6 Collar stay. The collar stay shall be of the special slotted type and shall be made from polyethylene terephthalate plastic sheet conforming to MIL-P-55010, except the thickness shall be 0.009 $\pm$ 0.0015 inch, the color shall be natural (clear or opaque) and the transparency and optical properties shall not apply. The stay shall measure not less than 1/4 inch or more than 3/8 inch wide and 2 1/8 to 2 3/4 inches in length when tested as specified in 4.4.1. Both ends shall be round, pointed, cut on an angle or any combination thereof. When other than round, points shall be rounded. The slotted portion shall be especially designed to accommodate collar insignia (see 6.4). The slot shall be towards the collar point in the finished shirt.

* 3.4 Design. The long sleeve shirt shall be of a two-piece princess style front and a one piece back, seven (7) button front closure, breast patch pockets with buttoned down flaps and convertible collar with collar band and collar stays. The sleeves shall have a placket at cuff opening, with two (2) buttons on each cuff for adjustment (see Figures 1 and 2).

3.4.1 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the specification and the figures, the specification shall govern.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way. The patterns provide an allowance of 1/4 inch for all seams except for the front seam which shall be 3/8 inch. Unless otherwise indicated in Table I, seams shall be in accordance with these seam allowances.

* 3.5.1 Pattern parts. The component parts shall be cut from the material as specified and in accordance with the following list of pattern parts:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Material	Pattern Parts	Cut Parts
Basic material	Back	1
	Center fronts	2
	Side fronts	2
	Sleeves	2
	Collar,	2
	Collar band	2
	Collar stay	2
	Cuff 1/	2
	Sleeve placket 1/	2
	Sleeve binding	2
	Pocket (patch)	2
	Pocket flap	4
Interlining, polyester	Cuff interlining	2
	Pocket flap interlining	2
	Collar interlining	1
	Collar band interlining	1
Templates	Template, finished pocket	-
	Template, finished flap	-
	Template, buttonhole marker	-

1/ Two piece construction is permitted, however, patterns must be adjusted to accommodate for seam allowances.

3.6 Construction.

3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types, as specified in Table I shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitchings are given for the same operation, any one of them may be used. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seam result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the shirt. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. The width of the safety stitch shall be 3/8 inch and the guide and knives on the machine shall be set to trim only the raveled ends of the fabric.

3.6.2 Stitches per inch. The minimum and maximum number of stitches shall be as specified in Table I.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked.

3.6.4 Buttonholes. The buttonholes shall be straight style with both ends securely barred. The finished cut length shall be 3/4 (+ 1/16) inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.7 Manufacturing operations requirements. The shirts shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished shirts are identical to that produced by following the sequence listed in Table I.

3.7.1 Pressing operations. All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

3.7.2 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:52Z
Check the source to verify that this is the current version before use.

The shirt shall be of one type in the following sizes 1.2 Classification

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
1.	Cutting a. All components of the basic cloth shall be cut in strict accordance with patterns furnished, which show size, shape, placement of pockets and flaps, directional lines for cutting and notches for proper assembly of all parts. b. Cut the components from one piece of material, except for the undercollar, sleeve binding, and underply pieces for both pocket flaps which may be cut from ends. Parts cut from ends shall approximate the shade of the main assembly. c. The component parts cut from the basic cloth shall finish with the face side of the material on the outside. d. Cut the stripping (if alternate method is used) for the sleeve binding and sleeve placket of sufficient width to comply with operation 10 and 11. The stripping may be placed on rolls, however, there shall be no piecing visible on the shirt and stripping shall approximate the shade of the shirt.				
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in section 4,shall be removed from production and replaced with non-defective and properly matched material.				
3.	Shade and size markings a. All parts shall be bundled, marked, or ticketed to insure proper shade and size identification, except parts cut from ends. b. The use of corrosive metal fastening devices or machine sewn-on tickets shall be prohibited.				

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
	c. The use of ink pad numbering machine, rubber stamp, or pencil will be permitted provided the numbers do not show through the outside of the garment and the numbers are covered by the seam allowance, when possible.				
*4.	Attach center fronts to side fronts				
	a. Join center fronts to side fronts face to face.	301 or 401	SSa-1	10-12	
	b. Overedge stitch the edges together.	503 or 504 or 602	SSa-1	8-10	
	or				
	c. Operations 4a and 4b may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 519	SSa-2	8-10	
	d. Turn seam allowances towards center fronts and top stitch 3/16 inch from the folded edge.	301	LSq-2(b)	10-12	
	e. Overedge stitch outer raw edges of center fronts and shoulder edges which will form the facing as specified in operation 16a.	502 or 503 or 504	EFd-1	8-10	
5.	Make patch pockets				
	a. Overedge stitch top raw edge of pockets. Fold the top edge of pocket as indicated by pattern marks forming hem.	502 or 503 or 504	EFd-1	8-10	
	b. The pockets may be creased on an edge creasing machine to insure uniformity of size and shape before stitching to the shirt.				
6.	Attach patch pockets				
	a. Set pockets to shirt according to marks on patterns, edgestitching 1/16 from folded edge along the bottom and sides.	301	LSd-1	10-12	
	b. Backstitch 3/4 inch each end of pocket openings with the backstitching superimposed upon pocket stitching.	301	Similar to LSd-2	10-12	
	or				

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
	c. The top corners of the pocket may be tacked with a triangle stitching. The base of the triangle (1/8 to 3/16 inches long), shall be at the top of the pocket with the apex 1/2 to 3/4 inches below the top of the pocket.	301	Similar to LSd-2	10-12	
	d. The finished pocket for all sizes shall measure 4-1/4 (+ 1/8) inches wide and 4-3/4 (+1/8) inches deep at center front.				
	Note: The finished pocket shall be checked for size and uniformity against the pocket template.				
*7.	Make pocket flaps				
	a. Superimpose interlining to backside of outer ply of pocket flap. With right sides together superimpose pocket flap pieces and stitch along sides and pointed edge 1/4 inch from raw edges.	301 or 401	SSe-2(a)	10-12	
	b. Turn to finished position, working corners and seams out smooth and flat to edges.				
	c. Topstitch sides and pointed edge 1/16 inch from turned edge.	301	SSe-2(b)	10-12	
8.	Attach pocket flaps				
	a. Position flaps on shirt 1/2 (+ 1/16) inch above top edge of finished pocket, and stitch 1/8 to 3/16 inch from the raw edge.	301	LSbk-2(a)	10-12	
	b. Turn flaps down and topstitch 5/16 inch from folded edge. Backstitch end of topstitching. The raw edge of the pocket flap shall not be exposed.	301	LSbk-2(b)	10-12	
*	c. The finished flap shall measure 4-3/8 (+ 1/8) inches wide, 1-3/8 (+ 1/16) inches deep at the sides and 2 (+ 1/16) inches deep at the center for all sizes.				
	Note: The finished flap shall be checked for size and uniformity against the flap template.				

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
9.	Join shoulder seams.				
	a. Stitch the back and fronts at shoulder seams, face to face.	301 or 401	SSa-1	10-12	
	b. Overedge stitch the edges together.	503, 504 or 602	SSa-1	8-10	
	or				
	c. Operation 9a and 9b may be performed in one operation by simultaneously stitching and overedging in one operation.	515, 516 or 519	SSa-2	8-10	
	d. Press seam flat, with seam allowance toward the back.				
10.	Make sleeve openings				
	a. Bind underside of sleeve openings with a continuous 1-1/2 inch wide strip of basic fabric. Fold strip in half, turn raw edges of bindings inside, inserting edges of sleeve openings. Stitch through all plies of material, 1/16 inch from folded edge of binding.	301 or 401	BSc-1	10-12	
	or				
	b. A folder may be used to perform this operation.				
	c. The finished binding shall measure 3/8 (± 1/16) inch in width.				
11.	Attach sleeve placket				
	a. Fold sleeve placket piece according to marks on pattern, and stitch 1/16 inch in from the folded edge.	301	OSf-1	10-12	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
	b. Join narrow face side of placket piece to underside of sleeve opening, and stitch 1/8 to 3/16 inch from the raw edge.	301	SSa-1	10-12	
	c. Turn placket to outside of sleeve.				
	d. Fold under the raw edge of sleeve placket 3/16 to 1/4 inch to form a point. Stitch to sleeve opening 1/16 inch from the folded edge, along both sides of the placket, continuing the stitching around the pointed end, ending 1-1/2 to 1-5/8 inches from the point. Place a row of horizontal stitching across the placket, 1-1/2 to 1-5/8 inches from the pointed end.	301 or 401	LSd-1 and SSa-1	10-12	
	e. As an alternate, the sleeve placket maybe stitched to sleeve opening in one operation using a folder. The pointed end and folded edge of placket shall be finished as specified above.	301 or 401	LSe-1 and LSd-1	10-12	
	f.The finished sleeve placket shall measure 1-3/8 (+ 1/8) inches in width and 4-1/2 (+ 1/4) inches in length when measured from top edge of cuff to the pointed end.				
	Note: Placket length shall not vary more than 1/2 inch between sleeves on any single shirt.				
12.	Set sleeves to armholes a. Having face sides together and notches aligned, stitch the sleeves to the armholes.	301 or 401	SSa-1	10-12	
	b. Overedge stitch the raw edges together. or	503 504 602	SSa-1	8-10	
	c. Operations 12a and 12b may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	8-10	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
	d. Press armhole seam flat, with seam allowance away from body of shirt.				
13.	Join side seams and underarm seams				
	a. With face sides together, stitch the side seams and underarm seam in one operation.	301 or 401	SSa-1	10-12	
	b. Overedge stitch the raw edges together.	503 504 or 602	SSa-1	8-10	
	or				
	c. Operations 13a and 13b may be performed in one operation by simultaneously stitching and overedging. NOTE: Side and underarm seams shall be staggered not more than 1/4 inch.	515 516 or 519	SSa-2	8-10	
	d. Press side and underarm seam flat, with seam allowance of armhole towards the bottom of the sleeve.				
*14.	Make and set cuff				
	a. Center interlining on the backside of top ply of cuff aligning edge of interlining in accordance with fold marks on pattern.	301 or 401 and 301	SSe-2	10-12	
	b. Fold top edge of cuff under 1/2 inch and stitch 3/16 to 1/4 inch from folded edge.	301 or 401	EFa-1	10-12	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
	c. With face sides together, fold cuff in half lengthwise along foldline marked on pattern and stitch sides together 5/16 to 3/8 inch from raw edges. Turn to finished position and top stitch bottom and side edges of cuff 3/16 to 1/4 inch from folded edge. The top stitching on the side of the cuff shall finish 1/2 (+1/8) inch from top edge of finished cuff. The top stitching may taper to edge of cuff at ends of stitching and need not be backstitched.	301 or 401 and 301	SSe-2	10-12	
	NOTE: If a two piece cuff construction is used, the top cuff shall be interlined and seam allowances adjusted accordingly. Position cuff pieces face to face and stitch bottom and side edges together. Continue as stated in operation 14c.	301 or 401	SSe-2	10-12	
	d. Stitch the raw edge of the under ply of cuff to the bottom edge of sleeve 3/16 to 1/4 inch from edge, putting three pleats in sleeve according to marks on pattern. The pleats shall be folded towards the sleeve placket opening. The sleeve inseam shall be folded towards the back.	301	SSa-1	10-12	
	e. Turn cuff to finished position and stitch 1/16 to 1/8 inch from the folded top edge to the bottom of sleeve on the outside.	301	LSb-1	10-12	
	f. The finished cuff shall be a uniform depth measuring 2-1/4 (+1/8) inches.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
*15.	Assemble collar					
	a. Superimpose collar stay material onto inside of undercollar and stitch collar stay tunnel according to marks on pattern for stay placement. Insert the special slotted stay so that the slotted portion finishes 1 inch from the bottom and front collar edges of the finished shirt. The stay shall not be caught in the edge stitching of the collar.	301	SSv-1	10-12		
	or					
	b. Spot laminate both ends of the special slotted stay with the slotted stay positioned as specified in operation above.					
	or					
	c. The special slotted stay may be stitched down the center of the stay, positioned as above. The end of the stitching shall extend beyond the ends of the stay by more than 3 stitches.	301	SSv-2	10-12		
	d. Center interlining to back of topcollar and join the topcollar and undercollar pieces together face to face. The collar stay material shall be superimposed against the undercollar. Stitch together along outside edges 1/4 inch from the raw edge.	301 or 401	SSe-2(a)	10-12		
	e. Trim corners, turn to finished position working out points. The slotted stay on undercollar stay reinforcement material shall finish on the underside of the interlining piece.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
	f. Topstitch around the top side edges of collar, 3/16 inch from the folded edge.	301	SSe-2(b)	10-12	
	g. Center interlining to back of top collarband.				
	h. Insert collar between face sides of collarbands and stitch 3/8 inch from raw edges.	301	SSe-2(a)	10-12	
	i. Turn to finished position and edgestitch 1/16 inch from folded edge.				
	16. Attach collar to body of shirt a. Fold back left and right center fronts, face to face, at notch to form facing.				
	b. Insert collarband between the front and facing and stitch from the notch for approximately 3-1/2 inches, finishing 3/4 inch from the shoulder seams. Stitching shall be 1/4 inch from the raw edge. At these points, notches shall be made through all plies by the operator.	301	SSa-1	10-12	
	c. Stitch collarband to back at neckline between the notches made by the operator, with the stitching 1/4 inch from the raw edge.	301	BSg-2(a)	10-12	
	d. Turn facings to finished position.				
	e. Turn under raw edges of top collarband and topstitch through all plies 1/16 inch from the turned edge, from notch to notch, simultaneously catching the edge of facing in the stitching. The type VI size label shall be stitched in the center of the collarband.	301	BSg-2(b)	10-12	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
	f. Position ends of facing even with the edges of the shoulder seam allowance and stitch to seam allowance. Or the ends of the facing may be secured to the shoulder seam allowances with a tack. NOTE: The tacking shall not be exposed on the outside of the shirt.	301 or tack	SSa-1	10-12 or 14 per tack	
	g. The finished collar shall measure as follows: - Width at center back 1-3/4 (+ 1/8) inches. (Measurement taken from top of collarband to edge of collar). - Length of point 3-1/4 (+1/8) inches. (Measurement taken from base of collarband to points of collar. - Points shall be equal in length. Note: There shall be no evidence of the collar stay or reinforcement piece protruding into the fold of the finished topcollar.				
17.	Hem fronts and backs a. Overedge entire bottom edge of shirt, with the side seams folded towards the back and facing turned to the finished position.	502 or 503 or 504	EFd-1	8-12	
18.	Make buttonholes a. Make six (6) vertical buttonholes in right front, 3/4 (+ 1/16) inch from the folded edge and positioned in accordance with the buttonhole marker template. The template shall be used only on the completely assembled shirt.	Button-hole		42-46 per button-hole not includ-ing tacks.	
	b. Make one vertical buttonhole centered in each pocket flap as indicated by pattern marks,with the inside cut of the buttonhole to finish 1/2 (+ 1/16) inch from the pointed edge.	Button-hole		42-46 per button-hole not includ-ing tacks	

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	c. Make one horizontal buttonhole, at top right front, as indicated by mark on template with the inside cut edge of the buttonhole to finish 5/8 (+ 1/16) inch from the finished front edge.	Button-hole		42-46 per button-hole not includ-ing tacks.		
	d. Make one horizontal buttonhole centered in each cuff with the inside cut edge of the buttonhole to finish 1/2 (+ 1/16) inch from the side edge.	Button-hole		42-46 per button-hole not includ-ing tacks.		
19.	Sew on buttons a. All buttons shall be in line with corresponding buttonholes.					
	b. Sew six (6) buttons securely by machine to left front, through all plies, with center of button 3/4 (+ 1/8) inch from front edge of facing, corresponding to respective buttonholes. The bottom of the anchor shall point downwards and button shall be positioned in center of the buttonhole.	301 or 101		14-16 per button 20-22 per button		
	c. Sew one button through each pocket piece so that when the pocket and flap are buttoned, the button shall finish at the center of the buttonhole. The bottom of the anchor shall point downwards. NOTE: The button shall be sewn through all plies of the pocket hem.	301 or 101		14-16 per button 20-22 per button		

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	d. Sew two buttons on each cuff aligned and centered to correspond with buttonholes in cuffs; with center of first button 5/8 (+ 1/16) inch from edge and center of second button placed one inch from the center of first. The bottom of the anchor shall point towards the bottom of the cuff.	301 or 101		14-16 per button 20-22 per button		
	e. Sew one button to left front of collarband through all plies, to to correspond with buttonhole. The button shall be centered with the center of the button 5/8 (+ 1/16) inch from the front edge. The bottom of the anchor shall point downwards. The button shall be positioned to the left of center of the buttonhole. NOTE: The buttons shall align evenly with corresponding buttonholes, so as to assure a neat and smooth closure.	301 or 101		14-16 per button 20-22 per button		
20.	Attach combination label. a. Center and stitch combination label to left front facing on inside of shirt around all four sides, 1/8 to 3/16 inch from the edge. The label shall finish face side up, with the top edge parallel to the folded front edge of facing and the side edge approximately 1 to 2 inches from the bottom edge of the shirt. All printing shall be clearly visible. or b. The bottom edge of label may be simultaneously caught in the overedging of the center fronts specified in operation 4e. The remaining sides and top of the label shall be stitched as specified above.	301	LSbj-1	10-12		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRTS

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr
23.	Clean shirts a. Trim all thread ends inside and out. Care shall be taken when trimming to ensure that damage to the fabric does not result. b. Remove all loose threads inside and out. c. Remove all spots, stains, and shade tickets.				
22.	Press shirts a. The entire shirt shall be neatly pressed with a heated iron or pressing machine. Care should be taken during pressing to avoid excess gloss and shine through garment. NOTE: The use of steam inflated bag type machine is prohibited for pressing. b. Button shirt and fold for packaging.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of the finished shirts shall be as shown in Table II (see figure 1 and 2). All measurements are expressed in inches.

Table II - Sizes and finished measurements

Ticket Size Bust-neck	A Bust	B Back Length	C Sleeve lengths	D Collar
32 - 12	37-3/4	27-1/8	29,30,32,34	12-1/2
32 - 13	37-3/4	27-1/2	29,30,32,34	13-1/2
34 - 12	39-3/4	27-1/8	29,30,32,34	12-1/2
34 - 13	39-3/4	27-1/2	29,30,32,34	13-1/2
34 - 14	39-3/4	27-7/8	29,30,32,34	14-1/2
34 - 15	39-3/4	28-1/4	29,30,32,34	15-1/2
36 - 13	41-3/4	27-1/2	29,30,32,34	13-1/2
36 - 14	41-3/4	27-7/8	29,30,32,34	14-1/2
36 - 15	41-3/4	28-1/4	29,30,32,34	15-1/2
38 - 13	43-3/4	27-1/2	29,30,32,34	13-1/2
38 - 14	43-3/4	27-7/8	29,30,32,34	14-1/2
38 - 15	43-3/4	28-1/4	29,30,32,34	15-1/2
38 - 16	43-3/4	28-5/8	29,30,32,34	16-1/2
40 - 14	45-3/4	27-7/8	29,30,32,34	14-1/2
40 - 15	45-3/4	28-1/4	29,30,32,34	15-1/2
40 - 16	45-3/4	28-5/8	29,30,32,34	16-1/2
42 - 16	47-3/4	28-5/8	29,30,32,34	16-1/2
Tolerances	±1/2	±1/2	±1/2	-1/2, +1/4

NOTE: A, B, C, and D refer to figures 1 and 2. A, B, and C measurements shall be taken with the shirt buttoned, laid flat, and smooth.

A. Bust. Twice the measurement taken across the front at the base of the armhole from folded edge to folded edge.

B. Back length. Back length shall be taken along the center of the back from collarband seam to bottom edge of shirt.

C. Sleeve length. Measurement shall be taken from center of back at collarband seam, diagonally across back along sleeve to top fold at bottom edge of cuff.

D. Collar. Measurement shall be taken from center of neckline button to front cut edge of buttonhole, with the collar in a flat position.

3.9 Workmanship. The finished shirts shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected as specified for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. The contractor shall furnish a certificate of compliance for the collar stay requirements of 3.3.6.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL'S), shall be as indicated in 4.4.2.3. The sample unit shall be one finished shirt. The lot size shall be expressed in units of one shirt.

4.4.2.1 Visual examination. The shirt shall be examined for defects in color, design, material, construction, workmanship, and marking, and the defects classified in accordance with the list below. The terms "outside" and "inside" as used throughout this examination are defined as follows:

Outside: Any part of shirt that is visible when the completely buttoned and closed shirt is examined.

Inside: Any part of shirt that is not visible when the completely buttoned and closed shirt is examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

shall be followed. All wherever applicable and as listed in Table III

Defect	Classification Major	Minor A	Minor B
I. MATERIAL DEFECT AND DAMAGE			
a. Any hole (including drill hole, cut, tear, smash, burn, or scorched area:			
1. On outside	X		
2. On inside (longest dimension in any direction):			
(a) Up to 1/4 inch inclusive			X
(b) More than 1/4 inch		X	
b. Misweave, missing yarn, broken yarn, visible mend, or thin place, on outside 1/	X		
c. Loose yarn, snagged thread, or woven in waste 1/		X	
d. Embedded crease of a permanent nature in cloth	X		
e. Needle chew on outside (largest dimension in direction):			
1. Up to and including 1/2 inch		X	
2. More than 1/2 inch	X		
f. Knot or slub on outside: 2/			
1. Knot larger than B or a slub larger than C in Zone X	X		
2. Knot larger than C or a slub larger than D in Zone Y			X
1/ This defect shall not be scored on the undercollar, underflaps, or below the bottom front button normally worn in skirts or slacks.			
2/ For these defects, use the Sears Fabric Defect Scale (see 6.5) and the zones as shown in Figures 1 and 2.			
II SHADED PART			
a. Any component part required to be cut from one piece, shaded	X		
b. Variation in shade within an outside part or between outside parts	X		
c. Undercollar, underflaps, or sleeve bindings do not approximate the shade of the shirt			X
III CLEANNESS			
a. Spot or stain on outside 1/			
1. Any spot or stain in Zone X	X		
2. Any spot or stain in Zone Y larger than 1/4 inch in longest direction	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
b. Three or more thread ends not trimmed to 1/4 inch or less on outside.		X	
c. Five or more thread ends not trimmed to 1/4 inch or less on inside			X
d. Two or more shade or size tickets not removed			X
e. Any shade or size marking visible on outside	X		
f. Any spot or stain on inside visible on outside		X	
1/ For these defects, use the zone areas as shown in Figures 1 and 2.			
IV CUTTING			
a. Any component part not cut in conformance with specification requirement	X		
b. Face of fabric not on outside	X		
V COMPONENT AND ASSEMBLY			
a. Any component part or required operation omitted (unless otherwise classified herein)	X		
b. Any component part twisted, distorted, pleated, misshaped, tight, or full (unless otherwise classified herein)		X	
c. Any component not as specified (type, size, color, etc).	X		
d. Any operation not performed as specified (unless otherwise classified herein)	X		
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X	
VI PRESSING			
a. Omitted (entire shirt)		X	
b. Burned or scorched	X		
c. Pressing excessive, forming gloss on outside		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
VII SEAMS AND STITCHING			
a. Accuracy of seaming			
1. Seam irregular, twisted, pleated, or wavy on outside	X		
2. Seam puckered (score only when on major portion of seam)			X
3. Any part of shirt caught in an unrelated operation or stitching		X	
4. End of stitching, when not caught in other seams or stitching, backtacked less than 3/8 inch			X
5. Thread break secured by stitching back of the break less than 1/2 inch			X
6. Ends of a continuous line of stitching overlapped less than 1/2 inch			X
7. Wrong or varying shades of thread used on outside	X		
b. Gauge of stitching and seam allowance:			
1. Gauge irregular or not within range specified			X
2. Top stitching sewn too close to edge, resulting in damage to cloth	X		
3. Seam allowance not as specified		X	
c. Open seam:(resulting from 2 or more skipped, broken, run-off, or missing stitches)			
1. On all seams except bottom hem and label stitching			
(a) Up to 1/4 inch inclusive			X
(b) More than 1/4 inch up to and including 1/2 inch		X	
(c) More than 1/2 inch	X		
2. Bottom hem more than 1/2 inch			X
3. Label stitching			X
NOTE: A safety-stitch seam shall be considered when either the inside stitch or the overedging is broken. A seam shall be classified as open when one or more stitches joining a seam are broken or runoff, or when two or more continuous skipped stitches occur.			
d. Runoff:			
1. On joining seam, score as open seam			
2. Top stitching (when not resulting in an open seam):			
(a) Up to and including 1/2 inch			X
(b) More than 1/2 inch		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

c. Remove all spots, stains, and size

Defect	Classification Major	Minor A	Minor B
e. Raw edge:			
1. On outside:			
(a) Up to and including 1/8 inch			X
(b) 1/8 inch to 1/2 inch inclusive		X	
(c) More than 1/2 inch	X		
2. On inside:			
(a) 1/2 inch to 1 inch inclusive			X
(b) More than 1 inch		X	
f. Seam and stitch type:			
1. Not specified seam or stitch type		X	
2. Any required line of stitching omitted	X		
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Any seam not lapped or finished as specified		X	
g. Broken, missing, or skipped stitches on top stitching (when seam is seamed, turned, and stitched):			
1. 1/4 inch up to and including 1/2 inch			X
2. More than 1/2 inch		X	
h. Stitch tension:			
1. Loose tension resulting in a loose seam	X		
- Up to 1/2 inch inclusive			X
- More than 1/2 inch up to 3/4 inch inclusive		X	
- More than 3/4 inch	X		
2. Loose tension on top stitching, resulting in exposed loose thread			X
3. Tight tension (stitches break when strain is applied in direction of seam or stitching)	X		
4. Tight tension, top and bottom thread loops not uniform		X	
i. Stitches per inch (to be scored only when the condition exists on more than half the length of seam or stitching):			
1. Less than the minimum		X	
2. More than the maximum			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
VIII BUTTONHOLE			
a. Omitted	X		
b. Not specified type or size		X	
c. Misplaced, not positioned as specified		X	
d. Ragged edge, i.e., yarn or thread ends on inside of bottonhole not trimmed to less than 1/4 inch, incomplete stitching, stitching not securely caught in fabric		X	
e. Three or more broken stitches or three or more skipped stitches in one or more buttonholes		X	
f. Buttonhole stitching extending beyond bartack; stitches per buttonhole less than minimum specified			X
g. Finished cut length not as specified			X
h. Uncut or partially cut buttonhole		X	
IX BUTTON - One or more			
a. Missing, broken, defective, misplaced, not positioned or attached as specified, or insecurely sewn		X	
b. Not specified type, size, or color		X	
c. Stitching on one or more not locked at end of cycle (tug at the loose end of the thread when accessible to determine if it will ravel)		X	
d. Stitching not caught through all plies			X
X SLEEVE PLACKET(S)			
a. Omitted	X		
b. Misplaced, not positioned as specified		X	
c. Finished width less than 1-1/4 inches or more than 1-1/2 inches		X	
d. Finished length less than 4-1/4 inches or more than 4-3/4 inches		X	
e. Placket length varies more than 1/2 inch between sleeves on any one shirt			X
f. Edgestitching missing along folded edge			X
XI SLEEVE BINDING(S)			
a. Omitted	X		
b. Misplaced, not positioned as specified		X	
c. Finished width less than 1/4 inch or more than 1/2 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
XII COLLAR			
a. Any pleat, pucker, or crease			
1. On topcollar piece		X	
2. On undercolar piece			X
b. Collar points uneven in length by:			
1. 1/8 inch up to and including 1/4 inch			X
2. More than 1/4 inch up to and including 3/8 inch		X	
3. More than 3/8 inch	X		
c. Twisted, not smooth, too full, short, or tight causing collar to turn out	X		
d. Edge of collar not properly forced out, i.e., having a fold of:			
1. 1/16 inch up to and including 1/8 inch in depth			X
2. More than 1/8 inch in depth		X	
e. One or both collar stays missing	X		
f. One or both collar stays misplaced		X	
g. Edge of undercollar exposed beyond edge of top collar:			
1. 1/16 inch or more for a distance of 2 inches or more	X		
2. Less than 1/16 inch on major portion of collar		X	
h. Width of collar at center back less than 1-5/8 inches or more than 1-7/8 inches		X	
i. Any evidence of the collar stay or reinforcement material protruding into the fold of the finished topcollar.	X		
XIII POCKETS OR FLAPS			
a. Not uniform in size or shape - any measurement varying from pocket to pocket or flap to flap:			
1. 1/4 inch up to and including 3/8 inch		X	
2. More than 3/8 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
b. Out of alignment at any point from pocket to pocket or flap to flap by: (Determination may be made by a straight edge)			
1. 1/4 inch up to and including 3/8 inch			X
2. More than 3/8 inch up to and including 1/2 inch		X	
3. More than 1/2 inch	X		
c. Pocket or flaps not according to template on any side by:			
1. More than 1/8 inch up to and including 3/16 inch			X
2. 1/4 inch or more		X	
d. Unbalanced positioning between pockets to center front (measurement takenfrom side edge of pocket to center of buttonhole)			
1. 1/4 inch up to and including 3/8 inch			X
2. More than 3/8 inch up to and including 1/2 inch		X	
3. More than 1/2 inch	X		
XIV POCKET(S)			
a. Pocket edge(s) not parallel to front edge of shirt by:			
1. 3/16 inch up to and including 1/4 inch			X
2. More than 1/4 inch up to and including 3/8 inch		X	
3. More than 3/8 inch	X		
b. Edge of pocket pleated or twisted			X
c. Width of pocket less than 4-1/8 inches or more than 4-3/8 inches		X	
d. Depth of pocket less than 4-5/8 inches or more than 4-7/8 inches		X	
e. Pocket hem not overedged			X
XV FLAP(S)			
a. Width of pocket flap less than 4-1/4 inches or more than 4-1/2 inches		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

prepared following fusing of every 100 collars, collarstands, epaulets or

Defect	Classification Major	Minor A	Minor B
b. Depth of pocket flap at center less than 1-15/16 inches or more than 2-1/16 inches		X	
c. Pocket exposed beyond end of flap by 1/8 inch or more with flap unbuttoned		X	
d. Fabric threads visible after attachment of flap		X	
e. Depth of pocket flap at sides less than 1-5/6 inches or more than 1-7/16 inches		X	
XVI FRONTS			
a. Any button out of alignment with corresponding buttonhole, causing a noticeable bulge		X	
b. Lengths of fronts uneven at bottom when buttoned:			
1. 3/8 inch up to 3/4 inch inclusive			X
2. More than 3/4 inch		X	
XVII SLEEVES AND ARMHOLE			
a. Setting:			
1. Sleeve tight at armhole, causing pleats or excessive puckers on front, back, or sleeve		X	
2. Sleeves reversed, i.e., left sleeve in right armhole; right sleeve in left armhole	X		
3. Side and underarm seam staggered more than 1/4 inch			X
XVIII CUFF(S)			
a. Construction and setting:			
1. Reversed, i.e., buttonhole on underside and button on top side	X		
2. Irregular in length by 1/4 inch or more			X
3. Cuff depth more than 2-3/8 inches or less than 2-1/8 inches		X	
XIX LABEL OR MARKING			
a. Not attached or affixed as specified, misplaced, or stitching through the printing		X	
b. Missing, incorrect, illegible, or strike through	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.2.1 Visual examination. The shirt shall be examined for defects in

4.4.2.2 Dimensional examination. The shirt shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from the dimensions and tolerances specified in Table II, shall be scored as a size measurement defect.
b. Sleeves uneven in length by 1/2 inch or more, shall be scored as a size measurement defect.

4.4.2.3 Inspection levels and acceptable levels (AQL). The inspection levels and the acceptable quality levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

	AQL	Inspection level
For defects applicable to 4.4.2.1		III
Major	1.5	
Major and Minor A	6.5	
Major, Minor A and Minor B (combined)	15.0	
For defects applicable to 4.4.2.2		
One class	4.0	S-3

4.4.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with the Section 5 requirements of this specification. The sample unit shall be one shipping container fully prepared for delivery, except that it need not be sealed. Examination for closure defects listed below shall be made. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper location, sequence, or method of applications.s Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as; incomplete closure of container flaps, loose strapping, inadequate stapling or improper taping. Bulged or distorted container. Open and non-continuous heat sealed seams of polyethylene bag or incorrectly fabricated bag.
Content	Number of shirts per shipping container more or less than specified 1/.

1/ For this defect, one container in the sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 as specified in MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Level A. Each fully buttoned shirt shall be neatly folded to measure approximately 14-1/2 inches by 10-1/2 inches. The folded shirt shall be secured with stainless steel (AISI type 304 or 316) pins, aluminum clips or plastic fasteners. Each shirt shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (± 25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type in which case a heat seal closure and corner vent hole are not required.

5.1.2 Level C. Shirts shall be packed to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be Level A, B, or C as specified (see 6.2.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Eighteen (18) shirts of one class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, grade V15c, variety DW, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat two in length, one in width, and nine in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Eighteen (18) shirts of one class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, grade 275, variety DW, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, of MIL-B-17757. Level B packages shall be packed flat two in length, one in width, and nine in depth within the shipping container. Each container shall have the content completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Shirts packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Container shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Palletization. Items packed as specified shall be palletized on a four way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means (C, K, and L) or O or P. Pallet pattern shall be in accordance with the appendex of MIL-STD-147.

The pallet shall be four way, Type IV, V, or VIII, Class 1, Style A, Size 2, wood group I, II, or IV, Grade A of NN-P-71, or four way, Style 1, Size A, Type I, Class 1, wood group I, II, III, or IV, Grade A of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified on MIL-STD-147, the pallet used shall be approved by the contracting office.

5.4 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

5.4.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

SHIRT, WOMAN'S DRESS, BLUE (LONG SLEEVE)
STOCK NUMBER:
SIZE:
QUANTITY:

5.4.2 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing and stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The shirts are intended for wear by female military personnel of the Department of the Navy.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Sizes and sleeve length required (see 1.2).

(c) Selection of applicable levels of packing and packaging (see 5.1 and 5.2).

(d) When first article inspection is required, the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.

(e) When palletization is required (see 5.3).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

* 6.4 The special slotted collar stays designed especially for use with military insignia (style DPSS) are available from: National Flexway Co., 1040 Avenue of the Americas, New York, N.Y. 10018.

* 6.5 Sears Fabric Defect Scales are available from Sears Roebuck and Company, Department 817 (Attn: BSC 23-29), Sears Tower, Chicago, Il 60684.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.


Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8410-N565

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

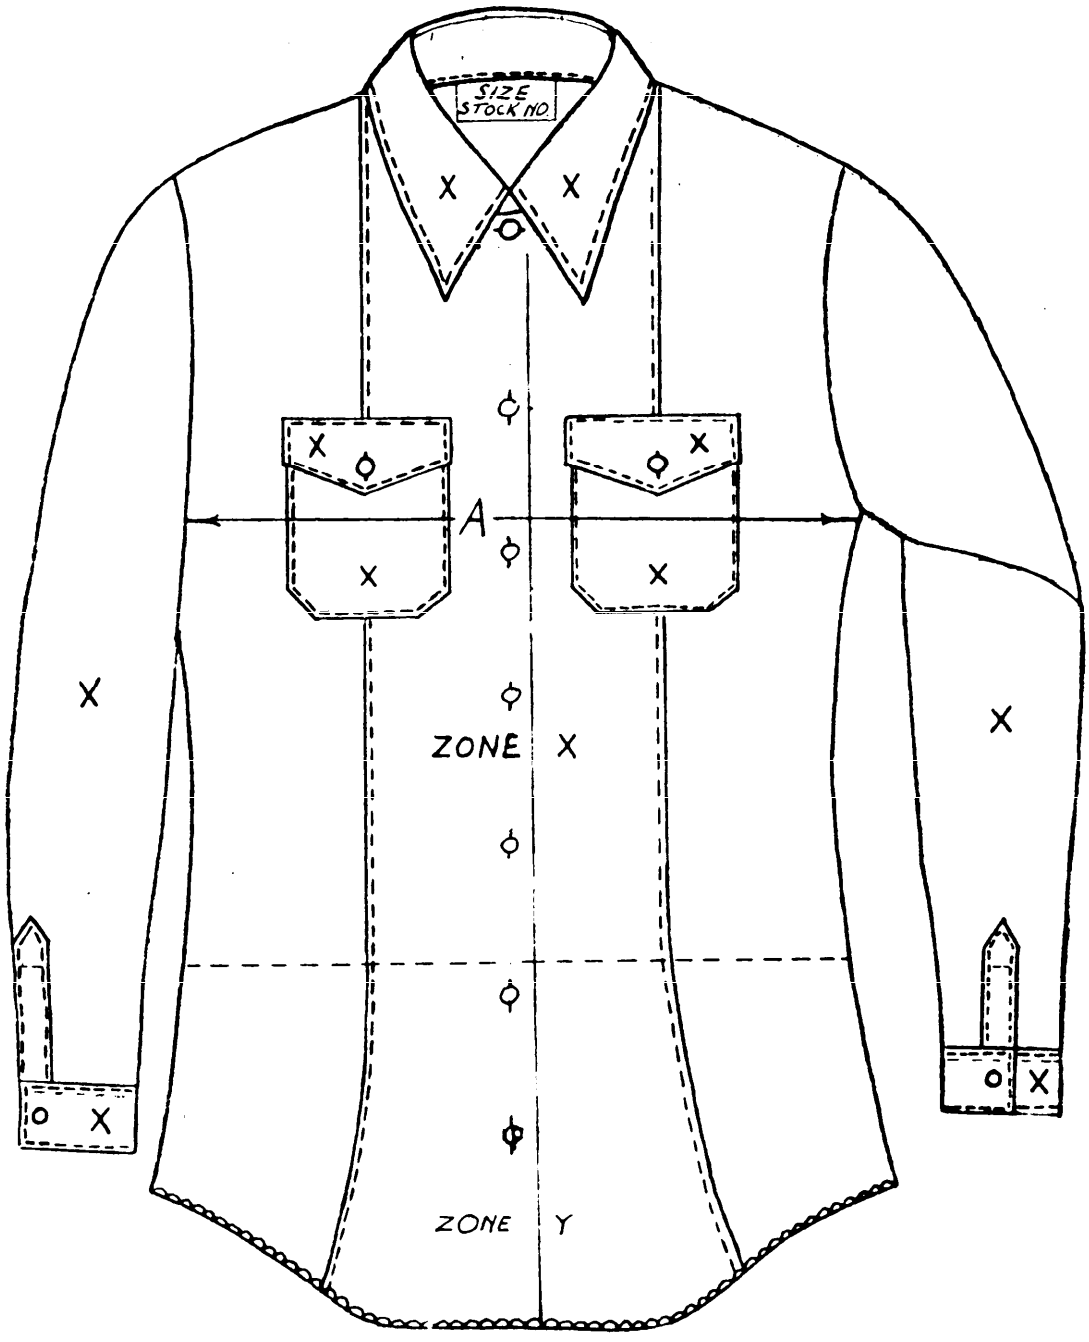

FRONT VIEW

ZONES X AND Y (DEFECT AREAS) SHALL APPLY ONLY TO THE OUTSIDE FRONT AND BACK AS ILLUSTRATED

FIG. 1 - SHIRT, WOMAN'S, DRESS, BLUE (LONG SLEEVES)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

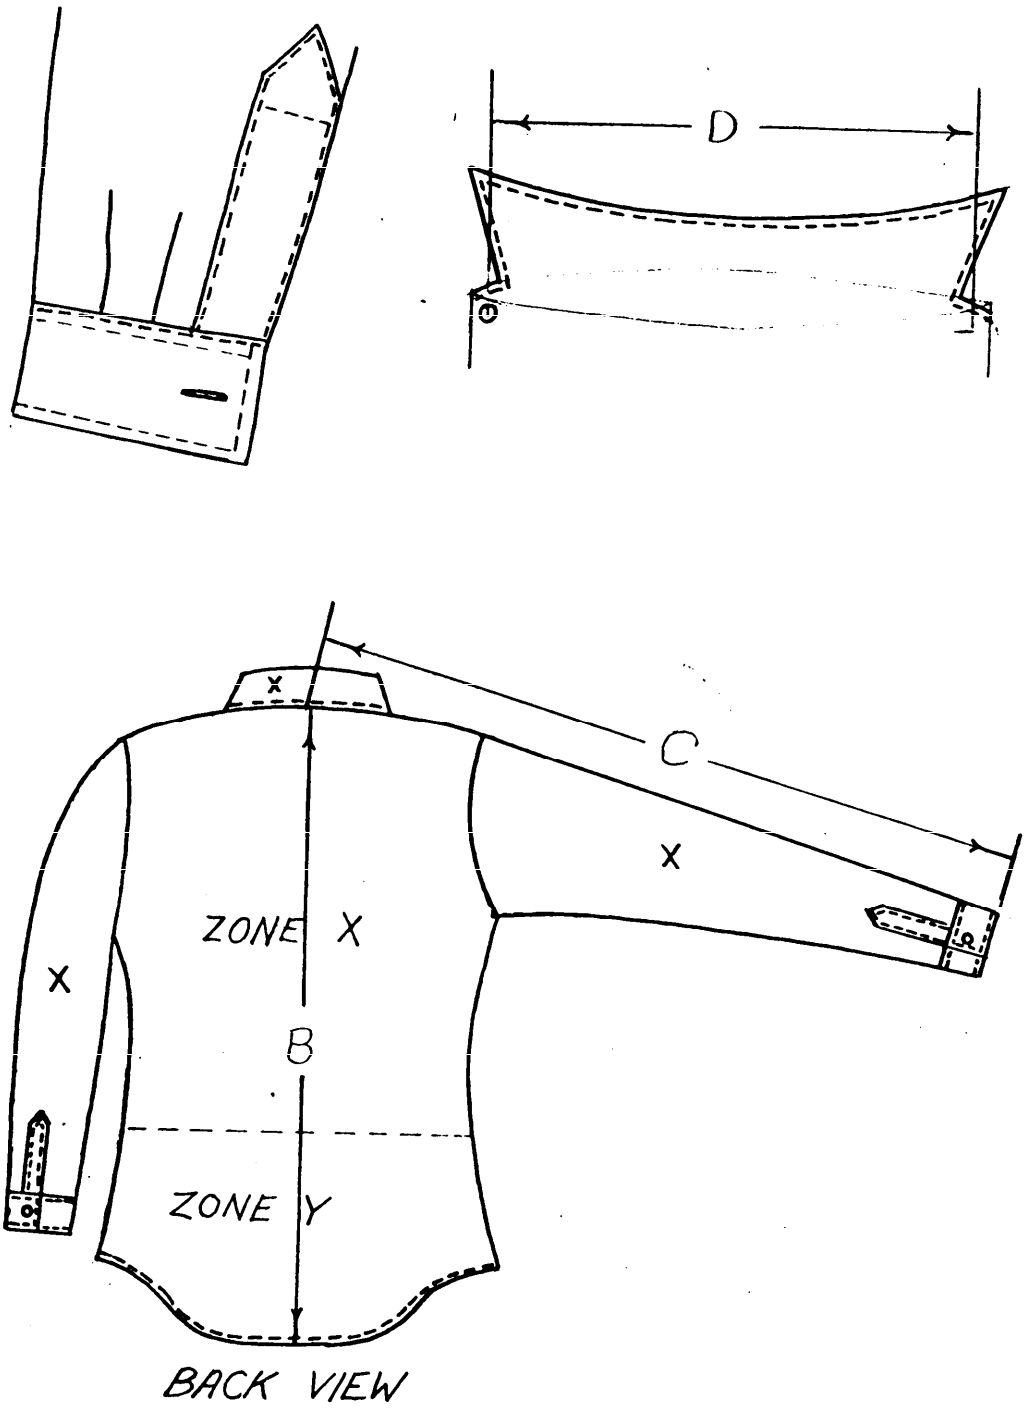


FIG. 2 - SHIRT, WOMAN'S, DRESS, BLUE (LONG SLEEVES)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
21 Strathmore Road
Code 50
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-87056A(NU)	SHIRT, WOMAN'S DRESS BLUE (LONG SLEEVE)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://... 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Acceptance comply with all