MIL-S-87073(NU)
15 July 1980

MILITARY SPECIFICATION

SHIRT, WOMAN'S, WORKING, KHAKI (LONG SLEEVE)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a woman's long sleeve work shirt, made of a polyester/cotton material.

1.2 Classification. The shirt shall be of one type, and procured in the following sizes:

Schedule of sizes		
Bust	Neck	Sleeve lengths
32	12, 13	29, 32, 34
34	12, 13, 14, 15	29, 32, 34
36	13, 14, 15	29, 32, 34
38	13, 14, 15, 16	29, 32, 34
40	14, 15, 16	29, 32, 34
42	16	29, 32, 34

2. APPLICABLE DOCUMENTS

2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

DDD-L-20 - Label; For Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-B-17143 - Button, Insignia (Anchor, Plastic, Black)
MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-21881 - Cloth, Poplin, Polyester and Cotton
MIL-T-43548 - Thread, Polyester, Cotton-Covered
MIL-C-43594 - Cloth, Interlining, Polyester
MIL-P-55010 - Plastic, Sheet, Polyethylene Terephthalate

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing & Textile Research Facility, 21 Strathmore Road, Natick, MA 01760, by using the self-addressed standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:53Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, ATTN: Traffic Department, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

3.3 Materials

3.3.1 Basic material. The basic material shall be of a polyester/cotton poplin, Khaki Shade No. 2115 conforming to type II, class 1 of MIL-C-21881.

3.3.2 Cloth, interlining, polyester. The polyester material used for interlining the collar, cuffs, and pocket flaps shall conform to MIL-C-43594.

3.3.3 Buttons, plastic. The plastic buttons used for the fronts, cuffs, and pocket flap closures, shall be size 20 line conforming to type II, class D, style 24 of V-B-871. The color of the button shall approximate Tan Shade A-J, Cable No. 62028.

3.3.4 Collar stay. The collar stay shall be of the slotted type and shall be made from polyethylene terephthalate plastic sheet conforming to MIL-P-55010, except that the thickness shall be 0.010 ± 0.001 inch; the color shall be natural (clear or opaque); and the transparency and optical properties shall not apply. The finished stay shall measure not less than 1/4 inch nor more than 3/8 inch in width and 2 3/4 (± 1/16) inches in length when tested as specified in 4.3.1. Both ends shall be round, pointed, cut on an angle, or any combination thereof. When other than round, points shall be rounded.

3.3.5 Thread, polyester - cotton-covered. The polyester-cotton covered thread for seaming and stitching the shirt as noted below, shall conform to MIL-T-43548. The color of the thread shall approximate the shade of the basic material.

Use	Ticket No.	Ply
General seaming	70	2 or 3
Overedging	70 or 80	2 or 3
Button and Buttonhole	50	2 or 3

3.3.6 Combination label. Each shirt shall have a cloth combination identification and instruction label conforming to type I, classes 1 and 3, of DDD-L-20, except that the inscription shall be as shown below. The size of the label shall be not more than 1-3/4 inches in height and 3 inches in length. The height of the lettering shall be not less than 1/16 inch. The markings shall show fastness to laundering:

SHIRT, WOMAN'S, WORKING, KHAKI, LONG SLEEVE
65% POLYESTER/35% COTTON
CONTRACT NO: DLA 100-00-0-0000 (Example)
NAME OF CONTRACTOR:

MACHINE WASH - WARM WATER (120°F)
TUMBLE DRY - MEDIUM HEAT
REMOVE IMMEDIATELY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.3.6.1 Size label. Each shirt shall have a size label conforming to type I, class 2, of DDD-L-20, except that the marking medium shall be of any contrasting color and shall bear the following inscription:

34B - 15 N - 29 S (Example)
8410-00-000-0000 (Example - Stock No.)

NOTE: The neck, bust, and sleeve may be abbreviated as "N", "B". and "S" as shown above.

3.4 Design. The long sleeve working shirt is designed with a two piece front, interlined collar with collar stays, breast patch pockets with button-down flaps, a six button front closure and two-button adjustment type cuffs with sleeve plackets.

3.4.1 Figures. Figures 1 and 2 are furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns to be used to cut the working patterns will be furnished by the Government (see 6.3). Unless otherwise indicated in Table I, the patterns allow a 1/4 inch seam allowance for all seams except for the front seams which shall all be 3/8 inch. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 List of pattern parts. The shirt shall be cut from material as specified, and in accordance with pattern parts indicated.

Material	Nomenclature of pattern parts	Cut parts
Cloth, poplin polyester/cotton	Center fronts (left and right)	2
	Side fronts (left and right)	2
	Back	1
	Collar (top and undercollar)	1 ea
	Collar stay	2
	Pocket	2
	Pocket flap	4
	Sleeve	2
	Cuffs	2
	Sleeve placket	2
	Sleeve binding	2
Cloth, interlining polyester	Collar interlining	1
	Pocket flap interlining	2
	Cuff interlining	2
Templates	Finished pocket	-
	Finished flap	-
	Buttonhole marker	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types as specified in Table I, shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitchings are given for the same operation, any one of them may be used.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings,, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be over-stitched not less than 1/2 inch. The ends of the label stitching shall be over-stitched not less than 1/4 inch. Thread breaks (all stitch types) shall be repaired by starting the stitching 1/2 inch in back of the break. Skipped stitches or thread breaks may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked.

3.6.4 Buttonholes The buttonholes shall be straight style with both ends securely barred. The finished cut length shall be 9/16 to 11/16 inch.

3.7 Manufacturing operation requirements. The contractor shall manufacture the shirt in accordance with every applicable operation specified in Table I. The contractor is not required to follow the exact sequence of operations listed.

3.7.1 Shade and size marking. The component parts shall be marked, ticketed, or bundled to insure a uniform shade and size throughout the shirt, except parts which may be cut from ends. Any method may be used except:

1. Metal fastening devices.
2. Sew-on tickets.
3. Adhesive type tickets whose adhesives causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets.

The use of a rubber stamp, ink pad numbering machine, or pencil is acceptable provided the numbers are legible and are not visible on the outside of the shirt.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirt

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the shirt in strict accordance with patterns furnished, which shall show size; shape; directional lines for cutting; and notches for proper assembly of all parts. b. Cut the component parts from one piece of material, except for the undercollar; sleeve binding; sleeve placket and underflaps which may be cut from ends. Parts cut from ends shall approximate the shade of the main assembly. c. The component parts cut from the basic poplin cloth, shall finish with the face side of the material on outside. d. Cut the stripping (if alternate method is used) for the sleeve binding and sleeve placket of sufficient width to comply with operations 9 and 10. The stripping may be placed on rolls, however, there shall be no piecing visible on the shirt and the stripping shall approximate the shade of the shirt.					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in section 4, shall be removed from production and replaced with non-defective and properly matched components.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Shade and size markings (see 3.7.1) Mark, ticket, or bundle all component cut parts, except when cut from ends, in order to insure a uniform shade and size throughout the shirt.					
4.	Attach center fronts to side fronts a. Join center fronts to side fronts face to face, and simultaneously stitch and overedge raw edges in one continuous operation.	515 or 516 or 519	LSq-2(a)	8-10	70 (chainstitching) 80 (overedging)	80 80
	OR b. Operation "a" may be performed in two (2) separate sequences.					
	c. Turn seam allowance towards center fronts, and top stitch 3/16 inch from the folded edge.	301	LSq-2(b)	10-12	70	70
	d. Overedge stitch outer raw edge of center fronts, and shoulder step, which shall form the facings as specified in operation 13.	502 or 503 or 504	EFd-1	8-10	80	80
5.	Assemble breast pockets and attach to fronts a. Overedge stitch the top raw edge of pocket pieces.	502 or 503 or 504	EFd-1	8-10	80	80
	b. Fold under the top edge of pocket pieces as indicated by pattern notches, forming the hem.					
	c. Position pocket pieces on fronts as indicated by pattern markings, turn under raw edges of each side and bottom and stitch to fronts 1/16 inch from folded edges, securely backtacking the ends of stitching. The pockets may be precreased on an edge creasing machine prior to attachment of pockets to the fronts.	301	LSd-1	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Assemble breast pockets and attach to fronts (cont'd)					
	d. The finished pockets shall measure 4 3/4 (± 1/8) inches in depth and 4 1/4 (± 1/16) inches in width for all sizes.					
6.	Assemble pocket flaps and attach to fronts					
	a. With the top and underply pieces of pocket flaps positioned, face to face, superimpose the interlining piece on the top or underply piece and stitch along the sides and pointed end 1/4 (± 1/16) inch from the raw edges.	301	SSe-2(a)	10-12	70	70
	b. Turn pocket flap to finished position, working out corners, points, and edges.					
	c. Topstitch 1/8 inch from the folded edges along the sides and pointed end.	301	SSe-2(b)	10-12	70	70
	d. Position raw edge of pocket flaps on fronts 1/2 (± 1/16) inch above top edge of finished pockets, and stitch 1/8 to 3/16 inch from the raw edge.	301	LSb1-2(a)	10-12	70	70
	e. Turn pocket flaps down and topstitch 5 1/6 inch from the folded edge. The raw edge of the pocket flaps shall not be exposed.	301	LSb1-2(b)	10-12	70	70
	f. The finished pocket flaps shall measure 4 3/8 (± 1/16) inches in width and 2 (± 1/16) inches in depth at center point for all sizes.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Close shoulders a. Join fronts to back at shoulder, face to face, and simultaneously stitch and overedge raw edges in one continuous operation.	515 or 516 or 519	SSa-2	8-10	70 (chainstitching) 80 (overedging)	80 80
	OR					
	b. Operation "a" may be performed in two (2) separate sequences.					
8.	Attach sleeve binding a. Superimpose sleeve binding on underside of back edge of sleeve opening and stitch 1/8 to 3/16 inch from the raw edges.	301 or 401	BSj-2(a)	10-12	70 70	70 80
	b. Turn binding to outside of sleeve with the raw edge turned under and topstitch 1/16 inch from the folded edge. The binding shall finish 3/8 to 1/2 inch wide.	301	BSj-2(b)	10-12	70	70
	OR					
	c. Bind back edge of sleeve opening with the sleeve binding; and top stitch 1/16 inch from the folded edge of turn under.	301	BSc-1	10-12	70	70
9.	Attach sleeve placket a. Fold placket piece lengthwise according to marks on pattern, and stitch 1/16 inch from the folded edge.	301	OSf-1	10-12	70	70
	b. Join smaller side of placket piece to underside of front edge of sleeve opening, with raw edges even and stitch 1/8 to 3/16 inch from raw edge from bottom to top end of opening.	301	SSa-1	10-12	70	70

NCTR Form 1, 15 Sep 1967

MIL-S-87073

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Attach sleeve placket (cont'd) c. Turn placket to outside of sleeve.					
	d. Fold under the raw edge of sleeve placket 3/16 to 1/4 inch and stitch to sleeve opening 1/16 inch from the folded edge. The stitching shall commence at bottom open edge and continue around the pointed end, ending 1 1/2 to 1 5/8 inches below the point. Stitch and backstitch a row of horizontal stitching across the width of the placket 1 1/2 to 1 5/8 inches from the pointed end. Stitching shall be thru all plies catching the bound edge of sleeve opening.	301	LSd-1 and SSv-1	10-12	70	70
	OR					
	e. As an alternate, the sleeve placket piece may be modified and stitched to sleeve opening in one operation using a folder.	301	LSe-1 (similar)	10-12	70	70
	f. The finished sleeve placket shall measure 1 3/8 (± 1/8) inches in width and 4 1/2 (± 1/8) inches in length when measured from the top edge of the cuff to the pointed end.					
10.	Set sleeve to armholes Join sleeves to armholes, face to face, with the shoulder seams folded towards back, simultaneously stitching and overedging raw edges in one continuous operation. As an alternate, this operation may be performed in two sequences.	515 or 516 or 519	SSa-2	8-10	70 (chainsitching) 80 (overedging)	80 80

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:53Z
Check the source to verify that this is the currenversion before use.

Table I - Construction of shirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
11.	Join side seams and underarm seams Stitch sides and underarms, face to face, in one continuous operation, by simultaneously stitching and overedging the raw edges. The armhole seams shall be folded towards the bottom of the sleeve. OR As an alternate, this operation may be performed in two sequences.	515 or 516 or 519	SSa-2	8-10	70 (chainstitching) 80 (overedging)	80 80
12.	Assemble cuffs a. Fold cuffs in half lengthwise, face to face, superimpose interlining and stitch each side 5/16 to 3/8 inch from raw edge thru all plies.	301	SSe-2(e)	10-12	70	70
	b. Turn to finished position and stitch bottom and side edges of cuff 3/16 to 1/4 inch from folded edge. The stitching on the sides of the cuff shall finish 1/2 (± 1/8) inch from top raw edge of cuff.	301	SSe-2(b)	10-12	70	70
13.	Attach cuffs a. Position the underply of cuff on the lower inside end of sleeve with raw edges even and stitch together with a 1/4 inch seam. The three (3) sleeve pleats shall be formed in accordance with notches on pattern and the sleeve inseam folded towards the back.	301	SSa-1	10-12	70	70
	b. Turn cuff to finished position. Turn under top raw edge of top ply and stich to sleeve thru all plies 1/16 to 1/8 inch from folded edge. OR	301	LSb-1	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Attach cuffs (cont'd) c. The cuffs may be attached in one operation, provided that the finished appearance is the same as specified in operations a and b and the ends of the row of stitching are backtacked or crossed with another line of stitching. NOTE: 1/8 inch may be added to the patterns, however, a finished width measurement of 2 to 2 1/8 inches must be maintained.	301	LSe-1 (similar)	10-12	70	70
14.	Assemble collar a. Stitch or fuse slotted stay to the collar stay material. The stitching shall straddle the center bar of the slotted stay material.	101 (Zig-Zag)	SSv-2	20-24	70	-
	OR b. Spot laminate both ends of the slotted stay to the collar stay material according to marks on pattern.					
	c. Join the three (3) plies of collar together with the topcollar and undercollar pieces, face to face, and the interlining and collar stay material super-imposed respectively on the topcollar. Stitch together along side and top (outer) edges 1/8 to 3/16 inch from the raw edge.	304 or 401	SSe-2(a)	10-12	70 70	70 80
	d. Trim corners, turn to finished position working out edges and points. The slotted stay on collar stay reinforcement material shall finish on the underside of the interlining piece.					
	e. Press collar points on a collar pointing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirt (cont')

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
14.	Assembly collar (cont'd) f. Topstitch around the top and side edges of collar 1/8 to 3/16 inch from the folded edge.	301	SSe-2(b)	10-12	70	70
15.	Attach collar to shirt a. Fold back the left and right center fronts at notches to form a facing.					
	b. Insert assembled collar between the fronts and facings and stitch from the fold at front to a point 3/4 to 1 inch before the shoulder seam, 1/4 inch from raw edge. Notch the seam to the seamline and continue stitching the undercollar to the neck edge across the back, 1/4 inch from raw edge.	301	SSa-1	10-12	70	70
	c. Turn facings to finished position.					
	d. Turn under the unsewn portion of topcollar and topstitch 1/16 to 1/8 inch from the folded edge of the topcollar thru all plies. The size label shall be simultaneously positioned in the center of the neckline and caught during this operation.	301	Similar to BSj-2(b)	10-12	70	70
	e. Stitch facing ends to shoulder seam outlets.	301	SSa-1	10-12	70	70
	f. The finished collar shall measure as follows: -Width at center back 2 3/4 (± 1/8) inches -Length of points 3 (± 1/8) inches -Points shall be equal in length.					
	NOTE: There shall be no evidence of the collar stay or reinforcement piece protruding into the fold of the finished topcollar.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
16. seam	Finish bottom of shirt a. Overedge entrie bottom edge of shirt with the side seams folded towards the back.	502 or 503 or 504	EFd-1	8-10	80	80
17.	Make buttonholes a. Make five (5) vertical buttonholes through right front, 3/4 inch from the folded edge and positioned in accordance with the buttonhole marker template.	Buttonhole		42-46 per buttonhole including tack	50	50
	b. Make one vertical buttonhole in each pocket flap as indicated by pattern marks, with the inside cut of the buttonhole to finish 1/2 (± 1/16) inch from the pointed edge.	Buttonhole		42-46 per buttonhole including tack	50	50
	c. Make one horizontal buttonhole through collar on right side as indicated by pattern marks, with the inside front edge of the buttonhole to finish 5/8 (± 1/16) inch from the outer angled edge.					
	d. Make one horizontal buttonhole in each cuff centered with the inside front edge of buttohole to finish 1/2 (± 1/16) inch from the side edge.	Buttonhole	-	42-46 per buttonhole including tack	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirts (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
18.	Attach buttons					
	a. Sew five (5) buttons securely on left front facing, with the center of button 1 (± 1/8) inch from the front edge, corresponding to respective buttonholes.	101	-	20-22 per button	50	-
		or 301		14-16 per button	50	50
	b. Sew one button through each pocket piece, so that when the pocket and flap are buttoned the button shall finish at bottom end of buttonhole nearest to pointed end of flap.	101	-	20-22 per button	50	-
		or 301		14-16 per button	50	50
	c. Sew two (2) buttons in each cuff, horizontally aligned and centered, with the center of the buttons 5/8 (± 1/16) inch and 1 5/8 (± 1/16) inches respectively from the end of the cuff. When cuff is buttoned each button shall finish at front inside edge of buttonhole nearest to outer end of cuff.	101	-	20-20 per button	50	-
		or 301	-	14-16 per button	50	50
	d. Sew one button to collar, horizontally aligned thru all plies so as to correspond with respective buttonhole. When collar is buttoned the button shall finish at front inside edge of buttonhole nearest outer end of collar.	101	-	20-20 per button	50	-
		or 301	-	14-16 per button	50	50
	NOTE: The buttons shall align evenly with corresponding buttonholes, so as to assure a neat and smooth closure.					
19.	Attach combination label (see 3.3.6)					
	a. Position combination label on left front facing (inside of shirt) with the bottom edge of label even with the back serged edge of facing. The right side of the label shall finish approximately 1 to 2 inches from overedged bottom of shirt.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Table I - Construction of shirt (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
19.	Attach combination label (see 3.3.6) a. Position combination label on left front facing (inside of shirt) with the bottom edge of label even with the back serged edge of facing. The right side of the label shall finish approximately 1 to 2 inches from overedged bottom of shirt.					
	b. Stitch around all four sides of the label 1/8 to 3/16 inch from the edge. The label shall finish face side up, with the printing clearly visible.	301	LSbj-1	10-12	70	70
	OR					
	c. The bottom edge of label may be simultaneously caught in the overedging of the center fronts specified in operation 4d. The remaining two sides and top of the label shall be stitched as specified in sequence b.					
20.	Clean shirt a. Trim all thread ends.					
	b. Remove all loose threads.					
	c. Remove all spots, stains, and size markings.					
21.	Press and prepare for packaging a. Press the entire shirt. Care shall be taken to avoid excess gloss and/or shine throughout the shirt.					
	b. Button shirt and fold for packaging.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished buttoned shirt, placed flat upon a table and smoothed out, shall conform to the dimensions specified in Table II. All measurements are expressed in inches.

Table II - Finished measurements

A - Bust		B - Collar 1/		C - Center	D - Sleeve
Ticket Size	Bust Measurement	Ticket Size	Collar Measurement	Back Length	Length
32	37	12	12 1/2	27 1/8	29-32-34
34	39	12	12 1/2	27 1/8	29-32-34
32	37	13	13 1/2	27 1/2	29-32-34
34	39	13	13 1/2	27 1/2	29-32-34
36	41	13	13 1/2	27 1/2	29-32-34
38	43	13	13 1/2	27 1/2	29-32-34
34	39	14	14 1/2	27 7/8	29-32-34
36	41	14	14 1/2	27 7/8	29-32-34
38	43	14	14 1/2	27 7/8	29-32-34
40	45	14	14 1/2	27 7/8	29-32-34
34	39	15	15 1/2	28 1/4	29-32-34
36	41	15	15 1/2	28 1/4	29-32-34
38	43	15	15 1/2	28 1/4	29-32-34
40	45	15	15 1/2	28 1/4	29-32-34
38	43	16	16 1/2	28 5/8	29-32-34
40	45	16	16 1/2	28 5/8	29-32-34
42	47	16	16 1/2	28 5/8	29-32-34
Tolerance	± 1		+ 1/2 - 0	± 1/2	± 1/2

1/ The finished width of collar at center back shall be 2 3/4 ± 1/8 inches for all sizes.

NOTE: Refer to figures 1 and 2 for A, B, C, and D points of measurement.

A. Twice the measurement taken across the front at base of armhole, folded edge to folded edge.
B. Measurement shall be taken along length of collar between center of collar button and front cut end of buttonhole, with collar in a flat position.
C. Measurement shall be taken at center back, from undercollar seam to bottom edge of shirt.
D. Measurement shall be taken with the sleeve extended from center back at lower edge of undercollar seam to bottom edge of cuff.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.9 Workmanship The finished shirt shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified for compliance with design, construction, workmanship, and dimensional requirements.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated herein.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. A certificate of compliance shall be submitted by the contractor for the collar stay requirements (see 3.3.4).

4.3.2 Examination of the end item. The defects found during the examination of the end item shall be classified in accordance with 4.3.2.1 and 4.3.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.2.3. The lot size shall be expressed in units of shirts. The sample unit shall be one finished shirt.

4.3.2.1 Visual examination. The terms "outside" and "inside" as used throughout this examination, are defined as follows:

Outside	Any part of shirt that is visible when the completely buttoned shirt is examined.
Inside	Any part of shirt that is not visible when the completely buttoned shirt is examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
I MATERIAL DEFECT AND DAMAGE			
a. Any hole (including drill hole), cut, tear, smash, burn, or scorched area:			
1. On outside	X		
2. On inside (longest dimension in any direction):			
(a) Up to and including 1/4 inch			X
(b) More than 1/4 inch		X	
b. Misweave, missing yarn, broken yarn, visible mend, or thin place, on outside 1/	X		
c. Loose yarn, snagged thread, or woven in waste 1/		X	
d. Embedded crease of a permanent nature in cloth	X		
e. Needle chew on outside (largest dimension in any direction):			
1. Up to and including 1/2 inch		X	
2. More than 1/2 inch	X		
f. Knot or slub on outside: 2/			
1. Knot larger than B or a slub larger than C in Zone X	X		
2. Knot larger than C or a slub larger than D in Zone Y			X
II SHADED PART			
a. Any component part required to be cut from one piece, shaded	X		

1/ This defect shall not be scored on the undercollar, underflaps, or below the bottom front button normally worn in skirts or slacks.

2/ For these defects, use the Sears Fabric Defect Scale (see 6.4) and the zones as shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
II SHADED PART (cont'd)			
b. Variation in shade within an outside part or between outside parts 1/	X		
c. Undercollar, underflaps, sleeve placket or sleeve binding does not approximate the shade of the shirt			X
1/ This defect shall not be scored on parts cut from ends or below the bottom front button normally worn in skirts or slacks.			
III CLEANNESS			
a. Spot or stain on outside 1/			
1. Any spot or stain in Zone X	X		
2. Any spot or stain in Zone Y larger than 1/4 inch in longest direction	X		
b. Three or more thread ends not trimmed to 1/4 inch or less			X
c. Two or more shade or size tickets not removed			X
d. Any shade or size markings visible on outside	X		
1/ For these defects, use the zone areas as shown in Figure 1.			
IV CUTTING			
Any component part not cut in conformance with specification requirement	X		
V COMPONENT AND ASSEMBLY			
a. Any component part or required operation omitted (unless otherwise classified herein)	X		
b. Any component part twisted, distorted, pleated, misshaped, tight, or full (unless otherwise classified herein)		X	
c. Any component not as specified (type, size, color, etc.)	X		
d. Any operation not performed as specified (unless otherwise classified herein)			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
VI PRESSING			
Omitted (entire shirt)		X	
Burned or scorched	X		
VII SEAMS AND STITCHING			
a. Accuracy of seaming			
1. Seam irregular, twisted, pleated, or wavy		X	
2. Seam puckered (score only when on major portion of seam)			X
3. Any part of shirt caught in an unrelated operation or stitching		X	
4. End of stitching, when not caught in other seams or stitching, backtacked less than 3/8 inch			X
5. Thread break repaired by starting stitching less than 1/2 inch in back of the break			X
6. Ends of a continuous line of stitching overstitched less than 1/2 inch			X
b. Gage of stitching and seam allowance:			
1. Gage irregular or not within range specified			X
2. Top stitching sewn too close to edge, resulting in damage to cloth	X		
3. Seam allowance not as specified		X	
c. Open seam:			
1. On all seams except label stitching 1/			
(a) Up to and including 1/2 inch			X
(b) More than 1/2 inch up to and including 3/4 inch		X	
(c) More than 3/4 inch	X		
2. Overedged bottom of shirt, more than 1/2 inch broken			X
3. Label stitching			X

1/ A safety-stitch seam shall be considered open when either the inside stitch or the overedging is broken. A seam shall be classified as open when one or more stitches joining a seam are broken or runoff, or when two or more continuous skipped stitches occur.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
VII SEAMS AND STITCHING (cont'd)			
d. Runoff:			
1. On joining seam, score as open seam			
2. Top stitching (when not resulting in an open seam):			
(a) Up to and including 1/2 inch			X
(b) More than 1/2 inch		X	
e. Raw edge:			
1. On outside:			
(a) Up to and including 3/8 inch			X
(b) More than 3/8 inch		X	
2. On inside:			
(a) More than 2 inches		X	
(b) 1/4 inch up to and including 2 inches			X
f. Seam and stitch type:			
1. Not specified seam or stitch type		X	
2. Any required line of stitching omitted		X	
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Any seam allowance not lapped or folded as specified		X	
g. Broken, missing, or skipped stitches on top stitching (when seam is seamed, turned, and stitched):			
1. 1/4 inch up to and including 1/2 inch			X
2. More than 1/2 inch		X	
h. Stitch tension:			
1. Loose tension resulting in a loose seam	X		
2. Loose tension on top stitching, resulting in exposed loose thread			X
3. Tight tension (stitches break when strain is applied in direction of seam or stitching)	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
VII SEAMS AND STITCHING (cont'd)			
i. Stitches per inch (to be scored only when the condition exists on more than half the length of seam or stitching):			
1. Less than the minimum		X	
2. More than the maximum			X
VIII BUTTONHOLE(S)			
a. Omitted, added, or not specified type	X		
b. Misplaced, not positioned as specified	X		
c. Ragged edge, incomplete stitching, stitching not securely caught in fabric		X	
d. Three or more broken stitches or three or more skipped stitches in one or more buttonholes		X	
e. Buttonhole stitching extending beyond bar-tack; stitches per buttonhole less than minimum specified			X
f. Finished cut length less than 9/16 inch or more than 11/16 inch			X
IX BUTTON - One or more			
a. Missing, broken, defective, misplaced, insecurely sewn, not positioned or attached as specified		X	
b. Not specified type, size, or color			X
c. Stitching on one or more not locked at end of cycle (tug at the loose end of the thread when accessible to determine if it will ravel)		X	
d. Stitching not caught through facing			X
X SLEEVE PLACKET(S)			
a. Omitted	X		
b. Misplaced, not positioned as specified		X	
c. Finished width less than 1-1/4 inches or more than 1-1/2 inches		X	
d. Finished length less than 4-3/8 inches or more than 4-5/8 inches		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
XI SLEEVE BINDING(S)			
a. Omitted	X		
b. Misplaced, not positioned as specified		X	
c. Finished width less than 3/8 inch or more than 1/2 inch		X	
XII COLLAR			
a. Any pleat, pucker, or crease:			
1. On topcollar piece		X	
2. On undercollar piece			X
b. Collar points uneven in length by:			
1. 1/8 inch up to and including 1/4 inch			X
2. More than 1/4 inch up to and including 3/8 inch		X	
3. More than 3/8 inch	X		
c. Twisted, not smooth, too full, short, or tight causing collar to turn out	X		
d. Edge of collar not properly forced out, i.e., having a fold of:			
1. 1/16 inch up to and including 1/8 inch in depth			X
2. More than 1/8 inch in depth		X	
e. One or both collar stays missing	X		
f. One or both collar stays misplaced		X	
g. Edge of undercollar exposed beyond edge of top collar:			
1. 1/16 inch or more for a distance of 2 inches or more	X		
2. Less than 1/16 inch on major portion of collar		X	
h. Width of collar at center back less than 2 5/8 inches or more than 2 7/8 inches		X	
i. Any evidence of the collar stay or reinforement material protruding into the fold of the finished topcollar		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
XIII POCKETS OR FLAPS			
a. Not uniform in size or shape - any measurement varying from pocket to pocket or flap to flap:			
1. 1/4 inch up to and including 3/8 inch		X	
2. More than 3/8 inch	X		
b. Out of alignment at any point from pocket to pocket or flap to flap by: (Determination may be made by a straight edge)			
1. 1/4 inch up to and including 3/8 inch			X
2. More than 3/8 inch up to and including 1/2 inch		X	
3. More than 1/2 inch	X		
XIV POCKETS(S)			
a. Pocket edges(s) not parallel to front edge of shirt by:			
1. 3/16 inch up to and including 1/4 inch			X
2. More than 1/4 inch up to and including 3/8 inch		X	
3. More than 3/8 inch	X		
b. Edge of pocket pleated or twisted			X
c. Width of pocket less than 4 3/16 inches or more than 4 5/16 inches		X	
d. Depth of pocket less than 4 5/8 inches or more than 4 7/8 inches		X	
e. Pocket hem not overedged			X
XV FLAP(S)			
a. Width of pocket flap less than 4 5/16 inches or more than 4 7/16 inches		X	
b. Depth of pocket flap at center less than 1 15/16 inches or more than 2 1/16 inches		X	
c. Pocket exposed beyond end of flap by 1/8 inch or more		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the currentversion before use.

Defect	Classification Major	Minor A	Minor B
XVI FRONTS			
a. Any button out of alignment with corresponding buttonhole, causing a noticeable bulge when buttoned		X	
b. Lengths of fronts uneven at bottom when buttoned:			
(1) - 3/8 inch up to and including 3/4 inch			X
(2) - More than 3/4 inch		X	
XVII SLEEVES			
a. Setting:			
1. Sleeve tight at armhole, causing pleats or excessive puckers on front, back, or sleeve		X	
2. Sleeves reversed, i.e., left sleeve in right armhole; right sleeve in left armhole	X		
XVIII CUFFS			
a. Irregular in width by 1/4 inch or more		X	
b. Twisted, pleated, or puckered:		X	
c. Width of cuff less than 2 or more than 2 1/8 inches			X
d. Reversed; buttons and buttonhole on wrong ends of cuff	X		
XIX LABEL OR MARKING			
a. Not attached or affixed as specified, misplaced, or stitching through the printing		X	
b. Missing, incorrect, illegible, or strike through	X		

4.3.2.2 Dimension examination. The shirt shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from the dimensions and tolerances specified in Table II, shall be scored as a size measurement defect.
b. Sleeves uneven in length by 1/2 inch or more, shall be scored as a size measurement defect.

4.3.2.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and the acceptable quality levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

	AQL	Inspection level
For visual examination in 4.3.2.1		III
Major	1.5	
Major and Minor A	10.0	
Major, Minor A and Minor B (combined)	25.0	
For dimensional examination in 4.3.2.2		
One class	4.0	S-3

4.3.3 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking complies with the Section 5 requirements of this specification. The sample unit shall be one shipping container fully packaged, except that it need not be closed. Examination for the closure defects listed below shall be made. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper location, sequence, or method of application. Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling or improper taping. Bulged or distorted container. Open and non-continuous heat sealed seams of polyethylene bag or incorrectly fabricated bag.
Content	Number of shirts per shipping container more or less than specified 1/

1/ For this defect, one container in the sample shall be examined.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or level C, as specified (see 6.2).

5.1.1 Level A. Each fully buttoned shirt shall be folded to measure approximately 14 inches in length by 10 inches in width. The folded shirt shall be secured with stainless steel (AISI type 304 or 316) pins, tin or nickel plated brass pins, aluminum clips, or plastic fasteners. Each folded shirt shall be inserted into a snug-fitting, flat style, clear polyethylene film bag of 0.00125 inch thickness (± 25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. Alternately, the final closure of the bag may be accomplished by means of a tuck or reverse flap in which a heat seal closure and corner hole are not required.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

5.1.2 Level C (Commercial). Shirts shall be preserved-packaged to afford adequate protection against deterioration and physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Forty (40) shirts of one class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, grade V2s, size 3A, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c, of MIL-B-17757. Level A packages shall be packed flat front up, collars alternated front to rear, two in length, one in width, and twenty in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same class and size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Forty (40) shirts of one class and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 200, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Level A packages shall be packed flat front up, collars alternated front to rear, two in length, one in width, and twenty in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same class and size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping containers shall be grade V3c, W5c or W6c fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C (Commercial). Shirts, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

SHIRT, WOMAN'S, WORKING KHAKI (LONG SLEEVES)
STOCK NUMBER:
SIZE:
QUANTITY:

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The shirts are intended for wear by female military personnel of the Department of the Navy.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) When first article sample is required (see 3.2).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1).


6.4 Sears Fabric Defect Scales are aviailable from: Sears Roebuck and Company, Department 733Q, "Sears Defect Kit", Sears Tower, Chicago, ILL 60684.

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Project No. 8410-N488

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

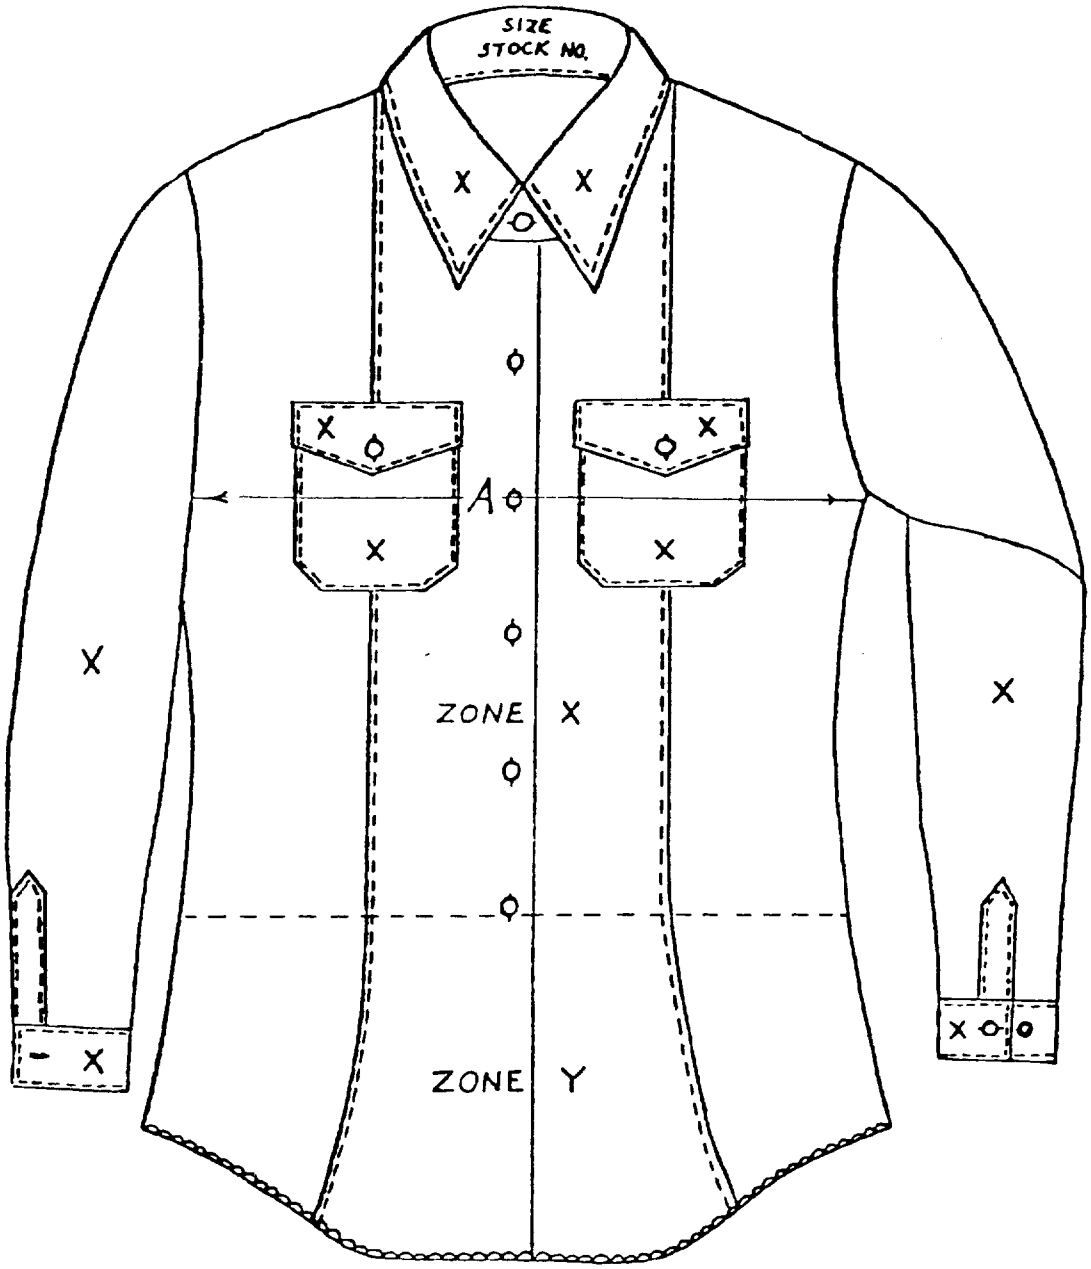

FRONT VIEW

ZONES X AND Y (DEFECT AREAS) SHALL APPLY ONLY TO THE OUTSIDE FRONT AND BACK AS ILLUSTRATED

FIG. 1 - SHIRT, WOMAN'S, WORKING (LONG SLEEVES)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

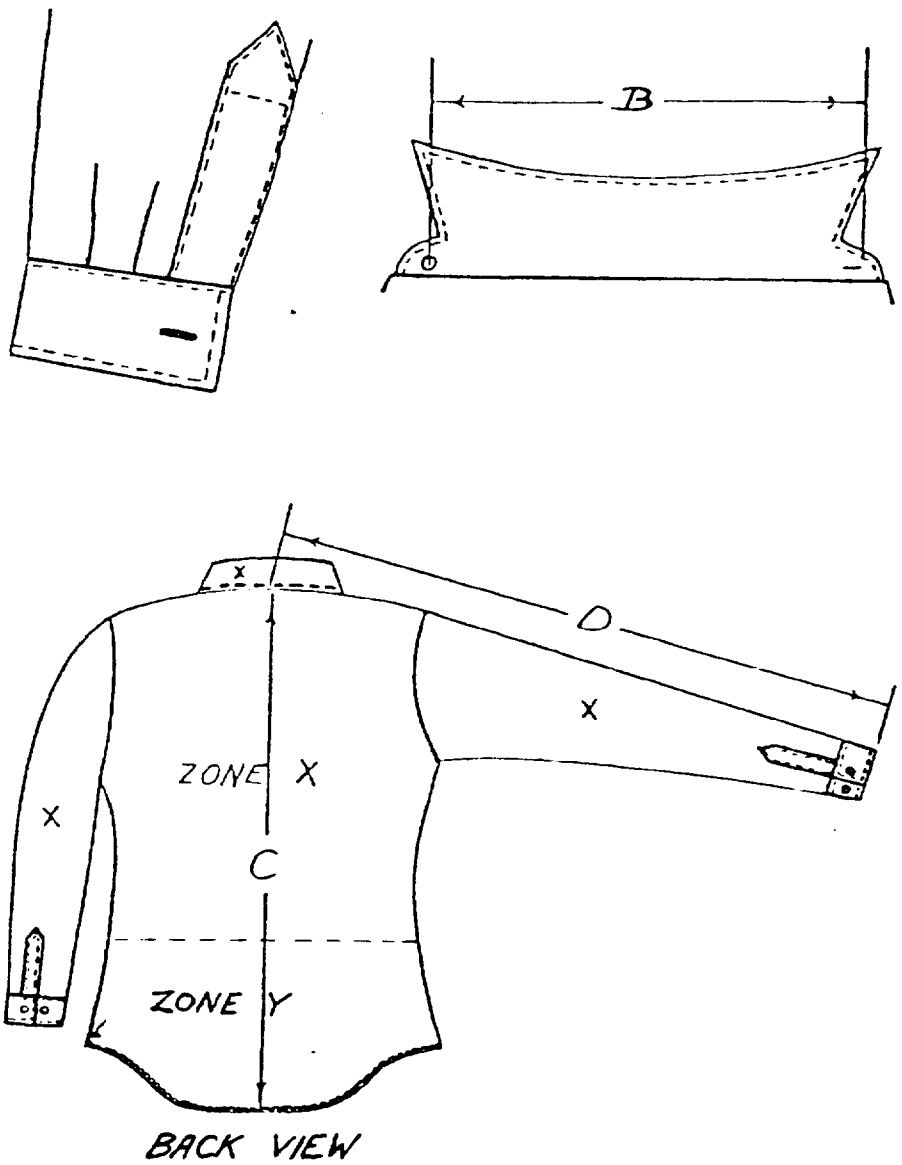


FIG. 2 - SHIRT, WOMAN'S, WORKING (LONG SLEEVES)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

Shirt, Woman's, Working, Khaki (Long Sleeve) - MIL-S-87073

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Officer in Charge
Navy Clothing and Textile Research Facility
(Code 50)
21 Strathmore Road
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.