MIL-S-87091C(NU)
14 September 1988

SUPERSEDING
MIL-S-87091B(NU)
13 December 1986

MILITARY SPECIFICATION

SHIRT, WOMAN'S, OPEN NOTCH COLLAR

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a woman's short sleeve dress shirt, with shoulder epaulets, made of various materials.

* 1.2 Classification. The shirt shall be procured in the following types and sizes (see 6.2):

1.2.1 Types:

Type I - Khaki polyester/cotton poplin
Type II - White polyester twill

1.2.2 Schedule of sizes. 32, 34, 36, 38, 40, 42

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement therto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole and Button, Staple, (Plastic)
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
DDD-L-20	- Label; for Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-21881	- Cloth, Poplin, Polyester and Cotton
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43594	- Cloth, Interlining, Polyester
MIL-P-55010	- Plastic, Sheet, Polyethylene Terephthalate
MIL-C-87052	- Cloth, Twill, Polyester, White

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

b. The use of corrosive metal fastening

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402-0001).

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATIN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads

Department of Defense Standard Shades of Buttons

(Applications for copies should be addressed to the Color Association of the United States, Inc., 343 Lexington Ave., New York, N.Y. 10016)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

* 3.3.1 Basic material. The basic material for the type I shirt shall be a polyester and cotton poplin, shade Khaki 3729, conforming to type II of MIL-C-21881. The basic material for the type II shirt shall be a polyester twill, White Shade No. 3006, conforming to MIL-C-87052.

3.3.2 Cloth, interlining, polyester. The polyester material used for interlining the collar, epaulets and pocket flaps shall conform to MIL-C-43594. The color shall match the basic material.

3.3.3 Buttons, plastic. The plastic buttons used for the fronts, pocket flap closures and shoulder epaulets shall be size 19 line and shall conform to type II, class K, style 25, color Tan AJ, Cable No. 62028 for type I shirt, and white BA, cable No. 62031 for type II shirt of V-B-871. The color shall match DOD Standard Shade for Buttons.

3.3.4 Collar stay The collar stay shall be of the special slotted type and shall be made from polyethylene terephthalate plastic sheet conforming to MIL-P-55010, except the thickness shall be 0.009 ± 0.0015 inch, the color shall be natural (clear or opaque) and the transparency and optical properties shall not apply. The stay shall measure not less than 1/4 inch or more than 3/8 inch wide and 2 1/8 to 2 3/4 inches in length when tested as specified in 4.4.1. Both ends shall be round, pointed, cut on an angle or any combination thereof. When other than round, points shall be rounded. The slotted portion shall be especially designed to accommodate collar insignia (see 6.4). The center of the slot shall be positioned 1 1/2 to 1 3/4 inches from the collar point in the finished shirt.

* 3.3.5 Thread, polyester covered. The polyester covered thread for seaming and stitching the shirt as noted below shall conform to MIL-T-43548. The color of the thread shall conform to Khaki P-1, Cable No. 66019 for the type I shirt or shade White AH, Cable No. 66050 for type II shirt . The thread colors shall be in accordance with the DOD Standard Shades for Sewing Threads. The polyester core, polyester covered thread is not allowed.

Use	Ticket No.	Ply
General seaming and overedging	70	2 or 3
Button and buttonhole	50	2 or 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.3.5.1 Colorfastness. The dyed thread shall show colorfastness to laundering and light equal to or better than the standard sample when tested as specified in MIL-T-43548. As a limit of acceptability, or when no standard is available, the dyed thread shall show a minimum of "good" colorfastness to laundering and light when tested as specified in MIL-T-43548.

* 3.3.6 Combination label. Each shirt shall have a combination identification, instruction and personal label conforming to type VI, classes 10 and 15 of DDD-L-20. The marking shall show colorfastness to laundering. The inscription and format shall be as follows:

NAME:
SERVICE NO:
NAME OF ITEM: SHIRT, WOMAN'S, OPEN NOTCH COLLAR
TYPE II (EXAMPLE)1/
FIBER CONTENT: POLYESTER (100%)(EXAMPLE) 2/
CONTRACT NO: DLA 100-00-0-0000 (Example)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER (If other than contractor)

1/ When type I shirt is applicable, the label shall reflect it.
2/ When type I shirt is applicable, the label shall read, "POLYESTER 65% - COTTON 35%"

The following laundering instruction applies to the type II shirt.

LAUNDERING INSTRUCTIONS

Machine washing
Use "Permanent Press" cycle. Wash separately from colored garments using hot water (160°F) and heavy duty soap or detergent. Fill machine with clothes to only 2/3 capacity. If bleach is used, follow manufacturer's instructions and only a non-chlorine bleach may be used. If stains are present, prespot with a special laundry pretreatment product or by rubbing with a paste made from soap or detergent and water. Remove from washer and tumble dry using warm setting (do not overload). Remove at once from dryer. If automatic dryer is not available, shape and hang to dry in a good current of air. If needed, touch up any wrinkled area with a warm, never hot, iron.

DO NOT REMOVE THIS LABEL

The following instruction label apply to the type I shirt.

LAUNDERING INSTRUCTIONS

Machine Wash, Warm, Permanent Press Cycle
Tumble Dry, Medium Heat
Remove Promptly
DO NOT USE CHLORINE BLEACH
Touch Up With Warm Iron if Needed

or

Follow NAVEDTRA Manual 414-01-45-81, Formula II

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

NOTE: If the label becomes too large to fit in the area specified, the instruction may become a seperated label and stitched along side the personal/identification label.

3.3.6.1 Size label. Each shirt shall have a size label conforming to type IV or VI, class 2 of DDD-L-20. The inscription shall be as follows:

SIZE 36 - (Example)
STOCK NUMBER - 8410-00-000-0000 (Example)

* 3.4 Design. The short sleeve shirt shall be of a two-piece princess style front and a one piece back, Six (6) button front closure, breast patch pockets with buttoned down flaps, an open notch collar with collar stays and two (2) shoulder epaulets (see figures 1 and 2). The collar, epaulets and pocket flaps shall be interlined.

3.4.1 Figures. Figures 1 and 2 are furnished for information purposes only. To the extent of any inconsistencies between the specification and the figures, the specification shall govern.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification. The patterns provide an allowance of 5/16 inch for all seams except for the front seam which shall be 3/8 inch. Unless otherwise indicated in Table I, seams shall be in accordance with these seam allowances.

* 3.5.1 Pattern parts. The component parts shall be cut from the material as specified and in accordance with the following list of pattern parts:

Material	Pattern Parts	Cut Parts
Basic material	Back	1
	Center fronts (left and right)	2
	Side fronts (left and right)	2
	Collar	2
	Sleeve	2
	Pocket	2
	Pocket flap	4
	Epaulets	4
Cloth, interlining	Pocket flap interlining	2
	Collar interlining	1
	Epaulet interlining	2
Templates	Template finished pocket	-
	Template finished flap	-
	Template buttonhole marker	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.6 Construction.

* 3.6.1 Stitches, seams and stitchings. Stitch, seam and stitching types, as specified in Table I shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitchings are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the shirt. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. The width of the safety stitch shall be 3/8 inch with the bight of the overedge stitching 3/16 inch. The guides and knive on the safety stitch machine shall be set to trim only the raveled ends of the fabric.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except label) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks of 401 stitching may be repaired by using 301 stitch type. When ends of overedge stitching are not caught in other seams or stitching, the ends shall be tacked. The end of type 401 stitching not caught in other stitching or seams shall have a 1/2 to 3/4 inch chain extending from it.

3.6.4 Buttonholes. The buttonholes shall be straight style with both ends securely barred. The finished cut length shall be 5/8 to 11/16 inch.

* 3.7 Manufacturing operations requirements. The shirts shall be manufactured in accordance with operation requirements as specified in Table I. The contractor is not required to follow the exact sequence of operations provided the finished shirts are identical to that produced by following the sequence as listed in Table I. Any additional stitching used to facilitate manufacturing is permissible provided the thread does not show on the finished shirt. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification.

3.7.1 Pressing operations. All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.7.2 Abbreviations in Table of Operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl Bob/ Lpr

1. Cutting

a. All components of the basic cloth shall be cut in strict accordance with patterns furnished, which show size, shape, placement of pockets and flaps, directional lines for cutting and notches for proper assembly of all parts.

b. Cut the components from one piece of material, except for the undercollar and underply pieces for epaulets and pocket flaps which may be cut from ends. Parts cut from ends shall approximate the shade of the main assembly.

c. The component parts cut from the basic material shall finish with the face side of the material on the outside.

2. Replacement of defective components

During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched material.

3. Shade and size markings

a. All parts shall be marked or ticketed to insure proper shade and size identification, except parts cut from ends.

b. The use of corrosive metal fastening devices, machine sewn-on tickets or adhesive type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets is prohibited.

c. The use of ink pad numbering machine, rubber stamp, or pencil will be permitted provided the numbers do not show through the outside of the garment and the numbers are covered by the seam allowance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

ously stitching and ...ib or ... one operation by simultane

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
4.	Attach center fronts to side fronts					
	a. Join center fronts to side fronts face to face.	301 or 401	SSa-1	10-12	70	70
	b. Overedge stitch the edges together.	503 or 504 or 602	SSa-1	8-10	70	70
	or					
	c. Operations 4a and 4b may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 519	SSa-2	10-12	70	70
	d. Turn seam allowance towards center front and topstitch 3/16 inch from the folded edge.	301	LSq-2(b)	10-12	70	70
	e. Overedge stitch outer raw edge of center fronts and shoulder edges which shall form the facings as specified in operation 13.	502 or 503 or 504	EFd-1	8-10	70	70
5.	Assemble breast pockets and attach to fronts.					
	a. Form a hem at top of pocket according to pattern marks with raw edge folded under 3/16 to 1/4 inch with the row of stitching 1/16 inch from folded edge.	502 or 503 or 504	EFb-1	10-12	70	70
	or					
	b. As an alternate, overedge stitch the top raw edge of pocket pieces. Fold the top edge of pocket as indicated by pattern marks forming the hem.	301	EFd-1	8-10	70	70
	c. Turn under the side and bottom edges in accordance with the pocket template.					
NOTE:	The pockets may be creased on an edge creasing machine to insure uniformity of size and shape before stitching to the shirt.					
	d. Set pockets to shirt according to marks on patterns, edgestitching 1/16 inch from folded edge along the bottom and sides.	301	LSd-1	10-12	70	70
	e. Backstitch 3/4 inch each end of pocket openings with the backstitching superimposed upon pocket stitching.	301	Similar to LSd-2	10-12	70	70
	or					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	f. The top corners of the pocket may be tacked with a triangle stitching. The base of the triangle (1/8 to 3/16 inches wide) shall be at the top of the pocket with the apex 1/2 to 3/4 inches below the top of the pocket.	301	Similar to LSd-2	10-12	70	70
	g. The finished pockets shall measure 4-1/4 (+ 1/8) in depth at pocket sides, 4-3/4 (+ 1/8) inches in depth at pocket center and 4-1/4 (+ 1/8) inches in width for all sizes.					
	NOTE: The finished pocket shall be checked for size and uniformity against the pocket template.					
6.	Assemble pocket flaps and attach to fronts					
	a. Superimpose interlining to backside of outer ply of pocket flap. With right sides together, superimpose pocket flap pieces and stitch along sides and pointed edge 1/4 inch from raw edges.	301 or 401	SSe-2(a)	10-12	70	70
	b. Turn pocket flap to finished position, working corners, points and seams out smooth and flat to edges.					
	c. Edgestitch 1/16 inch from the folded edges along the sides and pointed bottom edge.	301	SSe-2(b)	10-12	70	70
	d. Position pocket flaps to fronts with the raw edge 1/2 (+ 1/16) inch above top edge of finished pockets and stitch 1/8 to 3/16 inch from the raw edge.	301	LSbl-2(a)	10-12	70	70
	e. Turn pocket flaps down and topstitch 3/16 to 1/4 inch from the folded edge enclosing raw edges.	301	LSbl-2(b)	10-12	70	70
	f. The finished pocket flaps shall measure 4-3/8 (+ 1/8) inches in width, 2 (+ 1/8) inches in depth at center point and 1-3/8 (+ 1/8) inches in depth at the sides for all sizes.					
	NOTE: The finished flap shall be checked for size and uniformity against the flap template.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
7.	Close shoulders					
	a. Join fronts to back at shoulders, face to face.	301 or 401	SSa-1	10-12	70	70
	b. Overedge stitch the edges together.	503 504 or 602	SSa-1	8-10	70	70
	or					
	c. Operations 7a and 7b may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	10-12	70	70
	d. Press seam flat with seam allowance toward the back.					
8.	Assemble shoulder epaulets					
	a. Superimpose interlining to backside of outer ply of epaulet. With right sides together, superimpose epaulet pieces and stitch along sides and pointed edges 1/4 inch from raw edges.	301 or 401	SSe-2(a)	10-12	70	70
	b. Trim corners, work out points and turn inside out to finished position.					
	c. Edgestitch 1/16 inch from the folded sides and pointed edge of epaulets.	301	SSe-2(b)	10-12	70	70
9.	Set sleeves to armholes and attach epaulets					
	a. Position assembled epaulets so that the center of the back (squared) end of epaulet is 1/4 (+ 1/16) inch forward of the shoulder seam with the pointed end positioned 1/4 to 3/8 inch below the raw edge of neckline. Back end of epaulet shall be trimmed to match armhole.					
	b. Stitch the sleeves to the armholes, face to face, with notches matching, simultaneously catching back end of epaulet.	301 or 401	SSa-2	10-12	70	70
	c. Overedge stitch the raw edges together.	503 504 or 602	SSa-1	8-10	70	70
	or					
	d. Operations 9b and 9c may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	10-12	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	e. The shoulder epaulets shall finish face side up and with the shorter straight edge towards the front of the shirt.					
	f. The width of the finished epaulets shall measure as follows: 1-1/2 (± 1/8) inches at buttonhole 1-3/4 (± 1/8) inches at armhole seam					
10.	Join side seams and underarm seams					
	a. Stitch raw edges of sides and underarms face to face. The armhole seams shall be folded towards the bottom of the sleeve.	301 or 401	SSa-1	10-12	70	70
	b. Overedge stitch the edges together.	503	SSa-1	8-10	70	70
	or	504 or 602				
	c. Operations 10a and 10b may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	10-12	70	70
	NOTE: Side and underarm seams shall be staggered not more than 1/4 inch.					
11.	Hem sleeves					
	With the sleeve inseams folded towards the back, turn up the bottom edge of sleeves with the raw edge folded under to the inside of sleeve and stitch 1/16 to 1/8 inch from the turned edge. The finished hem shall measure 1-3/8 to 1-1/2 inch in width.	301	EFb-1	10-12	70	70
	NOTE: The hemming of sleeve may be performed before or after joining of underarm seam. When sleeve is hemmed prior to joining underarm seams, end of seam shall be backtacked not less than 3/8 inch, or a horizontal bartack shall be placed across seam allowance, at the end of the underarm seam 3/16 to 1/4 inch from bottom of sleeve.	301 or bartack	SSa-1	10-12 21-28 stchs/ bartack	70 70	70 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
12.	Make collar.					
	a. The special slotted stay shall be positioned with the center of the slotted portion finishing 1-1/2 to 1-3/4 inches up from the collar point.					
	b. Collar stays shall be positioned onto the undercollar according to marks on pattern with the tapered end fitting into the collar point. The application shall be as follows:					
	(1) Spot laminate both tips of stay to undercollar. Spot lamination shall not extend more than 5/8 inch from either tip.					
	or					
	(2) The stay may be stitched down the center, positioned as above. The ends of the stitching shall extend a minimum of 3 stitches past the end of the stay.	101	zig-zag	20-24	70	70
	c. Stitch the topcollar to the undercollar, back to back, with the interlining piece superimposed against the topcollar. Stitch together along outside edges 1/4 inch from the raw edge.	301 or 401	SSe-2(a)	10-12	70	70
	d. Trim corners, turn to finished position working out points and outer edges.					
	e. Edgestitch around the top side edges of collar, 1/16 inch from the folded edge. Any stitching penetrating the collar stay shall not damage the stay to the extent that the appearance of the finished shirt is affected.	301	SSe-2(b)	10-12	70	70
	f. The collar shall be pressed smooth and flat. The undercollar shall not be exposed beyond the edge of the topcollar.					
	NOTE: There shall be no evidence of the collar stay protruding into the fold of the finished topcollar.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
13.	Attach collar to shirt					
	a. Fold back the left and right center fronts at notches to form a facing.					
	b. Insert collar between the front and facing and stitch from notch to shoulder seam. Stitching shall be 1/4 inch from the raw edge. At these points, notches shall be made through all plies by the operator.	301	SSa-1	10-12	70	70
	c. Stitch undercollar to back at neckline between notches made by the operator, with the stitching 1/4 inch from raw edge.	301	Similar to BSg-2(a)	10-12	70	70
	d. Turn facings to finished position.					
	e. Turn under raw edges of topcollar and edgestitch through all plies 1/16 inch from the turned edge.	301	Similar to BSg-2(b)	10-12	70	70
	f. Position ends of the facing even with the edges of the shoulder seam allowance and tack stitch to seam allowance.	301	SSa-1	10-12	70	70
	NOTE: the tacking shall not be exposed on the outside of the shirt.					
	g. The finished collar shall measure as follows:					
	- Width at center back 2-3/4 (+ 1/8) inches. - Length of points 3-1/4 (± 1/8) inches.					
	-Length between points shall not vary more than 1/16 inch.					
	h. Stamp the size label inscription as specified in 3.3.6.1 on inside bottom edge of topcollar and centered. There shall be no evidence of the printing visible on outside of finished collar as worn.					
	or					
	i. Simultaneously center and catch the size label in the topcollar stitching with operation 13e.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
14.	Hem bottom of shirt.					
	a. Overedge entire bottom edge of shirt with the side seams folded toward the back and facing turned to finished position.	502 503 or 504	EFd-1	8-10	70	70
15.	Make buttonholes					
	a. Make five (5) vertical buttonholes through right front, 3/4 (± 1/8) inch from folded edge and positioned in accordance with the buttonhole marker template. The template shall be used only on the completely assembled shirt.	Button hole	-	42-46 per buttonhole including tack	50	50
	b. Make one vertical buttonhole in each pocket flap as indicated by pattern marks, with the inside cut of the buttonhole to finish 1/2 (± 1/8) inch from the pointed edge.	Button hole	-	42-46 per buttonhole including tack	50	50
	c. Make one horizontal buttonhole in each shoulder epaulet, with the inside cut edge of the buttonhole to finish 5/16 (± 1/8) inch from the pointed edge.	Button-hole		42-46 per buttonhole including tack	50	50
16.	Attach buttons					
	a. Sew five (5) buttons securely on left front through all plies with the center of button 3/4 (± 1/8) inch from the front edge, corresponding to respective buttonholes. The button shall be positioned in the center of the buttonhole.	101	-	20-22 per button	50	-
		or 301	-	14-16 per button	50	50
	b. Sew one button through each pocket piece so that when the pocket and flap are buttoned, the button shall finish at the center of the buttonhole.	101	-	20-22 per button	50	-
		or 301	-	14-16 per button	50	50
	NOTE: The button shall be sewn through all plies of the pocket hem.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
	c. Sew one button through each shoulder, 1/4 (+ 1/16) inch forward of the shoulder seam, through all plies, to correspond with buttonhole in epaulet, so that when buttoned and in the finished position, the button shall finish at the end of the buttonhole nearest to the pointed end of the epaulet. There shall be no slack in the epaulet when buttoned. The epaulet shall lay smooth and flat along the shoulder area, with no bulging or distortion. The point may not extend beyond the collar seam.	101 or	-	20-22 per button	50	-
		301	-	14-16 per button	50	50
	NOTE: The buttons shall align evenly with corresponding buttonholes, so as to assure a neat and smooth closure.					
17.	Attach combination label (see 3.3.6)					
	a. Center and stitch combination label to left front facing on inside of shirt around all four sides, 1/8 to 3/16 inch from the edge. The label shall finish face side up, with the top edge parallel to the folded front edge of facing and the side edge approximately 1 to 2 inches from the bottom edge of shirt. All of the printing shall be clearly visible. The label shall not extend past the bottom button.	301	LSbj-1	10-12	70	70
	or					
	b. The bottom edge of label may be simultaneously caught in the overedging of the center fronts specified in operation 4e. The remaining sides and top of the label shall be stitched as specified in sequence a.					
18.	Clean shirt					
	a. Trim all thread ends.					
	NOTE: Care shall be taken when triming to ensure that damage to the fabric does not result.					
	b. Remove all loose threads.					
	c. Remove all spots, stains, size markings and shade tickets.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF SHIRT

No.	Operation	Stch Type	Seam/ Stch type	Stch in	Thread Ndl	Thread Bob/ Lpr
19.	Press and prepare for packaging					
	a. Press shirt with a heated pressing iron or machine.					
	b. Button shirt and fold for packaging.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The finished buttoned shirt, placed flat upon a table and smoothed out, shall conform to the dimensions specified in Table II. All measurements are expressed in inches.

Table II - Finished measurements

Size	Bust (A)	Collar (B)	Center Back Length (C)	Sleeve length (D)
32	38	13 1/2	28	4 1/4
34	40	14	28-1/4	4 1/4
36	42	14-1/2	28-1/2	4 1/4
38	44	15	28-3/4	4 1/4
40	46	15-1/2	29	4 1/4
42	48	16	29-1/4	4 1/4
Tolerance	±1/2	±1/4	±1/2	±1/4

A. Twice the measurement taken across the front at the base of the armhole from folded edge to folded edge.
B. Measurement shall be taken along neck seam of collar, from one end to opposite end.
C. Measurement shall be taken at center back, from undercollar seam to bottom edge of shirt.
D. Measurement shall be taken along inseam, from underarm seam to bottom edge of sleeve.

3.10 Workmanship. The finished shirts shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected as specified for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. The contractor shall furnish a certificate of compliance for the collar stay requirements of 3.3.4.

4.5 Examination of the end item. Examination of the end item shall be in accordance with 4.5.1 and 4.5.2. The applicable inspection levels and acceptable quality levels (AQL'S), shall be as indicated in 4.5.3. The sample unit shall be one finished shirt. The lot size shall be expressed in units of one shirt.

4.5.1 Visual examination. The shirt shall be examined for defects in design, material, construction, workmanship and marking and the defects classified in accordance with the list below. The terms "outside" and "inside" as used throughout this examination are defined as follows:

Outside Any part of shirt that is visible when the completely buttoned and closed shirt is examined.

Inside Any part of shirt that is not visible when the completely buttoned and closed shirt is examined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
I. MATERIAL DEFECT AND DAMAGE			
a. Any hole (including drill hole, cut, tear, smash, burn, or scorched area:			
1. On outside	X		
2. On inside (longest dimensions in any direction):			
(a) Up to 1/4 inch inclusive			X
(b) More than 1/4 inch		X	
b. Misweave, missing yarn, broken yarn, visible mend, or thin place, on outside 1/	X		
c. Loose yarn, snagged thread, or woven in waste 1/		X	
d. Embedded crease of a permanent nature in cloth	X		
e. Needle chew on outside (largest dimension in any direction):			
1. Up to and including 1/2 inch		X	
2. More than 1/2 inch	X		
f. Knot or slub on outside: 2/			
1. Knot larger than B or a slub larger than C in Zone X	X		
2. Knot larger than C or a slub larger than D in Zone Y			X
II SHADED PART			
a. Any component part required to be cut from one piece, shaded	X		
b. Variation in shade within an outside part or between outside parts	X		
c. Undercollar, under ply of epaulets, or pocket underflaps do not approximate the shade of the shirt			X
III CLEANNESS			
a. Spot or stain on outside 1/			
1. Any spot or stain in Zone X	X		
2. Any spot or stain in Zone Y larger than 1/4 inch in longest direction	X		

1/ This defect shall not be scored on the undercollar, underflaps, or under ply of shoulder epaulets.
2/ For these defects, use the Sears Fabric Defect Scale (see 6.4) and the zones as shown in Figures 1 and 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
b. Three or more thread ends not trimmed to 1/4 inch or less on outside.		X	
c. Five or more thread ends not trimmed to 1/4 inch or less on inside			X
d. Two or more shade or size tickets not removed			X
e. Any shade or size markings visible on outside	X		
f. Any spot or stain on inside visible on outside		X	
1/ For these defects, use the zone areas as shown in Figures 1 and 2.			
IV CUTTING			
a. Any component part not cut in conformance with specification requirement	X		
b. Face of fabric not on outside	X		
V COMPONENT AND ASSEMBLY			
a. Any component part or required operation omitted (unless otherwise classified herein)	X		
b. Any component part twisted, distorted, pleated, misshaped, tight, or full (unless otherwise classified herein)		X	
c. Any component not as specified (type, size, color, etc).	X		
d. Any operation not performed as specified (unless otherwise classified herein)	X		
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X	
VI PRESSING			
a. Omitted		X	
b. Burned or scorched	X		
c. Pressing excessive, forming gloss on outside		X	
VII SEAMS AND STITCHING			
a. Accuracy of seaming			
1. Seam irregular, twisted, pleated, or wavy on outside	X		
2. Seam puckered (score only when on major portion of seam)			X
3. Any part of shirt caught in an unrelated operation or stitching		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Classification Defect	Major	Minor A	 B
4. End of stitching, when not caught in other seams or stitching, backtacked less than 3/8 inch			X
5. Thread break secured by stitching back of the break less than 1/2 inch			X
6. Ends of a continuous line of stitching overlapped less than 1/2 inch			X
7. Wrong or varying shades of thread used on outside	X		
b. Gauge of stitching and seam allowance:			
1. Gauge irregular or not within range specified			X
2. Topstitching or edgestitching sewn too close to edge, resulting in damage to cloth	X		
3. Seam allowance not as specified		X	
4. When no range or tolerance is given, seam allowance deviates by more 1/16 inch from that specified		X	
c. Open seam: (resulting from 2 or more skipped, broken, run-off, or missing stitches)			
1. On all seams except label stitching			
(a) Up to 1/4 inch inclusive			X
(b) More than 1/4 inch up to and including 1/2 inch		X	
(c) More than 1/2 inch	X		
2. Label stitching			X
NOTE: A safety-stitch seam shall be considered open when either the inside stitch or the overedging is broken. A seam shall be classified as open when one or more stitches joining a seam are broken or runoff, or when two or more continuous skipped stitches occur.			
d. Runoff:			
1. On joining seam, score as open seam			
2. Topstitching or edgestitching (when not resulting in an open seam):			
(a) Up to and including 1/2 inch			X
(b) More than 1/2 inch		X	
e. Raw edge:			
1. On outside:			
(a) Up to and including 1/8 inch			X
(b) 1/8 inch to 1/2 inch inclusive		X	
(c) More than 1/2 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
2. On inside:			
(a) 1/2 inch to 1 inch inclusive			X
(b) More than 1 inch		X	
f. Seam and stitch type:			
1. Not specified seam or stitch type		X	
2. Any required line of stitching omitted	X		
3. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
4. Any seam not lapped or finished as specified		X	
g. Broken, missing, or skipped stitches on top stitching or edgestitching (when seam is seamed, turned, and stitched):			
1. 1/4 inch up to and including 1/2 inch			X
2. More than 1/2 inch		X	
h. Stitch tension:			
1. Loose tension resulting in a loose seam			
- Up to 1/2 inch inclusive			X
- More than 1/2 inch up to 3/4 inch inclusive		X	
- More than 3/4 inch	X		
2. Loose tension on topstitching or edgestitching, resulting in exposed loose thread			X
3. Tight tension (stitches break when strain is applied in direction of seam or stitching)	X		
4. Tight tension (top & bottom thread loop not uniform)		X	
i. Stitches per inch (to be scored only when the condition exists on more than half the length of seam or stitching):			
1. Less than the minimum		X	
2. More than the maximum			X
VIII BUTTONHOLE			
a. Omitted	X		
b. Not specified type or size		X	
c. Misplaced, not positioned as specified		X	
d. Ragged edge, incomplete stitching, stitching not securely caught in fabric		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

Classification Defect	Major	Minor A	Minor B
e. Three or more broken stitches or three or more skipped stitches in one or more buttonholes		X	
f. Buttonhole stitching extending beyond bartack; stitches per buttonhole less than minimum specified			X
g. Finished cut length not as specified			X
h. Uncut or partially cut buttonhole		X	
IX BUTTON - One or more			
a. Missing, broken, defective, misplaced, not positioned or attached as specified, or insecurely sewn		X	
b. Not specified type, size, or color		X	
c. Stitching on one or more not locked at end of cycle (tug at the loose end of the thread when accessible to determine if it will ravel)		X	
d. Stitching not caught through all plies			X
X COLLAR			
a. Any pleat, pucker, or crease			
1. On topcollar piece		X	
2. On undercollar piece			X
b. Length between collar points uneven by:			
1. More than 1/16 inch up to and including 1/4 inch			X
2. More than 1/4 inch up to and including 3/8 inch		X	
3. More than 3/8 inch	X		
c. Twisted, not smooth, too full, short, or tight causing collar to turn out	X		
d. Edge of collar not properly forced out, i.e., having a fold of:			
1. 1/16 inch up to and including 1/8 inch in depth			X
2. More than 1/8 inch in depth		X	
e. One or both collar stays missing	X		
f. One or both collar stays misplaced		X	
g. Edge of undercollar exposed beyond edge of topcollar:			
1. 1/16 inch or more for a distance of 2 inches or more	X		
2. Less than 1/16 inch on major portion of collar		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Classification Defect	Major	Minor A	Minor B
h. Width of collar at center back less than 2-5/8 inches or more than 2-7/8 inches		X	
i. Collar points measure less than 3 1/8 inches or more then 3 3/8 inches		X	
j. Any evidence of the collar stay or reinforcement material protruding into the fold of the finished topcollar.	X		
XI POCKETS OR FLAPS			
a. Pocket not uniform in size or shape - any measurement varying from pocket to pocket or pocket to template by:			
1. 1/4 inch up to and including 3/8 inch		X	
2. More than 3/8 inch	X		
b. Flap not uniform in size or shape - any measurement varying from flap to flap or flap to template by:			
1. 1/4 inch up to and including 3/8 inch		X	
2. More than 3/8 inch	X		
c. Out of alignment at any point from pocket to pocket or flap to flap by: (Determination may be made by a straight edge)			
1. 1/4 inch up to and including 3/8 inch			X
2. More than 3/8 inch up to and including 1/2 inch		X	
3. More than 1/2 inch	X		
d. Pocket or flap not according to template on any side by:			
1. More than 1/8 inch up to and including 3/16 inch			X
2. 1/4 inch or more		X	
e. Unbalanced positioning between pockets to center front (measurement taken from side edge of pocket to center of buttonhole).			
1. 1/4 inch up to and including 3/8 inch			X
2. More than 3/8 inch up to and including 1/2 inch		X	
3. More than 1/2 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Classification Defect	Major	Minor A	Minor B
XII POCKET(S)			
a. Pocket edge(s) not parallel to front edge of shirt by:			
1. 3/16 inch up to and including 1/4 inch			X
2. More than 1/4 inch up to and including 3/8 inch		X	
3. More than 3/8 inch	X		
b. Edge of pocket pleated, puckered or twisted			X
c. Width of pocket less than 4-3/8 inches or more than 4-5/8 inches		X	
d. Depth at center of pocket less than 4-5/8 inches or more than 4-7/8 inches		X	
e. Depth at sides of pocket less than 4-1/8 inches or more than 4-3/8 inches		X	
f. Pocket hem not overedged			X
g. Pocket not according to template on any side by:			
1. More than 1/8 inch up to and including 3/16 inch.			X
2. 1/4 inch or more		X	
XIII FLAP(S)			
a. Width of pocket flap less than 4-1/4 inches or more than 4-1/2 inches		X	
b. Depth of pocket flap at center less than 1-7/8 inches or more than 2-1/8 inches		X	
c. Depth of pocket flap at sides less than 1-1/4 inches or more than 1-1/2 inches.		X	
d. Pocket exposed beyond end of flap by 1/8 inch or more w/flap unbuttoned		X	
e. Fabric threads visible after attachment of flap		X	
XIV FRONTS			
a. Any button out of alignment with corresponding buttonhole, causing a noticeable bulge		X	
b. Lengths of fronts uneven at bottom when buttoned:			
1. 3/8 inch up to 3/4 inch inclusive			X
2. More than 3/4 inch		X	
XV ARMHOLE AND SLEEVE			
a. Setting:			
1. Sleeve tight at armhole, causing pleats or excessive puckers on front, back, or sleeve		X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the currentversion before use.

ility for inspection. Unless otherwise specified in the 4.4 Responsib

Classification Defect	Major	Minor A	 B
2. Sleeves reversed, i.e., left sleeve in right armhole; right sleeve in left armhole	X		
3. End of side and underarm seams not staggered as specified.			X
XVI SLEEVE HEM			
a. Hem twisted, pleated, or puckered		X	
b. Width not as specified		X	
c. Irregular in width by 1/4 inch or more		X	
XVII LABEL OR MARKING			
a. Not attached or affixed as specified, misplaced, or stitching through the printing		X	
b. Missing, incorrect, illegible, or strike through	X		
XVIII SHOULDER EPAULETS			
a. Not positioned as specified or attached crookedly		X	
b. Not smooth and flat along the shoulder area, affecting appearance		X	
c. Width of finished epaulet less than 1-3/8 or more than 1-5/8 at end of buttonhole furthest from pointed edge		X	
d. Width of finished epaulet less than 1-5/8 inches or more than 1-7/8 inches at armhole seam		X	
e. Epaulet tight, loose or badly distorted when buttoned		X	
f. Back (squared) end of epaulet center positioned less than 3/16 inch or more than 5/16 inch beyond shoulder seam		X	
XIX BARTACK OR TACK - One or more			
a. Missing, insecure, misplaced, not specified size or type, or not serving intended purpose:			
1. Bartack for attachment		X	
2. Bartack for reinforcement			X
b. Loose stitch tension			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.5.2. Dimensional examination. The shirt shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from the dimensions and tolerances specified in Table II shall be scored as a size measurement defect.

b. Sleeves uneven in length by 1/2 inch or more shall be scored as a size measurement defect.

4.5.2.1 Inspection levels and acceptable quality levels (AQL's). The inspection levels and acceptable quality levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

	AQL	Inspection level
For defects applicable to 4.5.1		III
Major	1.5	
Major and minor A	6.5	
Major, Minor A and Minor B (combined)	15.0	
For defects applicable to 4.5.2		
One class	4.0	S-3

4.6 Examination of packaging requirements. An examination shall be made to determine that packaging, packing and marking comply with the section 5 requirements of this specification. The sample unit shall be one shipping container fully prepared for delivery. Examination for closure defects listed below shall be made. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

4.5 Examination of packaging requirements. An examination shall be made to determine that packaging, packing and marking complies with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Examine	Defects
Marking (interior and exterior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Material	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling. Distorted or bulging containers.
Content	Open and non-continuous heat sealed seams and closure of polyethylene bag. 1/ Alternate closure of polyethylene bag not provided with tuck or reverse flap. 1/ Omission of required vent hole in polyethylene bag. 1/ Number of shirts per shipping container more or less than specified. 1/ Size shown on one or more items not as specified on shipping container. 2/

1/ For this defect, one container in the sample shall be examined.
2/ For this defect, one item from each shipping container in sample shall be examined.

4.7 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:53Z
Check the source to verify that this is the currentversion before use.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Level A. Each fully buttoned shirt shall be neatly folded to measure approximately 14 inches by 10 inches. The folded shirt shall be secured with stainless steel (AISI type 304 or 316) pins, aluminum clips or plastic fasteners. Each shirt shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (+ 25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape.

5.1.2 Level C. Shirts shall be packed to afford adequate protection against deterioration and physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be Level A, B, or C as specified (see 6.2).

5.2.1 Level A. Sixty (60) shirts of type I or forty-eight (48) shirts of type II of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, front up, collars alternated front to rear, two in length, one in width, and two equal tiers within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Level B. Sixty (60) shirts of type I and forty-eight (48) shirts of type II of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, variety DW, grade 275, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, front up, collars alternated front to rear, two in length, one in width, and two equal tires within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Commercial Shirts packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

5.2.4 Palletization. When specified (see 6.2) item, packed as specified shall be palletized on a 4-way entry pallet in accordance with load type IA of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means C, K, and L or O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, type IV; Type V, class 1, size 2; or Type VIII, fabricated from wood groups I, II, III, or IV, Grade A of NN-P-71, or 4-way, style 1, Size A, Type I, Class 1 fabricated from wood groups specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polythylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

SHIRT, WOMAN'S, OPEN NOTCH COLLAR
STOCK NO:
SIZE:
QUANTITY:

6. NOTES

6.1 Intended use. The shirts are intended for wear by female military personnel of the Department of the Navy.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When first article inspection is required, (see 3.2) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
(e) When palletization is required (see 5.2.4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids. (see 3.1).

6.4 (a) Sears Fabric Defect Scales are available from: Sears Roebuck and Company, Department 733Q, "Sears Defect Kit", Sears Tower, Chicago, Il. 60684.

(b) Slotted collar stays designed especially for use with military insignia (style DPSS) are available from: National Flexway Co. 1040 Avenue of the Americas, New York, N.Y. 10018.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.6 Subject term (key word) listing.
Closure, front, button
Collar, one piece
Epaulets, shoulder
Interlining, polyester
Shirt, woman's dress
Sleeve, short
Style, princess


Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8410-N687


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

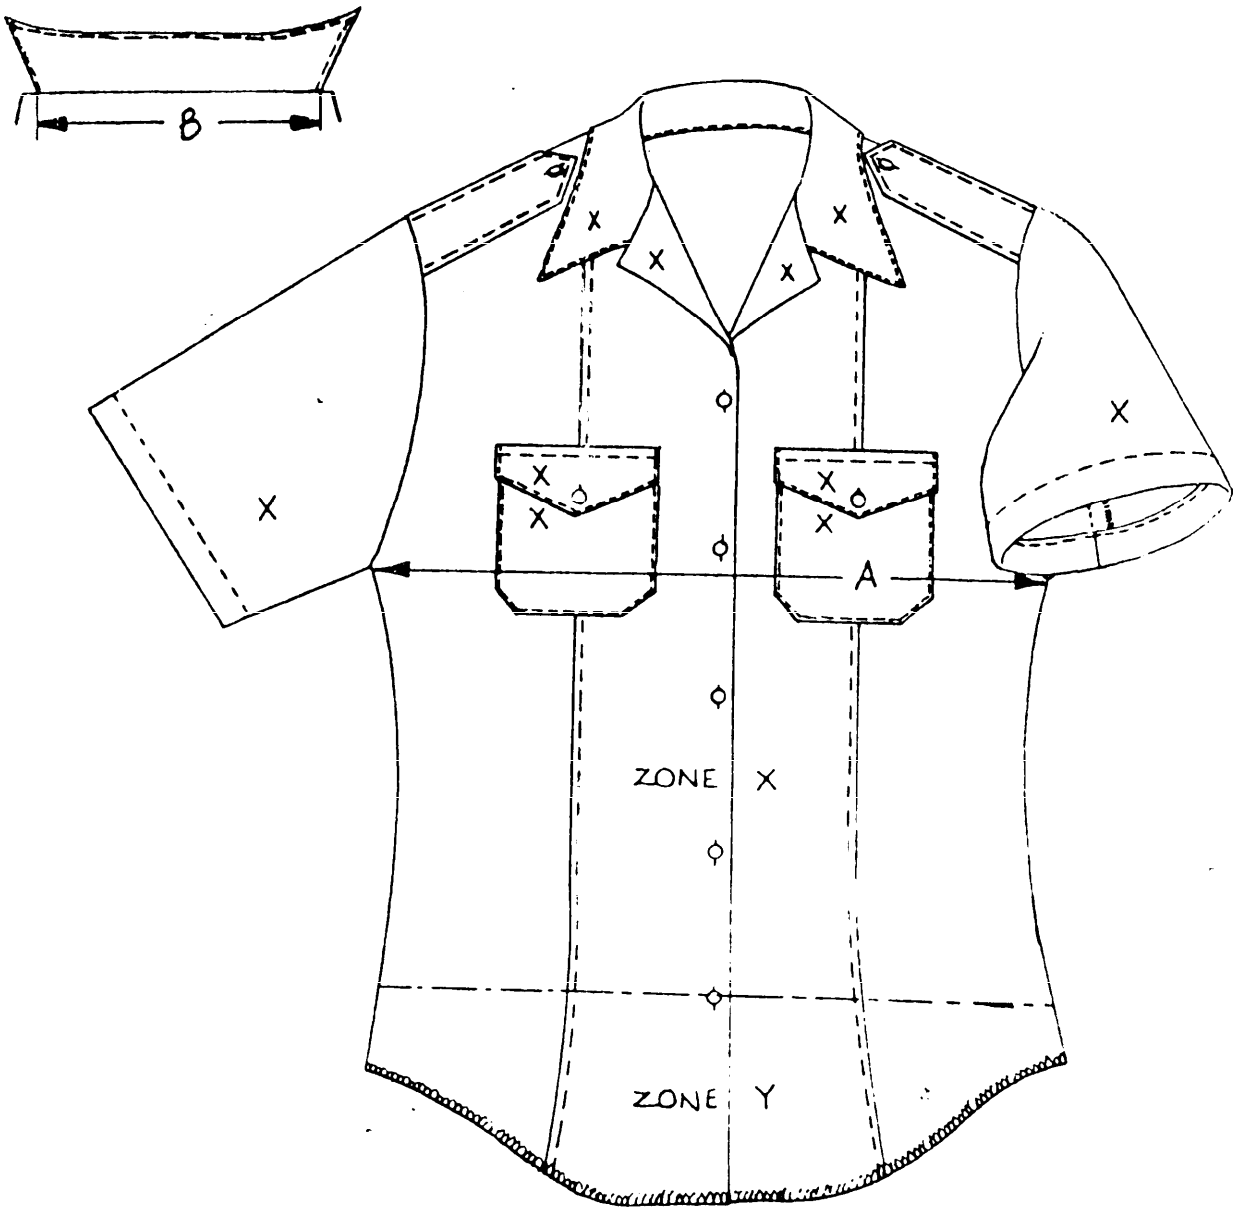

ZONE X AND Y (DEFECT AREAS) SHALL APPLY ONLY TO THE OUTSIDE FRONT AND BACK

Figure 1 - Shirt, Woman's Open Notch Collar

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

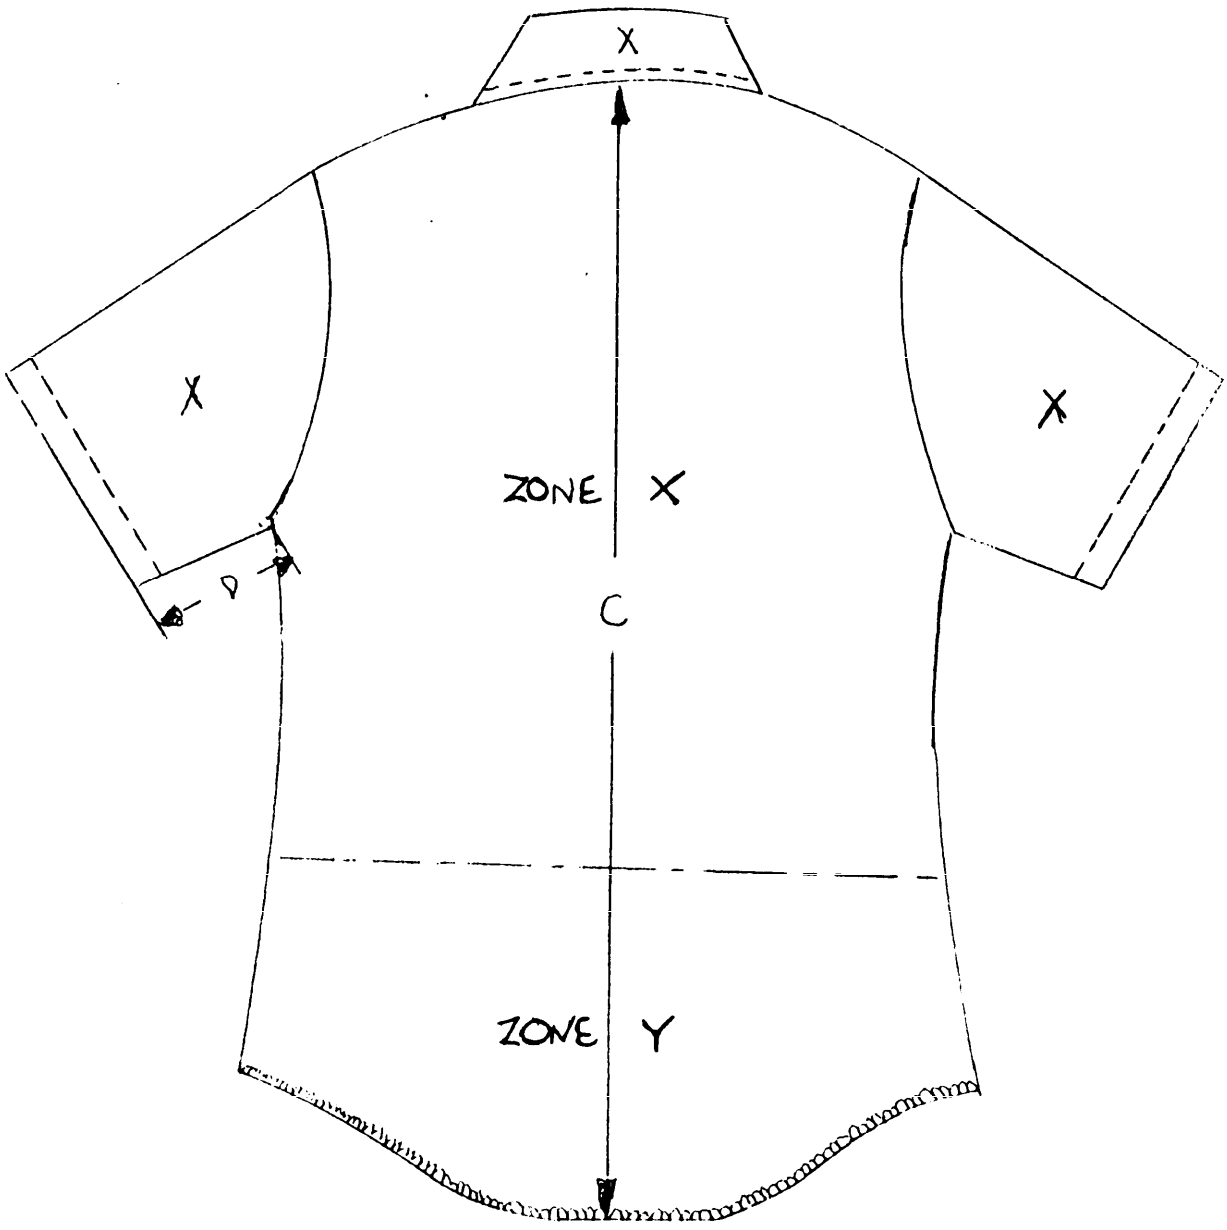

BACK VIEW

ZONE X AND Y (DEFECT AREAS) SHALL APPLY ONLY TO THE OUTSIDE FRONT AND BACK

Figure 2 - Shirt, Woman's Open Notch Collar

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, Natick, Mass. 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-87091C (NU)	SHIRT, WOMAN'S, OPEN NOTCH COLLAR

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.