MILITARY SPECIFICATION

SHIRT, WOMAN'S, CWU-55/P

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of woman's, long sleeve, cotton shirt which is designated CWU-55/P.

1.2 Sizes. The shirt shall be furnished in one of the following sizes as specified (see 6.2):

Short	Regular	Long
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
	18	18
	20.	

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-276	Thread, Cotton
V-T-280	Thread, Gimp, Cotton, Buttonhole
UU-P-268	Paper, Kraft, Wrapping
DDD-L-20	Label; for Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Aeronautical Systems Division, ASD/ENESS, Wright-Patterson AFB, Ohio 45433, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-10296 Cloth, Sateen, Cotton

STANDARDS

FEDERAL

FED-STD-751 Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 Marking for Shipment and Storage

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Department of Defense (DOD) Standard Shades for Buttons 1966

DOD Standard Color Card of Official Standardized Shades for Sewing Threads 1968

(Copies of these documents can be obtained from The Color Association of the United States, Inc.; 200 Madison Avenue; New York, New York 10016.)

(Technical society and technical association specifications and standards are generally available for reference from libraries and are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Materials

3.1.1 Basic fabric. The basic fabric shall conform to class 1 of MIL-C-10296 and shall be Olive Green 107 (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.1.2 Thread. The thread for sewing shall be cotton thread that conforms to table I. The thread shall be DOD Thread Shade Olive Drab S-1, Cable No. 66022 (see DOD Standard Color Card of Official Standardized Shades for Sewing Threads 1968) and shall have good colorfastness to light and to combined laundering and bleaching.

TABLE I. Thread.

Application	Specification V-T-276		
	Type	Ticket No.	Ply
Seaming and stitching	IA3	30	3
	IA3	50	3
	IA3	70	2
Button sewing	IA3 or IB3	30	3
Buttonholes	IA3	30	3
	IA3	50	3

3.1.3 Gimp. The gimp for reinforcing the buttonholes shall conform to type I or II, No. 8 of V-T-280. The gimp shall be DOD Thread Shade Olive Drab S-1, Cable No. 66022 (see DOD Standard Color Card of Official Standardized Shades for Sewing Threads 1968) and shall have good colorfastness to laundering.

3.1.4 Buttons. The buttons shall conform to type II, class D, style 26, 30-line size of V-B-871 and shall be DOD Button Shade Olive Green BP, Cable No. 62016 (see DOD Standard Shades for Buttons 1966) with a dull finish.

3.2 Design. The shirt shall be a single-breasted, coat-style shirt. It shall have a five-button front closure, side vents, a convertible collar, a yoke back, long hemmed sleeves, and breast patch pockets with button-down flaps. The pocket and the flap on the left side of the shirt shall have two slots for inserting pencils.

3.3 Construction. The shirt shall be constructed as specified in table II; however, the manufacturer will not be required to follow the exact sequence of operations as listed therein. Additional basting or holding stitching to facilities manufacture may be used, provided the thread is removed or does not show on the finished shirt.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations.

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
1	Cut parts (a) Cut the parts of the shirt in accordance with the patterns, which show size, shape, placement of pockets, flaps, warp directional lines, and notches for proper assembly of all the parts. (b) Unless otherwise specified herein, cut all parts of the shirt from one piece of the basic fabric. The under ply of the flaps may be cut from ends but shall closely match the shade of the other parts of the shirt. (c) At the time of cutting, replace any part that contains a hole, a smash, a multiple float, a shade bar, or a slub. (d) Replace during the manufacture of the shirt any part that contains a needle chew, a tear, a mend, a burn, a hole, or an exposed drill hole.					
2	Overedge facings (a) If the back edge of the facings is not cut on the selvage, overedge stitch the back edge of the facings.	70-2	70-2	502 or 503	EFd-1	6-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
3	Mark, ticket, or bundle parts					
	(a) Mark, ticket, or bundle (see 3.3.3) all parts of the shirt except parts cut from ends.					
4	Make flaps					
	(a) Join the bottom and the side edges of each flap. Turn each flap and work out the points. Stitch each flap, 3/16 to 1/4 inch from the edge, along the side and the bottom edges.	50-3	50-3	301	SSe-2	10-14
	OR					
	(b) Fold each flap in half, and seam the side edges. Turn each flap, and work out the corners.	50-3 50-3	50-3 70-2	301 or 401	SSe-2(a) SSe-2(a)	10-14 10-14
	(c) Topstitch the bottom and the side edges of each flap 1/16 to 3/32 inch from the edge.	50-3	50-3	301	SSe-2(b) and OSf-1	10-14
	OR					
	(d) Fold each flap in half, and turn the bottom and the side edges to the inside. The edges of the flaps may be turned in on a creasing machine. Single stitch the bottom and the side edges of each flap 3/16 to 1/4 inch from the edge.	50-3	50-3	301	SSc-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per inch
		Top	Lower			
	Note: If four pieces are cut for the breast pocket flaps, the flaps shall be made as specified in No. 4(a). If two pieces are cut for the breast pocket flaps, the flaps shall be made as specified in No. 4(b) and 4(c) or as specified in No. 4(d).					
	(e) Make a vertical cut buttonhole in the center of each flap, with the inside edge of the eyelet 5/8 to 3/4 inch in from the pointed end. The buttonholes shall be an eyelet-end, taper-bar or square-bar type and shall be worked over gimp with the ends tacked. The bar end of the eyelet-end, taper-bar type of buttonhole shall have a minimum of four stitches not counting the first cross-over stitch. The cut length of the buttonholes shall be 3/4 to 7/8 inch. The purling of the buttonholes shall be on the outside of the finished shirt.	30-3	50-3	Button-hole		52-56 stitches per button-hole includ-ing tack
	(f) If the buttonholes in the flaps are eyelet-end, square-bar type of buttonholes, bartack each buttonhole in a separate operation.	50-3	50-3	Bartack		21 stitches per bartack
5	Make collar					
	(a) Seam the ends of the collar. Trim and turn the collar, and work out the points. Stitch the collar with a single row of stitching 3/16 to 1/4 inch along the ends	50-3 50-3 50-3	50-3 70-2 50-3	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b) and	10-14 10-14 10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	and the top folded edge. The finished collar shall be uniform in size and shape. The edges of the finished collar shall be smooth and flat, without pleats, twists, gathers, puckers, or raw edges.				OSf-1	
6	Make and attach patch pockets					
	(a) Overedge the top raw edge of each pocket. Turn in the top edge of each pocket, as indicated by the pattern marks, forming a hem. Note: The width of the finished top hem in each pocket shall be 1-1/4 inches (plus or minus 1/8 inch).	70-2	70-2	503 or 504	EFd-1	6-10
	(b) Turn in the side and the bottom edges of each pocket. The pockets may be pre-creased. Position the pockets on the fronts as indicated by the pattern marks. Single stitch each pocket to the fronts 3/16 to 1/4 inch from the edge, with the stitching continued across the top ends and down the sides 1/16 to 3/32 inch from the edges. The stitching along the sides of the pockets shall terminate 3/4 to 1 inch below the top edges of the pockets. The facing shall not be caught in the line of stitching.	50-3	50-3	301	LSd-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	(c) Bartack the top of the left pocket with three bartacks that are 1/4 to 3/8 inch long to correspond with the three bartacks for the pencil opening on the top of the left flap.	50-3	50-3	Bartack		28 stitches per bartack
7	Sew on flaps					
	(a) Position the flaps on the shirt as indicated by the pattern marks. Stitch each flap to the shirt with a single row of stitching. The seaming of the left flap shall terminate 2-3/8 inches (plus or minus 1/8 inch) from the front edge of the flap.	50-3	50-3	301	LSbj-1	10-14
	(b) Bartack the top of the left flap, to form the two pencil openings, with three vertical bartacks that are 1/4 to 3/8 inch long. The location of the bartacks shall be as follows: one bartack superimposed on the edge stitching on the front edge of the flap, one bartack in the center of the flap, and one bartack centered between the other two bartacks.	50-3	50-3	Bartack		28 stitches per bartack
8	Join yoke to back					
	(a) Join the yoke to the back, forming the two pleats as indicated on the patterns, with a double-lapped, double-stitch seam, with the yoke overlapping the back. The pleats may be stitched in position before	30-3 30-3	30-3 50-3	301 or 401	LSc-2 LSc-2	10-14 10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	the yoke is joined to the back. The outside fold of the pleats shall face toward the armhole in the finished shirt.					
9	Join shoulders					
	(a) Join the fronts to the back (yoke), at the shoulders, forming a pleat in each front as indicated on the patterns, with a double-lapped, double-stitched seam, with the back (yoke) overlapping the fronts. The pleats may be stitched in position before the shoulders are joined. The outside fold of the pleats shall face toward the armhole in the finished shirt.	30-3 30-3	30-3 50-3	301 or 401	LSc-2 LSc-2	10-14 10-14
10	Set sleeves					
	(a) Set the sleeves to the armholes, with the sleeve notch aligned with the seam joining the yoke to the front and with the front and the back parts overlapping the sleeve, with a double-lapped, double-stitched seam.	50-3 50-3	50-3 70-2	301 or 401	LSc-2 LSc-2	10-14 10-14
11	Join side and sleeve seams					
	(a) Join each side and sleeve seam in one continuous operation, leaving the side vents at the bottom of the shirt open as indicated by the marks on the patterns, with a double-lapped, double-stitched seam and with the	50-3 50-3	50-3 70-2	301 or 401	LSc-2 LSc-2	10-14 10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	fronts overlapping the back. The ends of the armhole seams shall not be staggered more than 3/8 inch (measured from the center of the seams).					
12	Hem sleeves					
	(a) Turn in the bottom edge of each sleeve, as indicated by the pattern marks, with the raw edge turned in, and stitch with a single row of stitching 1/16 to 1/8 inch from the edge. The width of the finished hem in each sleeve shall be 1 inch (plus or minus 1/8 inch).	50-3	50-3	301	EFb-1	10-14
13	Join collar to shirt					
	(a) Fold the facing at the front notch. Insert the collar between the fronts and the facing at the collar notch, and stitch across the step and the gorge. Slash the seam allowance 1/4 inch forward of the shoulder seam. Continue stitching the under-collar to the shirt with the raw ends of the facings turned towards the outside even with the turned edge of the shoulder seam on the inside of the shirt.	50-3	50-3	301	SSa-1	10-14
	(b) Turn under and stitch the unsewn portion of the topcollar to the neck 1/16 to 1/8 inch from the edge, catching the size label or the combination identification and	50-3	50-3	301	LSb-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	size label as applicable (1/2 inch off center tolerance) in the stitching. Continue the stitching along the folded ends of the facing.					
14	Attach identification label to facing					
	(a) If the combination identification and size label is not used, center (1/2-inch tolerance) the identification label on the left facing 3 to 3-1/4 inches from the bottom raw edge. Stitch the identification label on all four sides to the facing. The line of stitching shall not show through the front of the finished shirt.	30-3	30-3	301	LSbj-1	10-14
15	Hem side vents					
	(a) Hem each side vent, with the raw edges turned in, with a single row of stitching 1/16 to 3/32 inch from the edge. The width of the finished hem in each side vent shall be 3/8 to 1/2 inch.	50-3	50-3	301	EFb-1	10-14
16	Hem bottom of shirt					
	(a) Hem the bottom of the shirt, with the raw edges turned in, with a single row of stitching 1/16 to 1/8 inch from the edge. Continue the stitching along the folded ends at the sides and the fronts. The width of the finished hem in the bottom of the shirt shall be 1 inch (plus or minus 1/8 inch).	50-3	50-3	301	EFb-1	10-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
17	Make buttonholes in right front					
	(a) Make a horizontal buttonhole in the right front lapel, as indicated by the pattern marks, with the nearest inside edge of the eyelet 3/8 inch (plus or minus 1/16 inch) from the finished edge of the front and 3/8 inch (plus or minus 1/16 inch) from the edge of the lapel step. The buttonhole shall be an eyelet-end, taper-bar or square-bar type and shall be worked over gimp with the ends tacked. The bar end of the eyelet-end, taper-bar type of buttonhole shall have a minimum of four stitches not counting the first cross-over stitch. The cut length of the buttonhole shall be 3/4 to 7/8 inch. The purling of the buttonhole shall be on the outside of the finished shirt.	30-3	50-3	Button-hole		52-56 stitches per button-hole including tack
	(b) Make four horizontal buttonholes in the right front, as indicated by the pattern marks, with the nearest inside edge of the eyelets 3/4 inch (plus or minus 1/16 inch) from the finished edge of the front. The buttonholes shall be an eyelet-end, taper-bar or square-bar type and shall be worked over gimp with the ends tacked. The bar end of the eyelet-end, taper-bar type of button-holes shall have a minimum of four stitches not counting the first cross-over stitch. The cut length of the buttonholes shall be	30-3	50-3	Button-hole		52-56 stitches per button-hole including tack

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
	3/4 to 7/8 inch. The purling of the buttonholes shall be on the outside of the finished shirt.					
	(c) If the buttonholes in the right front are eyelet-end, square-bar type of buttonholes, bartack each buttonhole in a separate operation.	50-3	50-3	Bartack		21 stitches per tack
18	Sew buttons on left front					
	(a) Sew five buttons on the left front, through the facing, to correspond with the eyelet ends of the buttonholes in the right front. The top button shall be positioned so that edges of the collar of the finished shirt will not overlap or spread more than 1/4 inch.	30-3		101 or		14-16 stitches per button
		30-3	30-3	301		14-16 stitches per button
	(b) Sew one button on each pocket, through the hem, to correspond with the eyelet end of the buttonhole in the flap.	30-3		101 or		14-16 stitches per button
		30-3	30-3	301		14-16 stitches per button

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Thread		Stitch Type	Seam and Stitch Type	Stitches Per Inch
		Top	Lower			
19	Bartack side vent openings					
	(a) Bartack the top of each side vent opening with a horizontal bartack that is 3/8 to 1/2 inch long.	50-3	50-3	Bartack		28 stitches per bartack
20	Clean shirts					
	(a) Trim the ends of all thread. Remove all loose thread from the shirt.					
	(b) Remove all spots and stains from the shirt.					
	(c) Remove all shade and size markings from the shirt.					
21	Pressing					
	(a) Press the shirt smooth with a heated pressing iron or machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.3.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types specified in table II shall conform to FED-STD-751. If two or more methods or seam or stitch types are given for the same part of an operation, any one of them may be used. The looper (under thread) of stitch type 401 shall be on the inside of the shirt. The gage of the double rows of stitching specified in table II shall be 1/4 to 5/16 inch. The stitches per inch specified in table II shall be the minimum and the maximum stitches per inch.

3.3.2 Ends of seams and stitching and thread breaks. The ends of all seams and stitching of stitch type 301, if not caught in other seams or stitching or if not the end of a continuous line of stitching, shall be backtacked not less than 1/4 inch. The ends of continuous lines of stitching shall overlap not less than 1/2 inch. Thread breaks of all stitch types shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches and thread breaks of stitch type 401 may be repaired using stitch type 301.

3.3.3 Marking, ticketing, and bundling. The cut parts of the shirt shall be marked, ticketed, or bundled to insure a uniform shade and size throughout the shirt. Any method of marking may be used except corrosive metal fastening devices, sew-on-type marking, and adhesive-type tickets that will discolor the fabric or that will leave residue of the adhesive material on the fabric after the tickets are removed from the shirt.

3.4 Cutting parts. The parts of the shirt shall be cut from the specified material in accordance with the pattern parts listed in table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III. Pattern parts.

Material	Pattern Parts	Cut Parts
Basic fabric (see 3.1.1)	Front	2
	Back	1
	Back yoke	1
	Collar	1
	Sleeve	2
	Breast pocket	2
	Breast pocket flap	1/

1/ If the breast pocket flaps are made as specified in No. 4(a), four cut parts shall be required. If the breast pocket flaps are made as specified in No. 4(b) and 4(c) or as specified in No. 4(d), two cut parts shall be required.

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.5 Standard patterns. Standard patterns will be furnished by the Government (see 6.2). Unless otherwise specified herein, the standard patterns will provide a seam allowance of 1/2 inch. The standard patterns will provide a seam allowance of 3/8 inch for the collar and the neck and of 1/4 inch for the pocket flaps. The standard patterns are to be used in cutting the manufacturer's working patterns. The manufacturer's working patterns shall be identical in size and shape to the standard patterns. The standard patterns and the manufacturer's working patterns shall not be altered in any way.

3.6 Finished measurements. The finished measurements of the shirt shall conform to table IV. The finished measurements of the shirt shall be taken as follows: Measure the 1/2 bust at the base of the armhole, with the shirt buttoned, from folded edge to folded edge. Measure the back length, along the center of the back, from the undercollar seam to the bottom of the shirt. Measure the sleeve length from the base of the armhole to the bottom edge of the sleeve.

TABLE IV. Finished measurements.

Size of Shirt	Finished Measurements in Inches 1/ 2/		
	1/2 Bust	Back Length	Sleeve Length
Short			
6	18	24-1/4	17-5/8
8	18-1/2	24-1/2	17-3/4
10	19	24-3/4	17-7/8
12	19-1/2	25	18
14	20-1/4	25-1/4	18-1/8
16	21	25-1/2	18-1/4
Regular			
6	18	25-1/4	18-5/8
8	18-1/2	25-1/2	18-3/4
10	19	25-3/4	18-7/8
12	19-1/2	26	19
14	20-1/4	26-1/4	19-1/8
16	21	26-1/2	19-1/4
18	21-3/4	26-3/4	19-3/8
20	22-3/4	27	19-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE IV. Finished measurements. - Continued

Size of Shirt	Finished Measurements in Inches 1/ 2/		
	1/2 Bust	Back Length	Sleeve Length
Long			
6	18	26-1/4	19-5/8
8	18-1/2	26-1/2	19-3/4
10	19	26-3/4	19-7/8
12	19-1/2	27	20
14	20-1/4	27-1/4	20-1/8
16	21	27-1/2	20-1/4
18	21-3/4	27-3/4	20-3/8

1/ The finished measurements shall be taken as specified in 3.6.
2/ The tolerance for the finished measurements shall be plus or minus 3/8 inch.

3.7 Labels. The shirt shall either have two separate labels, which shall be an identification label and a size label, or shall have a combination identification and size label. The labels shall have colorfastness to laundering in accordance with DDD-L-20. The identification label shall conform to type I, class 1 of DDD-L-20 except that the marking shall include the care instructions specified herein. The size label shall conform to type I, class 2 of DDD-L-20. The combination identification and size label shall conform to type I, classes 1 and 2 of DDD-L-20 except that the marking shall include the care instructions specified herein. The size of the shirt that is marked on the label shall include the length; for example, size 14 regular shall be expressed as size 14R. The care instructions shall be as follows:

Instructions
Launder by hand or machine.

3.8 Workmanship. The shirt shall be manufactured in a thoroughly workmanlike manner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection

4.2.1 Materials and components. Unless otherwise specified by the procuring activity (see 6.2), materials and components shall be inspected in accordance with all of the applicable requirements of the documents referenced herein.

4.2.2 End items. The end items shall be inspected as specified in 4.2.2.1 and 4.2.2.2. The sample unit for this end item inspection shall be one finished shirt.

4.2.2.1 Visual examination. The end items shall be visually examined for defects. The defects found during this visual examination shall be classified as specified in tables V and VI. The inspection level for this visual examination of the end items shall be II of MIL-STD-105. The acceptable quality level for this visual examination of the end items shall be 2.5 defects per 100 units (dhu) for major defects, 10.0 dhu for major and minor A (combined) defects, and 25.0 dhu for total (combined major and minor A and B) defects.

4.2.2.2 Examination of finished measurements. The end item shall be examined to determine conformance to the finished measurements specified herein. Any finished measurement of the shirt that deviates from the finished measurements specified herein or inseam sleeve lengths uneven by more than 1/2 inch shall be classified as a finished measurement defect. The inspection level for the examination of the finished measurements shall be S-3 of MIL-STD-105. The acceptable quality level for the examination of the finished measurements shall be 4.0 dhu (one class).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE V. General defects.

Defect	Major	Minor A	Minor B
Material defects and workmanship damages			
Mend, darn, patch, shade bar, or exposed drill hole	X		
Any weakening defect such as smash, multiple float, or slub	X		
Hole, cut, tear, or needle chew	X		
Shaded parts			
Any outside part shaded	X		
Cleanness			
Any spot or stain on outside of shirt			X
Thread ends not trimmed or loose threads not removed throughout shirt			X
One or more shade or size markings not removed from shirt			X
Any holding or basting threads visible on finished shirt			X
Cutting			
Any part not cut in accordance with directional lines indicated on patterns or not cut in accordance with specification requirements	X		
Components and assembly			
Any component or required operation omitted (unless otherwise classified herein)	X		
Any operation not performed as specified (unless otherwise classified herein)			X
Seams and stitchings			
Any part of shirt caught in unrelated operation or stitching	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE V. General defects. - Continued

Defect	Major	Minor A	Minor B
Seams twisted, puckered, or pleated (unless otherwise classified herein)	X		
Ends of seams and stitchings, if not caught in other seams or stitching or if not end of continuous line of stitching, backtacked less than 1/4 inch		X	
Stitching overlapping end(s) of thread break less than 1/2 inch			X
Various shades of threads used on outside of shirt		X	
End of continuous line of stitching not overlapped or overlapped less than 1/2 inch		X	
Gage of double stitching, edge stitching, or stitching along turned-under edges irregular, i.e., unevenly gaged or corresponding stitching not uniformly gaged		X	
Gage of double stitching, edge stitching, or stitching along turned-under edges not within range specified or varying more than 1/16 inch if gage is not specified			X
Double stitching, edge stitching, or stitching along turned-under edges too close to edge, resulting in damage to fabric	X		
Any open seam up to 1/4 inch inclusive 1/			X
Any open seam 1/4 inch to 1 inch inclusive 1/		X	
Any open seam more than 1 inch 1/	X		
Stitches skipped or broken 1/4 to 1/2 inch inclusive			X
Stitches skipped or broken more than 1/2 inch		X	
Raw edge on outside of shirt (except underneath pocket flap) 1/4 to 3/4 inch inclusive 2/		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE V. General defects. - Continued

Defect	Major	Minor A	Minor B
Raw edge on outside of shirt (except underneath pocket flap) more than 3/4 inch 2/	X		
Raw edge on inside of shirt 1/2 to 2 inches inclusive 2/			X
Raw edge on inside of shirt more than 2 inches 2/		X	
Any raw edge on inside of shirt caused by omission of overedge stitching (if used) for distance of more than 3 inches 2/		X	
Run-off on joining seam resulting in open seam 1/			
Run-off 1/2 inch to 1 inch inclusive on edge or raise stitching not resulting in open seam			X
Run-off more than 1 inch on edge or raise stitching not resulting in open seam		X	
Seam or stitch not specified type		X	
Looper thread of stitch type 401 on outside of finished shirt	X		
Stitch tension loose resulting in loose seam	X		
Stitch tension loose on raised or edge stitching (recognized by loosely exposed loops of lower or top thread)		X	
Stitch tension tight (stitches breaking when normal strain is applied to seam or stitching) 3/	X		
Stitches per inch on major portion of seam one less than specified except overedge stitching			X
Stitches per inch on major portion of seam two less than specified except overedge stitching		X	
Stitches per inch on major portion of seam three or more less than specified except overedge stitching	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE V. General defects. - Continued

Defect	Major	Minor A	Minor B
Stitches per inch of overedge stitching less than specified on major portion of seam			X
Stitches per inch on major portion of seam more than maximum specified			X
Buttonholes			
Stitching of one or more buttonholes not securely caught in fabric, causing stitches to pull away from fabric	X		
Cut length of buttonhole less than 3/4 inch or more than 7/8 inch		X	
Buttonhole containing one or more broken or skipped stitches		X	
One buttonhole not worked over gimp			X
Two or more buttonholes not worked over gimp		X	
Buttonhole not specified type or uncut		X	
Number of buttonholes in shirt more or less than specified	X		
Buttonhole containing ragged edges			X
Bar inadequate or insecure at tapered end of one buttonhole			X
Bar inadequate or insecure at tapered end of two or more buttonholes		X	
Purling on one or more buttonholes not finished towards outside of shirt			X
Eyelet-end, taper-bar type of buttonhole containing less than four cross-over stitches not counting first cross-over stitch			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE V. General defects. - Continued

Defect	Major	Minor A	Minor B
Buttons			
One button missing, insecurely sewn or tacked, broken, or defective			X
Two or more buttons missing, insecurely sewn or tacked, broken, or defective		X	
Buttons not specified type, size, or color			X
Bartacks			
One or more bartacks missing, loose, or misplaced, not serving intended purpose		X	
Bartack not specified size or type			X
Bartacks not spaced as specified		X	

1/ One or more broken or two or more continuous skipped or run-off stitches on a joining seam shall be classified as an open seam. A double-stitched seam shall be classified as an open seam if either side is open.
2/ A raw edge shall be classified as such only if it occurs at places where the edge is required to be turned under.
3/ Puckering is evidence of tight tension. If puckering is evident, the seam shall be tested by exerting normal pull in the lengthwise direction of the seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE VI. Defects applicable to specific parts.

Defect	Major	Minor A	Minor B
Front closure			
Buttons and buttonholes not aligned, causing bulge on fronts when shirt is buttoned		X	
Fronts uneven 1/4 inch to 1/2 inch inclusive in length at neck when shirt is buttoned			X
Fronts uneven more than 1/2 inch in length at neck when shirt is buttoned		X	
Fronts uneven 1/2 inch to 3/4 inch inclusive in length at bottom when shirt is buttoned			X
Fronts uneven more than 3/4 inch in length at bottom when shirt is buttoned		X	
Nearest inside edge of lapel buttonhole less than 5/16 inch or more than 7/16 inch from finished front edge or less than 5/16 inch or more than 7/16 inch from lapel step		X	
Inside eyelet edge of front buttonholes less than 11/16 inch or more than 13/16 inch from front edge or buttonholes unevenly spaced 3/16 inch or more from front edge		X	
Ends of collar at neck edge overlapped or spread more than 1/4 inch when shirt is buttoned		X	
Collar			
Collar twisted or tight, causing edges to curl up	X		
Collar edge crooked		X	
Collar end not properly forced out, i.e., having folds 1/16 inch deep or more			X
Collar short, i.e., causing puckers on front, facing, or back	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE VI. Defects applicable to specific parts. - Continued

Defect	Major	Minor A	Minor B
Collar long, i.e., causing puckers on collar	X		
Front			
Front puckered or pulled at collar or shoulder, caused by tight facing		X	
Front edge stitching not connected with edge stitching on collar			X
Front(s) full between buttons or buttonholes caused by tight facing(s)		X	
Length of unbuttoned fronts uneven more than 1/2 inch		X	
Pockets and flaps			
Pockets or flaps 1/2 inch or more out of horizontal alignment		X	
Pockets or flaps set on crookedly or not uniform shape		X	
Flap not covering front or back edge of pocket more than 1/4 inch		X	
Flap less than 1/4 inch or more than 3/4 inch above pocket opening		X	
Pocket hem narrow, not fully reinforcing button		X	
Button and buttonhole not aligned causing pocket to pull up or flap to bulge or twist when buttoned		X	
Buttonhole in flap off center more than 1/8 inch		X	
Inside edge of eyelet of buttonhole in flap less than 5/8 inch or more than 3/4 inch from pointed end of flap		X	
Width of finished top hem of pocket less than 1-1/8 inches or more than 1-3/8 inches			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE VI. Defects applicable to specific parts. - Continued

Defect	Major	Minor A	Minor B
Shoulder seams			
Yoke not overlapping fronts at shoulder seams			X
Sleeve and armhole seams			
Sleeve overlapping front, yoke, or back			X
Sleeve tight at armhole, causing puckers on front, yoke, or back		X	
Sleeve pleated or puckered at joining to armhole		X	
Ends of armhole seams staggered more than 3/8 inch (measurement to be taken from center of seams)			X
Sleeve hem twisted or pleated or stitching at top of sleeve hem puckered		X	
Width of sleeve hem less than 7/8 inch or more than 1-1/8 inches			X
Side and sleeve closing seams			
Fronts not overlapping back at side and sleeve closing seams			X
Seam joining back and yoke			
Back overlapping yoke		X	
Pleats			
Position of pleats at yoke not uniform		X	
Outside fold of pleats at yoke not facing toward armhole		X	
Facing			
Facing caught in pocket or flap stitching		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE VI. Defects applicable to specific parts. - Continued

Defect	Major	Minor A	Minor B
Top end (shoulder edge) of facing not turned under and stitched to shoulder seams		X	
Edge of facing, if not cut on selvage, not overedge stitched		X	
Stitching of one or more buttons on left front not caught through facing			X
Bottom and side vent hems			
Width of bottom hem uneven more than 1/8 inch			X
Width of side vent hem less than 3/8 inch or more than 1/2 inch			X
Width of bottom hem less than 7/8 inch or more than 1-1/8 inches			X
Labels			
Bottom of identification label (if combination identification and size label is not used) less than 1-1/2 inches or more than 1-3/4 inches from bottom of left facing or off center on facing more than 1/2 inch			X
Identification label (if combination identification and size label is not used) missing, illegible, or incorrect		X	
Identification label (if combination identification and size label is not used) not stitched on one or more sides or stitched through outside of shirt		X	
Size label (if combination identification and size label is not used) missing, illegible, or incorrect	X		
Size label (if combination identification and size label is not used) off center more than 1/2 inch or not completely caught in stitching of topcollar		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE VI. Defects applicable to specific parts. - Continued

Defect	Major	Minor A	Minor B
Combination identification and size label (if separate identification label and size label are not used) missing, illegible, or incorrect	X		
Combination identification and size label (if separate identification label and size label are not used) off center more than 1/2 inch or not completely caught in stitching of topcollar		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.3 Inspection of preparation for delivery. Shipping containers fully prepared for delivery shall be examined, for the defects listed in table VII, to determine compliance with the requirements specified in section 5. The sample unit for this examination shall be one shipping container fully prepared for delivery except for final closure. The lot size for this examination shall be the number of shipping containers in the item inspection lot. The inspection level for this examination shall be S-2 of MIL-STD-105. The acceptable quality level for this examination shall be 2.5 dhu (one class).

TABLE VII. Inspection of preparation for delivery.

Examine	Defects
Marking (exterior and interior)	Marking omitted; incorrect; illegible; or improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Incomplete application of components such as incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling
	Container buldged or distorted
Contents	Number of shirts per bundle more or less than required 1/
	Number of bundles per shipping container more or less than required

1/ One bundle from each shipping container in the sample shall be examined for this defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each shirt shall be laid flat with the front up. The sleeves shall be folded, at right angles across the chest, one on top of the other. The shirt shall then be folded in half the length. The folded shirt shall be approximately 20 inches by 14 inches. Five folded shirts of one size only shall be neatly stacked in a bundle and securely tied, approximately 4 inches from each end, with cotton tape or twine.

5.1.2 Level C. Shirts shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice if it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Twenty shirts of one size only, packaged as specified, shall be packed in a shipping container that conforms to style RSC-1, grade V2s of PPP-B-636. The inside of the shipping container shall be fitted with a taped liner that conforms to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A packages shall be packed flat, four in depth, within the shipping container. The inside dimensions of the shipping container shall be approximately 20-1/2 inches long, 14-1/2 inches wide, and 9 inches deep. (Note: Approximate dimensions are furnished as a guide only.) The contents of the shipping container shall be completely covered on the top and the bottom with a sheet of kraft paper. The kraft paper shall be 30-pound minimum basis weight and shall conform to type I, grade B of UU-P-268. The shipping container shall be closed, waterproofed, and reinforced in accordance with the appendix of PPP-B-636. Towards the end of the contract or if the quantity of shirts of the same size is less than the quantity of shirts required per shipping container, mixed sizes (see 5.3.1) may be packed within the same shipping container.

5.2.2 Level B. Twenty shirts of one size only, packaged as specified, shall be packed in a shipping container that conforms to style RSC-L, type CF (variety SW) or type SF, class domestic, grade 275 of PPP-B-636. The inside of the shipping container shall be fitted with a taped liner that conforms to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A packages shall be packed flat, four in depth, within the shipping container. The inside dimensions of the shipping container shall be approximately 20-1/2 inches long, 14-1/2 inches wide, and 9 inches deep. (Approximately

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

dimensions are furnished as a guide only.) The contents of the shipping container shall be completely covered on the top and the bottom with a sheet of kraft paper. The kraft paper shall be 30-pound minimum basis weight and shall conform to type I, grade B of UU-P-268. The shipping container shall be closed in accordance with method II of the appendix of PPP-B-636. Towards the end of the contract or if the quantity of shirts of the same size is less than the quantity of shirts required per shipping container, mixed sizes (see 5.3.1) may be packed within the same shipping container.

5.2.2.1 Shipping container. When specified (see 6.2), the shipping container for level B packing shall be a grade V3c, V3s, or V4s box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of PPP-B-636.

5.2.3 Level C. Shirts packaged as specified shall be packed in a manner to insure acceptance by the carrier and safe delivery at destination at the lowest transportation rates for such supplies.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129. Each interior package shall have attached a manila colored paper shipping tag for identification information.

5.3.1 Mixed sizes. Each shipping container that is packed with mixed sizes (see 5.2.1 and 5.2.2) shall have securely attached to the end and side, directly under the printing or stencilling, a white paper label that is 5 inches by 4 inches. The words "mixed sizes" shall be plainly stamped or printed on the label. The quantity and the sizes of the shirts in the shipping container shall be legibly stamped or printed under the words "mixed sizes."

6. NOTES

6.1 Intended use. The shirt covered by this specification is intended to be worn by female military personnel.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification

(b) Size required (see 1.2)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

(c) Standard patterns (see 3.5)

(d) Material and component inspection (see 4.2.1)

(e) Selection of applicable levels of packaging and packing and grade of shipping container for level B packing (see 5.1, 5.2, and 5.2.2.1).

6.3 Color samples. Color samples can be obtained from the procuring activity or as directed by the contracting officer.

6.4 Figures. Figures 1 and 2 show general design of the shirt and are furnished for information only.

Custodian:
Air Force - 11

Reviewer:
Air Force - 82

Preparing activity:
Air Force - 11

Project No. 8410-0358

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

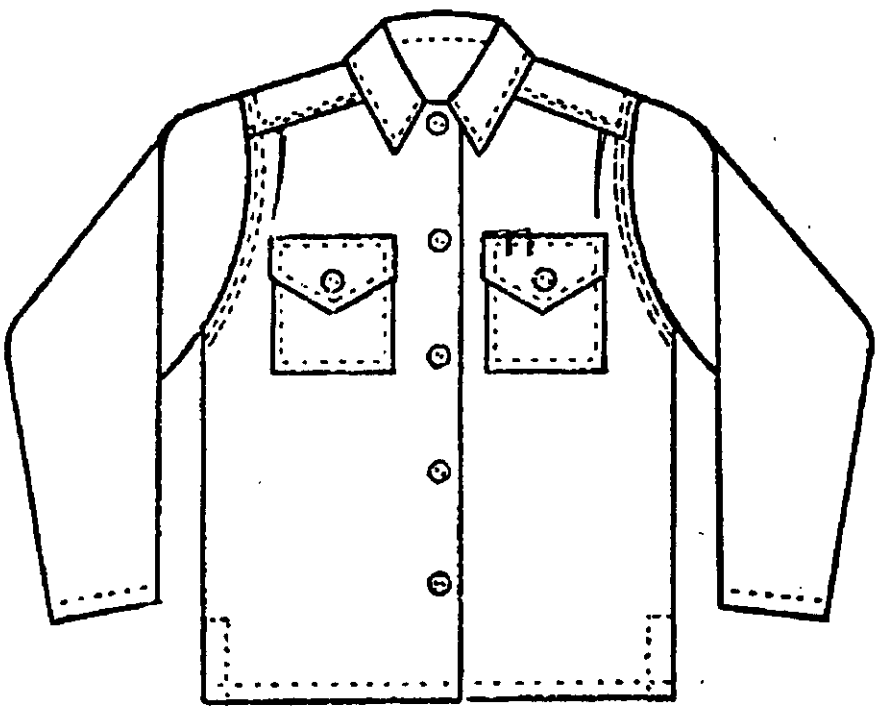


FIGURE 1. Shirt (front view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

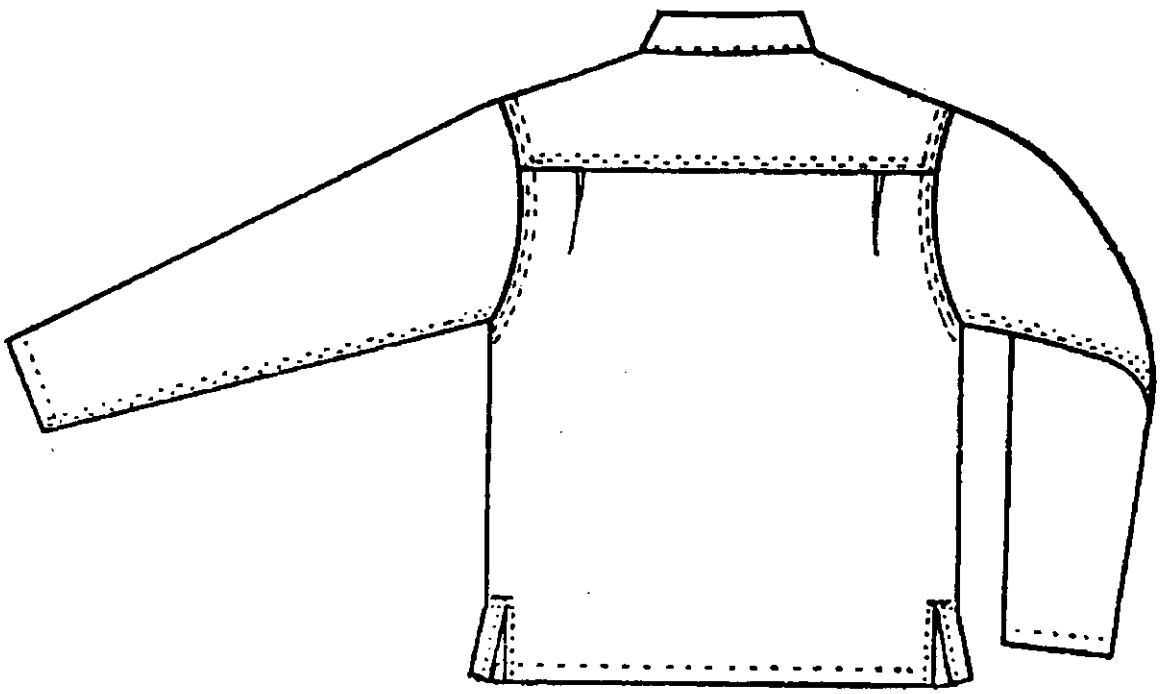


FIGURE 2. Shirt (back view).

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977 -703-020/581

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

C 16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.