MILITARY SPECIFICATION

SHIRT, WOMEN'S UTILITY, DURABLE PRESS

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a women's polyester/cotton durable press utility shirt.

1.2 Classification. The shirt shall be in the following types and sizes (see 6.2):

Type I - Olive Green 507
Type II - Blue 1577

Sizes			
Short	Regular	Long	Extra Long
6	6	6	
8	8	8	
10	10	10	10
12	12	12	12
14	14	14	14
16	16	16	16
18	18	18	18
20	20	20	20
22	22	22	22

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENESS, Wright-Patterson AFB, OH 45433 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871 - Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-280 - Thread, Gimp, Cotton, Buttonhole
UU-P-268 - Paper, Kraft, Wrapping
DDD-L-20 - Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-T-43548 - Thread, Polyester, Cotton Covered
MIL-C-43791 - Cloth, Twill, Polyester/Cotton (Durable Press)

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1492 - Provisions for Evaluating Quality of Men's Shirts

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer).

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

Technical Manual of the American Association of Textile Chemists and Colorists

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, P.O. Box 12215, Durham NC 27709.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the National Motor Freight Traffic Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington DC 20036.)

Uniform Classification Comittee, Agent

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

The Color Association of the United States, Inc.

Standard Color Card of America, 9th Edition

(Application for copies shall be addressed to The Color Association of the United States, Inc., 200 Madison Avenue, New York NY 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 Material

3.2.1 Basic material. The basic material shall be polyester/cotton twill cloth, Olive Green 507, conforming to type II, class 1 of MIL-C-43791 for the type I shirt and shall be polyester/cotton twill cloth, Blue 1577, conforming to type I or II, class 1 of MIL-C-43791 for the type II shirt.

3.2.2 Thread. The thread for seaming, stitching and buttonholes shall be cotton-covered polyester, ticket Nos. 50, 70 and 30, 3 ply for sewing on buttons, in accordance with MIL-T-43548.

3.2.2.1 Color and colorfastness. The color of the thread shall be Olive Drab S-1, C.A. 66022. The thread shall show colorfastness to laundering, perspiration and light, equal to or better than the standard sample for the type I shirt and Navy Blue AT, C.A. 66060 for the type II shirt. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, perspiration and light.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the currentversion before use.

3.2.3 Gimp. The cotton gimp for reinforcing buttonholes shall conform to type I or II, size No. 8 of V-T-280. The color shall be Olive Drab S-1, C.A. 66022 for the type I shirt and Navy Blue AT, C.A. 66060 for the type II shirt.

3.2.4 Buttons. The buttons shall conform to type II, class D, style 26, 30-line of V-B-871. The buttons shall have a dull finish and the color shall be Olive Green, BP, Cable No. 62016 for the type I shirt and Blue BV, Cable No. 62003 for the type II shirt.

3.2.5 Labels. Each shirt shall have an identification label, a size label and an instruction label conforming to type I of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.

3.2.5.1 Identification label. The identification label shall conform to class 1 of DDD-L-20.

3.2.5.2 Size label. The size label shall conform to class 2 of DDD-L-20.

3.2.5.3 Instruction label. The instruction label shall conform to class 3 of DDD-L-20, except that the label cloth shall be dyed Lemon Yellow, Cable No. 70205, in conformance with the Standard Color Card of America. The label shall contain the following information:

WASHING INSTRUCTIONS

1. Machine washing. Use wash and wear cycle. Wash with warm water (120°F), using soap or mild detergent. Heavy stains may require pre-soaking or pre-spotting.

2. Hand washing. Wash in warm water, using soap or mild detergent.

DO NOT WRING OR TWIST

3. DO NOT STARCH OR BLEACH

4. Dry in tumble dryer at warm setting. Remove immediately at end of drying. Shape and hang. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touch-up is required, iron at moderate or synthetic heat setting.

DO NOT REMOVE THIS LABEL

3.2.5.4 Combination identification-instruction label. The identification label and instruction label may be combined into one label. When combined the color of the label shall conform to the requirements of the instruction label (3.2.5.3) and the item nomenclature shall not be repeated. The coating of the class 3 label shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.3 End item appearance

3.3.1 Appearance and soil release rating. The finished cured shirt, after five washings, shall meet the ratings for the characteristics specified below when tested as specified in 4.2.2.

Characteristic	Appearance rating
Cloth appearance	4
Sleeve crease appearance	4
Seam appearance (min. individual rating)	
Armhole	3
Side	3
Underarm	3
Pockets	3
Collar	3
Cuff	3
Soil release (min. individual rating)	3

3.3.2 Shade. The shade of the finished, cured shirt shall match the standard sample when tested as specified in 4.2.2.

3.4 Tear strength of finished cured shirt. The finished cured shirts shall meet the physical requirement of tearing strength as specified for the type II cloth when tested as specified in MIL-C-43791 (see 4.2.2).

3.5 Design. The shirt is single-breasted with convertible collar, straight cut bottom with side vents, a yoke back, cuffed sleeves with two buttons on each cuff and two patch pockets with button through flaps. The flap on the left side (as worn) shall have two slots for inserting pencils.

3.5.1 Outline figures. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the requirements of this specification and the figure, the requirement of this specification shall govern.

3.6 Patterns. Standard patterns, to be used to cut working patterns, will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide a 1/4 inch seam allowance for joining cuff to bottom of sleeve, 1/2 inch for double lapped-double stitched seams and setting pocket and 3/8 inch for all other seams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

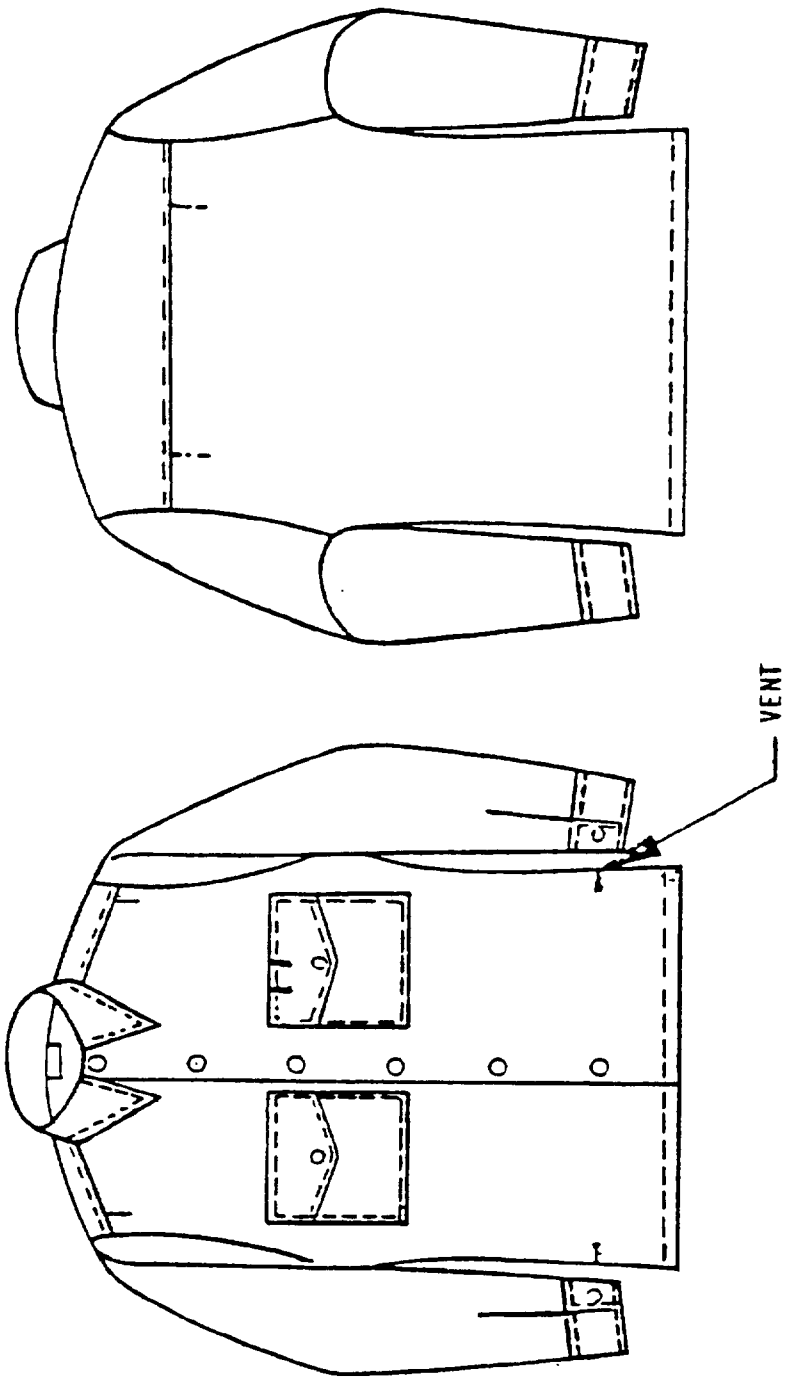


FIGURE 1. Shirt, utility, women's, durable press.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.6.1 Pattern parts. The component parts of the shirt shall be cut from material as specified in accordance with the number of parts indicated.

TABLE I. Pattern parts.

Material	Pattern Parts	Cut parts
Basic material	Front	2
	Back	1
	Collar	1
	Sleeve	2
	Cuff	2
	Breast patch pocket	2
	Pocket flap	4
	Back yoke	1

3.7 Construction

3.7.1 Stitches, seams, and stitching. Stitch, seam and stitching types specified in table II shall conform to FED-STD-751. When two or more methods of seam or stitch types are given for the same operation, any one may be used. Where stitch type 401 is used, the looper (under-thread) shall be on the inside of the shirt. Seams shall be sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams shall result (see 6.4). Edge stitching and raise stitching shall be uniformly gaged throughout the shirt. The gage of safety stitching shall be 3/8 inch. The guides and knives on safety stitching machines shall be set to trim only the ravelled edges of the fabric. The gage of double-lapped, double-stitched seams shall be 1/4 to 5/16 inch with outside row 1/16 to 1/8 inch from turned edge, except where otherwise specified herein.

3.7.2 Thread breaks and ends of seams. Ends of all seams and stitching produced with 301 stitch type when not caught in other seams or stitching shall be backtacked not less than 1/4 inch, except where otherwise specified in table II. Ends of a continuous line of stitching shall overlap not less than 1/2 inch, except that the ends of label stitching shall overlap not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on the 401 stitch type may be repaired using 301 stitch type.

3.7.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.7.4 Buttonholes. The buttonholes shall be the eyelet-end taper-bar type worked over No. 8 gimp, with the end tacked and shall have a cut length of 3/4 to 7/8 inch. The bar end of buttonholes shall have a minimum of 4 tacks not counting the first cross-over stitch in that it is part of the buttonhole, not the bar. The purling shall finish toward the outside of the shirt.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations.

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Needle	Thread Bobbin/ Looper	Cover
1	Cutting (a) Spread the material without tension. The cut parts from the top and bottom plies shall match and correspond to the pattern. The face of the fabric (2 up and 1 down left hand twill) shall finish on the outside of the shirt. (b) Cut the shirts in strict accordance with patterns furnished which show directional lines, size, placement of pockets, and notches for proper assembly of all parts. Directional lines shall be placed in the warp direction. The fronts shall be cut with the edge of the grown-on facings on the selvage. (c) The collar may be cut in the warp or filling direction. (d) Cut all parts of the garment out of one piece of material except sleeve bindings which may be cut from ends. Parts cut from ends shall approximate the shade of the other parts. (e) Cut sleeve binding from basic material, to finish 1/2 to 5/8 inch wide (see operation 11.a) and of sufficient length to bind the sleeve opening with the long dimension cut in the warp direction; of the binding may be strip-cut (warp direction) and placed on rolls.						

Source: https://assist.dla.mil - Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Needle	Thread Bobbin/ Looper	Cover
2	Marking						
	(a) Mark, ticket or bundle all parts of the shirt except those cut from ends to insure correct size and uniform shade throughout the garment.						
3	Replacement of defective component parts						
	(a) Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages as specified in MIL-STD-1492 are excluded and replaced with non-defective and properly matched material.						
4	Labeling						
	(a) Position size label on center back not more than 5/8 inch below neck edge (1/4 inch off center tolerance) and stitch on all four sides. The stitching shall not be through the printing. The label may be positioned so that the top of the label will be caught in the collar joining seam (see operation 13.e).	301	LSbj-1	8-10	50	50	
	(b) Position the identification label on the left facing directly above the yellow instruction label and stitch on all four sides.	301	LSbj-1	8-10	50	50	
	(c) Position the yellow instruction label on the bottom left facing with either the side or bottom edge of the label 1-1/2 ±1/2 inches from bottom of finished shirt and 1/8 to 1/4 inch from front of	301	LSbj-1	8-10	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Needle	Thread Bobbin/ Looper	Cover
	finished shirt, and stitch on all four sides. On the smaller size shirts the label may extend beyond the back edge of facing, in which case the label shall be stitched on three sides, leaving the extended side open. The stitching shall not be through the printing.						
	(d) The yellow combination label, when used, shall be positioned the same as the instruction label (operation 4.c) and stitched on all four sides. If label extends beyond back edge of facing on the smaller sizes, the label shall be stitched as specified in 4.c. The stitching shall not be through the printing.	301	LSbj-1	8-10	50	50	
5	Make cuffs						
	(a) Finished appearance. The cuffs shall finish flat and smooth without pleats, puckers or raw edges.						
	(b) Fold cuff in half lengthwise, face to face, and stitch sides.	301 or 401	SSe-2(a)	8-10	50 50	50 70	
	(c) Trim corners, turn and work out edges.						
	(d) Edge stitch, 1/16 to 1/8 inch from bottom and side turned edges, with stitching terminating 7/8 to 1 inch from top raw edge on both sides or the edge stitching may taper to edge of cuff at ends of stitching. (If stitching is tapered, it need not be backtacked.)	301	SSe-2(a) and OSf-1	8-10	50 50	50 50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Needle	Thread Bobbin/ Looper	Cover
	(e) Make one horizontal buttonhole in each cuff as indicated by mark on pattern, centered on cuff (1/8 inch off center tolerance) with the inside edges of eyelet 1/2 ±1/8 inch from side edge.	Button-hole	-----	52-56 per button-hole	50	50	
6	Make collar						
	(a) Fold collar in half lengthwise, face to face, and stitch sides.	301 or 401	SSe-2(a)	8-10	50 50	50 50	
	(b) Trim corners, turn, work out edges and points, and edge stitch, 1/16 to 1/8 inch from edges.	301	SSe-2(b) and OSf-1	8-10 8-10	50 50	50 50	
7	Make pocket flaps (reference figure 2)						
	(a) Fold flap in half, stitch sides and bottom, leaving a portion open for turning.	301 or 401	SSe-2(a)	8-10	50 50	50 70	
	(b) Trim corner, turn flap through opening work out corners and edges and edge stitch sides and bottom edges 1/16 to 1/8 inch from turned edge. or	301	SSe-2(b)	8-10	50	50	
	(c) Fold flap in half with the raw edge turned in on a creasing machine and edge stitch sides and bottom edges 1/16 to 1/8 inch from edges.	301	SSc-1	8-10	50	50	
	(d) Make a vertical buttonhole in center of flap (1/8 inch off center tolerance) with inside edge of eyelet, 1/2 to 5/8 inch from pointed edge of flap.	Button-hole	-----	52-56 per button-hole	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Needle	Thread Bobbin/ Looper	Cover
8	Make and sew on patch pockets						
	(a) Fold top of pocket as indicated by marks on pattern and with raw edge turned under 1/4 to 3/8 inch. Stitch 1/8 to 3/16 inch from turned edge forming hem. The hem shall finish 1-1/8 ±1/8 inches wide.	301	EFb-1	8-10	50	50	
	or						
	(b) As an alternate, raw edge may be overedged and turned to form hem. The hem shall finish 1-3/8 to 1-1/2 inch wide.	502 or 503	SSa-1	6-8	50	50	
	(c) Turn side and bottom edges and stitch pockets on fronts as indicated by marks on patterns. The stitching shall be 3/16 to 1/4 inch from edge. The pockets may be pre-creased.	301	LSd-1	8-10	50	50	
9	Sew on pocket flaps						
	(a) Position flaps on shirt as indicated by marks on pattern and stitch to shirt 1/16 to 1/8 inch from top folded edge, with stitching terminating at front and back edges of flap (-0, +1/8 inch). The stitching on the left flap, as worn, shall terminate 2-3/8 ±1/8 inch from the front edge.	301	LSbj-1	8-10	50	50	
10	Join yoke to back						
	(a) Join yoke to back, forming the two pleats as indicated on the patterns, with a double-lapped, double-stitched seam, with the yoke overlapping the back. The pleats may be switched in position	301 or 401	LSc-2	8-10	50 50	50 70	

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Needle	Thread Bobbin/ Looper	Cover
	before the yoke is joined to the back. The outside fold of the pleats shall face toward the armhole.						
11	Make sleeve openings						
	(a) Fold binding in half, lengthwise, turn the raw edges to the inside with the edge of the sleeve opening inserted and stitch.	301	BSc-1	8-10	50	50	
	or						
	(b) Seam binding to edge of sleeve opening on the underside. Fold binding over the edge of opening with the raw edge of binding turned in and stitch to sleeve.	301 or 401 and 301	BSg-2	8-10	50 50 50	50 70 50	
	(c) Turn bound sleeve opening to inside of sleeve and stitch, bartack, or line tack through binding and sleeve 1/8 to 1/4 inch below top of opening the full width of the binding. An automatic linetack may be used.	301 or bartack or 301 linetack	----- -----	8-10 28 per bartack 28 per tack	50 50 50	50 50 50	
12	Join shoulder seams						
	(a) Join the fronts to the back (yoke), at the shoulders, forming a pleat in each front as indicated on the patterns, with a double-lapped, double-stitched seam, with the back overlapping the fronts. The pleats may be stitched in position before the shoulders are joined. The outside fold of the pleats shall face toward the armhole in the finished shirt.	301 or 401	LSc-2	8-10 8-10	50 50	50 70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Needle	Thread Bobbin/ Looper	Cover
13	Join collar to shirt						
	(a) Overedge stitch the selvaged edge of facing if selvage is cut or frayed.	502 or 503	SSa-1	6-8	50 50	50 50	
	(b) Fold facing back at notch.						
	(c) Insert collar between fronts at collar notch.						
	(d) Stitch across step and gorge to a point 1-1/8 to 1-3/8 inches from shoulder seam. Seam under collar to neck of shirt.	301 301	SSe-2(a) and SSa-1	8-10 8-10	50 50	50 50	
	(e) Turn facing, work out steps. Insert top of facing inside of collar, turn in the unsewn portion of the top collar and stitch to neck through undercollar; or stitching may be adjacent to undercollar stitching. The top of the size label (operation 4.a) may be caught in the collar joining seam. Continue stitching around sides and bottom of label.	301 301	LSb-1 and LSbj-1	8-10 8-10	50 50	50 50	
14	Bartack pockets						
	(a) Bartack patch pockets at each end of pocket opening with 1/4 to 3/8 inch vertical bartacks superimposed on the pocket stitching. Bartacks shall not catch facings.	Bar-tack	-----	28 per bartack	50	50	
15	Set sleeves						
	(a) Set sleeves with a 3/8 inch safety stitch seam. The front and back parts shall overlap the sleeve.	515 or 516 or 519	SSa-2	8-10	50 70	50 70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Needle	Thread Bobbin/ Looper	Cover
16	Hem side vents						
	(a) Hem side vents as indicated by marks on pattern with raw edges turned in and stitch 1/16 to 3/32 inch from turned edge. The width of the hem shall finish 3/8 to 1/2 inch.	301	EFb-1	8-10	50	50	
17	Join side seams and sleeve seams						
	(a) Join side and underarm seams in a continuous operation with a safety stitch. Ends of armhole seam shall not be staggered by more than 1/2 inch. The top of the hemmed vent shall be caught in the stitching. The seam allowance of side seam shall be toward the front.	515 or 516 or 519	SSa-2	8-10	50 chain 70 over-edge	70 stitching 70 stitching	
	(b) Bartack the top of each side vent opening with a 3/8 to 1/2 inch horizontal bartack.	Bartack	-----	28 per bartack	50	50	
18	Join cuff to sleeve						
	(a) Position cuff lining to sleeve bottom on inside and join cuff lining to sleeve with the bound edge of the sleeve opening turned to inside at buttonhole end of cuff and caught in the stitching. (Underarm seam allowance shall be turned toward front).	301 or 401	SSa-1	8-10	50 50	50 70	
	(b) Turn cuff down and turn in seam allowance of cuff and stitch cuff to sleeve 1/16 to 3/32 inch from turned-in edge of cuff. The cuff joining stitch may be through cuff lining or adjacent to cuff lining.	301	-----	8-10	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Needle	Thread Bobbin/ Looper	Cover
19	Hem bottom of shirt						
	(a) Turn up bottom of shirt with the raw edge turned in and stitch 1/16 to 1/8 inch from turned edge; continue stitching across the ends of hem 1/16 to 1/8 inch from edges. Finished hem shall measure 1 ±1/8 inch wide. Hem ends shall not extend beyond front edges of shirt. (The hem of the vent on the front of shirt, shall be turned toward the inside).	301 301	EFb-1 and SSa-1	8-10 8-10	50 50	50 50	
20	Buttonholes						
	(a) Mark position for buttonholes on right front as indicated by pattern.						
	(b) Make a horizontal buttonhole at each mark with the inside edge of eyelet 1/2 to 5/8 inch from front edge with the ends tacked.	Button-hole	-----	52-56 per button-hole	50	50	
21	Clean shirts						
	(a) Trim all ends of thread and remove loose threads. Remove all spots, stains and all shade markings.						
	(b) Before folding and packaging, shirts must be free of residual fiber particles, lint and dust or other foreign materials.						

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Needle	Thread Bobbin/ Looper	Cover
22	Press shirts (a) Finished appearance. The pressing conditions with regard to time, temperature, steaming and head pressure shall be adequate to obtain required results. (b) Press entire shirt with underarm seam at bottom edge of sleeve, crease top edge from crown to bottom of cuff.						
23	Curing (a) The pressed shirt shall be suspended on a shirt hanger, with the collar spread open and lapels rolled back with the collar covering the undercollar joining seam and shall be subjected to dry oven heat. The temperature and time of curing conditions shall be adequate to obtain required results. After curing, the shirts shall be left on the hangers until they have cooled to room temperature.						
24	Sew on buttons (a) Position the buttons on the outside of the left front 5/8 to 3/4 inch in from the edge (measured from center of button) to correspond with the eyelet end of buttonholes in right front.	101 or 301	-----	14-16 per button 14-16 per button	30-3 30-3	 30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Needle	Thread Bobbin/ Looper	Cover
	(b) Sew a button on each pocket to correspond with the eyelet end of flap buttonholes.	101 or 301	-----	14-16 per button	30-3		
				14-16 per button	30-3	30-3	
	(c) Sew two buttons to each sleeve cuff on end opposite buttonhole. The first button shall be 5/8 to 3/4 inch from side edge of cuff, and the second button 1 1/4 ±1/8 inch back of the first. The buttons shall be centered on the cuff, 1/8 inch off center tolerance permitted. The dimensions given for position of buttons shall be taken from the center of the buttons. NOTE: Operation 24 may be performed prior to curing (operation 23) provided the impression of buttons does not show on the finished (cured) shirt.	101 or 301	-----	14-16 per button	30-3		
				14-16 per button	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

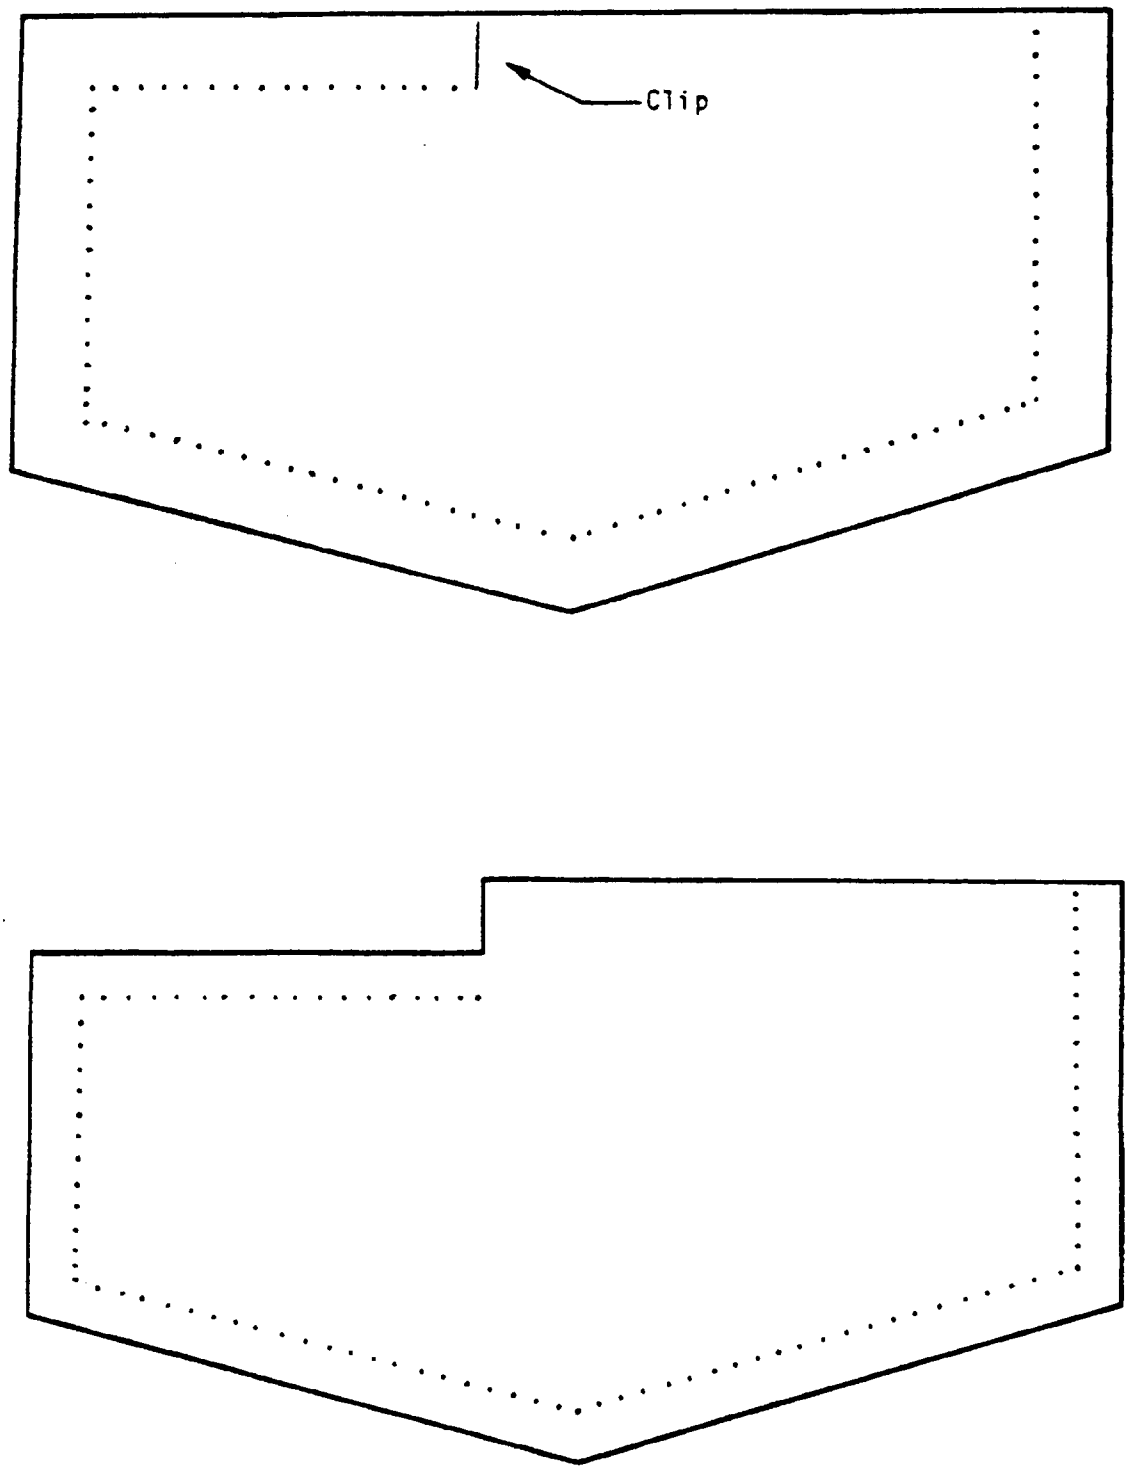


FIGURE 2. Make pocket flaps (see operation 7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.8 Manufacturing operations requirements. The shirts shall be manufactured in accordance with the operation requirements specified in table II. The manufacturer is not required to follow the exact sequence of operations shown with the exception of operations 21 through 24 which shall be performed in the sequence listed. Any basting or holding stitching required to facilitate manufacture is permissible provided the thread does not show on the completed shirt.

3.8.1 Marking. The cut parts of the shirt shall be marked to insure a uniform shade and size throughout the shirt. Any method of marking may be used except:

a. Corrosive metal fastening devices

b. Sew-on type tickets

c. Adhesive type tickets which discolor the material or leave traces of paper or adhesive on the material after removal of the tickets.

3.9 Finished measurements shall be as shown in table III.

3.10 Workmanship. The finished shirt shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point values or defect limits.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Sampling and examination of the end item shall be performed in accordance with MIL-STD-1492 and the following detailed defects applicable to the vents and pleats. The shirt shall be classified as a semi-dress (SD) dress.

Defects	Point Value
Vent	
a. Width of vent hem less than 3/8 or more than 1/2 inch	1
b. Vent hems not as specified	1
c. Vents uneven in length by more than 1/4 inch	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurements (in inches).

Sizes	6	8	10	12	14	16	18	20	22	Tolerance
1/2 Bust 1/										
Short	18-1/4	18-3/4	19-1/4	19-3/4	20-1/2	21-1/4	22	23	24	±1/2
Regular	18-1/4	18-3/4	19-1/4	19-3/4	20-1/2	21-1/4	22	23	24	±1/2
Long	18-1/4	18-3/4	19-1/4	19-3/4	20-1/2	21-1/4	22	23	24	±1/2
Extra Long 2/			19-1/4	19-3/4	20-1/2	21-1/4	22	23	24	±1/2
Back Length										
Short	25	25-1/4	25-1/2	25-3/4	26	26-1/4	26-1/2	26-3/4	27	±1/2
Regular	26	26-1/4	26-1/2	26-3/4	27	27-1/4	27-1/2	27-3/4	28	±1/2
Long	27	27-1/4	27-1/2	27-3/4	28	28-1/4	28-1/2	28-3/4	29	±1/2
Extra Long			27-1/2	27-3/4	28	28-1/4	28-1/2	28-3/4	29	±1/2
Crown Sleeve Length 3/										
Short	20-1/4	20-1/2	20-3/4	21	21-1/4	21-1/2	21-3/4	22	22-1/4	+1/4 -1/2
Regular	21-1/4	21-1/2	21-3/4	22	22-1/4	22-1/2	22-3/4	23	23-1/4	+1/4 -1/2
Long	22-1/4	22-1/2	22-3/4	23	23-1/4	23-1/2	23-3/4	24	24-1/4	+1/4 -1/2
Extra Long			24-1/4	24-1.2	24-3/4	25	25-1/4	25-1/2	25-3/4	+1/4 -1/2

1/ Half bust measurement shall be taken with shirt buttoned, at a point in line with base of armhole, from folded edge to folded edge.
2/ Back length shall be taken along center of back from undercollar seam to bottom edge of shirt.
3/ Sleeve length shall be taken from center of yoke at the armhole seam straight along sleeve to bottom edge of cuff.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

Pleats	Point Value
a. Pleats on fronts and back not folded toward armholes	1
b. Pleat omitted	2
c. Corresponding pleats uneven in length or depth by more than 1/8 inch	1

4.2.1 Component and material inspection. In accordance with 4.1 above, components and material shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification.

4.2.2 End item testing. The finished cured shirts shall be tested as specified in table IV. All test reports shall contain the individual values utilized in expressing the final result. The lot size shall be expressed in units of one shirt each. The sample unit shall be two finished shirts. One unlaundered shirt shall be used for determining shade and tear strength and the remaining shirt shall be laundered and used to perform the remaining tests. The sample size shall be as specified below:

Lot size	Sample size
800 or less	5
801 to 22,000 inclusive	8
22,001 and over	13

The lot shall be unacceptable if the sample fails to meet any of the following conditions:

a. For cloth appearance and sleeve crease appearance: Two-thirds or more of the individual ratings for each characteristic shall be 4 or above and no single rating shall fall below 3. 1/

b. For seam appearance and soil release: No single rating shall fall below 3.

c. For shade and tearing strength: No specimen shall fail to meet the specified requirement.

1/ The lot rating for each characteristic shall be determined from the total ratings assigned for that characteristic in each inspection lot, i.e., in a sample size of eight shirts, the appearance rating for each characteristic indicated above shall be based upon the total of 24 values assigned for that characteristic (three judgments for each of the eight shirts.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE IV. End item testing.

Characteristic	Requirement paragraph	Test method
Cloth appearance rating	3.3.1	4.3.1
Soil release rating	3.3.1	4.3.1
Seam appearance rating	3.3.1	4.3.1
Crease retention rating	3.3.1	4.3.1
Shade	3.3.2	1/
Tearing Strength	3.4	2/

1/ The shade of the finished cured shirt shall match the standard sample under artificial daylight having a color temperature of 7500 degrees Kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800 degrees Kelvin.

2/ Test in accordance with the cured fabric requirements of MIL-C-43791. This test shall be performed after curing but prior to laundering.

4.3 Test methods

4.3.1 Tests for appearance and soil release

4.3.1.1 Apparatus and material used for laundering. The following apparatus and material are required for laundering:

a. Automatic washing machine (see 6.5).

b. Automatic dryer (see 6.5).

c. AATCC Standard Detergent 124 or equivalent.

d. Mineral Oil: Nujol, Plough Inc., Memphis, TN, or equivalent.

e. AATCC standard blotting paper or equivalent.

f. 5-pound weight, 2-1/2 inches diameter.

g. 3 by 3 inch piece of polyethylene film.

h. Eyedropper.

i. Dummy pieces for ballast - 3 feet by 3 feet hemmed pieces of the basic material to be added to test shirts to make a 4-pound load.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.3.1.2 Apparatus and material used for evaluation. The following apparatus and material are required for evaluation of samples:

a. Apparatus for overhead and side lighting procedure as specified in AATCC Test Methods 124-1975 and 88C-1970.

b. AATCC three dimensional Durable Press Replicas.

c. AATCC photographic standards for evaluating single and double needle stitching and for evaluating pressed-in creases.

d. Deering Milliken photographic standards for evaluating stain release.

e. Non-reflecting black-topped table 35 ±1 inches high and at least 30 inches by 24 inches with the long dimension parallel and adjacent to the viewing board.

4.3.1.3 Procedure

4.3.1.3.1 Laundering. If the shirts weigh less than 4 pounds, ballast to make up a standard 4 pound load shall be added to the test shirts. The ballast shall consist of durable press shirts or pieces of the basic fabric. The pieces shall be hemmed and measure 3 feet by 3 feet. The washer shall be set for high water level, warm water temperature, and a 12-minute wash on the wash and wear cycle. The water used shall have a hardness not greater than 50 parts per million (PPM). The wash temperature shall be 115 ±5°F. When the washer has filled, add 140 g of detergent. Allow the washer to proceed automatically through the final spin cycle. Remove the shirts immediately at the completion of the final spin and separate the shirts and dummy pieces, when required, if tangled. Place the complete washed load in the dryer and dry at the Normal cycle and at a setting which generates an exhaust temperature range of 140 to 160°F. Operate the dryer until the load is dry and continue tumbling 5 minutes with the heat turned off (cool-down cycle). Remove the load immediately after the machine stops. Repeat the wash and dry cycle, until the load has completed four cycles. At the completion of the fourth cycle, the shirt shall be stained with mineral oil in three different spots on the tail of the shirt. Place the area to be stained on AATCC blotting paper. Using an eye dropper, drop five drops of mineral oil for each spot. Place a 3 by 3 inch piece of polyethylene film over the oil. Place a 5-pound weight (2-1/2 inches diameter) on the film directly over the oil. Keep the weight in place 60 seconds. Remove the weight and polyethylene film and wipe off the excess oil with clean tissue. Allow the test specimen to hang undisturbed for at least 15 minutes but not more than 2 hours. Return the stained shirts and the dummy pieces, when required, to the washing machine and wash for the fifth (last) complete washing and drying cycle. During conditioning and during interruption of wash dry cycles, the shirt shall be placed on a shirt hanger with all buttons fastened.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.3.1.3.2 Evaluation. Three trained observers shall evaluate and rate each sample unit for appearance criteria independently of each other. The shirt shall be placed on a clothes hanger with all buttons fastened and mounted on the viewing board with the center of the shirt approximately 5 feet from the floor and in such a manner that it lies flat on the board. With applicable lighting procedures being used, the observer shall stand in front of the board and at a distance of 4 feet from it. With the cloth, seam, or crease appearance standards, as applicable, placed on the viewing board, the observer shall rate each shirt according to the appearance standard that most nearly matches the appearance being evaluated on the shirt. No estimation of ratings falling between standards is allowed and the full numerical rating of the nearest standard must be assigned. Evaluation shall be conducted in a room where only source of light will be that used for observation. To prevent unwanted reflection of light that may interfere with the observation, the walls of the room may be painted a non-reflecting black or blackout curtain may be hung on each side of the viewing area.

4.3.1.3.2.1 Evaluation of cloth appearance. Overhead lighting procedure and cloth appearance standards shall be used (4.3.1.2). To facilitate comparative testing, the three dimensional plastic replicas that most nearly match the cloth appearance of the shirt shall be mounted on the board on each side of the shirt. The cloth appearance of the shirt shall be observed and compared with the standards. The overall cloth appearance of the shirt, i.e., front and back combined, shall be rated and assigned the numerical value of the appearance replica that most nearly matches it. The rating values assigned by each of the three observers for cloth appearance shall be reported for each sample unit.

4.3.1.3.2.2 Evaluation of seam appearance. Overhead lighting procedure and single and double needle stitching standards shall be used (4.3.1.2). To facilitate comparative testing, the seam standard shall be mounted on the viewing board to the left of the shirt as viewed. Seams specified in 3.3.1 shall be observed and compared with the standard. The appearance of each seam shall be assigned the numerical value of the standard that most nearly matches it. When rating the underarm and side seams, the shirt should be moved on the hanger so that the side seam is visible. An assistant should raise the sleeve and the underarm and side seam should be evaluated. This procedure should be repeated for the opposite underarm and side seam. The rating values assigned by each of the three observers for each sample unit shall be reported.

4.3.1.3.2.3 Evaluation of soil release. Overhead lighting procedure and the soil release standard shall be used (4.3.1.2). To facilitate comparative testing, the soil release standard shall be mounted and centered on the viewing board 45 inches from the floor (center). The shirt, with the stained area visible, shall be placed upon the black-topped table and in front of the standard. The shirt stains shall be compared with the standard and shall be assigned the numerical value of the standard that they most nearly match. One rating shall be assigned for all three stains by each observer. The rating values assigned by each of the three observers for each sample unit shall be reported.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.3.1.3.2.4 Evaluation of crease appearance. Overhead and side lighting procedures and the crease appearance standard shall be used (4.3.1.2). The required side lighting shall be added to the overhead lighting and the shirts evaluated for pressed-in creases. To facilitate comparative testing, the crease appearance standard shall be mounted on the viewing board to the left center of the shirt as viewed. The shirt shall be adjusted as necessary in order that the crease area being evaluated, i.e., sleeves, lies in a relaxed position perpendicular to the side lighting in order to allow proper comparison to the standard. The crease area specified in 3.3.1 shall be compared with the standard and assigned the numerical value of the standard that most nearly matches it. The crease area specified shall be rated on an overall appearance basis and assigned a value accordingly i.e., sleeve creases shall be rated in accordance with the overall appearance of both sleeves as a unit and not on an individual crease basis. Individual ratings assigned by each of the three observers for the crease specified in 3.3.1 shall be reported for each sample unit.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each shirt shall be laid flat with the front up. The sleeves shall be placed lengthwise along the sides. The shirt shall then be folded in half the length. The folded shirt shall measure approximately 23 by 14-1/2 inches. For the larger sizes, it may be necessary to adjust the sides and fold over the bottom edge to achieve the desired folded dimensions. Ten folded shirts of one type and size only shall be neatly stacked in a bundle and securely tied with cotton tape or twine approximately 4 inches in from each end.

5.1.2 Level C. Shirts shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A packing. Forty shirts of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather resistant, variety DW, grade V15c of PPP-B-636. Level A bundles shall be packed flat, four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 14 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, water-proofed in accordance with method V, and reinforced as specified in accordance with appendix of PPP-B-636, except that the inspection shall be in accordance with MIL-STD-1492. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing. Forty shirts of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A bundles shall be packed flat four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 14 inches in depth. Approximate dimensions are furnished as guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with MIL-STD-1492. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III PPP-B-636 except that the inspection shall be in accordance with MIL-STD-1492.

5.2.3 Level C packing. Shirts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification as applicable.

5.3 Marking. In addition to any special marking required by the contract, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon, and under the words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The type I shirt is intended for use by female Military personnel of the Department of Defense as the standard component for use with the Olive Green 507 durable press utility trousers. The type II shirt is intended for use by female Military personnel of the Department of the Air Force who are members of missile combat crews.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. Type and sizes required (see 1.2).

c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

d. When weather-resistant fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to samples of the shirt and shade samples, address the procuring activity issuing the invitation for bid.

6.4 Seams. In order to avoid puckering and to produce the flattest seams possible, consideration must be given to the following: The needle should be the smallest possible with a slim point. The smallest throat plate hole possible should be used to prevent flagging. Presser foot pressure should be just enough to insure a steady flow of material. Feed dogs should obtain 18 to 20 teeth per inch for normal sewing and 20 to 25 teeth per inch for stitching down. All attachments should be as smooth as possible to permit free flowing of the fabric through the machine. The lightest possible thread tension should be used while maintaining a good stitch. The upper and lower threads must be balanced. Frequent checks should be made to insure that blunt needles are eliminated and machine adjustments maintained. Experience has shown that the puckering, when sewing with stitch 401, can be reduced considerably, if not eliminated, by the use of needle feed machines, setting the feed one stitch higher than the desired number and the foot one stitch lower.

6.5 Recommended apparatus. The recommended apparatus for 4.3.1.1a and b are:

a. Kenmore Automatic Washing Machine Model 600 or similar machine. In case of dispute, the Kenmore Model 600 shall be used.

b. Kenmore Automatic Dryer Model 600 or equivalent.

6.6 Resins. Only those durable press resins already approved by the appropriate medical service and so listed in the invitation for bids or request for proposal shall be considered acceptable for the related procurement.

Custodians:
Air Force - 11

Review activities:
Air Force - 82,99

Preparing activity:
Air Force - 11

Project No. 8410-0551

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

AFWAL/MLSE
Wright-Patterson AFB, OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.