MILITARY SPECIFICATION

SLACKS, UTILITY, WOMAN'S, (DURABLE PRESS)

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for polyester/cotton durable press utility slacks.

1.2 Classification. The slacks shall be in the following types and sizes (see 6.2):

Type I - Olive Green 507
Type II - Blue 1577

Schedule of Sizes

| Short | Regular | Long |
|---|---|---|
| 6 | 6 | 6 |
| 8 | 8 | 8 |
| 10 | 10 | 10 |
| 12 | 12 | 12 |
| 14 | 14 | 14 |
| 16 | 16 | 16 |
| 18 | 18 | 18 |
| 20 | 20 | 20 |
| 22 | 22 | 22 |

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENESS, Wright-Patterson AFB, Ohio 45433, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

## 2. APPLICABLE DOCUMENTS

### 2.1 Government documents

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| V-B-871 | Button, Sewing Hole, and Button, Staple, (Plastic) |
| V-F-106 | Fasteners, Slide, Interlocking |
| V-T-280 | Thread, Gimp, Cotton, Buttonhole |
| UU-P-268 | Paper, Kraft, Wrapping |
| DDD-L-20 | Label: For Clothing, Equipage, and Tentage (General Use) |
| PPP-B-636 | Box, Shipping, Fiberboard |

MILITARY

| | |
|---|---|
| MIL-B-17757 | Box, Shipping, Fiberboard (Modular Sizes) |
| MIL-T-43548 | Thread, Polyester, Cotton-Covered |
| MIL-C-43791 | Cloth, Twill, Polyester/Cotton (Durable Press) |

STANDARDS

FEDERAL

| | |
|---|---|
| FED-STD-751 | Stitches, Seams, and Stitchings |

MILITARY

| | |
|---|---|
| MIL-STD-129 | Marking for Shipment and Storage |
| MIL-STD-1488 | Provisions for Evaluating Quality of Trousers, Men's |

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other government documents. The following other Government document shall form a part of this specification to the extent specified herein.

US ARMY NATICK RESEARCH & DEVELOPMENT LABORATORIES

NARADCOM Photographic Standards

(Application for copies should be addressed to Commander, USA Natick R & D Laboratories, ATTN: DRDNA-ES, Natick MA 01760.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DOD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

Technical Manual of the American Association of Textile Chemists and Colorists

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, Post Office Box 12215, Durham, NC 27709.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the National Motor Freight Traffic, Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT RULER

Uniform Freight Classification

(Application for copies should be addressed to Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Color Association of the United States Inc.,

Standard Color Card of America, 9th Edition

(Application for copies should be addressed to the Textile Color Card Association of the United States, Inc., 200 Madison Avenue, New York, NY 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Guide Samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 Materials

3.2.1 Basic Material. The basic material shall be polyester/cotton twill cloth, Olive Green 507, conforming to type II, class 1 of MIL-C-43791 for the type I slacks and shall be polyester/cotton twill cloth, Blue 1577, conforming to type I or II, class 1 of MIL-C-43791 for the type II slacks.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.2.2 Buttons. The buttons shall be type II, class D, style 26, 30-line conforming to V-B-871. The buttons shall have a dull finish and shall be Olive Green BP, Cable 62016 for the type I slacks and Blue BV, Cable No. 62003 for the type II slacks.

3.2.3 Thread. The thread shall be cotton-covered polyester, ticket Nos. 50 and 70 for seaming, stitching and buttonholes and 30, 3 ply for sewing the buttons. The thread shall conform to MIL-T-43548.

3.2.3.1 Color and colorfastness. The thread shall be Olive Drab S-1, C.A. 66022 and shall show colorfastness to laundering, perspiration, and light, equal to or better than the standard sample for the type I slacks and Navy blue AT. C.A. 66060 for the type II slacks. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, perspiration, and light.

3.2.4 Gimp. The cotton gimp for reinforcing buttonholes shall be No. 8, conforming to type I or type II of V-T-280. The gimp shall be Olive Drab S-1, C.A. 66022 for the type I slacks and Navy Blue AT, B.A. 66060 for the type II slacks.

3.2.5 Labels. Each pair of slacks shall have a size label and a combination identification-instruction label conforming to type VI of DDD-L-20, except that the combination identification-instruction label shall be Lemon Yellow, Cable No. 70205 in conformance with the Standard Color Card of America. Fastness to laundering requirements of DDD-L-20 shall apply.

3.2.5.1 Size label. The size label shall conform to class 2 in accordance with DDD-L-20 and shall indicate the size, letter abbreviation and inseam length, (i.e., 6 S26).

3.2.5.2 Combination label. The combination identification-instruction label shall conform to classes 1 and 3 combined in accordance with DDD-L-20. The body of the instruction shall be as follows and the coating of the class 3 label shall apply:

WASHING INSTRUCTIONS

1. Machine washing. Use wash and wear cycle. Wash with warm water, using soap or mild detergent. Heavy stains may require presoaking or prespotting.

2. Hand washing. Wash in warm water, using soap or mild detergent.

DO NOT WRING OR TWIST

3. DO NOT STARCH OR USE BLEACH.

4. Dry in tumble dryer at warm setting. Remove immediately at end of drying. Shape and hang. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touch-up is required, iron at moderate or synthetic heat setting.

DO NOT REMOVE THIS LABEL



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.2.6 Slide fasteners. The slide fasteners shall be brass, camlock, size M, short tab-pull, and shall conform to type I, style I of V-F-106 except that the tape shall be 9/16 +1/32 inch wide. Slide fasteners shall be of sufficient length to comply with operation 7 of table I. All components of the slide fastener shall be from the same contractor. The finished slide fastener shall not shrink more than 2 percent. The color of the slide fastener tape shall approximate the basic cloth.

3.2.6.1 Slide fastener tape. The slide fastener tape shall be woven from yarns made of a blend of either cotton/nylon or cotton/polyester in both the warp and filling. The color of the tape for type I slacks shall be Olive Green 507. The color of the tape for the type II slacks shall approximate the color of the basic material specified for the type II slacks. The tape shall show colorfastness to laundering equal to or better than the standard sample. When no standard sample is available the tape shall show "good" fastness to laundering. The tapes shall be given an approved durable press treatment, consisting of a suitable catalyzed and cured system. Hand modifiers and a wetting agent may be used to facilitate processing. Durable press resins other than those approved for use are prohibited.

3.3 End item appearance

3.3.1 Appearance and soil release ratings. The finished cured slacks, after five washings, shall meet the ratings for the characteristics specified below when tested as specified in 4.2.2.

| Characteristic | Rating, minimum |
|---|---|
| Cloth appearance | 4 |
| Crease appearance | |
| Front | 4 |
| Back | 4 |
| Seam appearance (min. individual rating) | |
| Inseam | 3 |
| Outseam | 3 |
| Seat seam | 3 |
| Back pocket | 3 |
| Side pocket | 3 |
| Waist | 3 |
| Pocket flap | 3 |
| Fly appearance (min. individual rating) | 3 |
| Soil release (min. individual rating) | 3 |

3.3.2 Shade. The shade of the finished cured slacks shall match the standard sample when tested as specified in 4.2.2.

3.4 Tearing strength of finished cured slacks. The finished cured slacks shall meet the physical requirements for tearing strength as specified for the type II cloth when tested as specified in MIL-C-43791 (see 4.2.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations.

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| 1 | Cutting<br><br>(a) Cut slacks in strict accordance with patterns furnished which show directional lines, size, placement of pockets and pocket flaps, and notches for proper assembly of all parts. Unless otherwise specified, directional lines shall be placed in the warp direction. The face of the fabric (2 up and 1 down left hand twill) shall finish on the outside of the slacks.<br><br>(b) Directional lines on the fronts and backs may vary from the warp direction by not more than 1-1/2 inches. Measurements shall be taken at top and bottom edges of the pattern from the directional line to the selvage edge (on the even side of the lay) of the fabric and the difference between the two measurements shall not exceed 1-1/2 inches.<br><br>(c) Cut all parts of the slacks from the same piece of basic material except fly parts, belt loops, pocket facings, and flap lining (when made of two-piece construction) which may be cut from ends. Parts cut from ends shall approximate the shade of the slacks.<br><br>(d) Cut all component parts in the direction of the warp except the pocket flap linings (when two-piece construction is used) may be cut in the warp or filling direction.<br><br>(e) Cut the stripping for the loops of sufficient width to comply with operation 18. | | | |



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| 2 | Replacement of defective components<br><br>During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified in MIL-STD-1488 shall be removed from production and replaced with nondefective and properly matched components. | | | |
| 3 | Marking<br><br>Mark or ticket all component parts of the slacks except parts cut from ends, to insure correct size and uniform shade throughout the slacks. | | | |
| 4 | Make darts and attach labels<br><br>(a) Fold and stitch the darts in the fronts and the backs as indicated by the notches and the drill holes. The darts shall be tapered on the inside of the slacks without twists or puckers. The thread ends of the lower end of the darts shall not be trimmed closer than 1/2 inch in length. | 301 | OSf-1 | 8-10 |
| | (b) Press the front darts and the back darts so that the folded edge is toward the center front and the center back, respectively, with a heated pressing iron or machine. | | | |
| | (c) The combination identification, instruction label shall be centered in the left hip pocket location on the inside of the slacks and stitched on all four sides. The stitching shall not be through the printing. | 301 or 401 | SSa-1 | 8-10 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| 5 | Make front patch pockets | | | |
| | Finished appearance. The edges of the pocket shall finish smooth and flat. The pocket openings shall be uniform. Pockets shall be in alignment. The facings shall not be exposed beyond edge of pocket opening. | | | |
| | (a) Seam facing to front edge of pocket opening. | 301 or 401 | BSm-3(a) | 8-10 8-10 |
| | (b) Turn facing to the inside of pocket 1/8 to 3/16 from folded edge of pocket and edge stitch pocket 1/16 to 1/8 inch from edge of facing. | 301 | BSm-3(b) | 8-10 |
| | (c) Turn in the back raw edge of facing and single stitch 1/16 to 1/8 inch from the edge through pocket. | 301 | BSm-3(c) | 8-10 |
| | OR | | | |
| | (d) Attach facing with a double needle machine in one operation using folder. | 301 | LSk-2 | 8-10 |
| 6 | Sew on front patch pockets | | | |
| | (a) Position pockets on the outside of each front of slacks as indicated by marks on pattern, with the outside edge of pocket even with the side seam. The outside edge of pocket shall be caught in the side seam. | | | |



Source: https://assist.dla.mil -- Downloaded: 202640-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| | (b) Turn under the front and bottom edges of pocket and double stitch, 3/16 to 1/4 inch gage, through pockets and slacks. The outer row of double stitching shall be 1/16 to 1/8 inch from edge. | 301 | LSd-2 | 8-10 |
| | (c) Single stitch top and side of pocket to slacks with a permanent holding stitch 1/16 to 1/8 inch from edge. The top of pocket opening, in the finished slacks, shall terminate at the waistband seam. | 301 | LSbj-1 | 8-10 |
| 7 | Make flies | | | |
| | (a) Position the right half of the slide fastener on the right fly so that the edge of the chain will be 5/8 to 7/8 inch from the front edge of the finished fly at the top tapering to 3/8 to 1/2 inch from the front edge of the finished fly at the bottom. Stitch the slide fastener tape through the fly with two rows of stitching, with the first row of stitching 1/8 to 3/16 inch back of the chain and the second row of stitching 1/16 to 1/8 inch from the back edge of the tape. | 301 | SSau-2 | 8-10 |
| | (b) Stitch the left fly lining to the left fly; turn and stitch 1/16 to 1/8 inch from the edge. | 301 or 401 and 301 | SSe-2(a)<br>SSe-2(b) | 8-10<br>8-10 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| | (c) Overedge stitch the back raw edges of the left fly and the left fly lining together catching the left half of slide fastener in the stitching with the gage of the overedge stitching 1/8 to 3/16 inch. The bottom edge of the chain shall be 1/4 to 1/2 inch above fly notch after the fasteners are out and scoops removed. | 502 or 503 or 504 | SSa-1 | 8-10 |
| | (d) Overedge stitch the back raw edge of the right fly after the waistband has been attached to top of trousers and prior to raise stitching the right fly 1-1/4 to 1-1/2 inches from edge. | 502 or 503 or 504 | EFd-1 | 6-10 |
| 8 | Attach flies to front | | | |
| | (a) Join the right fly to the right front with the notches matching. Turn and raise stitch the right fly 1/16 to 1/8. | 301 or 401 and 301 | LSq-2(a)<br>LSq-2(b) | 8-10<br>8-10 |
| | (b) Overedge stitch the left front from the fly notch to the top edge of the waist. | 502 or 503 or 504 | EFd-1 | 6-10 |
| | (c) Join the left fly to the left front with the notches matching. | 301 or 401 | LSq-2(A) | 8-10 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| | (d) Turn the seam allowance toward the outseam of the front and raise stitch through all plies from the top of the slacks to the base of the fly, 1/16 to 1/8 inch from the edge of the front. The stitching may be continued along the crotch with the left front turned to the outside (see operation 15a). | 301 | LSq-2(b) | 8-10 |
| | (e) Attach the slider, and with the scoops evenly matched, staple the bottom of the slide fastener tape. The staple shall be perpendicular to the line of the scoops and shall overlap the scoops. | | | |
| 9 | Make hip pocket flaps | | | |
| | (a) Fold flaps as indicated on pattern and seam side edges; turn, work out corners, and double stitch 3/16 to 1/4 inch gage along side and bottom edges. | 301 or 401 and 301 | SSe-3(a) only<br>SSe-3(b) and OSf-2 | 8-10<br>8-10<br>8-10 |
| | (b) Make flaps from two pieces with seam allowance added accordingly, as follows: | | | |
| | (1) Fold flaps on a creasing machine with the raw edges turned in and double stitch, 3/16 to 1/4 inch gage. | 301 | SSc-2 | 8-10 |
| | OR | | | |
| | (2) Seam side and bottom edges of flap, trim corners, turn, and work out corners; and double stitch 3/16 to 1/4 inch gage. | 301 | SSe-3 | 8-10 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| | OR | | | |
| | (c) Top edges of one or two piece flaps may be folded in addition to all other edges on a creasing machine with the raw edges turned in, and double stitch sides and bottom edges 3/16 to 1/4 inch. The top creased edge of the underside of flap shall be creased 1/8 to 3/16 inch below the outer ply. | 301 | SSc-2 and OSf-2 (1-piece flap) | 8-10 |
| | OR | | | |
| | (d) The side and bottom raw edges of the two piece flaps, and the side edges of the one piece flaps, shall be turned in or creased and double stitched 3/16 to 1/4 inch gage. When the flaps are made of one piece, the stitching shall be continued along the bottom folded edge. | 301 | SSc-2 and OSf-2 (when applicable) | 8-10 |
| 10 | Make buttonhole in flaps | | | |
| | Make a vertical buttonhole in the center of each flap (1/4 inch off center tolerance allowed) with the inside edge of the eyelet 1/2 to 5/8 inch from bottom edge. | Buttonhole | | |
| 11 | Make hip pockets | | | |
| | Turn in top edge of pocket 1-3/4 ±1/8 inches with raw edge turned in and single stitch 1/16 to 1/8 inch from edge. The hem shall finish smooth and flat, without twists, pleats, or puckers. | 301 | EFb-1 | 8-10 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| 12 | Sew on hip pockets | | | |
| | Turn in the edges of pockets, position to each back of slacks as indicated by marks on pattern and double stitch 3/16 to 1/4 inch gage. Pocket edges may be precreased prior to setting. The pocket opening shall finish not less than 4 3/4 inches for all sizes. | 301 | LSd-2 | 8-10 |
| 13 | Sew on hip pocket flaps | | | |
| | (a) Center flap with raw edges 1/2 ±1/8 inch above top of pocket and seam 1/8 to 3/16 inch from raw edge. Turn down flap and single stitch 3/16 to 1/4 inch from turned edge or one piece flap may be used. | 301 | LSb1-2 | 8-10 |
| | (b) A 3/8 inch bartack shall be placed at each end of the flap superimposed on the lower row top stitching or the flap shall be securely bartacked with 301 stitch. | | | |
| | (c) When top edge of flap is folded in (see operation 9c) position folded edge 5/8 inch above top of pocket and seam 1/4 inch from folded top edge. | | | |
| 14 | Join seat seam | | | |
| | (a) Join seat seam, with the right back overlapping the left back, with a double-lapped and double-stitched seam. | 401 | LSc-2 | 8-10 |





Source: https://assist.dla.mil -- Downloaded: 202640-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| 15 | Join crotch seam | | | |
| | (a) When the raise stitching of left fly is not continued along crotch of left front (see operation 8d), turn crotch seam of left front to the outside and stitch 1/16 to 1/8 inch from edge. | 301 or 401 | EFa-1 | 8-10 |
| | (b) Turn edge of right front crotch seam to inside and double stitch, catching the left front crotch seam with both rows of stitching through left fly lining. The double stitching shall be 3/16 to 1/4 inch gage with the outer row of stitching 1/16 to 1/8 inch from folded edge. The top end of stitching shall terminate at the stitching along the back edge of right fly.<br><br>NOTE: These operations shall be accomplished after the waistband setting and right fly raise stitching has been completed. | 301 or 401 | LSb-2 | 8-10 |
| 16 | Join side seams | | | |
| | (a) Join the side seams, with the fronts overlapping the backs, catching the back edge of the front patch pockets in the seaming. The seam shall be double-lapped, double-stitched seam, 1/4 to 5/16 inch gage, with the outer row of stitching 1/16 to 1/8 inch from the turned edge. | 301 or 401 | LSc-2 | 8-10 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| 17 | Join inseams | | | |
| | (a) Join inseams in one continuous operation with a double-lapped and double-stitched seam. The seat and crotch seams shall not be staggered more than 3/8 inch (measurements taken from the center of seams). The fronts shall lap the backs. | 301 or 401 | LSc-2 | 8-10 |
| 18 | Make seven belt loops | | | |
| | Finished appearance. The seven belt loops shall measure 3/8 to 1/2 inch wide and shall be located as follows: One centered on each front, one adjacent to each side seam on the back part; one adjacent to seat seam; and one on each back, midway between seat seam and side seam. | | | |
| | (a) Fold stripping (see operation 1e) with edges abutted at center and double stitch not less than 3/16 inch gage, using a cover stitch on the underside. | 406 | EFh-1 | 6-10 |
| | OR | | | |
| | (b) Fold stripping (see operation 1e) lengthwise turn under both raw edges and single stitch each edge 1/16 to 1/8 inch from edge. | 301 | EFp-1 | 8-10 |
| | OR | | | |
| | (c) Fold stripping (see operation 1e) with both edges turned in and the turned in edges abutted and with the covering stitch on the underside. | 105 | EFae-1 | 12-16 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued)

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| 19 | Make and attach waistband<br><br>Finished appearance. The waistband shall be sewn flat and smooth without stitching the top edge of waistband of slacks and without fullness, gathers, or pleats. The waistband shall finish 1-3/8 to 1-5/8 inches wide. | | | |
| | (a) Fold the waistband in half lengthwise, and stitch the left end. Turn the waistband. Work out the corners. | 301 | SSe-2(a) | 8-10 |
| | (b) Stitch the underside of the waistband to the top of the slacks on the inside catching the top edge of the size label on the inside right back adjacent to the seat seam. | 301 or 401 | SSa-1 | 8-10 |
| | (c) Turn in the bottom edge of the outer side of the waistband, and stitch 1/16 to 3/32 inch from the edge, through the slacks, continuing the line of stitching around the ends and the top folded edge. | 301 | LSd-1 and OSf-1 and SSe-2(b) | 8-10 |
| | (d) Turn under the right end of waistband and right fly with the seam line set back 1/8 to 3/16 inch from finished edge of fly. The right fly shall be stitched from the bottom notch of fly to the top of waistband 1-1/4 to 1-1/2 inches from finished front edge. | 301 | SSa-1 | 8-10 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| 20 | Finish bottoms | | | |
| | (a) Hem bottom of slacks, as indicated by marks on pattern, with the raw edges turned in and single stitch 1/16 to 1/8 inch from edge. The hem shall finish 1 ±1/4 inches wide. | 301 | EFb-1 | 8-10 |
| 21 | Make waistband buttonhole | | | |
| | (a) Make a horizontal buttonhole in the top of right fly in the center of waistband (1/4 inch off center tolerance) with the inside edge of eyelet 1/2 to 5/8 inch from edge of right fly. | Button-hole | | |
| 22 | Bartacking | | | |
| | (a) Turn under the raw edges of the belt loops. Bartack the top and bottom of the belt loops not more than 1/4 inch from the folded edges to the slacks at the following locations: One in the center of each front; one on each side seam; one in the seat seam; and one on each back, midway between the seat seam and the side seam.<br><br>NOTE: The bartacks shall be 3/8 to 1/2 inch long. The distance between the bartacks at the top and the bottom of each belt loop shall be 1-3/4 to 2 inches. The folded top edge of each belt loop shall be even (±1/8 inch tolerance) with the top edge of the waistband. | Bartack | | 28 per bartack |





Source: https://assist.dla.mil -- Downloaded: 202640-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| | (b) Bartack the top and the bottom ends of each front patch pocket opening to the slacks. The bartacks shall be 3/8 to 1/2 inch long and shall be positioned at right angles to the opening. The bartack at the top of the opening shall be not more than 1/4 inch below the bottom row of waistband stitching. The bottom bartack shall extend into the outseam. | Bartack | | 28 per bartack |
| | (c) Bartack each corner of the top of each hip pocket opening with a vertical bartack superimposed on the inside rows of stitching. The vertical bartack shall be 3/8 to 1/2 inch long. | Bartack | | 28 per bartack |
| | (d) Bartack bottom of right fly at top of crotch seam with bartack through left fly. Bartack to be set diagonally in line with the right fly stitching at the junction of the crotch seam and stitching on right fly. | Bartack | | 28 per buttonhole |
| 23 | Cleaning | | | |
| | (a) Trim all ends of outside stitching and remove loose threads from the slacks. Trim ends of belt loops; remove all spots and stains, and all shade or size markings. | | | |
| | (b) Before folding and packaging, slacks must be free of residual fiber particles, lint and dust, or other foreign materials. | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE I. Sewing operations. - Continued

| No. | Description of Operation | Stitch Type | Seam and Stitching Type | Stitches Per Inch |
|---|---|---|---|---|
| 24 | Pressing<br><br>Finished appearance. The pressing conditions with regards to time, temperature, steaming, and head pressure shall be adequate to obtain required results. Press the tops, including the fly, and pockets. The legs shall be pressed individually. Crease the legs in the center with the seams matching at the bottom and at the knee. There shall be no variation in the sharpness of the leg creases at front and back parts of leg. The end of the creases shall not extend into the bottom of the pockets nor shall they be more than one inch below the bottom of pockets. Touch up pressing may be required to remove extraneous wrinkles prior to curing. | | | |
| 25 | Curing<br><br>The pressed slacks shall be suspended from the bottoms or waist and subjected to dry oven heat. The temperature and time of curing conditions shall be adequate to obtain required results. After curing, the slacks shall be left on the hangers until they cool to room temperature. | | | |
| 26 | Attach buttons | | | |
| | (a) Sew a button on left fly at waist to correspond with eyelet end of buttonhole in right fly at waist. | 101 or 301 | | 14-16 per button |
| | (b) Sew a button to each hip pocket through hem to correspond to eyelet end of buttonhole in flaps. | 101 or 301 | | 14-16 per button |
| | NOTE: Operation 26 may be performed prior to curing (operation 25) provided the impression of buttons does not show on the finished (cured) slacks. | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.5 Design. The slacks shall have two front patch pockets, two hip patch pockets with flaps closed with buttons and buttonholes, seven belt loops, hemmed bottoms, and a slide fastener front closure.

3.6 Patterns. Standard patterns which provide an allowance of 1/2 inch for outseams, inseams, seat and crotch seams, side and bottom edges of hip pockets, front and bottom edges of front pockets, and 3/8 inch for all other seams will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used only as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.6.1 Pattern parts. The component parts of the slacks shall be cut from the specified material in accordance with the pattern parts indicated in table II.

3.7 Construction

3.7.1 Stitches, seams, and stitchings. Stitch, seam and stitching types, specified in table I shall conform to FED-STD-751. When two or more seam or stitch types are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper shall be on the inside of the slacks. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers or open seams will result (see 6.4). All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Edge stitching and top stitching shall be uniformly gaged throughout the garment. Seams required to be worked out, that have a depth between the fold of 1/16 inch or more shall be considered a defect. The guides and knives for the overedge machines shall be set to trim only the ravelled edges of the fabric. The gage of double-lapped, double-stitched seams shall be 1/4 to 5/16 inch with the outside row 1/16 to 1/8 inch from turned edge, except where otherwise specified herein.

TABLE II. Pattern parts.

| Material | Pattern Nomenclature | Cut Parts |
|---|---|---|
| Basic material | Front | 2 |
| | Back | 2 |
| | Front patch pocket | 2 |
| | Front patch pocket facing 1/ | 2 |
| | Hip pocket | 2 |
| | Hip pocket flap | 2 |
| | Fly (left-2, right-1) | 3 |
| | Waistband 2/ | 1 |

1/ The front patch pocket facing may be roll cut.
2/ Patterns are not furnished for belt loops, for alternate method of making pocket flaps (see operation 1 of table I).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.7.2 Thread breaks and ends of seams. Ends of seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type. Ends of a continuous line of stitching (except labels) shall overlap not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches.

3.7.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

3.7.4 Buttonholes. The buttonholes shall be the eyelet-end taper-bar type worked over No. 8 gimp with the ends tacked and shall have a cut length 3/4 to 7/8 inch. The bar end of the buttonholes shall have a minimum of four tacks not counting the first cross-over stitch in that it is part of the buttonhole, not the bar. The purling shall finish toward the outside of the slacks.

3.8 Manufacturing operations requirements. The slacks shall be manufactured in accordance with operation requirements specified in table I. The contractor is not required to follow the exact sequence of operations shown with the exception of operations 24 through 27, which shall be performed in the sequence listed. Any basting or holding stitching required to facilitate manufacture is permissible provided the thread does not show on the finished slacks.

3.8.1 Marking. The cut parts of the slacks shall be marked to insure a uniform shade and size throughout the slacks. Any method of marking may be used except:

(1) Corrosive metal fastening devices
(2) Sew-on type tickets
(3) Adhesive-type tickets which discolor the material or leave traces of paper or adhesive on the material after removal of the tickets.

3.9 Finished measurements. The finished measurements of the slacks shall conform to table III and shall be taken as follows: Measure the waist from folded edge to folded edge across the center of the waistband, with the slide fastener closed. Measure the hips from folded edge to folded edge 3 inches above the crotch seam, with the slide fastener closed. Measure the inseam length, along the inseam, from the crotch seam to the hemmed bottom of the leg.

3.10 Workmanship. The finished slacks shall conform to the quality of product established by this specification. The occurence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurement.

| Size of Slacks | | | | | |
|---|---|---|---|---|---|
| Short | 1/2 Waist | 1/2 Hips | Inseam Length | | |
| 6 | 11-3/4 | 18-1/2 | 26 | 27 | |
| 8 | 12-1/4 | 19 | 26 | 27 | 28 |
| 10 | 12-3/4 | 19-1/2 | 27 | 28 | 29 |
| 12 | 13-1/4 | 20 | 27 | 28 | 29 |
| 14 | 14 | 20-3/4 | 28 | 29 | 30 |
| 16 | 14-3/4 | 21-1/2 | 28 | 29 | 30 |
| 18 | 15-1/2 | 22-1/4 | 29 | 30 | |
| 20 | 16-1/2 | 23-1/4 | 29 | 30 | |
| 22 | 17-1/2 | 24-1/2 | 30 | 31 | |
| Regular | 1/2 Waist | 1/2 Hips | Inseam Length | | |
| 6 | 11-3/4 | 18-1/2 | 27 | 28 | |
| 8 | 12-1/4 | 19 | 27 | 28 | 29 |
| 10 | 12-3/4 | 19-1/2 | 28 | 29 | 30 |
| 12 | 13-1/4 | 20 | 28 | 29 | 30 |
| 14 | 14 | 20-3/4 | 29 | 30 | 31 |
| 16 | 14-3/4 | 21-1/2 | 29 | 30 | 31 |
| 18 | 15-1/2 | 22-1/4 | 30 | 31 | |
| 20 | 16-1/2 | 23-1/4 | 30 | 31 | |
| 22 | 17-1/2 | 24-1/2 | 31 | 32 | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurement. - Continued

| Size of Slacks | | | | | |
|---|---|---|---|---|---|
| Long | 1/2 Waist | 1/2 Hip | Inseam Length | | |
| 6 | 11-3/4 | 18-1/2 | 28 | 29 | |
| 8 | 12-1/4 | 19 | 28 | 29 | 30 |
| 10 | 12-3/4 | 19-1/2 | 29 | 30 | 31 |
| 12 | 13-1/4 | 20 | 29 | 30 | 31 |
| 14 | 14 | 20-3/4 | 30 | 31 | 32 |
| 16 | 14-3/4 | 21-1/2 | 30 | 31 | 32 |
| 18 | 15-1/2 | 22-1/4 | 31 | 32 | |
| 20 | 16-1/2 | 23-1/4 | 31 | 32 | |
| 22 | 17-1/2 | 24-1/2 | 32 | 33 | |
| X-Long | 1/2 Waist | 1/2 Hip | Inseam Lengths | | |
| 8 | 12-1/4 | 19 | 31 | | |
| 10 | 12-3/4 | 19-1/2 | 33 | | |
| 12 | 13-1/4 | 20 | 33 | | |
| 14 | 14 | 20-3/4 | 33 | 35 | |
| 16 | 14-3/4 | 21-1/2 | 33 | 35 | |
| 18 | 15-1/2 | 22-1/4 | 33 | 35 | |
| 20 | 16-1/2 | 23-1/4 | 33 | 35 | |
| 22 | 17-1/2 | 24-1/2 | 33 | 35 | |

NOTE: Unless otherwise specified herein, the tolerance for the finished measurements shall be plus or minus 3/8 inch. The tolerance for the inseam length shall be plus or minus 1/2 inch.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.2 Quality conformance inspection. Sampling and examination of the end item shall be performed in accordance with MIL-STD-1488. The slacks shall be classified as utility ("SD") slacks.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance wtih all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended modified, or qualified in this specification or applicable purchase documents.

4.2.2 End item testing. The finished cured slacks shall be tested as specified in table IV. All test reports shall contain the individual values utilized in expressing the final results. The lot size shall be expressed in units of one pair of slacks. The sample unit shall be two finished pair of slacks. One unlaundered pair of slacks shall be used for determining shade and tearing strength and the remaining one pair of slacks shall be laundered and used to perform the remaining tests. The sample size shall be as specified below.

| Lot size | Sample size |
|---|---|
| 800 or less | 5 |
| 801 to 22,000 inclusive | 8 |
| 22,001 and over | 13 |

The lot shall be unacceptable if the sample fails to meet any of the following conditions:

a. For cloth appearance and crease appearance: Two-thirds or more of the rating for each characteristic shall be 4 or above and no single rating shall fall below 3. 1/

b. For seam, fly appearance and soil release: No single rating shall fall below 3.

c. For shade and tearing strength: No specimen shall fail to meet the specified requirement.

1/ The lot rating for each characteristic shall be determined from the total ratings assigned for that characteristic in each inspection lot, i.e., in a sample size of eight slacks, the appearance rating for each characteristic indicated in table IV shall be based upon the total of 24 values assigned for that characteristic (three judgements for each of the eight slacks.)

4.3 Test methods

4.3.1 Tests for appearance and soil release

4.3.1.1 Apparatus and material used for laundering. The following apparatus and material are required for laundering:

a. Automatic washing machine (see 6.5)
b. Automatic dryer (see 6.5)
c. AATCC Standard Detergent 124 or equivalent
d. Dummy pieces for ballast - 3 feet by 3 feet hemmed pieces of the basic material to be added to test slacks to make a 4 pound load



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

e. Mineral oil: Nujol, Plough Inc., Memphis, Tennessee or equivalent
f. AATCC Standard Blotting Paper or equivalent
g. Five pound weight, 2-1/2 inches in diameter
h. Polyethylene film, 3 inches by 3 inches
i. Eye dropper.

TABLE IV. End item testing.

| Characteristic | Requirement paragraph | Test method |
|---|---|---|
| Cloth appearance rating | 3.3.1 | 4.3.1 |
| Crease appearance rating | 3.3.1 | 4.3.1 |
| Seam appearance rating | 3.3.1 | 4.3.1 |
| Fly appearance | 3.3.1 | 4.3.1 |
| Soil release rating | 3.3.1 | 4.3.1 |
| Shade | 3.3.2 | 1/ |
| Tearing strength | 3.4 | 2/ |

1/ The shade of the finished cured slacks shall match the standard sample under artificial daylight having a color temperature of 7500 kelvin and shall be a good approximation of the standard sample under incandescent lamplight at 2800 kelvin.

2/ Test in accordance with the cured fabric requirements of MIL-C-43791. This test shall be performed after curing but prior to laundering.

4.3.1.2 Apparatus and material used for evaluation. The following apparatus and material are required for evaluation of samples:

a. Apparatus for overhead and side lighting procedure as specified in AATCC Test Methods 124-1975 and 88C-1970
b. AATCC three dimensional Durable Press Replicas
c. AATCC photographic standards for evaluating single and double needle stitching and for evaluating pressed in creases
d. Deering Milliken photographic standards for evaluating stain release
e. Non-reflecting black-topped table 35 ±1 inches high and at least 30 inches by 24 inches, with the long dimension parallel and adjacent to the viewing board.
f. NARADCOM photographic standards for evaluating slack/trouser flies (see 6.3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.3.1.3 Procedure

4.3.1.3.1 Laundering. If the slacks weigh less than 4 pounds, ballast to make up a standard 4 pound load shall be added to the test slacks. The ballast shall consist of durable press slacks or pieces of the basic fabric. The washer shall be set for high water level, warm water temperature, and a 12 minute wash on the wash and wear cycle. The water used shall have a hardness not greater than 50 parts per million (ppm). The water shall be supplied at a temperature of 115° ±5°F. When the water has filled, add 140 g of detergent. Allow the washing to process automatically through the final spin cycle. Remove the slacks immediately at the completion of the final spin and separate the slacks, and ballast pieces when required, if tangled. Place the complete washed load in the dryer and dry at the normal cycle and at a setting which generates an exhaust temperature range of 140 to 160°F. Operate the dryer until the load is dry and continue tumbling 5 minutes with the heat turned off (cool-down cycle). Remove the load immediately after the machine stops. Repeat the wash and dry cycle until the load has completed four cycles. At the completion of the fourth cycle, the slacks shall be stained with mineral oil in three different spots on the inside of one leg of the slacks. Place the area to be stained on AATCC standard blotting paper. Using an eye dropper, drop five drops of mineral oil for each spot. Place a 3 by 3 inch piece of polyethylene film over the oil. Place a 5 pound weight (2-1/2 inches diameter) on the film directly over the oil. Keep the weight in place for 60 seconds. Remove the weight and polyethylene film and wipe off the excess oil with a clean tissue. Allow the specimen to hang undisturbed for at least 15 minutes but no longer than 2 hours. The stained slacks, and the dummy pieces when required, shall then be returned to the washing machine and washed for the fifth (last) complete washing and drying cycle. The slacks shall be buttoned and the legs shall be folded along the crease and suspended by the leg bottoms in a pants holder or similar device with legs kept separate from each other. The slacks shall also be held in this manner during conditioning and during interruption of wash and dry cycle.

4.3.1.3.2 Evaluation. Three trained observers shall evaluate and rate each sample unit for appearance criteria independently of each other. The slacks shall be zipped and placed on a clothes hanger, similar to that used to hang women's skirts, by spring clips at the waistband. The slacks shall hang with the waistband extended so that the front lays against the back and the crease falls in the center of the leg as it faces the observer. The slacks shall be suspended on the viewing board in such a manner that the slacks lay flat on the surface and the point midway between the top of the waistband and the lower hem of the leg is 5 feet (1.5 m) from the floor. With the cloth, seam fly or crease appearance standards as applicable, placed on the viewing board, the observer shall compare the slacks to each standard and shall rate the slacks according to the appearance on the cloth, seam fly or crease standard that most nearly matches the appearance of the slacks. No estimation of ratings falling between standards is allowed and the full numerical rating of the nearest standard must be assigned. Evaluation shall be conducted in a room where the only source of light will be that used for observation. To prevent unwanted reflection of light that will be painted a non-reflecting black, or blackout curtains may be hung on each side of the viewing area.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.3.1.3.2.1 Evaluation of cloth. Overhead lighting procedure and cloth appearance standards shall be used (4.3.1.2). To facilitate comparative testing, the three dimensional plastic replicas that most nearly match the cloth appearance of the slacks shall be mounted on the board on each side of the slacks. The cloth appearance of the slacks shall be observed and compared with the standards. The overall cloth appearance of the slacks i.e., front and back combined, shall be rated and assigned the numerical value of the appearance replica that most nearly matches it. The rating values assigned by each of the three observers for cloth appearance shall be reported for each sample unit.

4.3.1.3.2.2 Evaluation of seam appearance. Overhead lighting procedure and single and double needle stitching standards shall be used (4.3.1.2). To facilitate comparative testing, the seam standards shall be mounted on the viewing board to the left of the slacks as viewed. Seams specified in 3.3.1 shall be observed and compared with the standards. The appearance of each seam shall be assigned the numerical value of the standard that most nearly matches it. The rating values assigned by each of the three observers for each sample unit shall be reported.

4.3.1.3.2.3 Evaluation of soil release. Overhead lighting procedure and the soil release standard shall be used (4.3.1.2). To facilitate comparative testing, the soil release standard shall be mounted and centered on the viewing board 45 inches from the floor (center). The slacks, with the stained area visible, shall be placed upon the black topped table and in front of the standard. The slacks stains shall be compared with the standard and shall be assigned the numerical value of the standard that they most nearly match. One rating shall be assigned for all three stains by each observer. The rating value assigned by each of the three observers for each sample unit shall be reported.

4.3.1.3.2.4 Evaluation of crease appearance. Overhead and side lighting procedures and the crease appearance standard shall be used (4.3.1.2). The required side lighting shall be added to the overhead lighting and the slacks evaluated for crease appearance. To facilitate comparative testing, the crease appearance standard shall be mounted on the viewing board to the left center of the slacks as viewed. The slacks shall be adjusted as necessary in order that each crease area being evaluated, i.e., front or back lies in a relaxed position perpendicular to the side lighting in order to allow proper comparison to the standard. Each crease area specified in 3.3.1 shall be compared with the standard and assigned the numerical value of the standard that most nearly matches it. Each crease area specified shall be rated on an overall appearance basis and assigned a value accordingly, i.e., creases on the back shall be rated in accordance with the overall appearance of both creases as a unit and not on an individual crease basis. Individual ratings assigned by each of the three observers of each crease area specified in 3.3.1 shall be reported for each sample unit.

4.3.1.3.2.5 Evaluation of fly appearance. Over-head lighting procedures and the NARADCOM fly appearance standards shall be used (see 4.3.1.2) to facilitate comparative testing. The fly standard shall be mounted on the viewing board to the left of the slacks as viewed by the observer. The fly appearance shall be observed and compared with the standard. The appearance of each fly shall be assigned the numerical value of the standard that most nearly matches it. The rating values assigned by each of the three observer for each sample unit shall be reported.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.3.2 End item examination. Sampling and examination of the end item shall be performed in accordance with provision and defects for semi-dress (SD) in MIL-STD-1488.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (6.2).

5.1.1 Level A. Each pair of slacks, with inseams meeting, shall be folded from the leg bottom up toward the waistband to an overall length of approximately 23 inches. For the larger sizes it may be necessary to adjust the seat area to achieve the desired width of approximately 14-1/2 inches. Ten pairs of folded slacks of one size only shall be neatly stacked in a bundle with the waistbands alternated and securely tied four inches in from each end with cotton tape or twine.

5.1.2 Level C. The slacks shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A packing. Forty pairs of slacks of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to grade V2s, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed flat, four in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 20-pound minimum basis weight (49 $m/m^2$) kraft paper conforming to grade B of UU-P-268. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B packing. Forty pairs of slacks of one type and size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Level B packages shall be packed flat, four in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight (49 $g/m^2$) kraft paper conforming to grade B of UU-P-268. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the box purchase description, except that the inspection shall be in accordance with MIL-STD-1488.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

5.2.3 Level C packing. Slacks, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with Uniform Freight Classification and National Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches, with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained herein.

6. NOTES

6.1 Intended use. The type I slacks are intended for use by female military personnel of the Department of Defense as the standard component for use with the Olive Green 507 durable press utility shirt. The type II slacks are intended for use by female military personnel of the Department of the Air Force who are members of missile combat crews.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification
b. Type and sizes required (see 1.2)
c. Selection of the applicable levels of packaging and packing (see 5.1 and 5.2)
d. When weather resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and photographic standards. For access to the shade samples or the NARADCOM photographic standards address the procuring activity issuing the invitation for bids (see 3.1).

6.4 Seams. In order to avoid puckering and to produce the flattest seams possible, consideration must be given to the following: The needle should be the smallest size possible with a slim point. The smallest throat plate hole possible should be used to prevent flagging. Presser foot pressure should be just enough to insure a steady flow of material. Feed dogs should contain 18 to 20 teeth per inch for normal sewing and 20 to 25 teeth per inch for stitching down. All attachments should be as smooth as possible to permit free flowing of the fabric through the machine. The lightest possible thread tension should be used while maintaining a good stitch. The upper and lower threads must be balanced. Frequent checks should be made to insure that blunt needles are eliminated and machine adjustment maintained. Experience has shown that the puckering, when sewing with a stitch 401, can be reduced considerably, if not eliminated, by the use of needle feed machines, setting the feed one stitch higher than the desired number and the foot one stitch lower.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

6.5 Recommended apparatus. The recommended apparatus for 4.3.1.1, subparagraphs a and b are:

a. Kenmore Automatic Washing Mahcine Model 600, or similar washing machine. In case of dispute, the Kenmore Model 600 shall be used.
b. Kenmore Automatic Dryer Model 600, or equivalent.

6.6 Resins. Only those durable press resins already approved by the appropriate medical service and so listed in the invitation for bids or request for proposal shall be considered acceptable for the related procurement.

6.7 Figure. Figures 1 and 2 are furnished for information only. To the extent of any inconsistencies between the requirements of this specification and the figures, the requirements of this specification shall govern.

Custodians:
Air Force - 11

Review activities:
Air Force - 99, 82

User:
Air Force - 45

Preparing activity:
Air Force - 11

Project No. 8410-0469

* U.S. GOVERNMENT PRINTING OFFICE: 1993—603-034/2618



Source: https://assist.dla.mil -- Downloaded: 202640-26T04:53Z
Check the source to verify that this is the currentversion before use.

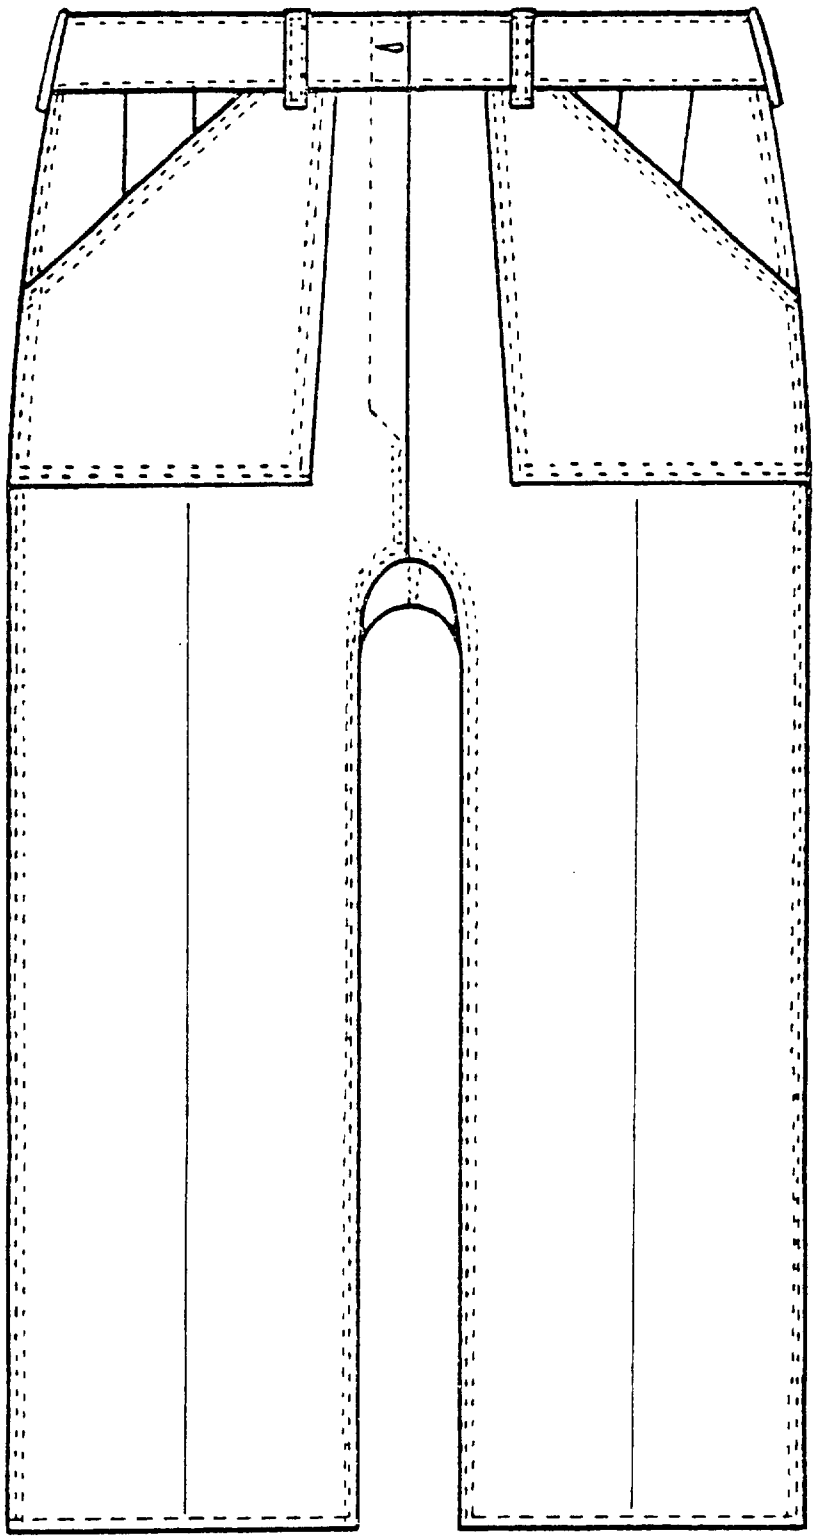


FIGURE 1. Slacks (front view).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

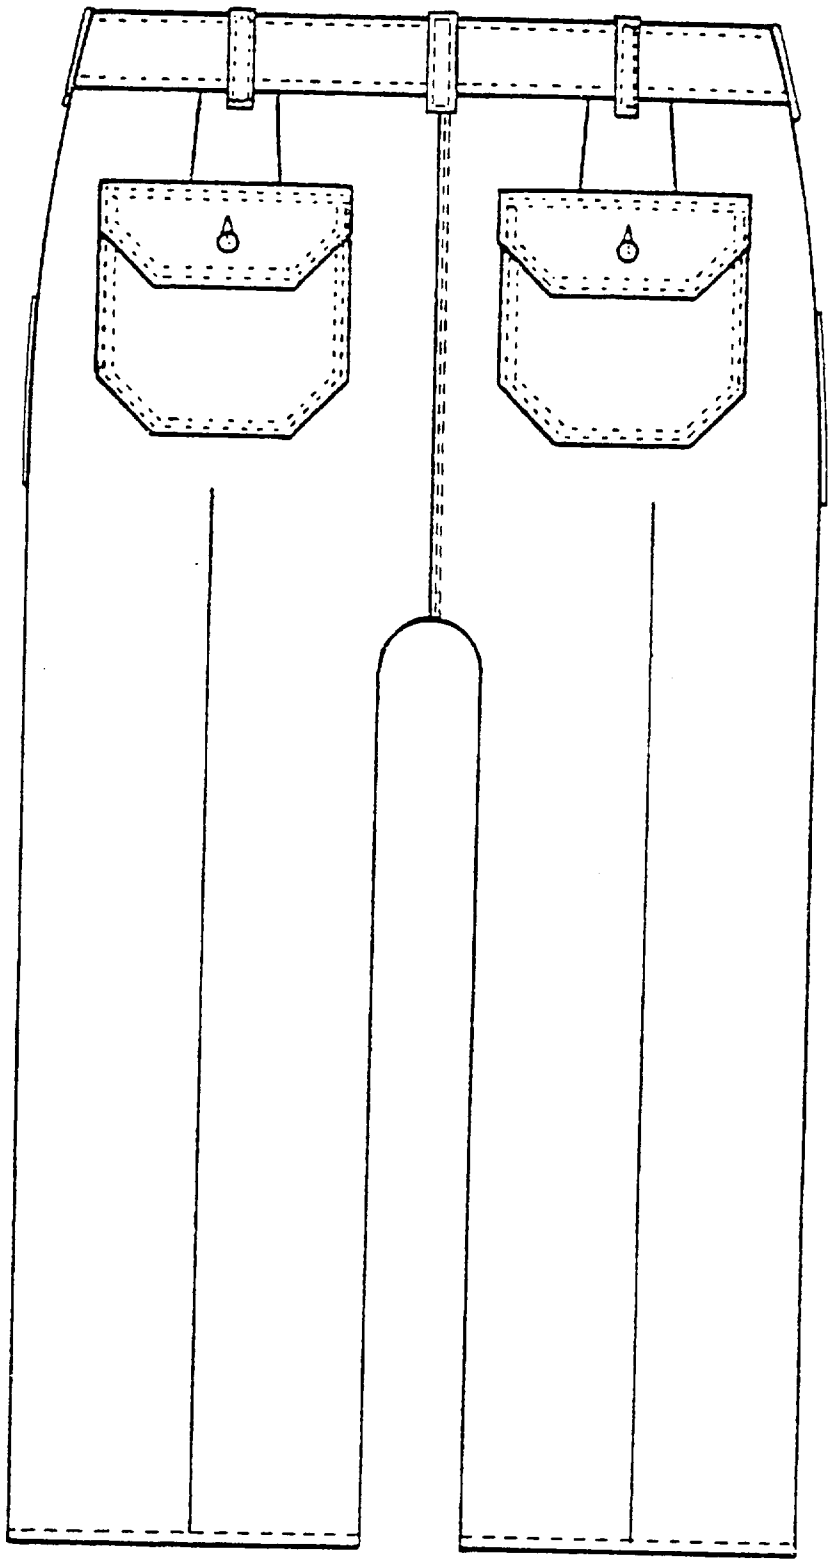


FIGURE 2. Slacks (back view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

**OFFICIAL BUSINESS**
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

ASD/ENESS
Wright-Patterson AFB, OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| | |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: |
| b. ADDRESS *(Street, City, State, ZIP Code)* | |
| | |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |
| | |

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.