MILITARY SPECIFICATION

TOPCOAT, MAN'S, POLYESTER/WOOL, ELASTIQUE (COAST GUARD)

1. SCOPE

1.1 Scope.- This specification covers the requirements for a blue polyester/wool single breasted topcoat.

1.2 Classification.- The topcoat shall be of one type, in the following sizes and lengths, as specified (see 6.2):

Sizes

34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47 and 48

Lengths

Short, Regular, Long, and Extra Long

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
V-T-280	- Thread, Cotton Gimp, Buttonhole
V-T-295	- Thread, Nylon
V-T-301	- Thread, Silk
CCC-C-438	- Cloth, Buckram, Cotton
DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)
DDD-T-86	- Tape, Textile, Cotton, General Purpose (Unbleached, Bleached or Dyed)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-297	- Cloth, Interlining, Cotton Warp, and Spun Hair-Wool Filling
MIL-C-326	- Cloth, Silesia, Cotton
MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-371	- Braid, Textile (Cotton, Tubular)
MIL-B-3461	- Button, Insignia, Metal, Uniform and Cap
MIL-C-15062	- Cloth, Flannel, Wool, Undercollar Cloth
MIL-P-15064	- Pads, Shoulder and Sleeve-Head
MIL-C-16375	- Cloth, Wigan, Cotton
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-29137	- Cloth, Felt-Fabric Composite, Undercollar
MIL-T-43548	- Thread, Polyester, Cotton-covered
MIL-C-43718	- Cloth, Twill, Polyester; Polyester and Cotton; Polyester and Rayon

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-1391	- Provisions for Evaluating Quality of Overcoats, Men's

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issues in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Associations, ATTN: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

3. REQUIREMENTS

3.1 Guide sample.- Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article approval.- The requirement for First Article will be as specified by the Procuring Activity (see 6.2).

3.3 Materials

3.3.1 Basic material.- The basic material for the topcoat shall be a polyester/wool blend elastique cloth, shade Blue 3362 conforming to Burlington Style No. 646-3362 or equal (see 6.4 and 6.5).

3.3.2 Lining.- The material for lining the fronts, backs, sleeves and pocket facings shall be rayon lining, 3.7 ounce, shade Blue 3351, conforming to class 1 of MIL-C-368.

3.3.3 Rayon binding.- The binding for the facings shall be the same material as specified in 3.3.2. The rayon shall be cut on a 45 ($\pm$ 5) degree angle in strips 3/4 to 7/8 inch wide.

3.3.4 Collar interlining.- The material for the collar interlining shall be cotton buckram, natural or bleached, conforming to type I, class 2 of CCC-C-438, except that the test for shrinkage shall be in accordance with test method 5580 of FED-STD-191 and the stiffness requirement shall not be less than 0.015 inch-pounds in the filling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.5 Undercollar cloth.- The undercollar material shall be wool flannel conforming to MIL-C-15062 or a felt/fabric composite conforming to MIL-C-29137. The shade shall approximate that of the basic material and requirements for perspiration and crocking shall not apply. When felt/fabric composite is used the cotton buckram interlining is not required.

3.3.6 Wigan.- The material for interlining the sleeve bottoms shall be cotton wigan, natural shade or dyed black, conforming to type I of MIL-C-16375, except that type I cloth shall have a warp stiffness of not less than 0.005 inch-pounds and not more than 0.015 inch pounds.

3.3.7 Pocketing.- The material for the front pockets, inside breast pockets, pocket stays, and shoulder epaulet interlining shall be cotton silesia conforming to type I of MIL-C-326 or polyester/cotton twill conforming to class 1 of MIL-C-43718. The shade shall be natural or black. When a black shade is used, the colorfastness requirements for perspiration and crocking shall not apply.

3.3.8 Coat front interlining.- The material for interlining the topcoat fronts shall be cotton warp and spun hair-wool filling conforming to type II, class 2 of MIL-C-297. The interlining shall be dyed black. (see figure 3).

3.3.9 Hanger and Button Loop.- The hanger and button loop for the topcoat shall be cotton tubular braid conforming to type III, class 1 of MIL-B-371 or shall be of the material specified in 3.3.2. The braid shall be black or shall match the lining or basic material and shall show good fastness to crocking and wet-dry cleaning when tested as specified in 4.3.1.

3.3.10 Shoulder and sleeve-head pads.- The shoulder pads shall conform to type I, class 1 and the sleeve-head pads shall conform to type IV of MIL-P-15064.

3.3.11 Tapes.-

3.3.11.1 Woven tape.- The tape shall be cotton, preshrunk, conforming to type I, class 1 or 2 of DDD-T-86. The widths shall be as follows:

5/8 inch for staying lapels, fronts, bottom edge of facings, and fold line of left vent.
5/8 inch for staying bridle at breakline of lapel.
1/4 inch for staying back armhole and lower part of front armhole.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.11.2 Bias-cut tape.- The tape for staying the front shoulder and upperpart of front armhole shall be dyed or undyed and shall conform to type I or II of MIL-C-326 or class 1 of MIL-C-43718.

3.3.12 Thread.-

3.3.12.1 Cotton thread.- The cotton thread shall be dyed shade Blue AT, Cable No. 66060 and shall conform to V-T-276 in the following types and sizes:

Use	Type	TicketNo.	Ply
Seaming and stitching	IC2	0 and 00	3
Padding lapels and collar	IA3	70	2
Button sewing:			
Hand	IB3	12 or 16	4
Machine	IA3	20	4

3.3.12.2 Polyester/cotton covered.- As an alternate to the cotton thread, a polyester/cotton covered thread may be used. When this option is exercised the thread shall match Blue AT, C.A. 66060 and shall conform to MIL-T-43548 as follows:

Use	Ticket No.	Ply
Seaming and stitching	50	2 or 3
Padding lapels and collar	70	2 or 3
Button sewing		
Hand	12	4
	or	
	16	2 or 3
Machine	20	2 or 3

3.3.12.3 Basting thread.- The cotton thread for basting and tacking shall be a good commercial grade, bleached or unbleached. A monofilament synthetic thread may be used for only those basting operations where the thread is required to be removed provided the garment is subsequently given a treatment by a cleaning agent in which the synthetic thread is soluble. When this thread is used, any residue remaining on the garment after the dry cleaning process shall be brushed off or removed.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.12.4 Silk thread.- The silk thread shall be dyed to approximate cotton shade Blue AT, Cable No. 66060 and shall conform to V-T-301 in the following types and sizes:

Use	Type	Class	Ticket No.	Ply
Machine felling, blind-stitching and edge stitching	I	-	A, B,	3
Buttonholes and bartacks	I	-	B, C,	3
Hand felling	III	3	A, C	2

3.3.12.5 Silk and cotton thread alternates.- The following nylon threads may be utilized as alternates for the operations indicated:

A. For machine felling and blindstitching with silk - Nylon thread conforming to Type III, size A/1 or AA/1 of V-T-295.
B. For hand felling with silk - Nylon thread conforming to Type IV, size A/2 or C/2 of V-T-295.
C. For padding lapels and collars with cotton - Nylon thread conforming to Type III, size 000 of V-T-295.

3.3.12.6 Nylon thread.- If an automatic machine which sews shank buttons imitating hand sewing is used, the thread shall be nylon waxed monocord, special No. 4, having a breaking strength of 11 pounds and a minimum length per pound of 3,250 yards and shall be tested for these requirements in accordance with test methods outlined in V-T-295.

3.3.12.7 Colorfastness of threads.- The dyed threads shall show colorfastness to wet-dry cleaning and light equal to or better than the standard sample when tested as specified in V-T-276, V-T-295, and V-T-301. When no standard sample is available, the dyed threads shall show good colorfastness to wet-dry cleaning and light when tested as specified in V-T-276, V-T-295, and V-T-301.

3.3.13 Gimp.- The gimp for reinforcing the buttonholes shall be thread, cotton gimp, buttonhole conforming to type I or II, size No. 8 of V-T-280. The gimp shall be dyed shade Blue AT, Cable No. 66060.

3.3.13.1 Colorfastness.- The dyed gimp shall show fastness to wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-280. When no standard sample is available, the dyed gimp shall show good fastness to wet-dry cleaning when tested as specified in V-T-280.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.14 Buttons.- The gold plated metal buttons for the front of the topcoat shall be 40-line hopper back (depressed) conforming to type I, style 5, class A of MIL-B-3461.

3.3.15 Labels.-

3.3.15.1 Combination label.- Each topcoat shall have a combination identification/size/instruction/personal label conforming to type I, classes 1, 2, 3 and 10 of DDD-L-20. The label marking shall show colorfastness to dry cleaning. The inscription shall be as follows:

NAME:
SERVICE NO:
TOPCOAT, MAN'S, 55% polyester/45% wool, elastique
CONTRACT NO: DSA 100-00-0-0000 (EXAMPLE)
STOCK NO: 8405-00-000-0000 (EXAMPLE)
SIZE: 38 Regular (EXAMPLE)
NAME OF SUPPLIER:

INSTRUCTIONS: DRY CLEAN ONLY

NOTE: The length (short, regular, long, and extra long) may be abbreviated as S, R, L and XL.

3.3.15.2 Size ticket.- A commercial type size ticket shall be attached on the outside of the right top sleeve 2 or 3 inches from the bottom edge. The ticket shall be tacked on four corners by machine or hand (6 to 8 stitches per tack by machine or 2 to 4 stitches per tack by hand). The corners may be doubled perforated for ease in tacking. The ticket shall be made of suitable commercial cardboard and shall be legibly printed with the following information:

Size - 38 Regular (EXAMPLE)

The length (Short, Regular, Long and Extra Long) may be abbreviated as S, R, L, and XL

3.4 Design.- The topcoat is single breasted, fully lined, with set-in sleeves, two lower hanging pockets with self-lined flaps, two inside vertical breast pockets, shoulder epaulets, a two piece back with center vent, and four metal insignia buttons on front. The topcoat shall have provisions for slide fastener extension on the back edge of front facings to accomodate a detachable sleeveless liner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.4.1 Figures.- The figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.5 Patterns.- Standard patterns to be used for cutting the suppliers working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the standard patterns and shall not be altered in anyway, except as allowed by footnotes to the list of pattern parts. The patterns allow 5/8 inch seam allowance for major joining seams. Seam allowances for all other seams are as indicated in Table I.

3.5.1 Pattern parts.- The component parts shall be cut from the materials specified and in accordance with the following pattern parts:

Material	Pattern Parts	Cut Parts
Cloth, Elastique, Polyester/Wool	Front	2
	Back	2
	Front facing	2
	Topsleeve	2
	Undersleeve	2
	Shoulder epaulet	2
	Lower pocket flap	4
	Pocket piping	2
	Topcollar	1
	Topcollar stand	1
Cloth, Lining, Rayon	Front lining	2
	Back lining	2
	Topsleeve lining	2
	Undersleeve lining	2
	Lower Pocket Facing lining	2
	Pocket Facing lining	2
Cloth, Cotton, Buckram	Undercollar canvas	1 1/ 3/
Cloth, Felt/Fabric Composite	Undercollar (bias)	1 2/
Cloth, Wool, Flannel	Undercollar (bias)	1 3/
Cloth, Cotton, Silesia or Cloth, Polyester/Cotton, Twill	Shoulder strap interlining	2
	Lower pocket	2
	Cash pocket	1
	Inside breast pocket	2
Cloth, Cotton, Wigan	Sleeve interlining (bias)	2
Templates	Lapel shaper	-
	Undercollar shaper	-
	Topcollar shaper	-
	Undercollar stand marker	-
	Finished lapel and collar	-
	Finished flap	-

1/ Not required when felt/fabric composite undercollar is used.
2/ Pattern shall be cut as one piece only.
3/ Pattern may be cut as two pieces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.6 Construction.-

3.6.1 Stitches, seams, and stitching types.- Stitch, seam, and stitching types as specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used. Unless otherwise specified, edge-stitching shall be 5/16 inch from the folded edge.

3.6.2 Thread breaks and ends of seams.- Ends of all seams and stitchings when not caught in other seams or stitchings shall be backtacked not less than 3/8 inch, unless otherwise specified. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches and thread breaks may be repaired by using 301 stitch type.

3.6.3 Stitches per inch.- The minimum and maximum number of stitches per inch shall be as specified in Table I.

3.7 Manufacturing operations requirements.- The topcoats shall be manufactured in accordance with the operation requirements specified in Table I. The supplier is not required to follow the exact sequence of operations listed provided that the finished topcoat is identical to those produced by following the sequence of operations as listed in Table I.

3.7.1 All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

3.7.2 Shade and size marking.- The component parts of the topcoat shall be marked or ticketed to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) Corrosive metal fastening devices. No metal device or sewn-on type markings shall be used on rayon lining.
(2) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible, is covered by the seam allowance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. Cut the topcoat in strict accordance with patterns furnished, which show size, shape, placement of pockets, directional warp lines and notches for the proper assembly of all parts. Perforated paper markers and plain paper markers shall not be used on the basic fabric. Felt back paper markers are permitted. b. All component basic material parts shall be cut from one piece of material except the lower pocket facings and underply of flaps, which may be cut from ends. When underply of flaps are cut from ends, they shall match each other. c. All component lining parts shall be cut from one piece of material except sleeve linings and facings for inside pockets, which may be cut from ends and when so cut shall approximately match the main assembly. Sleeve linings cut from ends shall be shade marked and match each other. d. Cut all other component parts listed in 3.5.1 as indicated by patterns from the material specified. When the wool flannel undercollar is cut in two pieces, the two pieces shall match each other. e. Cut all inside pocket stays 2 inches wide in the warp direction. The length of the individual pocket stay shall be 1 1/2 inches longer than the nominal finished pocket opening.					

NCTR Form 1, 15 Sep 1967

MIL-T-87001(CG)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
2.	Replacement of damaged parts Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages, as specified in MIL-STD-1391 are excluded and replaced with non-defective and properly matched material.					
3.	Shade marking All component parts of the basic material and linings, including sleeve linings, whether cut from ends or in the main lay, shall be marked or ticketed to assure a uniform shade throughout the topcoat. Other parts cut from ends need not be shade marked (see 3.7.2).					
4.	Make topcollar					
	a. Join the topcollar to the topcollar stand with a 1/4 inch seam, distributing proper fullness on the collarstand between the center notch and each end.	301 or 401	SSz-3(a)	10-14	0/3 0/3	0/3 00/3
	b. Open the seam and stitch on each side of the seam 1/16 inch from the seamline.	301	SSz-3(b)	10-14	0/3	0/3
5.	Make undercollar					
	a. The undercollar shall be constructed with a wool flannel or felt/fabric composite.					
	b. Wool flannel undercollar construction.					
	1. The undercollar shall consist of a one or two-piece wool flannel undercollar and a one or two-piece buckram interlining.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Make undercollar (cont'd)					
	2. Seam wool flannel undercollar face to face at center back 1/4 inch from edge.	301 or 401	SSa-1	10-14	0/3 0/3	0/3 00/3
	3. Press seam open and flat					
	NOTE: These operations shall be omitted when wool flannel undercollar is cut as one piece.					
	4. Seam buckram interlining at center back overlapping the edges approximately 3/8 inch.	301 or 401	LSa-1	10-14	0/3 0/3	0/3 00/3
	NOTE: This operation shall be omitted when buckram interlining is cut as one piece.					
	5. Pad interlining to wool flannel undercollar with 7 to 8 rows of blindstitching.	103 or 306	SSm-7 or 8	4-8	70/2 70/2	70/2
	6. Press undercollar flat.					
	7. Mark and shape undercollar to conform to undercollar pattern template. Trim interlining 1/8 to 3/16 inch from neck edge of undercollar.					
	NOTE: Marking and shaping of undercollar may be performed with a clicker machine using dies conforming to undercollar template.					
	8. Mark the breakline of the finished undercollar in accordance with marks on pattern.					
	9. Seam wool flannel undercollar to interlining at breakline (the finished undercollar stand at center shall measure 1 1/4 (± 1/8) inches).	301 or 401	SSv-1	10-14	0/3 0/3	0/3 00/3
	OR					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Make undercollar (cont'd)					
	c. Felt fabric composite construction					
	1. The composite undercollar shall be one piece. A separate collar interlining is not required with this type undercollar material.					
	2. Mark and shape undercollar to conform to undercollar shaper template. Marking and shaping of undercollar may be performed with a clicker machine using dies conforming to undercollar shaper template.					
6.	Make collar					
	a. Baste top edge of finished undercollar along straight top edge of topcollar matching and distributing fullness of topcollar between the notches on outer edge of undercollar and topcollar.	Hand or Machine			Commercial	
	NOTE: This operation shall be omitted when top edge of collar is machine felled.					
	b. Baste the topcollar to undercollar along creaseline and outer edge putting in proper fullness. The finished collarstand at center shall measure 1 1/4 (± 1/8) inches.	Hand or Machine			Commercial	
	c. Trim, turn, and baste edges of topcollar.	Hand or Machine			Commercial	
	d. Fell top corners and side edges of topcollar to finished undercollar by hand or top edge may be machine felled with simulated hand stitching.	Hand or Machine		8-10 6-10	C(silk) A(silk)	A (Silk)

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Make collar (cont'd)					
	e. Trim neck edge of topcollar to allow for seaming.					
	f. Press and crease the stand of the topcollar and the undercollar together in one operation to shape, stretching the outer edge of the collar across the shoulders and holding the creaseline short. Center area of creaseline shall be straight for a distance of 3 to 4 inches.					
7.	Make shoulder epaulets					
	a. The epaulets shall be made of one piece of the basic material and interlined with pocketing material.					
	b. Fold epaulet in half lengthwise and stitch 1/4 inch from raw edge.	301	SSa-1	10-14	0/3	0/3
	c. Press seam open and flat with seam off-center of epaulet.					
	d. Stitch point of epaulet.	301	SSe-2(a)	10-14	0/3	0/3
	e. Stitch the interlining to the lengthwise side seam	301	SSa-1	8-12	0/3	0/3
	OR					
	Blindstitch interlining to the side edges of the epaulet.	103 or 301	SSm-1 SSm-1	4-8 4-8	0/3 0/3	0/3
	f. Turn epaulet to finished position with seam on the underside. Work out point and edges and press epaulet smooth and flat. The epaulet shall finish 2 (± 1/8) inches at sleeve tapering to 1 3/4 (± 1/8) inches at the base of point.					
	g. Single stitch around all folded edges of epaulet 5/16 to 3/8 inch from edge.	301	OSf-1 and SSe-2(b)	10-14	A(silk)	A(silk)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Make pocket flaps					
	a. Stitch underply to upperply, face to face, 1/4 inch from raw edge.	301	SSe-2(a)	10-14	0/3	0/3
	b. Trim the corners, turn to finished position, force out edges, and single stitch around all folded edge of flap 5/16 to 3/8 inch from edge.	301	SSe-2(b)	10-14	A(silk)	A(Silk)
	c. Press the flaps smooth and flat.					
9.	Make sleeves and sleeve linings					
	a. Sleeves shall be set-in type consisting of a topsleeve and undersleeve.					
	b. Join forearm seam of sleeve (basic material) face to face 3/8 inch from edge distributing fullness between notches.	301 or 401	SSa-1	10-14	0/3 0/3	0/3 00/3
	c. Press forearm seam open and flat holding seam short.					
	d. Stitch sleeve interlining (wigan) to forearm seam and sides of backarm seam allowances. Bottom edge of sleeve interlining shall be 1/2 to 3/4 inch below turnup notches. Trim ends of sleeve interlining even with edges of sleeve.	301 or 401	SSa-1	10-14	0/3 0/3	0/3 00/3
	e. Press turnup of sleeve as indicated by notches in pattern.					
	f. Join backarm seam of sleeve, face to face, 3/8 inch from edge.	301 or 401	SSa-1	10-14	0/3 0/3	0/3 00/3
	g. Press backarm seam open and flat.					
	h. Blindstitch top edge of sleeve turnup to interlining.	103 or 306 Hand	EFc-1(b) EFc-1(b)	4-8 4-8 4-8	0/3 0/3 0/3	0/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Make sleeves and sleeve linings (cont'd)					
	i. Join the forearm seam of the sleeve linings, face to face, 3/8 inch from edge distributing fullness between notches.	301 or 401	SSa-1	10-14	0/3 0/3	0/3 00/3
	OR As an alternate, join the forearm seam of sleeve lining, face to face, 3/8 inch from raw edge leaving a 6 inch opening starting 2 inches below armhole seam.					
	j. Join the back arm seam of sleeve linings, face to face, 3/8 inch from edge.	301 or 401	SSa-1	10-14	0/3 0/3	0/3 00/3
10.	Attach sleeve lining to sleeve					
	a. The sleeve lining shall extend not less than 3/4 inch nor more than 1 inch above top of the basic material sleeve.					
	b. Tack forearm and backarm seam of sleeve lining to forearm and backarm seam of sleeves respectively distributing proper fullness in lining. Tacking shall extend from not more than 6 inches below top to not more than 6 inches above creased bottom edge. When tacking is done by hand, both ends of the stitching shall be securely backstitched with not less than three stitches.	301 or 401 or Hand		4-8 4-8 1/2 to 1 1/2 inches in length	0/3 0/3 commercial 0/3 or commercial	0/3 00/3
	c. Pull sleeve through lining and baste turnup of sleeve lining. Sleeve lining shall have not less than 1 1/4 inches turnup. NOTE: The bottom of the sleeve lining may be felled without basting.	Hand or machine			commercial	

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Attach sleeve lining to sleeve (cont'd)					
	d. Fell bottom of sleeve lining to sleeve turnup.	Hand or		6-8	A or C (silk)	
		103 or 306		6-10 6-10	A (silk) A (silk)	A (silk)
	e. Turn sleeves to finished position and assemble in pairs.					
11.	Make cash pocket					
	a. There shall be a cash pocket on the inside of the right outside front pocket. Cash pocket shall be made from material specified in 3.3.7 and shall measure 3 3/4 (± 1/4) inches wide and 3 (± 1/4) inches deep.					
	b. Construction of the cash pocket shall be at the option of the manufacturer.					
12.	Make two front pockets					
	a. The two front pockets shall be inside hanging pockets with basic material welt pieces and rayon lining bearers.					
	b. Stitch the welt piece to the lower edge of pocketing.	301 or 401	SSa-1	10-14	0/3 0/3	0/3 00/3
	c. Turn under the raw edge of rayon bearer and stitch to the upper part of the pocketing piece with a stay piece on the underside. A selvage edge need not be turned in.	301 or 401	LSd-1	10-14	0/3 0/3	0/3 00/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
12.	Make two front pockets (cont'd)					
	d. Mark the fronts for the pocket opening in accordance with marks on patterns and mark the width of the flaps in accordance with the finished flap template.					
	e. Position the flap and the welt piece with pocketing on the outside of the topcoat and stitch to the topcoat thru a staypiece on the underside of the topcoat.	301	SSa-1	10-14	0/3	0/3
	f. Cut opening thru the topcoat and the stay piece and tongue notch the corners. Turn the pocket piece thru the opening.					
	g. Press open the welt seam and single stitch along the seamline, forming a 1/4 (± 1/16) inch welt.	301	SSaf-2(b)	10-14	0/3	0/3
	OR					
	The welt may be formed prior to cutting and tongue notching the corners.					
	h. Turn down flap, turn up pocketing piece, fold under top edge of cut opening and stitch thru all plies 1/4 inch from raw edge of opening.	301	SSa-1	10-14	0/3	0/3
	i. Stitch sides and bottom of pocket.	301	SSa-1 and OSf-1	10-14	0/3	0/3
	j. Tack the corners of the pocket the width of the welt on the underside.	301		10-14	0/3	0/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Prepare fronts					
	a. Stitch a waist and underarm dart in each front, the length as indicated on patterns. The dart shall be 3/8 (+ 1/16) inch at center, tapering to a point at each end. Backtack each end of dart.	301	SSa-1	10-14	0/3	0/3
	b. Press waist and underarm darts open and flat.					
	c. Stitch a 5/8 inch wide bias-cut tape on front armhole 1/2 inch from shoulder seam to within 1/2 inch from shoulder seam to within 1/2 inch above armhole notch.	301	SSaa-1	10-14	0/3	0/3
	d. Stitch a 1/4 inch wide woven tape on front armhole from 1/2 inch from side seam to approximately 3/8 inch beyond bias-cut tape on front. (see NOTE following operation 17.b for alternate operation).	301	SSaa-1	10-14	0/3	0/3
	e. Stitch a 5/8 inch wide bias-cut tape on each front along shoulder seam 3/4 to 1 inch from gorge to 1/2 inch from armhole.	301	SSaa-1	10-14	0/3	0/3
	f. Stitch a 1/4 inch wide woven tape from neck-shoulder outlet to lapel notch (gorge).	301	SSaa-1	10-14	0/3	0/3
	g. Press tapes with a heated pressing iron.					
	h. A tolerance of + 1/4 inch shall be permitted for positioning of all stay tapes.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
14.	Baste interlining to fronts					
	a. The interlining shall extend the full length of the topcoat and well beyond the armholes and shoulders.					
	b. Baste the canvas interlining to each front along center from below the shoulder to bottom of topcoat simultaneously catching the seam allowance of front dart and front edge of hanging pocket.	Hand or Machine			Commercial	
	c. Baste across the shoulder, allowing room for placement of shoulder pads, and around armhole.	Hand or Machine			Commercial	
	d. Baste along breakline of lapel and down front edge of interlining to bottom of topcoat.	Hand or Machine			Commercial	
	e. Trim the excess interlining at the shoulder, armhole, and collar gorge.					
15.	Baste bridle tape Position a 5/8 inch wide bridle stay tape adjacent to and behind breakline of each lapel extending at least 1 inch above gorge seam to within 2 to 2 1/2 inches from bottom of lapel. Baste tape even and smooth for a distance of 1 1/2 to 2 inches from gorge, then hold tape taut for a distance of 4 to 5 inches to work in not less than 3/8 inch breast fullness. The balance of the tape shall be stitched without tautness or fullness. Tape and interlining shall be stamp marked to assure amount of fullness.	Hand or Machine			Commercial	

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
16.	Pad lapels					
	a. Pad (blindstitch) each lapel of topcoat with not less than 7 equally spaced rows of stitching. Fullness shall be equally distributed between rows of stitching in order to roll lapel.	103 or 306	SSm-7	4-8	70/2 70/2	 70/2
	b. Blindstitch bridle stay along both edges.	103 or 306	SSm-2	4-8	70/2 70/2	 70/2
17.	Make back					
	a. The back shall consist of two pieces with a center back vent..					
	b. Stitch a 1/4 inch wide woven tape on back of armhole 1/2 inch from top of shoulder to within 1/2 inch of side seam. NOTE: As an alternate, armholes may be taped in one operation.	301	SSaa-1	10-14	0/3	0/3
	c. Press tape.					
	d. Stitch a 5/8 inch wide woven tape on the folded edge of left vent. Tape shall extend approximately 1 inch beyond top of vent. Tape stitching shall not be exposed beyond fold line of left vent on front.	301	SSaa-1	10-14	0/3	0/3
	e. Join center back seam, face to face, 5/8 inch from raw edge to top of vent and across top of vent outlet to within 3/4 inch of extension edge. Slash seam allowance of right back diagonally at top of vent.	301	SSa-1	10-14	0/3	0/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
17.	Make back (cont'd)					
	f. Fold left vent under in line with the center back seam and baste along fold line to approximately 2 inches from bottom edge of topcoat.	Hand or Machine			Commercial	
	g. Blindstitch inner edge of left vent to back.	103 or 306	EFl-1	4-8	0/3 0/3	0/3
	h. Turn back raw edge of the right vent 1/2 inch and single stitch 1/16 to 1/8 inch from folded edge.	301	EFa-1	10-14	0/3	0/3
	i. Tack the top of the vent with a double stitched single row of diagonal stitching thru both sides of vent 1 5/8 to 1 3/4 inches in length.	301	SSv-1	10-14	A(silk)	A(silk)
	j. Press the center back seam open and flat with the vent in proper position.					
18.	Join side seams					
	a. Join sides of backs and fronts, face to face, 5/8 inch from raw edge.	301	SSa-1	10-14	0/3	0/3
	b. Press side seam open and flat.					
19.	Bind facings					
	Bind inside edge of facings with strips of rayon lining cut on the bias (see 3.3.3).	301	BSc-1	10-14	0/3	0/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
20.	Make front lining and attach facing to lining					
	a. Stitch the underarm dart in each front lining as indicated on pattern.	301	SSa-1	10-14	0/3	0/3
	b. Fold under front edge of lining 5/8 to 3/4 inch and position face side of lining on back side of facing 1 (+ 1/8) inches back from bound edge of facing. Stitch the lining to facing 1/16 to 1/8 inch from folded edge of lining, terminating seam approximately 1 inch above bottom edge of facing to allow sufficient clearance for forming hem.	301		10-14	0/3	0/3
21.	Make two inside vertical breast pockets					
	a. The openings of the finished vertical pockets shall be 6 (+ 1/4) inches. The depth of the finished vertical pockets shall be 4 (+ 3/8) inches when measured from the bottom of the pocket opening.					
	b. Mark position for a 3/16 to 1/4 inch wide double piped inside vertical breast pocket on the left and right front facings, as indicated by marks on pattern.					
	c. Stitch the rayon facing to the pocketing with the top and outer edges even. Turn in inner edge and stitch 1/16 inch from edge along fold line. Selvage edge need not be turned under.	301	LSd-1	10-14	0/3	0/3
	d. Stitch the pocket (lining and pocketing) to each front facing with two rows of stitching 1/4 to 5/16 inch apart, simultaneously catching a staypiece on the underside.	301	SSv-2	10-14	0/3	0/3

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
21	Make two inside vertical breast pockets (cont'd) e. Cut opening of pocket thru front facings and stay piece midway between the rows of stitching and tongue notch ends of opening. Turn pocket thru the cut opening forming a double piped opening. Topstitch thru seam allowance along seamline joining each pocket ply and stay piece.	301	SSaf-2(b) (shows finished seam)	10-14	0/3	0/3
	f. Draw piped edges together on the underside, turn in tongue notched ends and tack across the width of opening.	301	SSa-1	10-14	0/3	0/3
	g. Starting at ends of pocket opening stitch around all raw edges of pocket.	301	SSa-1	10-14	0/3	0/3
	NOTE: As an alternate, the above pocket opening operations may be accomplished with a double welt pocket machine which stitches, cuts, and turns welt edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine. The bottom welt piece shall be topstitched 1/16 inch through all plies of material. The top welt piece shall be topstitched through all plies closing top of the pocket opening. Ends of pocket opening shall be securely tacked. In addition, when this machine is used, the supplier may utilize the machine manufacturer's recommended pocket stay material in addition to the specification material.					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
22.	Attach label to right inside breast pocket a. Stitch four sides of label to inside of right breast pocket on the pocket ply next to the topcoat lining. The bottom edge of label shall overlap the rayon facing. Label stitching shall not catch the topcoat facing or lining. OR b. As an alternate, the bottom edge of label may be inserted and caught under the edge of rayon facing piece when making the pocket. The three remaining sides shall be stitched to the pocketing.	301	LSbj-1	10-14	0/3	0/3
23.	Make body lining a. Join back lining pieces, face to face, 1/2 inch from edge, to form a center back seam terminating at top of vent opening.	301	SSa-1	10-14	0/3	0/3
	b. Join fronts and back lining pieces at sides, face to face, 1/2 inch from edge.	301	SSa-1	10-14	0/3	0/3
	c. Press side seams flat to one side toward the center seam.					
	d. Press inside breast pockets smooth and flat.					
24.	Press fronts Press front edge, lapel, and chest of right and left fronts individually on a suitably shaped pressing block with a steam pressing machine to conform to the shape of the body.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
25.	Shape fronts a. Mark and shape lapels in accordance with lapel shaper. b. Trim front and bottom edges of topcoat, matching vent lengths. c. Trim the interlining 1/4 to 3/8 inch along lapel, bottom, and front edges. d. The canvas interlining at the bottom may be cut diagonally so that the bottom edge is not caught in the tape stitching.					
26.	Baste facings to fronts Match and baste facings to fronts putting in proper fullness at the chest and lapels. The facing should be held slightly taut across the bottom of topcoat to the back edge of facing.	Hand or Machine			Commercial	
27.	Tape edges and join facings to fronts a. Stitch a 5/8 inch wide woven tape and the facing to the edges of the topcoat, 1/8 to 3/16 inch from edge, from lapel notch, across top of lapel, down the front, and across bottom to not less than 3 inches beyond back edge of facing.	301	SSab-1	10-14	0/3	0/3
	b. Blindstitch back edge of tape to canvas interlining on fronts and lapels.	103 or 301	SSm-1	4-8	0/3 0/3	0/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
28.	Press and baste fronts					
	a. Press edges of lapels and fronts flat and smooth. Remove bastings and press edge seams open and flat.					
	b. Notch the corner of the lapels, trim around the lapel points, the bottom corners, and the front edges. Turn the facings to finished position and work out the lapels and the bottom corner of fronts.					
	c. Baste the edges around the lapels, down the fronts, and across the bottoms of facings.	Hand or Machine			Commercial	
	d. Baste the lapels, down the fronts, and across the bottoms of facings approximately 1 1/2 inches in from front edges.	Hand or Machine			Commercial	
	e. Baste a diagonal row from breakline of lapel to point of lapel.	Hand or Machine			Commercial	
	f. Baste the breakline of lapels.	Hand or Machine			Commercial	
	g. Baste the back edge of the facings 1 3/4 inch from the binding.	Hand or Machine			Commercial	

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
29.	Tack facings, pocketing, and left vent					
	a. Tack the seam allowance of the lining of the left and right facings to the canvas interlining with one row of blindstitching from 2 (± 1) inches below the shoulder seam to 1 1/2 (± 1) inches above inside breast pocket opening. Continue tacking from 1 1/2 (± 1) inches below inside breast pocket opening to 2 (± 1) inches above the bottom of topcoat.	Hand		2-4	0/3	
		or 103	SSm-1	4-8	0/3	
		or 301	SSm-1	4-8	0/3	0/3
	b. Tack the outside edges of the inside breast pockets to the canvas interlining with blindstitching for a distance of not less than 6 inches.	Hand		2-4	0/3	
		or 103	SSm-1	4-8	0/3	
		or 301	SSm-1	4-8	0/3	0/3
	c. Tack the back edge of the left vent with one row of blindstitching.	103 or 301	SSm-1	2-6	0/3	
			SSm-1	2-6	0/3	0/3
30.	Baste shoulder pads Insert the shoulder pads between the canvas and the canvas and the felt and securely baste to the shoulder in the proper position.	Hand or Machine			Commercial	
31.	Baste bottom edge Turn up bottom of topcoat 1 1/4 (± 1/8) inches and baste edge of hem across bottom.	Hand or Machine			Commercial	

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
32.	Fit and baste lining					
	a. Baste lining up side seams (seam on seam) to approximately 4 inches below pit of armhole, then diagonally upward forming a 6 1/2 (± 1/2) inch long shoulder pleat positioned 3 (± 1/2) inches in from the edge of armhole with the fold facing towards the armhole.	Hand or Machine			Commercial	
	b. Pick up basting at pit of armholes at side seams and continue diagonally upward to center back at the neck, taking in excess material and forming a pleat in the center of back with the fold facing towards the left back. Continue basting to top edge of vent.	Hand or Machine			Commercial	
	c. Turn under and baste left vent lining 1 1/2 inches in from the folded edge of left vent facing.	Hand or Machine			Commercial	
	d. Notch, fold under, and baste right lining diagonally down from notch to top of right vent. Continue basting lining with the fold 1/16 to 1/8 inch in from the folded edge of right vent.	Hand or Machine			Commercial	
	e. Fold under bottom edge of lining approximately 1 1/2 inches and baste to hem of overcoat. Basting shall allow for felling operation. Folded edge of lining shall finish 3/8 to 5/8 inch from bottom folded edge of topcoat.	Hand or Machine			Commercial	
	f. Trim excess lining extending beyond armholes, shoulders, and neck edge of fronts and backs.					

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
33.	Join shoulder seams					
	a. Join shoulder seams of the topcoat, 3/8 inch from raw edge, working in fullness on the back with the shoulder seam slightly curved towards the front.	301	SSa-1	10-14	0/3	0/3
	b. Press shoulder seam open and flat.					
34.	Baste shoulder epaulets					
	Baste or stitch the epaulets to the shoulder at the armhole. Trim even with the armhole. The point of the epaulet shall be even with the edge of the gorge outlet and the shoulder seam. The back edge of the epaulet shall be 1/2 (± 1/4) inch in back of the shoulder seam at the armhole.	301	SSa-1	10-14	0/3	0/3
35.	Join lining at shoulders and neck					
	a. Join rayon lining at shoulders, 3/8 inch from raw edge, working in fullness on backs.	301	SSa-1	10-14	0/3	0/3
		or Hand	SSa-1	8-10	A or C (silk)	A or C (silk)
	b. Stitch the lining and facings to the overcoat across the top on the neck outlet thru all plies, simultaneously catching the hanger loop and button loop. The spread of the finished hanger loop shall measure 2 (± 1/2) inches.	301	SSa-1	10-14	0/3	0/3
36.	Set sleeves and sleeve pads					
	a. Stitch sleeve to armhole, 3/8 inch from edge, matching notches as indicated on pattern. Ease in fullness of sleeve so that set sleeve in finished overcoat is free of wrinkles or puckering at armhole seam. Shoulder epaulet shall be caught in the seam.	301	SSa-1	10-14	0/3	0/3

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
36.	Set sleeves and sleeve pads (cont'd)					
	b. Press armhole seam.					
	c. Baste all around armhole adjacent to armhole seam positioning lining in proper place.	Hand or Machine			Commercial	
	d. Tack sleeve head pad to armhole seam from front sleeve notch to back seam of sleeve; continue tacking all around armhole seam.	301	SSa-1	4-6	0/3	0/3
37.	Set collar					
	a. The center seam of the undercollar (when applicable) shall be positioned in line with center of back. Mark and trim the top of the facings and topcollar leaving a 3/8 inch seam allowance.					
	b. Stitch topcollar to front facings at gorge to a point not less than 1 inch back of lapel breakline.	301	SSa-1	10-14	0/3	0/3
	c. Notch seam allowance of gorge facing at end of stitching. Spread gorge seam open and tack, catching bridle tape and canvas interlining in the tacking. Continue stitching topcollar to neckline across front facing and back thru all plies, 3/8 inch from raw edge, catching button loop and hanger loop.	301	SSa-1	10-14	0/3	0/3
	d. Baste undercollar to neckline of collar.	Hand or Machine			Commercial	

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
37.	Set collar (cont'd)					
	e. Fell edge of undercollar to neckline and securely hand tack corners of undercollar to lapel at notch.	Hand or Machine (Hand type)		8-10 6-8	C(silk) A(silk)	
	f. The finished collar shall measure 3 1/4 (± 1/4) inches wide at center back.					
	g. The finished topcollar stand shall measure 5/8 (± 1/8) inch at center.					
38.	Edge stitching The collar, lapels, fronts, bottom edge at facings, left vent (up to row of diagonal stitching), flaps, and shoulder epaulets shall be edge stitched 5/16 to 3/8 inch from folded edge.					
39.	Complete right vent Stitch folded edge of lining of right vent to topcoat 1/16 to 1/8 inch from folded edge.	301	SSc-1	10-14	0/3	0/3
40.	Felling					
	a. Blindstitch lining to hem of topcoat.	Hand or 103 or 306		8-10 8-10 8-10	A or C (silk) A or B (silk) A or B (silk)	 A or B (silk)
	b. Hand fell bottom front corners of lining and front facings.	Hand		8-10	A or C (silk)	

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
40.	Felling (cont'd) c. Hand fell bottom corners of lining to hem at left and right vents.	Hand		8-10	A or C (silk)	
	d. Hand fell center back pleat of right lining starting approximately 1 1/4 inches above notched portion of pleat and continuing straight downward, then diagonally, and straight downward again to row of outside diagonal stitching.	Hand		8-10	A or C (silk)	
	e. Fell the lining at the armhole. Sleeve lining shall be seam on seam with sleeve. Pit of armhole shall be backstitched from forearm seam to side seam when armholes are hand felled.	Hand or Machine (simulated hand type		8-10 6-8	A or C (silk) A (silk)	
	OR					
	f. As an alternate, the sleeve lining may be stitched to the armhole on the inside by machine from forearm seam of sleeve to backarm seam across the undersleeve. Top portion of armhole may be felled by machine.	301 and machine (simulated hand type	SSa-1	10-14	0/3	0/3
	OR					
	g. As an alternate, the sleeve lining may be stitched to the entire circumference of the armhole on the inside by machine. NOTE: When the alternate method under operation 40.g is employed and the armhole is completely machine stitched the sleeve shall be turned thru opening in the sleeve lining and the lining forearm seam opening closed by topstitching.	301	SSa-1	10-14	0/3	0/3
	h. Tack the pointed ends of the shoulder epaulets on the underside to shoulder.	Hand		4-6	A or C (silk)	

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
41.	Press lapel and edges of front Press lapel and front edges prior to marking and making buttonholes.					
42.	Mark and stitch buttonholes a. All buttonholes shall be eyelet end, square bar, cut first type, reinforced with well worked over gimp with the stitching securely caught in the fabric and the ends of the gimp pulled through the underside. Buttonholes shall be clean, correctly positioned and the purling finishing on the outside.					
	b. The ends of all buttonholes shall be tacked by hand or machine in a separate operation from buttonhole making; securely catching ends of gimp and covering the width of the bar. The bartack shall be not more than 1/4 inch long.	Machine or Hand		21 per bartack 10-12 per tack	B (silk) B (silk)	B (silk)
	c. Stitch four horizontal buttonholes in left front as indicated by marks on pattern. The inside edge of eyelets shall be 5/8 to 3/4 inch from the finished edge of topcoat. The fully cut finished buttonhole after tacking shall measure not less than 1 1/4 inches nor more than 1 3/8 inches.	Machine	Size: 1 1/4 inch 1 3/8 inch	70-75 80-85 (not including tack)	C (silk)	B (silk)
43.	Cleaning a. Remove all basting threads.					
	b. All ends of stitching shall be trimmed and loose threads removed from the topcoat.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
43.	Cleaning (cont'd) c. All spots and stains shall be removed. Shade tickets shall be removed without injury to the material.					
44.	Pressing a. Press edge of lapels, fronts, collar, and bottom of overcoat on edge pressing machine. b. Press right and left fronts on right and left chest machine respectively. c. Roll press sleeves. d. Press balance of fronts, side seams, and back on body machine. e. Press collar on collar machine stretching outer edge of collar over shoulder area. Collar shall not be short nor too long. f. Press armholes and shoulders on an armhole machine. g. Press armhole solid from the inside, creasing armhole from not less than 1/2 inch above backarm seam to not less than 4 inches of shoulder seam. The armpit and back of the armhole shall be held short and pressed flat. h. Press lapels. The creasing of the lapels shall extend a uniform distance from the gorge seam. The lapels shall be roll pressed from midway between the gorge seam to bottom of lapel.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
45.	Finish pressing a. Press lining smooth and flat with a hand iron maintaining creased pleats at front shoulders and center back. b. Block armholes and shrink top sleeve with hand iron or machine. c. Touch up any area missed by hand or machine pressing. d. Remove gloss, creases, and all pressing impressions. e. Place topcoat on hanger until thoroughly dry.					
46.	Mark and sew on buttons a. Metal buttons shall be sewn on the right front with the eagle in the upright position, and aligned with corresponding buttonholes so that no bulging or distortion occurs when fronts are buttoned.	Hand or 101 or 301 or 801 (See Fig. 2)		Stitches per button 4 (double thread) 14-16 14-16 12 (min)	12/4 or 16/4 20/4 20/4 No. 4 (nylon)	 20/4
	b. Mark the location of the four buttons on each overcoat front 2 1/4 (± 1/4) inches from front edge. c. Sew four 40-line insignia buttons on the right front at the marks and thru all plies of material.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of topcoat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
47.	Fold each topcoat Refer to Section 5 for instructions.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements.- Sizes and measurements of finished top coat shall be as shown in Table II. All measurements and tolerances are expressed in inches.

Table II - Sizes and finished measurements

Sizes	Chest (A)	Sleeve length (B)				Back length (C)			
		Short	Regular	Long	Ex-long	Short	Regular	Long	Ex-long
34	40	15 3/4	16 3/4	17 3/4	18 3/4	38 1/4	40 1/4	42 1/2	44 3/4
35	41	15 3/4	16 3/4	17 3/4	18 3/4	38 3/8	40 3/8	42 5/8	44 7/8
36	42	15 3/4	16 3/4	17 3/4	18 3/4	38 1/2	40 1/2	42 3/4	45
37	43	15 3/4	16 3/4	17 3/4	18 3/4	38 5/8	40 5/8	42 7/8	45 1/8
38	44	15 3/4	16 3/4	17 3/4	18 3/4	38 3/4	40 3/4	43	45 1/4
39	45	15 3/4	16 3/4	17 3/4	18 3/4	38 7/8	40 7/8	43 1/8	45 3/8
40	46	15 3/4	16 3/4	17 3/4	18 3/4	39	41	43 1/4	45 1/2
41	47	15 3/4	16 3/4	17 3/4	18 3/4	39 1/8	41 1/8	43 3/8	45 5/8
42	48	15 3/4	16 3/4	17 3/4	18 3/4	39 1/4	41 1/4	43 1/2	45 3/4
43	49	15 3/4	16 3/4	17 3/4	18 3/4	39 3/8	41 3/8	43 5/8	45 7/8
44	50	15 3/4	16 3/4	17 3/4	18 3/4	39 1/2	41 1/2	43 3/4	46
45	51	15 3/4	16 3/4	17 3/4	18 3/4	39 5/8	41 5/8	43 7/8	46 1/8
46	52	15 3/4	16 3/4	17 3/4	18 3/4	39 3/4	41 3/4	44	46 1/4
47	53	15 3/4	16 3/4	17 3/4	18 3/4	39 7/8	41 7/8	44 1/8	46 3/8
48	54	15 3/4	16 3/4	17 3/4	18 3/4	40	42	44 1/2	46 1/2
Tolerance	+1 [- 3/4	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

NOTE: Chest and length measurements shall be taken with topcoat fully buttoned, placed smooth and flat. Refer to figures 1 and 2 for A, B and C measurements.

(A) Chest - Twice the measurement taken across front at the base of armholes from folded edge to folded edge.
(B) Sleeve length - Measurement taken from the base of the armhole, along inseam to bottom of sleeve.
(C) Back length - Measurement taken from the base of undercollar down center back seam to bottom of topcoat.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.

3.9 Workmanship.- The finished topcoat shall conform to the quality of product established by this specification. As a final step in the supplier's production control plan, before formation of a lot, each topcoat shall be buttoned on a model form and examined for selected defects. A topcoat containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in Table III of MIL-STD-1391. The occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance.- Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection.- When required the first article submitted in accordance with 3.2 shall be inspected as specified in 4.3.2 and 4.3.3 for compliance with design, construction, workmanship and dimensional requirements.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated in MIL-STD-1391.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents. In addition, a certificate of compliance shall be furnished for the colorfastness requirements of 3.3.9.

4.3.2 Examination of the end item.- The end item examination provisions for finished overcoats shall be as specified in MIL-STD-1391.

4.3.3 Dimensional examination.- The dimensional examination provisions for finished overcoats shall be as specified in MIL-STD-1391.

4.3.4 Examination of preparation for delivery requirements.- The examination for compliance with the packaging, packing and marking requirements shall be as specified in MIL-STD-1391.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each topcoat shall be unbuttoned, laid flat with back down, and folded as follows: 1. Lap the buttonhole front over the button front. 2. Position sleeves full length so that sleeve ends rest over the pockets. 3. Fold top of topcoat down approximately 1/3 the length of topcoat. 4. Fold bottom of topcoat up over the folded top portion so that folded garment measures approximately 14 1/2 inches by 23 inches. Each topcoat shall be inserted in a snug-fitting clear polyethylene film bag of not less than 0.003 inch thickness (± 20% tolerance). All seams and closures shall be formed by heat sealing. A 1/4 inch hole shall be made at one corner of the bag to allow excess air to escape. As an alternate the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required.

5.1.2 Level C (Commercial packaging).- Topcoats shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Four topcoats, of one size and length, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type SF, class weather-resistant, grade V2s, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed flat, four in depth within the container with every other one reversed, and the length of the bags parallel to the side panels of the container. Toward the end of the contract or order, or when there is less than the required amount per container of the same size mixed sizes may be packed within the same shipping container.

5.2.2 Level B.- Four topcoats, of one size and length, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class domestic, grade 275, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. Level A packages shall be packed flat, four in depth within the container with every other one reversed, and the length of the bags parallel to the side panels of the container. Toward the end of the contract or order, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C (Commercial packing).- Topcoats, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages.- The polyethylene bagged packages, specified in 5.1.1, shall have the required information legibly printed or stamped in black bold letters, 1/4 inch in height, directly on the bag across the center face or on a white paper label inserted within the bag to permit ready identification. The bag or label shall indicate the following information.

Stock Number
Nomenclature
Size and length
Quantity

5.3.2 Labels, mixed sizes.- Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use.- The topcoat specified herein is an optional part of the dress uniform worn by the Coast Guard enlisted male personnel.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes and lengths required (see 1.2).
c. Whether first article sample is required (see 3.2).
d. Levels of packaging and packing required (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

6.3 Samples and patterns.- For access to samples and patterns, address the procuring activity issuing the invitation for bids.

6.4 Basic material.- Basic material conforming to Burlington Style No. 646-3362 may be obtained from Raeford Uniform Fabrics Co., Div. of Burlington Industries, Inc., 1290 Avenue of the Americas, New York, N.Y. 10019.

6.3 Equal item.- Prior to the use of an "or equal" item the supplier shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency.

Custodian:
Navy - SA

User activity:
Navy - CG

Preparing Activity:
Navy - SA
Project No. 8405-N678

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

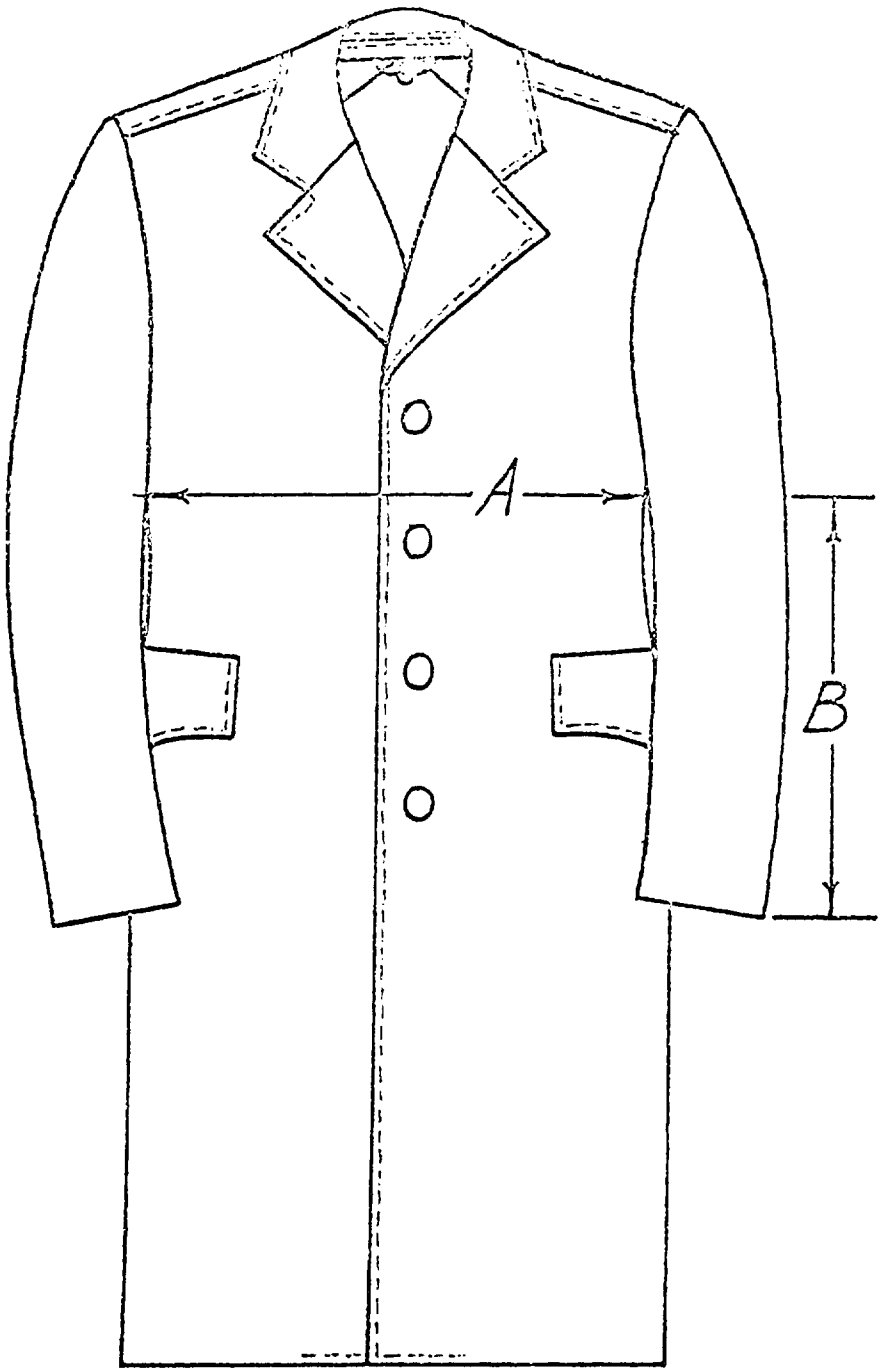


FIG. 1- TOPCOAT, MAN'S, POLYESTER/WOOL ELASTIQUE (COAST GUARD)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

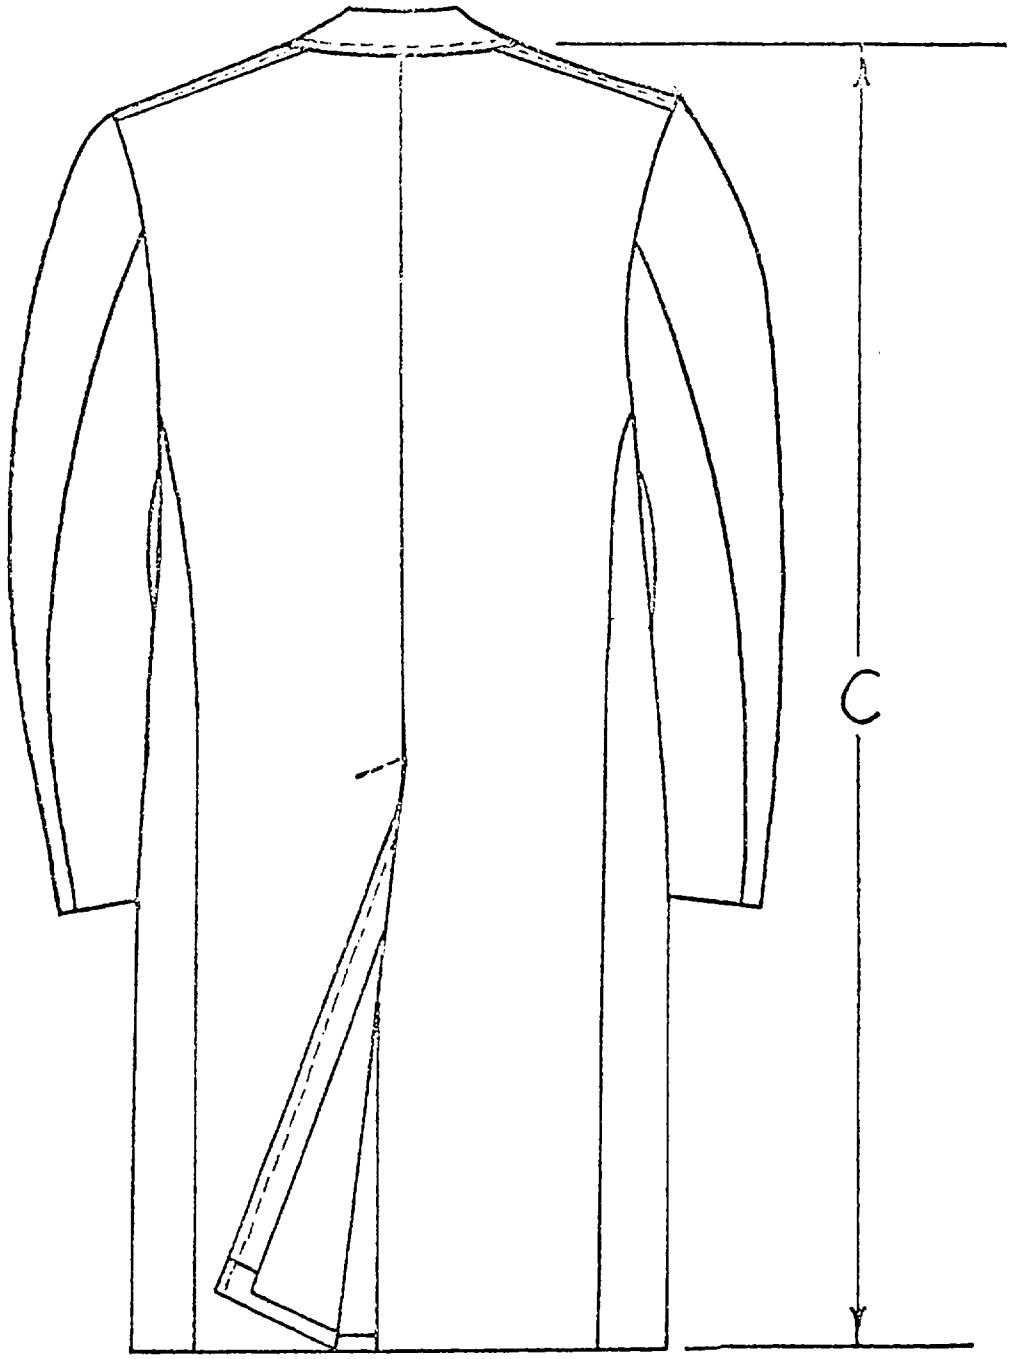


FIG. 2 - TOPCOAT, MAN'S, POLYESTER/WOOL ELASTIQUE (COAST GUARD)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.


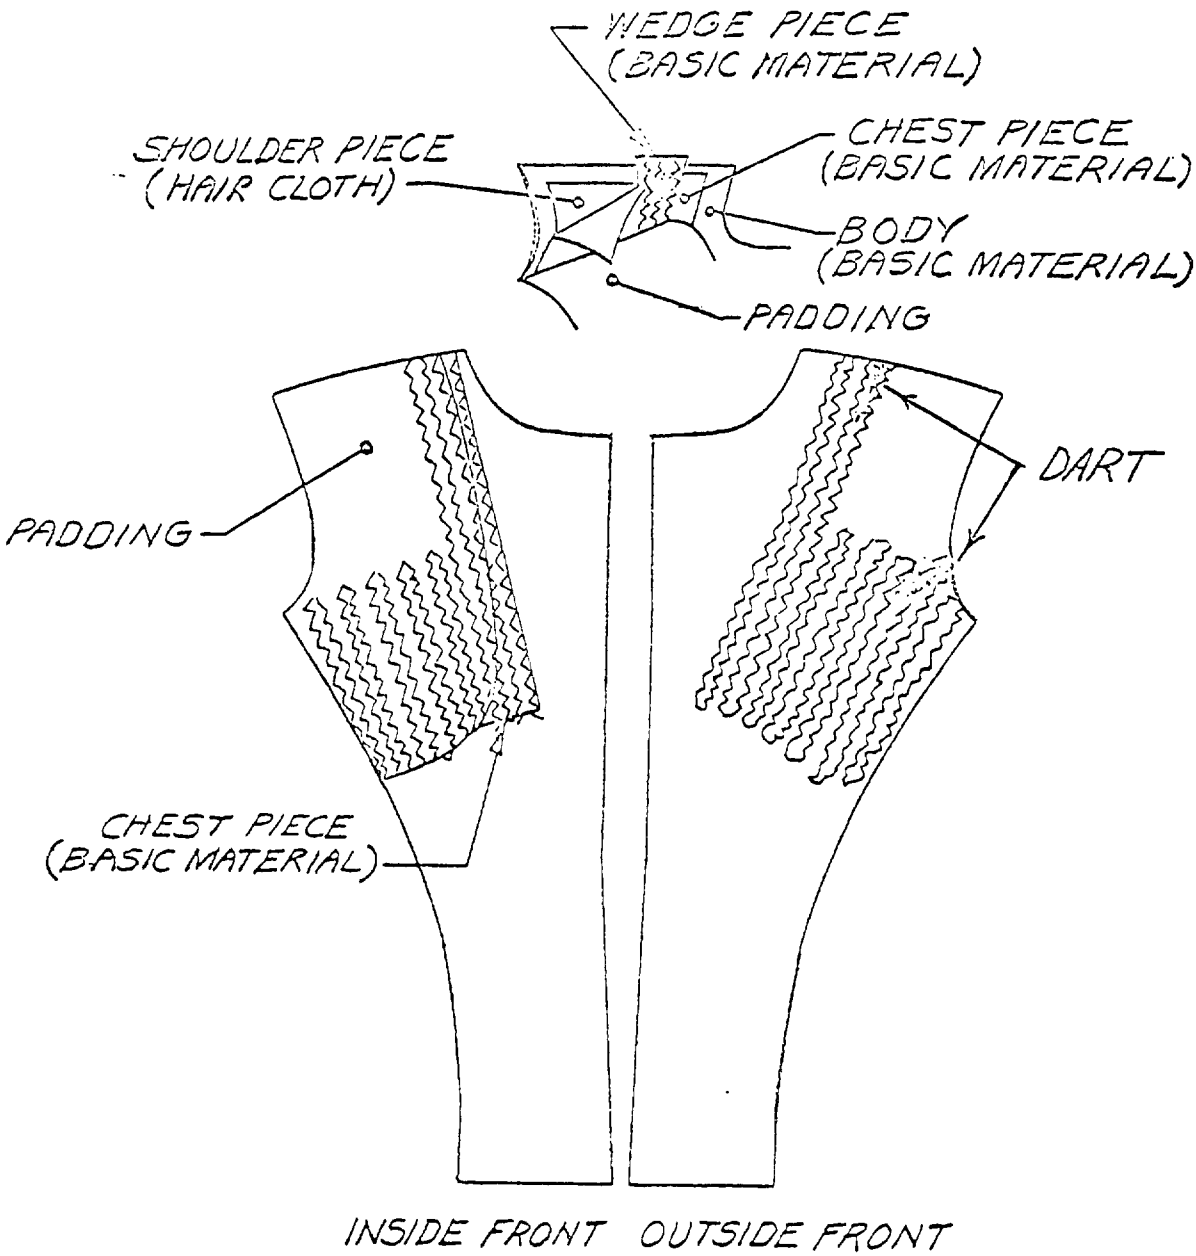


FIG. 3 -COAT FRONT FOR TOPCOAT, MAN'S, POLYESTER/WOOL, ELASTIQUE (COAST GUARD)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Stitch Class 800.- This class of stitch shall be formed with one or more needle threads and has for a general characteristic that the thread does not interloop with itself or any other thread or threads. The thread is passed completely through the material by means of a double pointed center eye needle and returned by another path. This class of stitch simulates hand stitching.

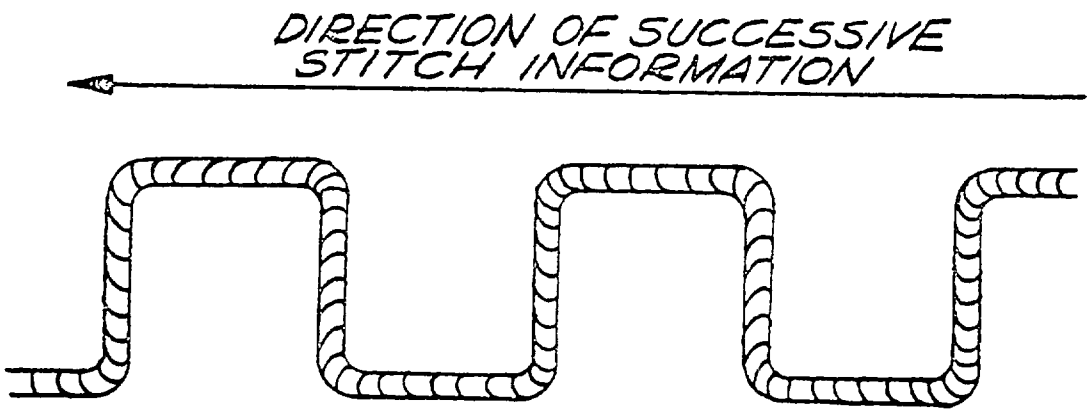

This type of stitch shall be formed with one needle thread which is passed completely through the material and returned by another path after the material has been moved forward one stitch length.

FIGURE - 4 -STITCH TYPE 801

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-T-87001(CG) TOPCOAT, MAN'S, POLYESTER/WOOL, ELASTIQUE (COAST GUARD)

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING AND TEXTILE RESEARCH UNIT
21 STRATHMORE ROAD
NATICK, MA 01760

POSTAGE AND FEES PAID
DoD 316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

OFFICER IN CHARGE
NAVY CLOTHING AND TEXTILE RESEARCH UNIT
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.