MIL-T-87039B(NU)
15 April 1985
SUPERSEDING
MIL-T-87039A(NU)
11 February 1983

MILITARY SPECIFICATION

TROUSERS, MEN'S (UNDRESS)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for undress trousers.

1.2 Classification The trousers shall be of one type only in the following classes, sizes and lengths (see 6.2)

1.2.1 Class

Class 1 - Polyester/Cotton
Class 2 - Polyester/Wool

1.2.2 Size 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 40, 42 44, 46, 48 and 50

1.2.3 Lengths Short, Regular, Long and Extra-Long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

	V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
	V-F-106	- Fasteners, Slide Interlocking
	V-T-280	- Thread, Gimp, Cotton, Buttonhole
	V-T-295	- Thread,Nylon
*	CCC-C-438	- Cloth, Buckram, Cotton
	DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use)

MILITARY

	MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
	MIL-C-24910	- Cloth. Tropical, Polyester and Wool
	MIL-C-29127	- Cloth, Twill, Polyester/Cotton Crease Resistant Finish
	MIL-T-43548	- Thread, Polyester Cotton-Covered and Rayon-Covered
*	MIL-C-43718	- Cloth. Twill, Polyester; Polyester and Cotton, Polyester and Rayon
*	MIL-C-43920	- Cloth, Interlining, Cotton or Synthetic and Nylon

STANDARDS

FEDERAL

	FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

	MIL-STD-129	- Marking for Shipment and Storage
*	MIL-STD-147	- Palletized Unit Loads
	MIL-STD-1488	- Provisions for Evaluating Quality of Trousers

(Copies of specifications, standards. drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings. and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendant of Documents, US Government Printing Office, Washington, DC 20402).

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Il 60606).

*

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Shades for Buttons- 1966

Standard Shades for Threads -1968

(Application for copies of color cards should be addresses to The Color Association of the U.S. Inc., 24 E. 38th Street, New York, NY 10016).

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials

3.3.1 Basic material The basic material shall be as specified in 3.3.1.1 and 3.3.1.2.

3.3.1.1 Class 1 The basic material for the class 1 trousers shall be polyester/cotton twill (crease resistant finish) cloth, shade White 3053, conforming to class 2 of MIL-C-29127.

3.3.1.2 Class 2 The basic material for the class 2 trousers shall be polyester/wool tropical conform to MIL-C-24910. Prior to cutting, the fabric shall be sponged. The color shall match shade Blue 3346.

3.3.2 Thread, polyester, covered The thread used for seaming and stitching the trousers shall be polyester covered conforming to ticket Nos. 24, 50 and 70, 2 or 3 ply of MIL-T-43548. The color of the thread shall be White AH, Cable No. 66050 for the class 1 trousers and Black AA, Cable No. 66043 for the class 2 trousers in accordance with Standard Shades for Thread.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.3.2.1 Colorfastness The thread shall show discoloration or colorfastness to light and laundering equal to or better than the standard sample when tested as specified in MIL-T-43548 When no standard sample is available the thread shall show a minimum of "good" discoloration or colorfastness to light and laundering when tested as specified in MIL-T-43548.

3.3.3 Gimp The gimp for reinforcing the buttonhole shall be cotton conforming to type I or II,size No. 8 of V-T-280. The color of the gimp shall be bleached white AH Cable No. 66050 for the class 1 trousers and Black AA Cable No. 66043 for the class 2 trousers in accordance with Standard Shades for Thread

3.3.3.1 Colorfastness The cotton gimp shall show discoloration or colorfastness to laundering equal to or better than the standard sample. When no standard sample is available the gimp shall show a minimum of "good" discoloration or colorfastness to laundering when tested as specified in V-T-280.

3.3.4 Button The button for the front fly closure and left hip pocket shall conform to type II. Class D Figure 1 Style 19. 22-line of V-B-871. The color of the button shall match shade White AA, Cable No. 62031 for Class 1 trousers and shade Black BT, Cable No. 62001 for the class 2 trousers in accordance with Standard Shades for Buttons.

3.3.4.1 Automatic button sewing If an automatic button machine is used. the thread shall be waxed nylon monocord special no. 5, having a minimum breaking strength of 16 pounds, minimum length per pound of 2150 yards. and shall be tested for these requirements in accordance with test methods specified in V-T-295.

3.3.4.2 Colorfastness The automatic button sewing thread shall show discoloration or colorfastness to laundering equal to or better than the standard sample. When no standard sample is available the thread shall show a minimum of "good" discoloration or colorfastness to laundering when tested as specified in V-T-295

3.3.5 Label

* 3.3.5.1 Combination label Each trouser shall have a combination label in accordance with type VI, classes 10 and 14 of DDD-L-20 The label shall show colorfastness to laundering. The inscription and format shall be as follows: 1/

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

NAME:
SERVICE NO:
TROUSERS, MEN'S UNDRESS, CLASS 1 (EXAMPLE)
FIBER CONTENT: POLYESTER (50%) AND COTTON (50%)
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
SIZE 38 R
STOCK NO: 8405-00-000-0000 (EXAMPLE)

LAUNDERING
MACHINE WASH - HOT WATER
DO NOT USE CHLORINE BLEACH
TUMBLE DRY - MEDIUM HEAT, REMOVE PROMPTLY
OR
FOLLOW NAVEDTRA MANUAL 414-01-45-81 Formula I

1/ For Class 2 trousers, the label shall read Class 2 fiber content shall be Polyester (75%) and Wool (25%), and the laundering instruction shall be as follows:

MACHINE WASH - WARM WATER
DO NOT BLEACH - TUMBLE DRY
MEDIUM HEAT - REMOVE PROMPTLY
OR
FOLLOW NAVEDTRA MANUAL 414-01-45-81 Formula III

NOTE: Abbreviation for applicable lengths shall be as follows:
Short - S; Regular - R; Long - L; Extra-Long - XL

3.3.6 Slide fastener The slide fastener for closing the fly shall conform to type I, style 1, cam lock, size LS, short-tab pull of V-F-106, except that all metal components of the slide fastener shall be fabricated of brass and purchased from the same contractor (see 4.4.1). A staple bottom stop is required. Tape for the slide fastener shall match the shade of the basic cloth. The tape shall show fastness to laundering equal to or better than the standard sample. When no standard sample is available, the tape shall show "good" colorfastness to laundering when tested as specified in V-F-106

* 3.3.7 Pocketing and lining The material for the pocketing and right fly lining shall be a twill cloth conforming to class 1 of MIL-C-43718. The color shall be white shade no. 3006 for class 1 and black shade no. 423 for class 2.

* 3.3.8 Waistband assembly The waistband assembly, composed of a waistband lining, buckram, and waistband stabilizer shall be fabricated of the materials specified in 3.3.8.1 thru 3.3.8.3. The contractor may elect to manufacture the assembly or he may procure a commercial waistband assembly composed of the materials specified. Or the contractor may submit to the preparing activity an alternate commercial waistband constructed from different materials and/or parts for approval (see 6.4)

* 3.3.8.1 Lining The material for the waistband lining shall be a twill cloth conforming to to class 1 of MIL-C-43718. The color shall be white shade no. 3006 for class 1 and black shade no. 423 for class 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.3.8.2 Buckram The material for interlining waistband shall be bleached or unbleached cotton buckram conforming to type II, class 1 or nonwoven material conforming to type IV Class 1 of CCC-C-438 The color shall be white for class 1 and black for class 2.

* 3.3.8.3 Waistband stabilizer. The material for the waistband stabilizer shall be interlining cloth conforming to type I of MIL-C-43920 The color shall be white for class 1 and black for class 2.

* 3.4 Design The trousers shall have two front pockets with openings along waistband edge and a back left hip welt pocket. The trousers shall have a one piece leg. seat seam outlet, back darts, and a waistband with belt loops. There shall be a slide fastener fly closure and buttoned waistband. Leg bottoms shall be unhemmed. Trousers shall be pressed inside out with a side crease (see Figure 1)

3.4.1 Figure The figure is furnished for information purposes only. To the extent of any inconsistencies between the specification and the figure. the specification shall govern.

3.5 Patterns Standard patterns will be furnished by the government to the contractor for the cutting of working patterns (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way. The patterns allow a 1/2 inch seam allowance for double lapped, double stitched seams.

* 3.5.1 Pattern parts The components parts of the trousers shall cut from the material as specified and in accordance with the pattern parts required for the manufacturing process as shown in Table I

Table I - Pattern parts

Material	Nomenclature of pattern parts 1/	Cuts parts
Cloth, basic material	Front and Back (1 piece)	2
	Waistband	2
	Fly	2
	Left hip pocket bearer and welt	2
Twill cloth	Fly lining	1
	Front pocket	2
	Left hip pocket	1

1/ Patterns are not furnished for belt loops (operation 4), waistband assembly (operation 1), buttonhole tab (operation 5) and pocket bearers (operation 8).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

3.6 Construction

3.6.1 Stitches, seams, and stitchings Stitch seam and stitching types specified in Table II shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation any one may be used Seam allowances shall be maintained with seam sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the trousers. Topstitching and edgestitching shall be 1/16 inch from the edge. The use of a trimming knife in the overedgeing operation 6.b and 7.d is prohibited. Unless otherwise specified, double needle stitching shall be 1/4 inch gauge with the outer row of stitching 1/16 inch from the finished edge.

3.6.2 Thread breaks and ends of seams Ends of all seams and stitching when not caught in other seams or stitchings shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be repaired by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type (except on the seat seam) may be repaired by using 301 stitch type. The seat seam must be resewn.

3.6.3 Stitches per inch The minimum and maximum number of stitches per inch shall be as specified in Table II.

3.6.4 Buttonhole The buttonhole specified in Table II shall be clean cut and correctly positioned. The stitching shall be caught in the fabric with the purling on the outside. Buttonhole shall be of the eyelet end, taper bar type, with ends tacked and worked over gimp. The cut length shall be 5/8 inch. The bar end of buttonhole shall have a minimum of 4 stitches not counting the first cross-over in that it is part of the buttonhole not the bar. Ends of gimp finishing on top of buttonhole should be pulled thru to the underside.

3.7 Manufacturing operation requirements The trousers shall be manufactured in accordance with the operation requirements in Table II. The contractor is not required to follow the exact sequence of operations provided that the finished trousers are identical to those produced by following the sequence as listed in Table II.

3.7.1 Shade and size marking The component parts of the trousers shall be marked to insure a uniform shade and size assembly throughout the garment. Any method may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on type tickets.
(c) Adhesive type tickets which show discoloration and the adhesive mass adheres to the material upon removal of the tickets.

3.7.2 Pressing All pressing required in Table II shall be performed with a heated pressing iron or machine.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

* 3.7.3 Abbreviations in table of operations. The abbeviations used in table I are as follows:

Stch	- Stitch
in	- inch
Ndl	- Needle
Bob	- Bobbin
Lpr	- Looper
Mchne	- Machine
Brtck	- Bartack
Comrcl	- Commercial
smlr	- similar
Btnhl	- Buttonhole
incl	- including
dbl	- double

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
*1	Cutting a. The trousers shall be cut in strict accordance with patterns furnished which shall show size. directional lines, and notches for proper assembling of all parts. b. The directional line on front and back piece may vary from the warp direction by not more than 1-1/2 inches. Measurements shall be taken at the top and bottom of the directional line on pattern to the selvage edge of the fabric and the difference between the two measurements shall not exceed 1-1/2 inches. c. All component parts shall be cut from one piece of material except right and left flies, left hip pocket bearer and welt, banded waistband, buttonhole tab and belt loops which may be cut from ends Parts cut from ends shall approximate the shade of the trousers. d. Cut the stripping for belt loops, tab and banded waistband of sufficient width to conform to the finished measurements operation 4 and 11 The stripping may be placed on rolls, however, there shall be no pieced belt loops or waistband visible on the finished trousers. e. Selvage shall not appear on the outside of trousers. f. Cut the right fly lining on the bias. g. If drill holes are used they must be at least 3/4 inch above the base of the dart h. Cut a two (2) inch wide strip of base fabric for pocket facing, to accomodate the full width of the pocket (operation 8). i. The waistband assembly shall be a commercial type using the lining, interlining and waistband stabilizer materials specified. The assembly should be of sufficient width and length to comply with operation 12.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
2.	Replacement of defective components During the spreading cutting and manufacturing process, components having material defects of damages that are classified as defects in MIL-STD-1488 and section 4 of this specification, shall be removed from production and replaced with non-defective and properly matched components.					
3	Shade and size marking a. All parts shall be marked or ticketed to insure a uniform shade, size and proper assembly throughout the garment, except those parts cut from ends which shall closely match the trousers					
	b. The use of ink pad numbering machine. rubber stamp or pencil is acceptable provided the marking does not show through the outside of the trousers as worn. The marking shall be covered by the seam allowance.					
4	Make stripping for belt loops and tab a. Fold stripping with both edges turned under to meet in the center; double stitch 3/16 to 1/4 inch gauge using a cover-stitch on the underside.	406	EFh-1	10-12	50	50
	OR					
	b. Fold stripping lengthwise. Turn under both raw edges and stitch 1/16 to 1/8 inch from the folded edges.	301 or 401	EFp-2	10-12	50 50	50 70
	OR					
	c Fold stripping with both edges turned in and abutted at center and with the covering stitch on the underside.	103	EFae-1	10-12	70	
	d. The finished width of loops shall measure 5/16 to 3/8 inch					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*5.	Make hip pocket buttonhole tab					
	a. Cut a piece of stripping (see operation 4) of sufficient length to comply with operation 5b and to measure 1-1/4 (+ 1/8) inches long when attached to the left hip pocket. Measurement shall be taken from bottom of top welt of pocket opening on outside to the pointed end of tab					
	b. Fold the piece in half and butt the side edges forming a point. Bartack across the butted edges at pointed end catching the base of the triangle. Place a second bartack across the butted edges 5/8 (+ 1/16) inches from the first tack forming slit buttonhole. The bartacks shall be 3/8 to 1/2 inch long.	bartack or automatic looptacker		21-28 tack 24-28 tack	50 50	50 50
*6.	Make flies					
	a. Double stitch back edge of fastener tape 3/16 to 1/4 inch gauge, to the left fly piece. The edge of the chain shall be 3/8 to 5/8 inch from front edge of the finished fly at the top, tapering to 1/4 to 3/8 inch at bottom, with the bottom ends of scoops not more than 1/2 inch above the fly notch, when fasteners are cut and scoops removed.	301 or 401	SSau-2	10-12	50 50	50 70
	b. Overedge fastener tape to back edge of right fly piece, with the bottom end of scoops not more than 1/2 inch above the fly notch, after fasteners are cut and scoops removed. Note. This operation is to be performed without the use of a trimming knife.	502 503 or 504	SSa-1	6-10	50 50	50 70
	c. Stitch the right fly lining piece to right fly piece, along outward curved edge 1/4 inch.	301	SSe-2(a)	10-12	50	50
	d. Turn and topstitch. Trim excess fly lining.	301	SSe-2(b)	10-12	50	50
	e. Overedge the back edge of the left fly.	502 503 or 504	EFd-1	6-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*7	Sew on right and left flies a. Finished appearance - The ends of the flies shall be even where they join at the crotch seam. The fly shall lie flat without twists or puckers when the slide fastener is closed. In the finished trousers, the upper end of the fly lining shall extend to the top of the waistband, over the waistband lining					
	b. Overedge front edge of right trouser piece, from crotch to waistband area.	503 504 or 602	SSa-1	6-10	70	70
	c. Stitch right fly (catching fastener tape in the seam) to right front 1/4 inch from edge.	301 or 401	LSq-2(a)	10-12	50 50	50 70
	d. Operations 7b and 7c may be performed simultaneously, by overedging the back edge of the right fly piece (catching fastener tape in the seam) to front edge of right trouser front, continuing to bottom at crotch seam. NOTE: This operation is to be performed without the use of a trimming knife.	503 504 or 602	SSa-1	6-10	70	70
	e Sew left fly (with slide fastener attached) to front edge of left trouser front.	301	LSq-2(a)	10-12	50	50
	f. Turn seam allowance against left fly and topstitch seam.	301	LSq-2(b)	10-12	50	50
8.	Make front pockets a. Position facing cut in operation 1h to top edge of pocket piece.					
	b. Turn in or overedge lower raw edge of pocket facing piece and seam to pocket piece. When facing is cut on selvage, the selvage edge need not be turned in.	301	LSd-1 or EFd-1 and LSbj-1	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c Stitch the unfaced ends of pocket piece to top edge of each front section 1/2 (+ 1/16) inch from edge as indicated by marks on pattern. Slash seam at each end of stitching. Notch corner (ends of openings); turn and double topstitch edge 1/4 inch gauge Note: Care shall be taken when performing this operation to insure that the pocketing material does not extend above the pocket opening, when viewed	301	SSe-3	10-12	50	50
	d. Fold pocket piece to form pocket; stitch sides 1/4 to 3/8 inch from edge.	301 or 401	SSa-1	10-12	50 50	50 70
	e. Overedge stitch side of pocket.	503 504 or 602	SSa-1	8-10	70	70
	f. Or operation 8d and 8e may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	10-12	50 (chain-stitch-ing) 70 (over-edge-stitch-ing)	50 70
	OR					
	g. Fold pocket and stitch sides.	301	SSe-2(a)	10-12	50	50
	h. Turn and edgestitch sides 3/16 to 1/4 inch along folded edge.	301	SSe-2(b)	10-12	50	50
	i. Pocket opening shall measure 4-1/4 (+ 1/4) inches wide for sizes 26 and 27; 4-1/2 (+ 1/4) inches wide for sizes 28, 29, and 30; and 4-3/4 (+ 1/4) inches wide for sizes 31 through 50. The finished pocket shall measure 6 (+ 1/4) inches deep.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
* 9.	Seam darts in trousers back Stitch a 1/2 (+ 1/8) inch wide inside dart in each trouser back section, as indicated by marks on patterns. The darts shall be tapered and sewn without twists or puckers. The thread end shall be trimmed to 1/2 inch in length. When an automatic dart machine is used the bottom end of the dart shall be backstitched with a minimum of 4 stitches. Turn dart toward center back and topstitch dart.	301	OSf-1 and OSe-1	10-12	50	50
*10.	Make left hip pocket Finished appearance - The width of the finished pocket openings shall measure 5 1/4 (+ 1/8 inches) and the depth of the pockets shall finish 5-3/4 (+ 1/4) inches. The top of the pocketing shall extend not less than 1/2 inch into the waistband and shall be caught in the bottom stitching of the waistband. Note: To perform this operation properly the left dart should be made prior to operation c below.					
	a. Stitch on four sides of label, centered on pocket. Label shall face the trouser when trouser is worn. Stitching shall not be thru the printing.	301	LSbj-1	10-12	40	40
	b. Turn in lower raw edge of pocket bearer piece and seam to pocket at notches as indicated on pattern. When bearer piece is cut on selvage, the edge need not be turned in.	301 or 401	LSd-1	10-12	40 40	40 50
	c. Position welt piece on outside as indicated by pattern and seam to trouser through pocket on under side with two rows of stitching, 3/8 inch gauge.	301	SSv-2	10-12	40	40
	d. Cut opening between the parallel rows of stitching and notch diagonally to the ends of each row of stitching through welt piece, trousers and pocket. Turn lower part of welt piece through cut opening and topstitch, forming a 1/8 to 3/16 inch welt edge.	301	SSbe-2(b)	10-12	40	40

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the currenversion before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Turn in lower raw edge of welt piece and seam to pocket. When welt piece is cut with selvage. the edge need not be turned in.	301 or 401	LSd-1	10-12	40 40	40 50
	f. Fold pocket, seam the sides and turn to finished position	301 or 401	SSae-2(a)	10-12	40 40	40 50
	g. Smooth out pocket and stitch sides 3/16 to 1/4 inch from edge. Stitching may extend across the bottom folded edge. The ends of the bearer and welt piece shall be caught in the edge stitching only.	301	SSae-2(b) and OSf-1	10-12	40	40
	h. Form a 1/8 to 3/16 inch welt on the upper edge of pocket opening, insert buttonhole tab at center (1/4 inch off center tolerance) on left hip pocket, and topstitch the seam through trouser. welt piece, pocket bearer and pocket, closing top of pocket.	301	LScc-2(b)	10-12	40	40
	i. Tack ends of pocket opening 1/4 to 3/8 inch through welt, bearer, and pocket.	301		10-12	40	40
	OR					
	j. Operations c and d above may be accomplished with a double welt pocket machine which stitches, cuts, and turns welt edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine. The interlining shall be of a suitable material as recommended by the machine manufacturer.	101		10-12	40	
	AND					

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	Top stitch the joining seam of lower welting piece through back of trousers and welting piece only. Topstitch the joining seam of the top welting piece through all plies closing the top of pocket. The ends of the pocket openings shall be securely tacked.	301		10-12	40	40
11.	Attach waistband piece and set belt loops.					
	a. Finished appearance - The finished waistband shall measure 1-1/2 (± 1/8) inches wide and have belt loops positioned with the ends (except the back center loop) inserted into waistband stitching and extending downwards 1/2 inch below the waistband. The belt loop opening shall measure 1-7/8 (± 1/8) inches long. All belt loops shall be bartacked (see operation 17). Placement of belt loops shall be as follows: (1) One at each end of front pocket opening. (2) For sizes 32 through 50 only, one centered between the loop at back end of pocket and center back. (3) One at center back. (4) For sizes 42 through 50 only, one on the right front 2 (± 1/4)) inches from the inner edge of right fly.					
	b. Stitch right and left waistband pieces to trouser top, catching back ply of pockets and the ends of belt loops (except center back loop) in their proper position in the stitching. Left end of waistband shall be overedge stitched and shall be even with the back edge of left fly.	301 or 401 and 503 504 or 602	SSa-1 SSa-1	10-12 6-8	50 70	50 70
	c. Drop belt loops and securely stitch or bartack the loops 3/8 to 1/2 below the waistband seam. The stitching or tacking shall not extend beyond the width of the loop.	301 or bartack or automatic loop tacker	-	8-10 21-28 24-28	50 50 50	50 50 50

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	Note: The top edge of the front pocket shall abut the bottom edge of the waistband					
	Note The waistband lining may be attached to the waistband operation 12a prior to setting to trousers.					
*12.	Join waistband assembly Finished appearance The waistband assembly shall finish 1/8 inch below the top finished edge of the waistband and shall measure 1-7/8 to 2 inches wide in the finished trousers. The waistband lining may be pieced providing the seam is flat and there is not more than one piecing on each trouser. The waistband stabilizer may be 1 inch shorter than the waistband lining at seat seam.					
	b. Turn under top edge of waistband assembly and stitch to top edge of waistband with a row of simulated hand felling or felled by hand.	304 404 or hand		10-16 6-8	50 50	50
*13.	Finish right and left flies Finished appearance. The top corner of the right fly shall be neatly and completely forced out. The joining seam of left fly to front shall not be exposed on outside of trousers.					
	a. Continue seaming the front edge of the right fly and fly lining to top edge of waistband across to back edge of fly lining	301 or 401	SSe-2(a)	10-12	50 50	50 70
	b. Trim turn and work out corner and single stitch 1/16 to 1/8 inch from edge. The edge stitching shall conform to stitching on edge of fly.	301	SSe-2(b)	10-12	50	50
	c. Turn under bottom raw and back edge of right fly lining and top stitch seam of fly through front. fastener tape and fly lining and continue stitching to top of waistband. The finished edge stitching shall be 1/8 to 3/16 inch from the back edge of the slide fastener scoops.	301	LSq-2(b)	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Turn back end of left waistband in line with the vertical fly joining seam and stitch across top edge of waistband the width of the fly. Trim, turn and work out point.	301	SSa-1	10-12	50	50
	e. Insert end of waistband lining under the left fly and seam back edge of left fly through front from notch to top of waistband 1 1/2 (± 1/8) inches from front edge, forming "J" stitching.	301	LSbj-1	10-12	50	50
	or f. As an alternate, a Union Special Left Trouser Fly topstitcher may be used.					
*14.	Assembly a. Overedge raw edges of crotch and seat allowances.	503 504 or 602	EFd-1	8-10	70	70
	b. Join inseams with a double lapped, double stitched seam with fronts lapped over the backs.	301 or 401	LSc-2	10-12	50	50
	c. Stitch crotch and seat seam (outlet) from base of fly to top of waistband with a double needle seat seamer with the two rows of stitches 1/64 to 1/32 inches apart. Inseams shall not be staggered by more than 3/8 inch. Press seam open and flat. NOTE: Seat seam outlet at top shall be not less than 1-3/8 inches deep tapering to 3/8 (± 1/8) inch deep at crotch to bottom of fly.	401	SSa-2	8-10 each needle	50	70
*15.	Finish waistband a. Open seat seam and turn down waistband lining to finished position. Topstitch waistband seam 1/16 to 1/8 inch above the joining seam on the trouser side, simultaneously catching the waistband lining (with the ends at center back folded in) and the top of the back pockets. The stitching shall not extend across the top of the fly.	301	LSq-2	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
* 16.	Assemble fasteners. Attach slider with the ends of the chain even and staple the fastener chains together at the bottom with the stop overlapping the scoops. The bottom stop shall be placed less than 1/2 inch from fly notch.					
17.	Bartacks Stitch 3/8 inch long bartacks as follows: (1) One at each end of front pocket opening perpendicular to opening. (2) One securing center back loop over seat seam 1/2 inch below waistband with the unfinished side up and the bottom raw edge adjacent to the waistband seam. (3) One centered across each belt loop securing loop to trousers 1/2 inch below waistband. (4) One centered across each belt loop securing top of belt loop to top of waistband with end of loop turned under. The top end of loops shall be even with the top edge of waistband and the bartack placed 1/16 to 1/8 inch from top of loop. (5) One at base of fly at the junction of the crotch seam and fly. The bartack shall be thru all plies and diagonally in line with left fly stitching. * (6) One at each side at the bottom edge of front pockets placed on ther chainstitching. * (7) One on inside of the trouser thru the left and right fly assembly adjacent to the "j" portion of the fly. Position the tack to relieve the tension placed upon the bottom stop (approximately 3/4 inch from the base of the fly bartack at 45 degrees from the horizontal).	Bartack		28 per bartack	50	50
18.	Buttonhole a. The horizontal buttonhole shall be centered in left end of waistband with center of eyelet 1/2 inch from front end of finished waistband. b. All thread ends shall be trimed and buttonhole cleaned.	Button-hole		46 per button-	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
19.	Button					
	a. Finished appearance-The button shall be securely sewn and properly aligned with buttonhole or tab. Handsewn button shall be shank wrapped three times and the end of the thread shall be securely tacked with not less than two stitches. A machine sewn button which is automatically shanked shall have a minimum of ten wraps with three locking stitches.	301 or 101		14-16/ button	24	24
				20-22/ button	24	
		or hand		4 dble/ button not including shank		
	b. Align, position and sew a 22-line button to right end of waistband to correspond with buttonhole in left end of waistband.					
	c. Sew a 22-line button on left hip pocket, thru pocket and facing to correspond to buttonhole tab.					
20.	Hem					
	a. Overedge bottom of trouser legs.	502 503 or 504	EFd-1	6-8	70	70
21.	Cleaning					
	a. Remove all shade tickets. b Remove all spots, stains and lint formations. c. Trim thread ends and remove all loose ends of threads, both on the inside and outside. NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.					
22.	Pressing					
	a. Press top of trousers including fly neatly. b. Turn trousers inside out and crease inner and outer legs neatly, observing to crease the inner leg alongside the edge of the inseam seam allowance on the back portion of the leg. c. Remove gloss and impressions.					

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the currentversion before use.

*3.8 Size and measurements. The size and measurements of the finished trousers shall be in accordance with Table III. All measurements and tolerances are expressed in inches.

Table III - Sizes and measurements

Size	Waist (A)	Seat (B)	INSEAM - UNHEMMED (C) Short	Regular	Long	X-Long	Knee (D)	Leg bottom (E)
26	26	35	32	34	36	39	20 3/4	22 1/2
27	27	36	32	34	36	39	20 3/4	22 1/2
28	28	37	32	34	36	39	20 3/4	22 1/2
29	29	38	32	34	36	39	21	22 3/4
30	30	39	32	34	36	39	21 1/2	23 1/4
31	31	40	32	34	36	39	22	23 3/4
32	32	41	32	34	36	39	22 1/2	24 1/4
33	33	42	32	34	36	39	22 1/2	24 1/4
34	34	43	32	34	36	39	22 1/2	24 1/4
35	35	44	32	34	36	39	22 3/4	24 1/2
36	36	45	32	34	36	39	22 3/4	24 1/2
37	37	46	32	34	36	39	23	24 3/4
38	38	47	32	34	36	39	23	24 3/4
40	40	49	32	34	36	39	23 1/4	25
42	42	51	32	34	36	39	23 1/2	25 1/4
44	44	53	32	34	36	39	23 3/4	25 1/2
46	46	55	32	34	36	39	23 3/4	25 1/2
48	48	56	32	34	36	39	24	25 3/4
50	50	57	32	34	36	39	24	25 3/4
Tolerance	± 1/2	± 1	+ 3/4 - 1/2	+ 3/4 - 1/2	+ 3/4 - 1/2	+ 3/4 - 1/2	± 1/2	± 1/2

A, B, C, D, and E - Refer to Figure 1

NOTE: Measurements for waist and seat shall be taken with waistband and fly closed, trousers laid out smooth and flat.

A. Waist - Twice the measurement taken across top of waistband from folded edge to folded edge.

B. Seat - Twice the measurement taken across the front, two inches above lower fly bartack from folded edge to folded edge.

C. Inseam - Measurement shall be taken from junction of seams (crotch) along inseam to bottom of unhemmed trouser leg.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

D. Knee - The location of knee measurements shall be as follows: up from unhemmed bottom of trousers 18-7/8 to 19-3/8 inches for Shorts, 19-7/8 to 20-3/8 inches for Regulars, 20-7/8 to 21-3/8 inches for Longs, and 21-7/8 to 22-3/8 inches for X-Longs. Twice the measurement taken from folded edge to folded edge.

E. Leg bottom - Twice the measurements of the unhemmed bottom of trouser leg from folded edge to folded edge.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Shall be performed in accordance with MIL-STD-1488, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified. or qualified in this specification or applicable procurement documents. In addition, the contractor shall furnish a certificate of compliance stating that all components of slide fasteners are brass and are furnished by the same contractor (see 3.3.6).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.2 Examination of the end item. Sampling and examination of the end item shall be performed in accordance with the provisions for dress ("D") trousers specified in MIL-STD-1488 and in accordance with the list below:

Defect	Point Value
BELT LOOPS	
a. Bottom end of one or more loops (except center back loops) not caught in waistband seam	2
b. Bottom bartack less than 1/4 inch or more than 1/2 inch below waistband seam	1
c. Tacking not extending full width of loop by 1/8 inch or more	1
FRONT SEAM	
a. Left front not overlapping on right front	2
POCKETS	
a. Fullness or tightness at opening	1
b. Defective waistband sewing causing ends of opening to finish 1/8 inch or more below waistband seam	2
c. Waistband /pocket out of alignment 1/8 inch or more (i.e. top edge of pocket and bottom edge of waistband does not form a straight line)	2
d. Edge of opening caught in waistband seam	2
BACK DARTS	
a. End of dart not properly tapered causing bulge or fullness	2
b. Fold of dart not toward seat seam	1
SEAT SEAM	
a. Waistband seam staggered at seat seam by:	
-1/4 inch or more but not more than 3/8 inch	1
-more than 3/8 inch	2
b. Outlet not securely stitched to back of trousers along bottom row of stitching of waistband joining	1
BUTTON	
a. Shank wrapping omitted or not trimmed to less than 1/4 inch	1
b. Misplaced with buttonhole or tab causing bulges or twist	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Point Value
BUTTONHOLE	
a. Ragged edges, i.e., yarns or thread ends on inside of buttonhole not trimmed to less than 1/4 inch or basic fabric not caught by buttonhole stitching.	1
CLEANING	
a. Thread ends not trimmed to within 1/4 inch	
1. Three or more on outside	2
2. Five or more on inside	1

4.3.6 Palletization examination An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 .

Examine	Defect
Finished dimensions	Length, width or heigth exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Ommitted; incorrect; illegible; of improper size, location, sequence,

5. PACKAGING

5.1 Preservation-packaging Packaging shall be level A or C (see 6.2).

5.1.1 Level A Each pair of trousers, pressed inside out, shall be folded as follows:

a. Close waistband and front fly.
b. Fold trousers in half lengthwise with the inseams meeting and the fly inside the fold.
c. Fold trousers in quarters across the length so that the folded trousers shall measure approximately 11-1/2 inches by 15-1/4 inches.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

NOTE 1: For the longer trouser lengths it may be necessary to bring the bottom of trousers up approximately 2-4 inches prior to folding trousers across the length.
NOTE 2: For larger sizes the waistband may have to be tucked in to conform with the folded measurements.

d. Each folded trouser shall be individually packaged in a snug-fitting flat style clear poyethylene bag of 0.00125 inch thickness (+ 20% tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. Alternately, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap and the corner hole not required.

5.1.2 Level C Trousers shall be packaged to afford adequate protection against physical damage during shipment from the contractor source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be level A, B, or C (see 6.2).

5.2.1 Level A Sixteen (16) pairs of trousers, of one size, class and length only, packaged as specified in 5.1.1, shall be stacked flat in the container, two (2) in length, one (1) in width and eight (8) in depth with the waistband alternated end to end and the length of the packages parallel to the end panels of the box. The fiberboard shipping container shall conform to class weather-resistant, type CF, grade VI5c, size 2A of MIL-B-17757. The fiberboard for the liner shall conform to type CF. class domestic, of MIL-B-17757. Toward the end of the contract or order, or when there is less than the required amount per container of the same size. mixed sizes may be packed within the same shipping container.

5.2.2 Level B Sixteen (16) pairs of trousers, of one size, class and length only, packaged as specified in 5.1.5, shall be stacked flat in the container, two (2) in length, one (1) in width and eight (8) in depth with the waistband alternated end to end and the length the of the packages parallel to the end panls of the box. The fiberboard shipping container shall conform to class domestic, type CF, variety DW, grade 200, size 2A of MIL-B17757. The fiberboard for the liner shall comform to class domestic, in accordance with MIL-B-17757. Toward the end of the contract or order, or when there is less than the required amount per container of the same size. mixed sizes may be packed within the same shipping container.

5.2.3 Level C Trousers, packages as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as the normally used by the contractor for retai distribution. Containers shall comply with th US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules as applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

5.2.4 Palletization. When specified (see 6.2), item packed as specified in 5.2 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L or film bonding means P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in the MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.3 Marking In addition to any special marking required by the contract or order, shipping container shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes Each shipping container, packed with mixed sizes only, shall have securely attached to the ends and side directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these works shall be legibly stamped or printed the correct quantity and size contained therein.

5.3.2 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inseted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
NOMENCLATURE
SIZE
QUANTITY

6. NOTES

6.1 Intended use The trousers covered by this specification are intent for use as part of the undress uniform worn by enlisted male personnel of the Navy.

6.2 Ordering data Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Class, sizes and lengths (see 1.2).
c. When first article is required (see 3.2), the item will be tested and should be a first article sample. The contracting officer shall include specific instructions in acquistion documents regarding arrangement for examinations, quantity, and testing and approval of the first article.
d. Selection for applicable levels of packaging and packing (see 5.1 and 5.2).
* e. When palletization is required (see 5.2.4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

6.3 Sample and patterns For access to samples and patterns, address the procuring activity issuing the invitation for bids.

* 6.4 Equal item. Prior to the use of an "interchangeable" item (see 3.3.8), the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible military agency.

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU

Review Activity:
DLA - CT

Preparing Activity:
Navy - NU

Project No.8405-N991

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the currenversion before use.


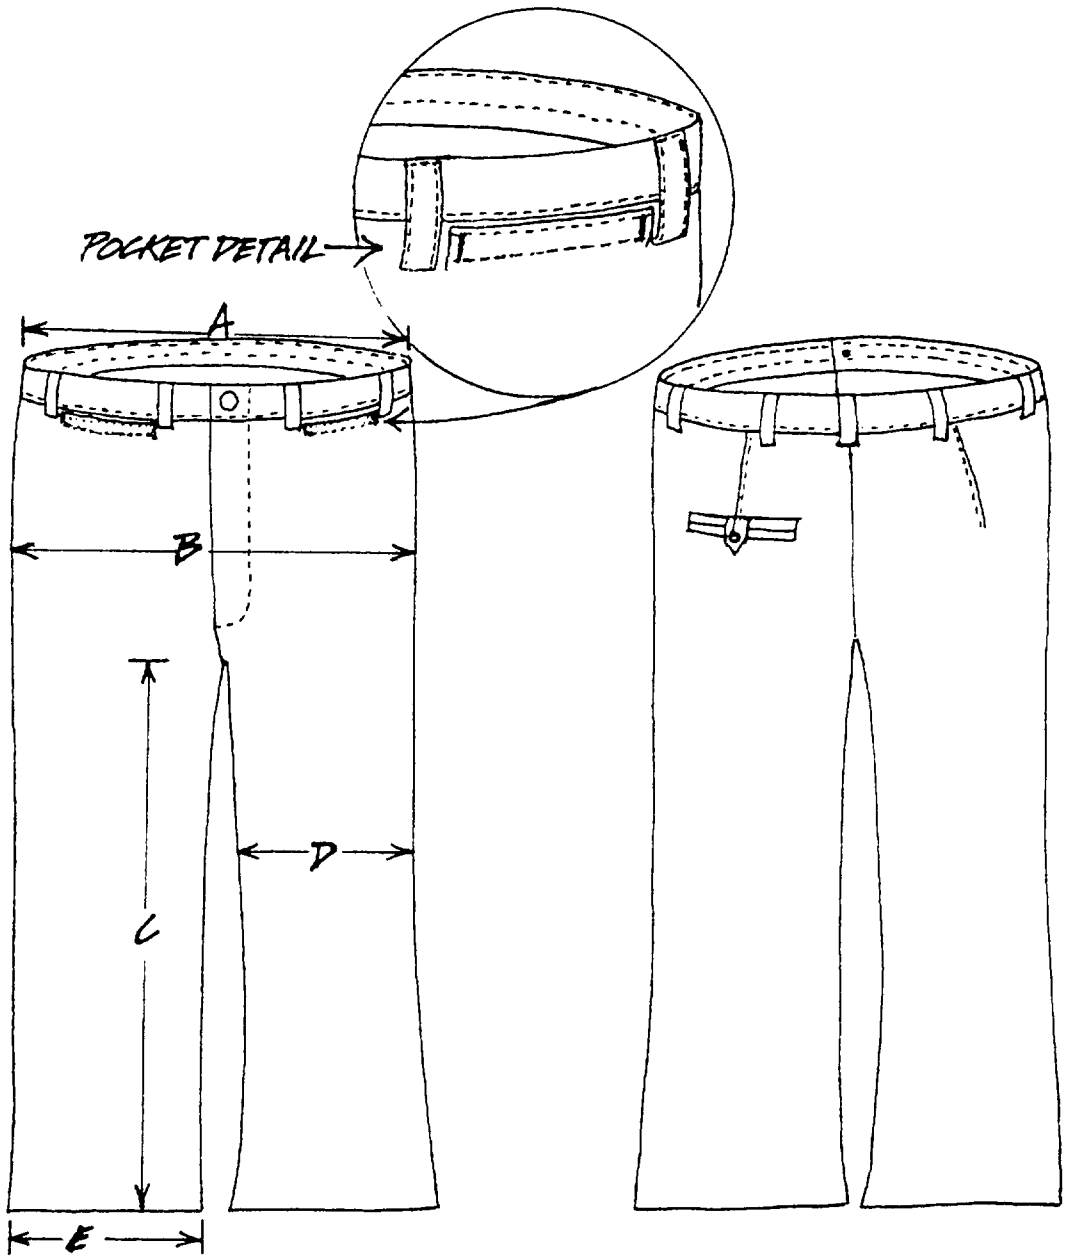


Fig. 1 Trousers, Men's (undress)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

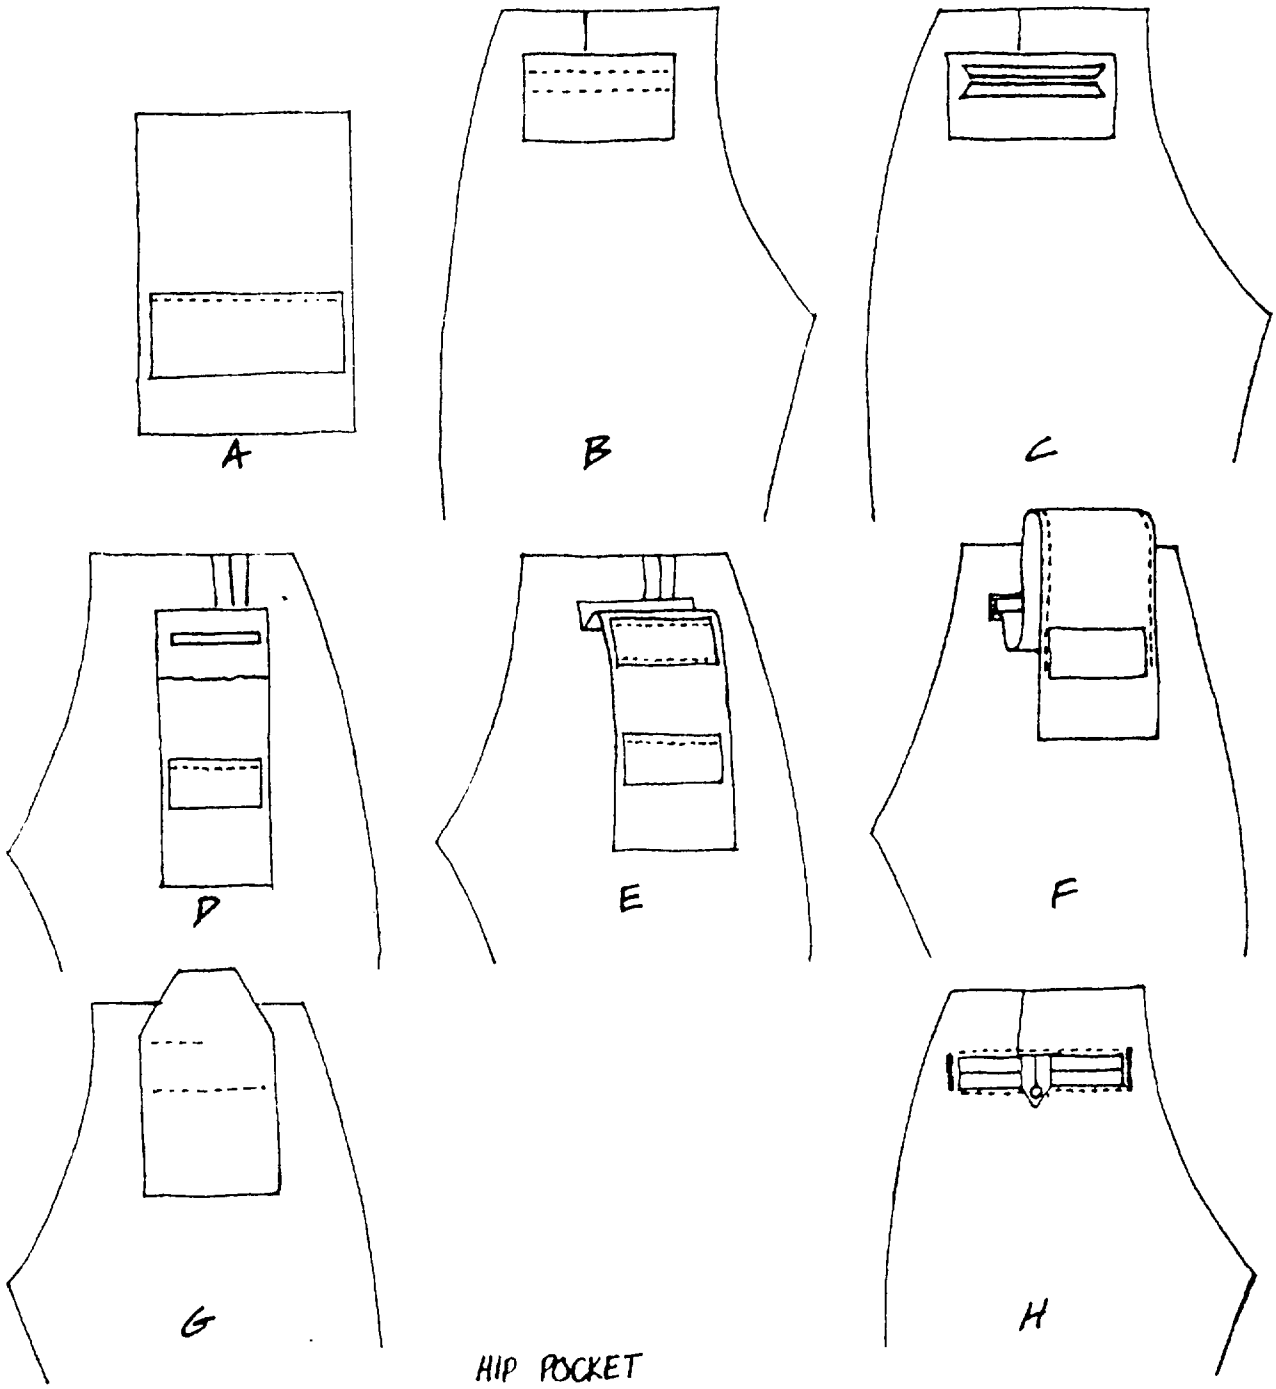


HIP POCKET

A- BEARER ON POCKET
B- CORD FACING PIECE ON OUTSIDE OF TROUSERS
C- CUT THROUGH CORD PIECE AND NOTCH
D- CORD PIECE TURNED INSIDE
E - MAKE CORD
F- POCKET PULLED THROUGH AND CLOSED
G - POCKET PULLED THROUGH TO INSIDE & TOPSTITCHED ON SIDES
H - TOP POCKET OPENING STITCHED THROUGH POCKET AND FACING PIECE WITH BUTTONHOLE TAB INSERTED

Fig. 2 Trousers, Men's (undress)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

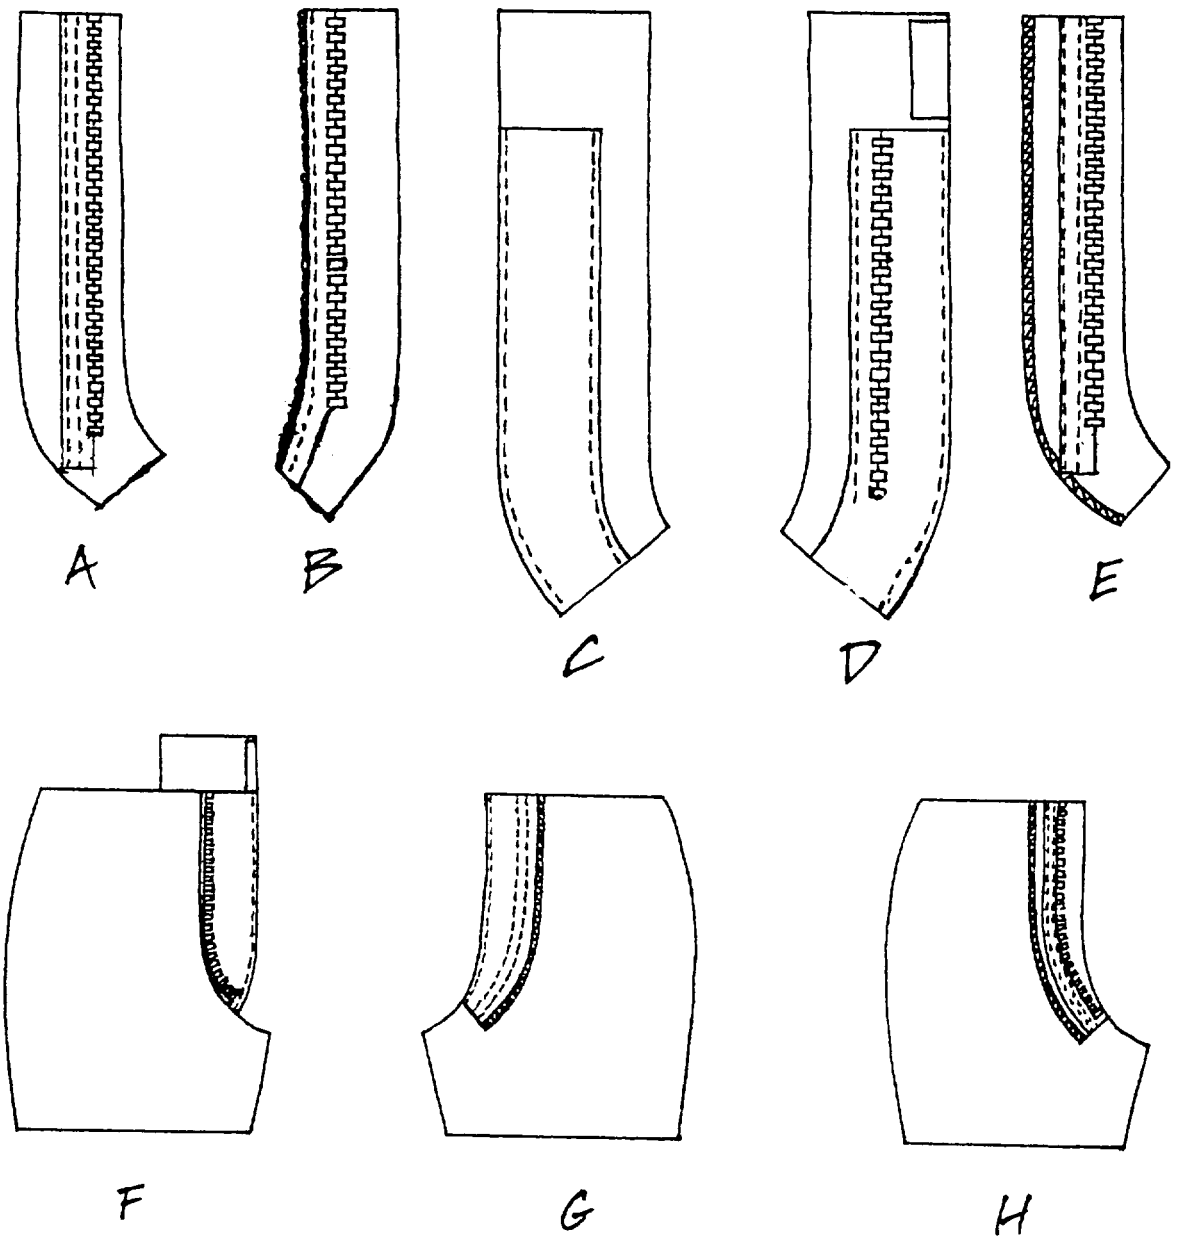

FLY (RIGHT AND LEFT)

A. Double stitch fastener tape to left fly through lining
B. Seam fastener tape to right fly
C&D. Seam lining to right fly, turn and top stitch
E. Overedge left fly
F. Join right fly to trousers
G&H. Join left fly to trousers and press

Fig. 3 Trousers, Men's (undress)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research Facility
Code 50
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-87039B(NU)	TROUSERS, MEN'S (UNDRESS)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the current version before use.