SUPERSEDING
MIL-T-87047
15 March 1978

MILITARY SPECIFICATION
TROUSERS, MEN'S POLYESTER/WOOL SERGE (CG)

This specification is approved for use by the United States Coast Guard, Department of Transportation, and is available for use by all Departments and Agencies.

1. SCOPE

1.1 Scope. This specification covers the requirements for polyester/wool trousers.

1.2 Classification. The trousers shall be of one type in the following lengths and sizes (see 6.2):

Sizes: 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42

Lengths: Short, Regular, Long, and X-Long

1.3 Uniform. When coat and trousers are procured as a uniform (see 6.2), the coat and trousers shall be cut from the same piece of material and the shades shall match.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-F-106	- Fasteners, Slide, Interlocking
V-T-276	- Thread Cotton
V-T-280	- Thread, Cotton Gimp, Buttonhole
V-T-295	- Thread, Nylon
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
CCC-C-438	- Cloth, Buckram, Cotton
DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-C-823	- Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-T-43548	- Thread, Polyester Cotton-Covered and Rayon-Covered
MIL-C-43718	- Cloth, Twill, Polyester; Polyester and Cotton, Polyester and Rayon
MIL-C-43920	- Cloth, Interlining, Cotton or Synthetic and Nylon
MIL-E-50011	- Ethanolamines (Monoethanolamine, Duthanolamine, and Triethanolamine) Technical

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.
Department of Defense
Standard Shades for Threads
Standard Shades for Buttons

(Application for copies of color cards should be addressed to the Color Association of the U.S. Inc., 343 Lexington Ave, New York, NY 10016.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material for the trousers shall be a 11.3 ounce polyester/wool serge conforming to type III, class 3 of MIL-C-823. The color shall be Blue 3362. The piece number for the standard sample is 80353.

*3.3.2 Pockets, lining, and interlining. The material for the pockets, waistband lining, right and left fly interlining, right fly lining, and crotch lining shall be a twill cloth, conforming to class 1 of MIL-C-43718. The color shall be Black 423.

*3.3.3 Waistband. The waistband shall be a pre-assembled commercial band using the material stated in 3.3.2, 3.3.4, 3.3.5, and 3.3.6.

*3.3.4 Buckram. The material for interlining the waistband shall be bleached or unbleached cotton buckram conforming to type II, class 1 or type IV class 1 of CCC-C-438.

*3.3.5 Tape, waistband, non-slip. The woven non-slip tape for the waistband lining assembly shall be constructed of either polyester or polyester/nylon, natural or white color, with two rows of chloroprene or nitrile rubber threads, woven or stitched to the tape, and shall not deteriorate during normal dry cleaning. The width of the completed tape shall be 7/8 inch and shall not shrink more than 2% in the length direction when subjected to the manufacturer's standard procedures for determining dimensional stability to dry-cleaning. There shall be a minimum distance of 1/4 inch from the rubber thread to edge of tape (see 4.4.1).

*3.3.6 Waistband stabilizer. The material for the waistband stabilizer shall be interlining cloth conforming to type I of MIL-C-43920.

*3.3.7 Combination label. The combination label shall conform to type VI, classes 10 and 15 of DDD-L-20. The label shall show fastness to dry cleaning and the inscription shall read as follows:

NAME:
SERVICE NO.
TROUSERS, MEN'S, POLYESTER/WOOL, SERGE
FIBER CONTENT: 55% POLYESTER 45% WOOL (EXAMPLE)
CONTRACT NO: DLA 100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS

Treated for permanent creasing.
Press on same crease line.
Undesired crease lines may be removed by steam.

DRY CLEAN ONLY

* 3.3.7.1 Size label. The size label shall conform to Type VI, Class 2 of DDD-L-20. The inscription and format shall be as follows:

Size: 34R (Example)
STOCK NUMBER: 8405-00-000-0000 (EXAMPLE)

NOTE: The lengths (Short, Regular, Long, and X-Long) may be abbreviated as S, R, L, or X-L.

3.3.8 Thread

*3.3.8.1 Polyester covered thread. The polyester covered thread used for seaming and stitching the trousers shall match Blue shade AT, C.A. 66060 in accordance with the standard shade for threads and conform to MIL-T-43548 in the following sizes:

Use	Ticket No.	Ply
Seaming and stitching	50, 70	2 or 3
Bartacks, buttonhole	50	2 or 3
Button sewing	16, 24	2 or 3

*3.3.8.2 Thread, cotton. As an alternate to the polyester covered thread, a cotton thread conforming to V-T-276, type I, may be used. The color shall be the same as specified above in the following types and sizes.

Operation	Type	Ticket No.	Ply
Seaming and stitching	IA3	50	3
Bartacks, buttonhole	IC2	0	3
Overedging	IA3	70	2
Button sewing	IB2	50	2 or 3

*3.3.8.3 Automatic button sewing. If an automatic machine which sews and shanks (wraps) the buttons in one operation is used, the thread shall be waxed nylon monocord special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per pound of 2150 yards, and shall be tested for these requirements and for colorfastness (3.3.8.5) in accordance with test methods in V-T-295. The color shall be as stated in 3.3.8.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

*3.3.8.4 Automatic pocket machine. When an automatic pocket machine using a 101 stitch type is used, the thread shall be type IC2, Ticket No. A, 3 ply conforming to V-T-276. When an automatic pocket machine using a 301 stitch type is used, the thread shall be Ticket No. 50, 2 or 3 ply conforming to MIL-T-43548. The color shall be as stated in 3.3.8.1.

3.3.8.5 Colorfastness. The colored thread shall show fastness to light and wet dry-cleaning equal to or better than the standard sample. When no standard sample is available, the colored thread shall show a minimum of "good" fastness to light and wet dry-cleaning when tested as specified in MIL-T-43548 or V-T-276.

3.3.9 Gimp. The gimp for reinforcing buttonholes shall be cotton, No. 8 conforming to type I or II of V-T-280. The color shall match Blue shade AT, C.A. 66060 in accordance with the standard shade for threads.

3.3.9.1 Colorfastness. The colored gimp shall show fastness to wet dry-cleaning equal to or better than the standard sample. When no standard sample is available, the colored gimp shall show a minimum of "good" colorfastness to wet dry-cleaning.

3.3.10 Buttons. The buttons for the left hip pocket, and fly-tab closure shall be type II, Class D, Style 4, 22-line, glossy finish conforming to V-B-871. The color of the buttons shall match Blue, Shade BV, Cable No. 62003 in accordance with standard shades for buttons.

*3.3.11 Slide fastener. The slide fastener shall be type I, style 1 cam lock, size LS, short tab pull, brass conforming to V-F-106, except that the salt spray test shall not apply. All metal components of the slide fastener shall be brass and shall be from the same supplier (see 4.4.1). A staple bottom stop is required. The tape shall show fastness to wet-dry cleaning equal to or better than the standard sample. When no standard sample is available, the tape shall show "good" colorfastness to wet-dry cleaning. The color of the slide fastener shall approximate the shade of the basic material.

*3.3.12 Hook and eye. The hook and eye shall be North and Judd (Hook Flex H-49 or E-50); Universal Fastener Inc., (#8 hook with #8 eye or #85 eye); Akim Co. (Junior Series, type JB, Slim-Slak or Slik-Slak with MB eye) or equal. (See 6.6). The finish shall be nickel plate (see 4.4.1).

*3.4 Design. The trousers are dress type with a sewn-on waistband with hook and eye closure, a french fly (separate or integrated fly tab) with slide fastener, quarter top pockets and double cord hip pockets. The left hip pocket has a buttonhole tab and button. An outlet is provided at seat seam. Trouser shall have permanent creasing (see 3.7.2).

3.4.1 Figures. Figures 1-5 are furnished for information only. To the extent of any inconsistencies between the written specification and the figures, the specification shall control.

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government. Except as allowed by footnotes to Table I, the working patterns shall be identical to the Government patterns, which shall not be altered in any way. The patterns provide a seam allowance as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Quarter top pockets	3/8 inch
Pocket facing and assembly	1/4 inch
Seat seam at waist tapered to crotch	1-1/4 inches tapered to 3/8 inch
Back leg inseam taped to notch at knee	7/8 inch tapered to 3/8 inch
All other seams except as indicated in Table of Operations	3/8 inch

*3.5.1 Pattern parts. The component parts of the trousers shall be cut from materials as specified in accordance with the number of parts required as shown in Table I.

Table I List of pattern parts

Material	Pattern nomenclature	Cut parts
Basic material	Front	2
	Back	2
	Fly (one right and one left)	2
	Right fly with integrated tab (optional) 1/	1
	Side pocket wide bearer	2
	Side pocket narrow facing	2
	Hip pocket bearer	2
	Hip pocket cord	2
	Waistband (one right and one left)	2
	Waistband left and right for use with integrated tab (optional) 1/	2
	Fly tab	2
Twill cloth	Right fly lining 1/	1
	Right fly lining with integrated tab (optional) 1/	1
	Crotch lining	2
	Fly interlining (one left and one right)	2
	Side pocket	2
	Hip pocket	2

*NOTE: Patterns are not furnished for belt loops, buttonhole tab, waistband lining, non-slip waistband tape, waistband stabilizer, and waistband interlining (buckram). See Table II, operations 1 and 2 for their requirements.

1/ The right front end of the waistband lining may extend to the front opening. When this optional constuction is used, the right fly lining shall be shortened at the top. The altered right fly lining must be sufficiently long to extend under the waistband lining and be caught by the waistband top stitching (see operations 18b and 20c).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.6 Construction.

*3.6.1 Stitches, seams, and stitchings. Stitch, seam and stitching types specified in Table II shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper (underthread), shall be on the inside of the trousers. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there will be no tight or loose tension. Buttonholes shall be clean cut and the stitching shall be securely caught in the fabric. The use of a trimming knife in the overedging of the right fly in operations 6d and 9b is prohibited.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

*3.6.3 Thread breaks and ends of seam. The ends of all seams and stitching, when not caught in other seams and stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 seaming (except for seat seam) may be repaired using 301 stitch type. The seat seam shall be completely resewn. Bartacks shall be not more than 1/16 inch wide. Ends of overedge stitching, when not caught in other seams and stitchings, shall be tacked.

3.6.4 Buttonholes. Buttonholes shall be the eyelet-end, taper bar, or eyelet-end, square-bar type, worked over gimp with the end securely tacked. The finished cut length shall be 5/8 inch. The square-bar type shall have 48-50 stitches per buttonhole and shall have a 21 stitch bartack as a separate operation. The taper-bar type shall have 52-54 stitches per buttonhole including a minimum of four tacks but not including the first cross-over stitch.

3.7 Manufacturing operations requirements. The trouser shall be manufactured in accordance with all operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations listed provided that the finished trouser is identical to that produced by following the sequence of operations listed in Table II. Any additional basting or holding stitching used to facilitate manufacture is permissible provided that the thread is removed or does not show on the finished trousers.

3.7.1 Pressing. Pressing as required in Table II shall be accomplished with a heated pressing iron or machine.

3.7.2 Permanent creasing. The trousers (see 3.4) shall be sprayed, prior to pressing, with a monoethanolamine solution (see 6.4, 6.4.1 and 6.5). The monoethanolamine solution shall conform to type I of MIL-E-50011. The permanency of crease shall be equal to or better than the standard sample when tested as specified in 4.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.8 Marking. The component parts shall be marked to insure a uniform shade and size throughout the trousers (or uniform). Any method of shade marking may be used except:

(a) Corrosive metal fastening devices
(b) Sew-on shade tickets
(c) Adhesive type tickets, which leave traces of paper or adhesive on material after removal of tickets

NOTE: The use of ink pad numbering machine, rubber stamp or pencil is acceptable provided the numbers do not show through the outside of the trousers and the numbers shall be covered by the seam allowance.

* 3.9 Abbreviations in table of operations. The abbreviations used in table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cut trousers. a. Spread the material without tension in a suitable number of plies. The cut parts from the top and bottom ply shall match and correspond to the pattern. b. Cut trousers in accordance with patterns furnished which show directional lines, size, placement of pockets and notches for the proper assembly of all parts. Directional lines shall be placed in the warp direction. c. The directional lines on the fronts and backs may vary from the warp direction by not more than 1 inch. Measurements shall be taken at the top and bottom edges of the pattern from the directional line to the selvage edge of the fabric (even side of lay) and the difference between the two measurements shall not exceed 1 inch. *d. Cut all parts of the trousers out of the same piece of material except narrow facings for side pockets, hip pocket bearers, belt loops, fly tab pieces, fly pieces (right and left), and right fly with integrated tab (optional), which may be cut from ends. The parts cut from ends shall approximate the shade of the trousers. e. When the trousers are cut as a part of the uniform, the trousers and the coat shall be cut from the same piece of material, except those parts which may be cut from ends. f. Cut the stripping for belt loops and buttonhole tabs of sufficient width to comply with operation 7. g. The selvage shall not appear on the outside of trousers.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
2.	Cut linings and interlinings. a. Cut the right fly lining on the straight or on the bias. *b. Cut left fly interlining and right fly interlining in the warp or filling direction. *c. The waistband lining shall be cut of sufficient length to finish as specified in operation 18. The waistband lining shall be of a commercial type using the material specified. *d. Cut crotch lining pieces so that the fold will be on the bias and one of the inseam sides is in the direction of the warp.				
3.	Cut pockets. Cut pocketing in the warp or filling direction.				
4.	Marking (see 3.8) Mark or ticket all component parts of trousers except parts cut from ends, to insure a correct size and uniform shade throughout the trousers (or uniform).				
5.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1488 and Section 4 shall be removed from production and replaced with non-defective and properly matched components.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
6.	Overedge stitching. NOTE: When a knife is allowed on serging machine the gage shall be set so that the raveled ends are trimmed but the edge of the fabric is not cut off.					
	*a. Overedge the seam allowance of inseam, outseam from lower side pocket notch to bottom of trousers, crotch seam, and right front edge of foreparts. The crotch lining, folded in half lengthwise, shall be caught in the overedge stitching of the front inseam.	503 or 504 or 602	EFd-1	8-10	70	70
	b. Overedge the seam allowance of inseam, outseam, and seat seam of back parts.	503 or 504 or 602	EFd-1	8-10	70	70
			EDf-1	8-10	70	70
	c. Overedge the left end of the waistband.	503 or 504 or 602	EFd-1	8-10	70	70
*	d. Overedge the top and bottom edges of the front and back parts, top of side pocket, the back edge of the right fly, and the back edge of the right fly interlining. or The back edges of the right fly and right fly interlining may be overedged to the slide fastener tape (see operation 9b). This operation is to be performed without the use of a trimming knife.	503 or 504 or 602	EFd-1	8-10	70	70
	e. The folded crotch lining may be stitched to the front inseam in a separate operation.	301	SSa-1	10-16	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
7.	Make stripping (see operation 1f) for buttonhole tab and belt loops.					
	a. Fold stripping with the edges abutted at center and stitch with each row of stitching not less than 1/16 inch from edge and the covering stitch on the underside. The finished stripping shall measure 5/16 to 3/8 inch wide.	406	EFh-1	12-14	50	70
	or					
	b. Fold stripping with both edges turned in and the turned-in edges abutted at center and stitch with a covering stitch.	105	EFae-1	12-14	50	70
	or					
	c. Turn in one side of stripping; fold stripping with the turned-in edge overlapped on the raw edges at center and stitch with a covering stitch.	105	-	12-14	50	70
*8.	Make a hip pocket buttonhole tab and fly tab (applicable if separate tab piece is used).					
	NOTE: Operations a and b are used to manufacture the hip pocket buttonhole tab and operations c and d for the fly tab.					
	a. Cut a piece of stripping (see operation 7) of sufficient length to comply with operation b below and to measure 1-1/4 (+ 1/8) inches long from outer cording welt when attached to the left hip pocket.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	*b. Fold the piece in half and abut the side edges forming a point. Center a bartack across the abutted edges at pointed end catching the base of the triangle. Center a second bartack across the abutted edges 5/8 (+ 1/16) inches from the first tack, forming slit buttonhole. The bartacks shall be 3/8 to 1/2 inch long and centered over the slit.	Bartack		21-24 per tack	50	50
				24-28 per tack	50	50
	*c. Stitch the two fly tab pieces together along the sides and the pointed end, trim corners, and point. Turn to finished position, forcing out edges and point. Edge stitch sides and point 1/16 to 1/8 inch from edge.	301 or 401 and 301	SSe-2	12-14	50 50 50	50 70 50
	*d. Make buttonhole at pointed end of tab as indicated by pattern, with the inside edge of the eyelet 1/2 (+ 1/8) inch from point. The purling shall face the wearer on the finished trousers.	Button-hole		(See 3.6.4)	50 50	50 50
*9.	Make flies.					
	a. Superimpose left fly on left fly interlining. Stitch back edge of fastener tape to left fly through interlining with two rows of stitching. The end of the scoops shall be 1/4 to 1/2 inch above the fly notch when fasteners are cut and scoops removed. When the trousers are finished the edge of the chain shall be 1/2 to 5/8 inch from edge at top, tapering to 1/4 to 3/8 inch from edge at bottom (Ill. A, Figure 3).	301 or 401	LSbj-2	12-14	50 50	50 70
	b. Superimpose right fly on right fly interlining. After fastener is cut and the scoops removed, stitch the fastener tape to back edge of right fly through interlining, with bottom end of scoops 1/4 to 1/2 inch above the fly notch (Ill. B, Figure 3). When stitch type 503 or 504 is used, a trimming knife is not allowed.	301 or 503 or 504	SSa-1	12-14	50 70 70	50 70 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	*c. (Applicable if separate tab piece is used). With the fly tab positioned 3/8 to 3/4 inch from the top raw edge of right fly, seam the lining to the front edge of the right fly to within 1 (+ 1/4) inch from top of fly, enclosing the fly tab between the two plies. On the finished trousers the fly, fly tab and waistband shall lie smooth and flat when fly tab is buttoned. (Ill C, Figure 3).	301 or 401	SSe-2(a)	12-14	50 50	50 70
	or					
	If option to use front fly with integrate fly tab is exercised, seam lining to the front edge of right fly to within 1 (+ 1/4) inch from top of fly.					
	d. Overedge the back edge of the left fly and interlining. (Ill. E, Figure 3).	503 or 504	SSa-1	8-10	70	70
10.	Seam darts in back. a. Fold the backs matching the cut edges of waist darts. Seam lengthwise along the entire length of the dart, starting 3/8 inch from cut edges at the top end and tapering to a point at the lower end as indicated by marks on patterns.	301	SSa-1	12-14	50	50
	b. Spread open and press darts smooth and flat with heated pressing iron or pressing machine.					
11.	Make hip pockets and attach label(s). Finished appearance - The pockets shall be in alignment, uniform in width and depth, and shall finish 5-3/4 to 6-1/4 inches deep. There shall be no raw edges or pleats at the end of the openings. The finished width of the pocket openings shall measure 5-1/4 (+ 1/8) inches.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	a. Position the combination personal-identification size-instruction label 1/2 inch from the bottom and right edge of the right hip pocketing (the label shall face the wearer on the finished trousers). Stitch on all four sides (the bottom and right side of label may be caught in the pocket edge stitching). Stitching shall not be through the printing.	301	LSbj-1	12-14	50	50
	b. Turn in lower raw edge of bearer and seam to pocket at notches. When the bearer piece is cut on the selvage, the edge need not be turned in (Ill. A, Figure 5).	301	LSd-1	12-14	50	50
	c. Position cord facing piece on outside of trousers as indicated on pattern with the pocketing placed on the underside (as indicated by solid line on pattern) and stitch to trousers through pocketing with two rows of stitching (Ill B, Figure 5).	301	-	12-14	50	50
	d. Cut opening between the rows of stiching through all plies simultaneously, turn lower part of cord piece through the cut opening to form a facing. Raise stitch forming a 1/8 to 3/16 inch cord edge (Ill. C, D, and E, Figure 5).	301	-	12-14	50	50
	e. Turn in lower raw edge of cord piece and seam to pocketing. When cord piece is cut on the selvage the edge need not be turned in (Ill E, Figure 5).	301 or 401	LSd-1	12-14	50 50	50 70
	f. Fold pocketing, seam the sides and turn to finished position (Ill F, Figure 5).	301 or 401	SSae-2(a)	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	g. Smooth out pocketing and single stitch 1/4 to 3/8 inch from edge. The stitching may extend across the bottom folded edge. The ends of the bearer and cord piece shall be caught by the edge stitching only (Ill. G, Figure 5).	301	SSae-2(b) and OSf-1	12-14 12-14	50 50	50 50
	h. Form a 1/8 to 3/16 inch cord of the facing on the upper edge of pocket opening, insert buttonhole tab at center (1/4 inch off center tolerance) on left hip pocket and raise stitch the seam through the trousers, cord piece, pocket bearer and pocketing, closing the top of pocket (Ill H, Figure 5).	301		12-14	50	50
	i. Bartack ends of pocket opening 1/4 to 3/8 inch through cord, bearer and pocketing.	304		21-28 per bartack	50	50
	or					
	j. Operation "d" and "e" above may be accomplished with a double welt (cord) pocket machine which stitches, cuts and turns cord edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine and the machine manufacturer's recommended pocket-stay material may be used.	101 or 301		12-14 10-12	A 50	 50
	and					
	*k. Raise stitch the joining seam of lower piping piece through back of trousers and piping piece only; raise stitch the joining seam of the top piping piece through all plies closing the top of pocket. The ends of the pocket openings shall be securely bartacked.	301 Bartack		12-14 21-28 per bartack	50 50	50 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
12.	Make side pockets.					
	Place facing and bearer on pocketing and stitch along the inner side, with the raw edge turned in, and across the lower end (Ill A, Figure 2). A selvage edge need not be turned in.	301 301	LSd-1 and LSbj-1	12-14 12-14	50 50	50 50
13.	Attach side pockets.					
	Finished appearance - The edges of the pocket openings shall not be distorted. The openings shall be aligned, uniform in length, and shall measure 6-1/4 to 6-1/2 inches between tacks. The folded edge of pocket from top bartack to top of trousers shall be edge stitched. Avoid notching the pocket on underside beyond the width of the side seam allowance.					
	*a. Seam side pocket to front, as indicated by marks on pattern. Notch for pocket opening. Turn to finished position with the seam inside and back from the front edge 1/8 inch and stitch 3/16 to 1/4 inch from front edge from the bottom of pocket opening to top of trousers.	301	SSbe-2	12-14	50	50
	b. Fold pocket right-side-out and seam raw edges from step to folded edge of pocketing. Notch pocket and facing at top of step and turn pocket (Ill D and E, Figure 2).	301 or 401	SSae-2(a)	12-14	50 50	50 70
	*c. Edge stitch 1/8 inch from folded edge of pocket opening, from top bartack location to top of trousers.	301	Similar to LSbj-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Bartack bottom of pocket opening. Bartack shall extend 1/16 to 1/8 inch into side seam allowance. Measure up from bottom bartack along pocket opening 6-1/4 to 6-1/2 inches and place top bartack. The edge of the bartack shall be even with the pocket opening. Bartack shall measure 1/4 to 3/8 inches. Bartack shall be parallel with trouser top. The right and left pocket opening shall not be out of alignment by more than 1/2 inch. The size of the opening shall not deviate by more than 1/8 inch from each other.	304		21-24 per bartack	50	50
14.	Sew on flies. Finished appearance - The ends of the flies shall be even where they join the crotch seam. The fly shall lie flat without twists or puckers when fastener is closed.					
	a. Sew on right fly (slide fastener and fly tab, as applicable, attached) with notches matched (Ill F, Figure 3).	301	SSa-1	12-14	50	50
	b. Sew on left fly (slide fastener attached) with notches matched. Turn fly to inside with the seam 1/16 to 1/8 inch back of folded edge and press front edge without damage to the fastener (Ill G and H, Figure 3).	301	SSa-1	12-14	50	50
15.	Join outseams.					
	a. Join outseams with the notches matched.	301 or 401	SSa-1	12-14	50 50	50 70
	b. Press outseams open from bottom to top of trousers.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
16.	Finished side pockets. Turn in back edge of side pockets and stitch 1/4 to 3/8 inch from edge along the side seam allowance. Continue the stitching around pocket to folded edge and securely backstitch end of seam (Ill G, Figure 2).	301	SSc-1 and SSae-2(b)	12-14	50	50
17.	Attach waistband and set belt loops. Finished appearance - The finished waistband shall measure 1-1/2 (+ 1/8) inches wide and shall be topstitched below the waistband from end to end (operation 22a). There shall be seven loops for sizes up to and including 37 and eight loops for sizes 38 and up. The loops shall be positioned as follows: One on each front with center of loop positioned in accordance with notches on patterns. One at each outseam on back. One centered between outseam and seat seam. One on seat seam (see operation 27b). The extra loop for larger sizes on right front 1-1/4 to 1-3/4 inches from right fly joining seam.					
	a. Stitch bottom edge of right and left waistbands to top edge of trousers catching the ends of belt loops (except center back loop, see operation 27a and b) in the stitching.	301	SSa-1	12-14	50	50
	b. Press waistband seams open and flat.					
	c. Drop belt loops and securely stitch or bartack the loops 3/8 to 1/2 inch below the waistband seam. The stitching or tacking shall not extend beyond the width of the loop.	301 or bar-tack or automatic loop tacker		12-14 21-28 per bartack 24-28 per tack	50 50 50	50 50 50

NOTE: The waistband lining may be attached to the waistband (operation 18) prior to setting to trousers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*18.	Join waistband lining. Finished appearance. The waistband lining shall be a pre-assembled commercial type, using the requirements stated in 3.3.3. The waistband lining shall measure 2 (+ 1/8) inches wide in the finished trousers. On the waistband lining assembly, the top row of rubber thread of the non-slip tape shall be 3/4 (+ 1/8) inch from the top of the waistband. No stitching shall penetrate the rubber thread of the non-slip tape. The waistband stabilizer may be one inch shorter than the waistband lining at the seat seam and may be inserted during the joining of the waistband and waistband lining. The waistband lining may be pieced providing the seam is flat and there is not more than one piecing on each trouser.					
	a. Turn under top edge of waistband lining and stitch to top edge of waistband catching stabilizer with a row of simulated hand felling or felled by hand.	304 or 404 or Hand		12-14 12-14 6-8	50 50 50	50 70
	b. (Applicable to trousers when option to extend waistband lining to right end of waistband is exercised). Turn right end of waistband lining to the outside and stitch to front edge of waistband catching the top of the fly lining in the stitching.	301 or 401	SSe-2(a)	12-14	50 50	50 70
	c. Fold waistband lining to the inside and baste or press top edge. The lining shall not be exposed beyond the top of waistband.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
19.	Attach hooks and eyes. a. Position the hook on the center (1/4 inch off center tolerance) of the left waistband with the rolled edge of the hook aligned with the slide fastener scoops. Attach through a suitable reinforcement. b. Position the eye on the center of the right waistband, aligned with the slide fastener scoops, to correspond to the hook of left waistband. Attach through a suitable reinforcement. NOTE: When the hook and eye is engaged on the finished trousers, the closure shall not bulge, pucker, twist, or be distorted.					
20.	Finish right and left flies. Finished appearance - The top corners of the right (when applicable) and left flies shall be completely forced out and shall not be bulky. The stitching of the left fly shall be uniformly spaced from edge of fly. The seam joining the left fly to the forepart shall not be exposed on outside of trousers, when fastener is closed. The right fly lining shall not be exposed on outside. The flies shall be smooth without twists or puckers or excessive fullness.					
	a. Continue the stitching of the right fly lining to the top of waistband.	301 or 401	SSe-2(a)	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II -- CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Turn right fly lining to the inside and stitch 1/16 to 1/8 inch from front edge. Turn in fly lining at top of waistband and continue the stitching across top; turn in raw edge of fly lining and raise stitch the fly joining seam catching the fly lining in the stitching (Ill D, Figure 3, and Ill J, Figure 4). The edge stitching along front edge of fly may be accomplished in a separate operation.	301	SSe-2(b) and SSc-1 and LSq-2(b)	12-14	50	50
	or					
	c. (Applicable to trousers when option to extend waistband lining to right end of waistband is exercised.) Turn right fly lining to the inside and stitch 1/16 to 1/8 inch from front edge; continue the stitching along front end of waistband, across top of waistband and down to meet back of right fly; turn in raw edge of fly lining and raise stitch the fly joining seam catching the fly lining in the stitching.	301	SSe-2(b) and LSq-2(b)	12-14	50	50
	d. Turn back end of waistband in line with the front folded edge of left fly and stitch across top of waistband the width of the fly. Trim, turn, and work out corner (Ill K, Figure 4).	301	SSa-1	12-14	50	50
	e. Stitch down left fly with waistband lining smoothly inserted between fly and trousers. The "J" stitching shall be 1-3/8 (+ 1/8) inches from front edge of fly, extend from top of waistband, and curve to fly notch (Ill K, Figure 4).	301	EFa-1	12-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
21.	Join inseams.					
	*a. Join inseam forming outlet, the seam allowance of the back part shall be 1-1/4 inch at the crotch tapering to 3/8 inch at knee notch. The seam shall start and finish evenly and the notches shall match.	301 or 401	SSbd-1 and SSa-1	12-14 12-14	50 50	50 70
	*b. Press inseam open and flat.					
22.	Join seat seam.					
	*Finished appearance - The seat seam shall be joined with stitch tension of sufficient elasticity to meet strain encountered in sitting or stooping. The waist shall be measured before the seat seam is joined to assure correct waist size. In the joining of the seat seam the inseams shall meet and the right and left waistband joining seams shall be aligned. The base of the left fly shall cover the right fly on outside of the finished trousers. The inseam shall not be staggered more than 3/8 inch at crotch.					
	a. Join seam from base of fly to end of waistband lining with a double needle seat seamer with the rows of stitching 1/64 to 1/32 inch apart. The seam from the waistband joining seam to the end of the waistband lining shall be perpendicular (90 degree angle) to the waistband joining seam.	401	SSa-2	8-10 each needle	50	70
	b. Press crotch and seat seam open.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II. CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
23.	Finish waistband and attach size label. a. Top stitch the spread open waistband seam 1/16 inch below the joining seam on the trouser, simultaneously catching the waistband lining but not penetrating the rubber of the non-slip tape (with the ends at center back folded in) and the tops of the pockets in the stitching. The stitching shall not extend across the fly except when option to extend waistband lining to right end of waistband is exercised. Pockets may be stitched or basted to waistband seam allowance prior to topstitching.	301	LSbd-2(b)	12-14	50	50
	*b. Stitch the top edge of the size label to the lower edge of waistband lining above the right hip pocket. The end of the stitching need not be tacked providing the stitching extends at least 1/2 inch beyond each end of the label. The stitching shall not be through the printing.	301		12-14	50	50
24.	Assemble fasteners. Attach the slider, and with the scoops evenly matched, staple the bottom of the slide fastener tape. The staple shall be perpendicular to the line of the scoops and shall overlap the scoops. The stop shall be within 3/8 inch of fly notch. The end of the tape shall extend at least 1/8 inch below notch.					
25.	Stitch right fly extension. Turn in the raw edges of the right fly extension piece and machine stitch or hand fell to each side of the spread-open crotch and seat seam (Ill L, Figure 4).	301 or Hand	SSac-3(b) (c) (d) SSac-3(b) (c) (d)	12-14 6-8	50 50	50
26.	Finish belt loop attachment. *Finished appearance - The tacking shall extend the width of the loop but not beyond.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	a. Turn up belt loops, fold under top of loops and position folded edge 1/8 (+ 1/16) inch from top of waistband and bartack. The finished belt loops shall measure 1-3/4 (+ 1/8) inches from bartack at top of loop to the bottom folded edge.	301 or bar-tack or auto-matic loop tacker	LSd-1	12-14	50	50
			LSd-1	21-28 per bartack	50	50
			LSd-1	24-28 per tack	50	50
27.	Attach center back belt loop. Finished appearance - The tacking shall extend the width of the loop but not beyond.					
	*a. Place bottom edge of belt loop, with underside facing up, even with bottom edge of waistband, positioned over center back seam. Securely stitch or bartack the loop 3/8 to 1/2 inch below waistband seam.	301 or bar-tack or auto-matic loop tacker	LSd-1	12-14	50	50
				21-28 per bartack	50	50
				24-28 per tack	50	50
	*b. Turn belt loop to finished position, turn under top of loop and position folded edge 1/8 (+ 1/16) inch from top of waistband and stitch or bartack. The finished back center belt loop shall measure 1-3/4 (+ 1/8) inches from bartack at top of loop to the bottom folded edge.	301 or bartack or automatic loop tacker	LSd-1	12-14	50	50
				21-28 per bar-tack	50	50
				24-28 per tack	50	50
28.	Make buttonhole. (Applicable to fly with integrated fly tab). Make buttonhole at end of tab, as indicated by pattern, with the inside edge of eyelet 1/2 (+ 1/8) inch from point. The purling shall face the wearer on the finished trousers.	Button-hole		(See 3.6.4)	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
29.	Mark or gage and sew buttons. *Finished appearance - The buttons shall be securely sewn and properly aligned with buttonholes. Hand sewn buttons shall be shank wrapped three times and the ends of the thread shall be securely tacked with not less than two stitches. Machine sewn buttons (see 3.3.8.3) which are automatically shanked shall have a minimum of ten wraps with three locking stitches. Buttons sewn with stitch type 301 or 101 are not required to be shank wrapped.					
	a. Sew a 22-line button on the left waistband lining to correspond with the fly tab buttonhole. The stitching shall not be visible on the outside of the trousers.	301 or		14-16 per button	24 or 50	24 or 50
		101 or		14-16 per button	24 or 50	
		Hand or		4 double per button not including shank wrapping	16 or 50	
		205		7 (min) 1 deep set per button not including shank wrapping	5 nylon	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Sew a 22-line button on left hip pocket through pocket and facing to correspond to buttonhole tab.	301 or		14-16 per button	20	20
		101 or		14-16 per button	20	
		Hand or		4 double per button not including shank wrapping	16	
		205		7 (min) 1 deep set per button not including shank wrapping	5 nylon	
*30.	Bartacking. Finished appearance - The bartacks shall be well made and correctly placed to reinforce points of strain as specified. The bartacks at side pocket opening shall extend beyond the outseam 1/16 to 1/8 inch and be even with the pocket opening for top tack.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	a. Bartack all pockets at ends of pocket openings. The bartacks shall be perpendicular to the opening.	Bartack		21-28 per bartack	50	50
	b. Bartack at base of fly at the junction of the crotch seam and fly. A 3/8 inch bartack shall be horizontal and shall not extend beyond the crotch seam (Ill M, Figure 4).	Bartack		21-28 per bartack	50	50
*31.	Hem. a. Overedge bottom of trouser legs.	502 503 or 504	EFd-1	8-10	70	70
32.	Cleaning. a. Trim all ends of stitching and remove loose threads. b. Trim ends of center back belt loop to a length of 1/16 to 1/4 inch. c. Remove all spots, stains, and marking tickets.					
*NOTE:	Care shall be taken when trimming thread ends that damage to the fabric does not result.					
33.	Pressing. a. Spray the front and back of legs along the crease area with the creasing solution (see paragraph 3.7.2). Press and crease the legs with seams matching at the bottoms and knees. The legs shall be pressed individually. There shall be no variation in the sharpness of the leg crease at front and backparts of the legs. The end of the crease shall be not more than 1 inch higher nor less than 2 inches lower than the junction of the inseams at crotch. The length of the creases shall not vary by more than 1-1/2 inches.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	b. Press tops of trousers, including fly and pockets.				
	c. Close slide fastener, fasten waistband and button hip pocket.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The finished trousers shall conform to the measurements shown in Table III.

Table III - Measurements in inches

Size	Waist (A)	Seat (B)	Knee (C)	Bottom (D)
27	27	36	18	18
28	28	37	18-1/2	18-1/2
29	29	38	18-1/2	18-1/2
30	30	39	19	19
31	31	40	19	19
32	32	41	19-1/2	19-1/2
33	33	42	19-1/2	19-1/2
34	34	43	20	20
35	35	44	20	20
36	36	45	20-1/2	20-1/2
37	37	46	20-1/2	20-1/2
38	38	47	21	21
39	39	48	21	21
40	40	49	21-1/2	21-1/2
41	41	50	21-1/2	21-1/2
42	42	51	22	22
Tolerance	+ 3/4 - 1/2	+ 3/4 - 1/2	± 1/4	± 1/4

	Inseam Length Unhemmed (E)			
Size	Short	Regular	Long	X-Long
27	32	34	36	38
28	32	34	36	38
29	32	34	36	38
30	32	34	36	38
31	32	34	36	38
32	32	34	36	38
33	32	34	36	38
34	32	34	36	38
35	32	34	36	38
36	32	34	36	38
37	32	34	36	38
38	32	34	36	38
39	32	34	36	38
40	32	34	36	38
41	32	34	36	38
42	32	34	36	38
Tolerance	+ 1/2 - 3/8	+ 1/2 - 3/8	+ 1/2 - 3/8	+ 1/2 - 3/8

*NOTE: Waist and hip measurements of the trousers shall be taken with slide fastener fully closed and waistband hooked. All measurements shall be taken with trousers smooth and flat. A, B, C, D, and E refer to Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

(A) Waist - Twice the measurement taken from folded edge to folded edge along top edge of waistband.

(B) Seat - Twice the measurement taken from folded edge to folded edge 1 inch above fly bartack.

(C) Knee - Twice the measurement taken from folded edge to folded edge across the width of trouser leg at a point up from unfinished bottom of leg as follows: Short - 19-1/8 (± 1/4) inches; Regular - 20-1/8 (± 1/4) inches; Long - 21-1/8 (± 1/4) inches; and X-Long - 22-1/8 (± 1/4) inches.

(D) Bottom - Twice the measurement taken from folded edge to folded edge across unfinished bottom of leg.

(E) Inseam - Length measurement taken along inseam from crotch seam to unhemmed bottom edge. (An allowance of 3 inches for hems is included in the inseam lengths).

3.10 Workmanship. The finished trousers shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable point value of defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. A certificate of compliance will be acceptable for the non-slip tape requirements of 3.3.5, the hook and eye requirements of 3.3.12, and the slide fastener requirements of 3.3.11 stating that all metal components are brass and furnished by the same supplier.

4.4.2 Permanent creasing test. Prior to the presentation of each end item lot, a test of the results of the permanent creasing process (see 3.7.2) for the permanency of crease shall be made in accordance with test method outlined in 4.6.1. The sample unit shall be one pair of trousers selected at random from the end item lot or an 11 by 40-inch piece of fabric cut from the same lot as the end item, the long dimension being in the warp direction. The fabric sample shall be taken at least 12 inches from the selvage edge of the cloth. The fabric sample unit shall be permanently creased down the center of the long dimension in the same manner as the end item. The sample size shall be 3 and each end item lot, represented by the sample, shall be unacceptable if one or more units fail to meet the requirements specified.

4.4.3 Examination of the end item. Examination of the end item shall be in accordance with 4.4.3.1 through 4.4.3.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.3.3. The sample unit shall be one finished pair of trousers. The lot size shall be expressed in units of pair of trousers.

4.4.3.1 Visual examination. The trousers shall be examined for defects in color, design, material, construction, workmanship, and marking and the defects classified in accordance with the following list.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table IV. Classification of defects

Defect	Classification Major	Minor A	Minor B
I. MATERIAL DEFECT AND DAMAGE			
a. Any hole, cut, tear, smash, burn, drill hole 1/ scorched area, multiple float, or open place:			
1. On outside (longest dimension in any direction):			
(a) - up to 1/4 inch inclusive		X	
(b) - more than 1/4 inch	X		
2. On inside (longest dimension in any direction):			
(a) - up to 1/4 inch inclusive			X
(b) - more than 1/4 inch		X	
b. Knot or slub on outside 2/:		X	
c. No dye penetration	X		
d. Misweave, area of poor dye penetration, dye streak, broken yarn, missing yarn, visible mend, thin place, or shade bar (longest dimension in any direction) on outside:			
1. 1/4 to 1/2 inch inclusive		X	
2. more than 1/2 inch	X		
e. Loose yarn or coarse yarn more than 1 inch on outside	X		
f. Woven in waste on outside visible at 3 feet (largest dimension in any direction):			
1. up to 1/2 inch inclusive		X	
2. more than 1/2 inch	X		
g. Permanent fold, pleat, or crease in cloth (when caught in seaming or stitching) on outside	X		
h. Needle chew on outside (largest dimension in any direction):			
1. up to 1/2 inch inclusive		X	
2. more than 1/2 inch	X		
II. SHADED PART			
a. On outside:			
1. Variation in shade within a part or between parts (except part which may be cut from ends)	X		
2. Part cut from ends badly shaded or unevenly shaded			X

1/ Drill hole - This defect should not be scored when visible on the inside of trouser, provided that the component as attached to outside of trouser fully covers the drill hole.

2/ Knot and slub defects shall be in accordance with basic material requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
III. PRESSING			
a. Omitted or poorly pressed, or exhibiting a double crease line on permanent crease	X		
b. Legs not pressed seam on seam at bottom or at knee by more than 3/4 inch on permanent creased		X	
c. Permanent crease line not ending within specified limits		X	
d. Seam not pressed open (to be scored only when condition exists on major portion of seam)			X
e. Bulge or distortion on or near inseam or outseam for a distance of more than 2 inches on outside			X
f. Permanent crease (other than a specified crease)			
1. Occurring anywhere on the outside of trouser, except within 1 inch of the inseam	X		
2. Occurring within 1 inch of the inseam:			
(a) - less than 1/2 inch in length in any direction			X
(b) - more than 1/2 inch in length in any direction		X	
IV. CLEANNESS			
a. Any spot or stain on outside visible at least 3 feet (largest dimension in any direction):			
1. Up to 3/8 inch inclusive			X
2. 3/8 to 3/4 inch inclusive		X	
3. More than 3/4 inch	X		
b. More than 3 thread ends not trimmed to 1/4 inch or less on outside.		X	
c. More than 5 thread ends not trimmed to 1/2 inch or less on inside.			X
d. Two or more shade or size marking or tickets not removed			X
e. Any size or shade marking or residue on outside, score:			
1. Up to 3/8 inch inclusive			X
2. 3/8 to 3/4 inch inclusive		X	
3. More than 3/4 inch	X		
f. Loose thread ends not removed from trousers			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
V. COMPONENT AND ASSEMBLY			
a. Any component part or operation omitted (unless otherwise classified herein)	X		
b. Any component not as specified	X		
c. Any component part tight, twisted, distorted, pleated, or full (unless otherwise classified herein)	X		
d. Any operation not as specified (unless otherwise classified herein)	X		
e. The edge of any component part required to be forced out having folds of more than 1/8 inch (unless otherwise classified herein)		X	
VI. CUTTING			
a. Any component part not cut in accordance with specified pattern or directional lines on patterns, or not in accordance with specification requirements	X		
b. Any cut part not cut in accordance with specification requirements	X		
VII. SEAMS AND STITCHING			
a. Accuracy of seaming:			
1. Seam irregular or wavy	X		
2. Seam puckered, pleated, or twisted on outside	X		
3. Any part of trouser caught in an unrelated operation or stitching (unless otherwise specified herein)	X		
4. End of all seams and stitching when not caught in other seams or stitching not backstitched (except stitching for attaching labels and automatic stitching)		X	
5. Thread break secured by stitching back of the break less than 1/2 inch		X	
6. Ends of a continuous line of stitching overlapped less than 1/2 inch		X	
7. Wrong or varying shades of thread used on outside	X		
8. Not specified color thread used on inside		X	
9. Stitching for attaching labels or automatic stitching not finished as specified			X
b. Gage of stitching			
1. Gage irregular or not within range specified (score only when condition exists on more than 1/2 the length of the seam).			X
2. Edge or raised stitching sewn too close to edge, resulting in damage to cloth	X		
3. Seam allowance not as specified or varies more than 1/8 inch		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
c. Open seam (resulting from 2 or more skipped, broken, runoff, or missing stitches)			
1. On joining seams			
(a) - Less than 1/4 inch			X
(b) - 1/4 inch to 1/2 inch		X	
(c) - More than 1/2 inch	X		
2. On overedging			
(a) - Less than 3 inches			X
(b) - More than 3 inches		X	
3. On label, edge, or raised stitching			
(a) - Up to 1/2 inch			X
(b) - More than 1/2 inch		X	
4. On seat seam			
(a) - Not completely resewn	X		
d. Runoff:			
1. On joining seam		X	
2. Edge or raise stitching			X
e. Raw edge 1/			
1. On outside:			
(a) Up to 1/8 inch			X
(b) More than 1/8 inch up to 1/2 inch inclusive		X	
(c) More than 1/2 inch	X		
2. On inside:			
(a) - 1/2 inch to 1 inch inclusive			X
(b) - 1 inch or more		X	
f. Seams and stitch type:			
1. Not specified seam or stitch type		X	
2. Looper thread of 401 or 406 stitch type on outside	X		
3. Any line of stitching omitted	X		
4. Any line of stitching not beginning or ending where specified (unless otherwise classified herein)			X
g. Broken, missing, or skipped stitches on edge or raised stitching (when seam is seamed, turned, and stitched)			
1. 1/4 to 1/2 inch inclusive			X
2. More than 1/2 inch		X	
h. Stitch tension:			
1. Loose tension resulting in a loose seam:			
(a) - up to 1/2 inch inclusive			X
(b) - more than 1/2 inch up to 3/4 inch inclusive		X	
(c) - more than 3/4 inch	X		
2. Loose tension on raised or edge stitching resulting in exposed loose thread		X	

1/ Raw edge resulting from missing, incomplete, or loose serging on leg bottom or any part of trouser shall be scored as a raw edge on inside.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching):			
(a) - Seat seam:			
(1) - both rows of stitching break at seam place	X		
(2) - both rows of stitching break at different places	X		
(3) - stitches break in one row of stitching		X	
(b) All other seams	X		
i. Stitches per inch (to be scored only when the condition exists on the major portion of seam or stitching):			
1. Less than the minimum specified (except on overedge stitching and labels)		X	
2. Less than the minimum specified on overedge stitching and labels			X
3. More than the maximum specified			X
VIII. BUTTONHOLE			
a. Omitted, added, not specified type, or not finished as specified	X		
b. Misplaced resulting in bulge or twist when buttoned	X		
c. Gimp omitted, uncut buttonhole, end of gimp not pulled through to underside, incomplete stitching, or stitching not securely caught in fabric	X		
d. Broken stitch, or two or more skipped stitches:			
1. On outside		X	
2. On inside			X
e. Buttonhole stitching extending beyond bartack or stitches per buttonhole not as specified:			
1. On outside		X	
2. On inside			X
f. Finished cut length not as specified			X
g. Purling not on side specified			X
h. Ragged edges, i.e., yarns or thread ends on inside of buttonhole not trimmed to less than 1/4 inch or basic fabric not caught by buttonhole stitching			X
IX. BUTTON			
a. Missing, broken, defective, misplaced, not as specified, or insecurely sewn			X
b. Any part of trouser pleated or puckered by button attachment			X
c. Stitching not locked at end of cycle (tug at loose end of thread, when accessible, to determine whether it will ravel)			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
X. HOOK AND EYE			
a. Hook or eye damaged affecting function, or not securely attached	X		
b. Hook or eye not positioned as specified causing bulge, twist, distortion, or pucker on outside	X		
XI. BARTACK OR TACK			
a. Missing, insecure, misplaced, not serving intended purpose, or not specified length or type		X	
b. Loose stitch tension			X
c. Width of two or more bartacks more than 1/32 inch wider than specified			X
XII. WAISTBAND			
a. Width of finished waistband or waistband lining not as specified			X
b. Lining exposed on outside:			
1. Up to 1/2 inch inclusive			X
2. More than 1/2 inch		X	
c. Waistband joining seam staggered at center back more than 3/16 inch			X
d. Waistband stitching varying more than 1/8 inch			X
e. Waistband lining non-slip tape:			
1. Not specified type		X	
2. Not incorporated in the preassembled commercial waistband			X
3. Stitching penetrating rubber threads	X		
XIII. BELT LOOPS			
a. Omitted or covering stitch on outside		X	
b. Set at an angle (more than 3/16 inch off perpendicular), insecure, not attached as specified, length too short constricting waistband, width not as specified, or poorly shaped			X
c. Misplaced by more than 1/4 inch, length too long causing gap of material to extend more than 1/8 inch above waistband, or finished length more than 1/4 inch longer than specified			X
d. Finished length shorter than specified			X
e. Turn under of loop not trimmed as specified or not trimmed to 1/2 inch when no requirement is specified			X
f. Bottom end of one or more loops (except center-back loop) not securely caught in waist seam		X	
g. Center back loop not on seat seam		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
XIV. FRONT OPENING			
a. Length of fly uneven at top (examination to be performed with slide fastener closed and hook and eye unfastened) by 1/4 inch or greater	X		
b. Fly facing exposed beyond front edge, seam joining right fly to front exposed when fly is closed, or left facing set more than 1/4 inch inward from front edge			X
c. Stitching on left fly, irregular or not positioned as specified or not terminating where specified			X
d. Raw edge of right fly extension not turned under, or the turned edge not stitched to edge of crotch seam allowance			X
e. Fly tab not positioned as specified			X
XV. SLIDE FASTENER			
Operate slider on chain twice, opening and closing the complete length of chain and locking slider each time			
a. Slide pull becomes detached or slider disengages from either row of scoops	X		
b. Chain becomes unmeshed or does not mesh properly	X		
c. Any required component missing or not properly assembled	X		
d. Slider lock does not retain slider when pull is in down position on non-automatic lock, or when pull is released on automatic lock, when the open chain above the slider is lightly pulled apart.	X		
e. Slider binds, catches, or sticks at any point or does not function properly	X		
f. Fastener is not type, size, style, or finish specified		X	
g. Chain (scoops) installed upside down	X		
h. Cut, tear, or hole in slide fastener tape	X		
i. Stitching too close to metal edge not permitting slider to pass freely	X		
j. Tape set too loose or too tight causing bulge, twist, or fullness in closed fly on top end of tape; tape not caught as specified; or staple not securely clinched at bottom of chain, or slide fastener chain misplaced (set too high or low) or tape not attached as specified		X	
k. Edge of chain not positioned within specified range at top or bottom from finished edge of left fly or end of metal scoops uneven at top by more than 3/16 inch			X
l. Slide fastener stop too high by 1/2 inch or more		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
XVI. POCKET			
a. General:			
1. Notch exposed at pocket opening	X		
2. Top of pocketing not securely inserted under waistband		X	
3. Top of pocketing not evenly inserted under waistband causing bulge or distortion on outside		X	
4. Length of pocket opening not as specified		X	
5. Pocket opening gapped by 1/4 inch or more			X
6. Depth of pocket not as specified			X
7. Pocketing caught in unrelated stitching			X
8. Raw edge or unfinished seam on inside of twill cloth side and rear pockets (not finished seam)			X
b. Side pocket:			
1. Facing or bearer not caught in bartack at each end of opening; facing or bearer not extending below bottom bartack and above top bartack	X		
2. Facing exposed on outside			X
3. Pocketing notched more than 1/4 inch beyond width of outseam allowance on the underside			X
4. Bartack extends beyond outseam, less than 1/16 inch or more than 1/8 inch			X
5. Bottom of pocket opening more than 1/8 inch from outseam joining seam			X
6. Left and right pocket out of alignment by more than 1/2 inch	X		
7. Opening deviates by more than 1/8 inch from each other			X
c. Hip pocket cord type:			
1. Cord not specified width or varies in width by more than 1/16 inch		X	
2. Buttonhole tab length not as specified or spacing between bartacks not as specified			X
3. Pocketing material or black threads visible on outside			X
4. End of cord or bearer not caught in the edge stitching or pocketing			X
5. Inside end of pockets at bartack not equidistant from center back seam:			
(a) - up to size 38: - difference of more than 1/2 inch			X
(b) - size 39 and up: - difference of more than 3/4 inch			X
6. Set on higher or lower than companion pocket by 1/4 inch or more	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
XVII. DART			
a. Not type specified; not properly tapered causing bulge, twist, fullness, or opening		X	
b. Lower end not extending into pocket opening			X
c. Incomplete			X
XVIII. INSEAMS AND OUTSEAMS			
a. Seat seam outlet omitted or less than specified by more than 1/2 inch on total width of both seams			X
b. Crotch seam stitching more than 1/4 inch above bartack at base of fly			X
c. Width of inseam outlet at crotch less than specified			X
d. Inseam staggered at crotch more than 1/2 inch (center to center) or crotch and seat seam staggered at inseam more than 1/2 inch (center to center)		X	
e. Crotch reinforcement piece missing or insecurely attached.		X	
XIX. LEG BOTTOM			
a. Not finished as specified			X
XX. LABEL			
a. Not attached as specified, misplaced, or stitching through the printing			X
b. Missing, incorrect, or illegible	X		

4.4.3.2 Dimensional examination. The trousers shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from nominal dimensions and tolerances specified in Table II shall be scored as a size measurement defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.3.3 Inspection levels and acceptable quality level. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units for visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
For visual examination in 4.4.3.1		
Major	1.0	III
Major, Minor A (combined)	6.5	III
Total (Major, Minor B combined)	15.0	III
For dimensionsl examination in 4.4.3.2		
One class	4.0	S-3

4.4.4 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be on the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling, bulged or distorted container.
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container. 1/

1/ For this defect, one item from each shipping container in sample shall be examined.

4.5 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

4.6 Test methods.

4.6.1 Permanency of creasing test.

4.6.1.1 Test specimens. The creased test specimens shall be soaked for 30 minutes in water containing a minimum amount of a suitable wetting agent to thoroughly wet out the cloth. The temperature of the water shall be 165 ± 5°F (74° ± 3°C). The wet out test specimens shall be removed without squeezing and shall be air dried or dried at a temperature not exceeding 180°F (82°C), while laying flat on an absorbent surface such as paper hand toweling or kitchen type tissue. The wet out and dried test specimens shall be compared with a standard sample prepared in the same manner. The sharpness of crease on the test specimens shall not be less than that of the standard sample. Results shall be reported as "pass" or "fail".

4.6.1.2 Standard sample preparation and storage. The standard sample shall be wet out and dried in the same manner as the test specimen. Store the wet out and dried standard sample by folding along the crease and hanging it by one end with the crease in the vertical axis. This will prevent wrinkling or other distortion which will be detrimental to its future use as a reference for comparison. Unless otherwise specified the standard sample shall be wet out and dried once only. The wet out and dried standard shall be used for all specimen evaluations. Only when the test results are uncertain or in dispute shall a new standard sample be wet out and dried and used for comparison. The old standard shall then be discarded and the new standard retained for future specimen evaluation.

5. PACKAGING

5.1 Preservation packaging. Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of trousers shall be folded so that the length dimension is approximately 23 inches and packaged in a close-fitting, flat style, clear polyethylene film bag of 0.0025 inch thickness (± 20 percent tolerance). The bag may be fabricated from polyethylene film tubing or sheeting. The polyethyelene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The final closure of the polyethylene bag shall be accomplished by means of a tuck or reverse flap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Trousers shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Fifteen trousers of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class weather resistant, grade V15C, variety DW, size 2A, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A folded trousers shall be packed flat, alternated end for end, within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed with in the same shipping container.

5.2.2 Level B. Fifteen trousers of one size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, type CF, grade 200, variety DW, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, of MIL-B-17757. Level A folded trousers shall be packed flat, alternated end for end, within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less then required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 4 by 5 inches with the words "Mixed NSN" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and National Stock Nuambers contained therein.

5.3.2 Polyethylene bagged packages. Polyethylene bagged packages shall have the required identification information printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

5.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K, and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2, or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1, fabricated from wood group specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The trousers are for wear by male personnel of the Coast Guard as part of the dress uniform.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification
b. Lengths and sizes required (see 1.2).
c. Whether coat and trousers are procured as a uniform (see 1.3).
*d. When first article is required (see 3.2). The item will be tested and should be a first article sample. The contracting officer should include specific instruction in acquisition documents regarding arrangements for examination, quantity and testing and approval of the first article.
e. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
*f. When pallletization is required (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1).

6.4 Permanent creasing. A guide for the permanent creasing procedure is as follows: Spray the crease area with a 2-1/2 percent solution of monoethanolamine being careful to maintain greater wetting in the area to be creased and gradually tapering to each side (approximately 60 percent wet pick-up or when the fabric is damp to the touch on the inside). Both back and front crease areas are to be sprayed. The sprayed trousers are steamed on a leg presser, 30 seconds steam, 30 seconds bake. This is accomplished with the press head locked. The press head should be carefully balanced so that uniform creases in both legs will result. After the trousers are pressed, they should be hung in a heated room or chamber until dry using the following drying conditions:

(1) In drying room or chambers having no arrangement for exhausting the moisture laden atmosphere, the drying temperature shall not exceed 140°F. (60°C).

(2) In drying room or chambers containing circulating and exhausting system for the removal of moisture laden atmosphere, the drying temperature used may range from 140° to 180°F (60° to 82°C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Materials required for the process are obtainable from Allied Chemical Corp., 40 Rector St., New York, NY; Dow Chemical Co.,Midland, MI; Olin Mathieson Chemical Corp., Chemicals Div., Mathieson Building, Baltimore, MD. The monoethanolamine solution is prepared as follows: 16 (2-1/2 percent) fluid ounces monoethanolamine; 0.32 (0.05 percent) fluid ounces non-ionic surfactant, 624 ounces of water. Suitable surfactants are Triton X100, Rohm Hass Co., Philadelphia, PA; Igepal CO 710, Antara Chemical Division of General Aniline and Film Corp., 345 Hudson St., New York, NY; or their equal. The spraying is accomplished in a booth by means of spray nozzles riding on a traverse rod located about 3 feet above the surface of the spray table. The solution is applied to the entire length of the trouser starting at the bottom and traveling to the crotch. The trousers are turned over and sprayed during the return of the spray nozzles.

6.4.1 Caution regarding condition of press pads and covers. In processing and pressing the monoethanolamine treated trouser legs, there is a tendency for an accelerated build-up of rust, soil, scorch products, and chemical adulteration on the pads and covers of the presses. Accordingly, frequent replacement is recommended in order to eliminate the transfer of discoloration, soils, and stains to the trouser legs during the permanent creasing operation.

6.5 Permanent creasing solution. Monoethanolamine solution has been approved for permanently creasing the trousers. No other solution is allowed except by specific approval of the contracting officer. Approval of such components is the responsibility of the the US Army Natick Research, Development, and Engineering Command, Natick, MA 01760 and is based on extensive tests, including toxicity, which are not set forth in this specification. Because of the time necessary to conduct full evaluation, only those chemical treatments already approved are acceptable for the related procurement.

6.5.1 Storage and stability (Shelf Life) of monoethanolamine, type I of MIL-E-50011, used in permanent creasing:

a. A six month storage life can be expected if stored in the original, unopened container at a temperature of 50° to 80°F (10° to 27°C).

b. Care should be taken not to introduce contaminants during storage or while withdrawing the chemical for use.

c. Discard monoethanolamine when color is distinctly amber and has a strong ammonia or fishy odor.

d. MEA on hand for six months or more should be tested to determine compliance with requirements of the type I compound under MIL-E-50011.

6.6 Equal time. Prior to the use of an "or equal" item, the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

* 6.7 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.8 Subject terms (key words) listing.

Blue 3362
Pants
Serge, Poly/Wool
Unhemmed
Waistband, Non-Slip

Custodian:
Navy - NU

Review Activity:
Coast Guard - CG
DLA - CT

Preparing Activity:
Navy - NU

Project No. 8405-N999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

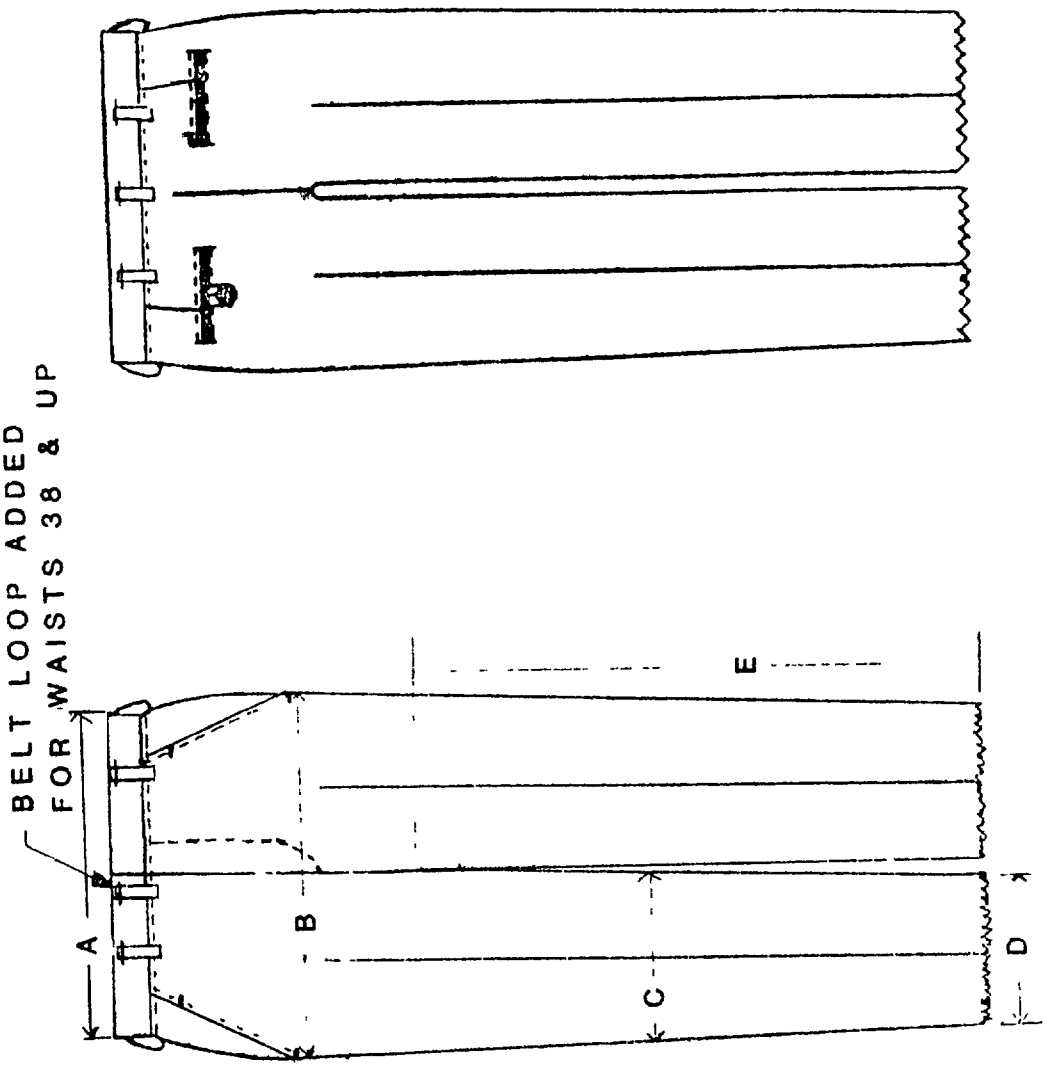


FIG. 1 - TROUSER MEN'S, POLYESTER/WOOL SERGE (CG)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

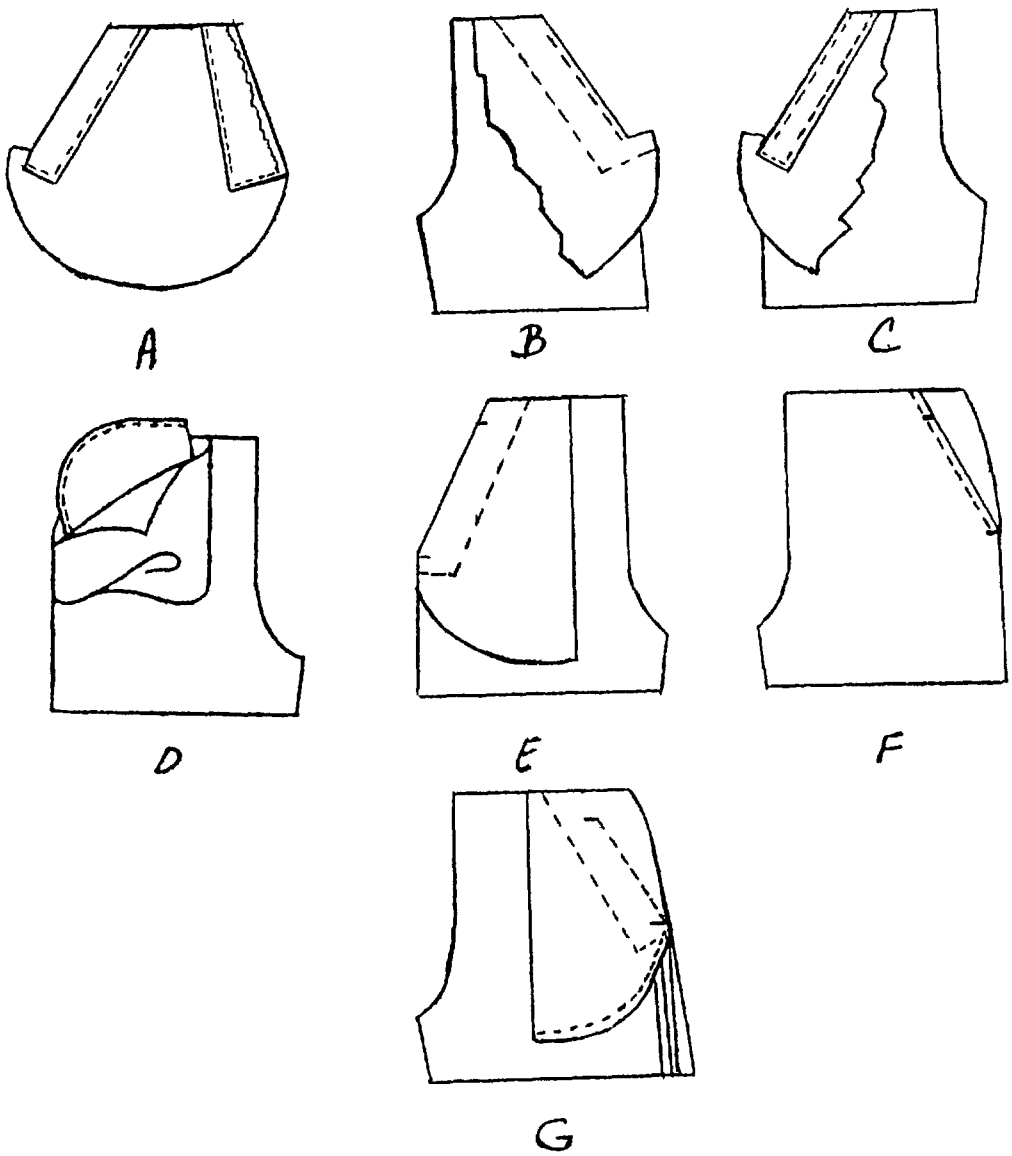


FIG. 2 SIDE POCKET

A - STITCH FACING AND BEARER TO POCKET
B - STITCH POCKET TO FRONT
C - TURN POCKET AND TOP STITCH
D&E - SEAMED AND TURNED
F - TACK POCKET OPENING TO BEARER
G - FINISHED POCKET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

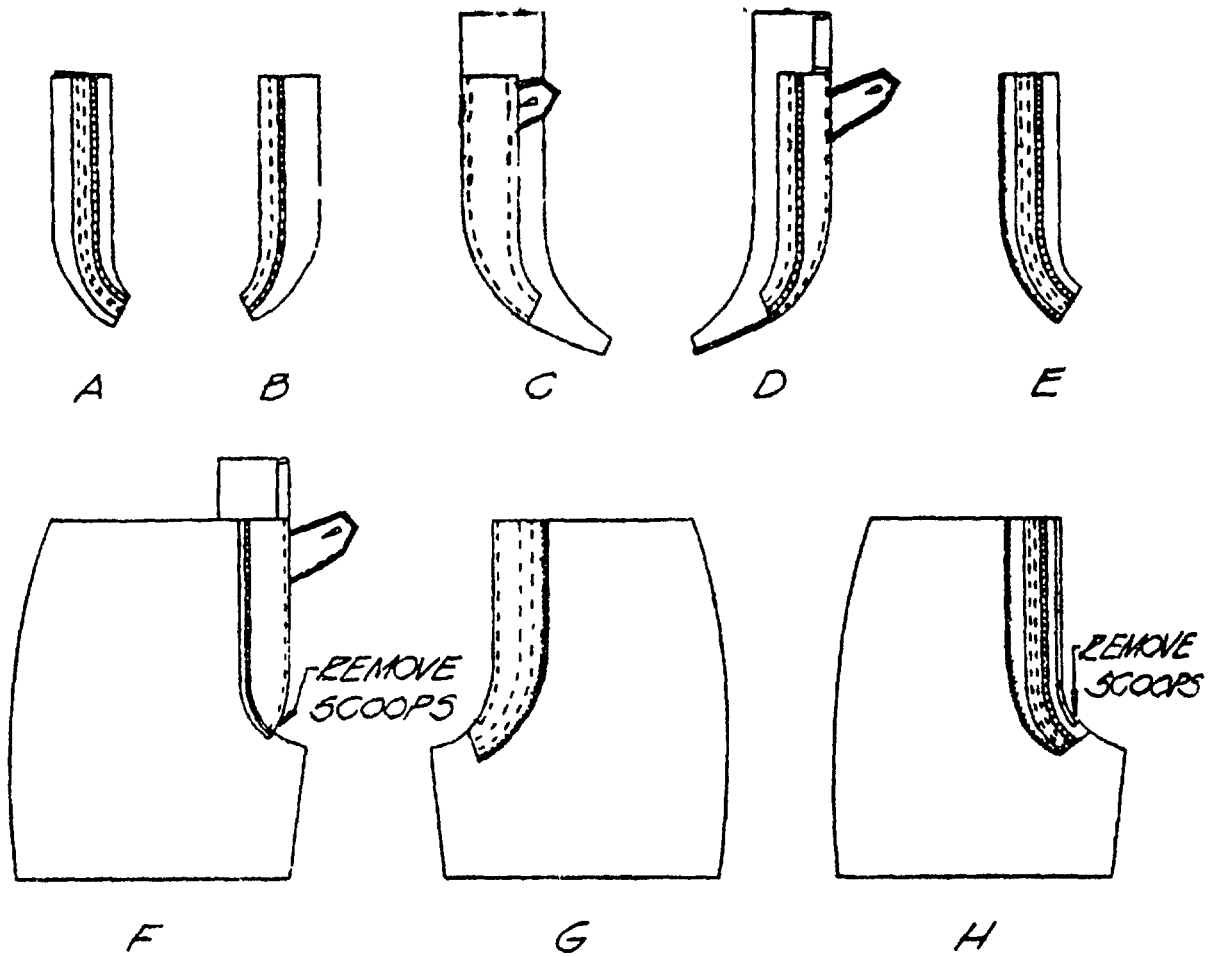


FIG 3 FLY

A - DOUBLE STITCH FASTENER TAPE TO LEFT FLY THROUGH LINING.
B - SEAM FASTENER TAPE TO RIGHT FLY.
C&D - SEAM LINING TO RIGHT FLY, TURN AND RAISE STITCH
E - OVEREDGE LEFT FLY
F - JOIN RIGHT FLY TO TROUSERS
G&H - JOIN LEFT FLY TO TROUSERS AND PRESS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

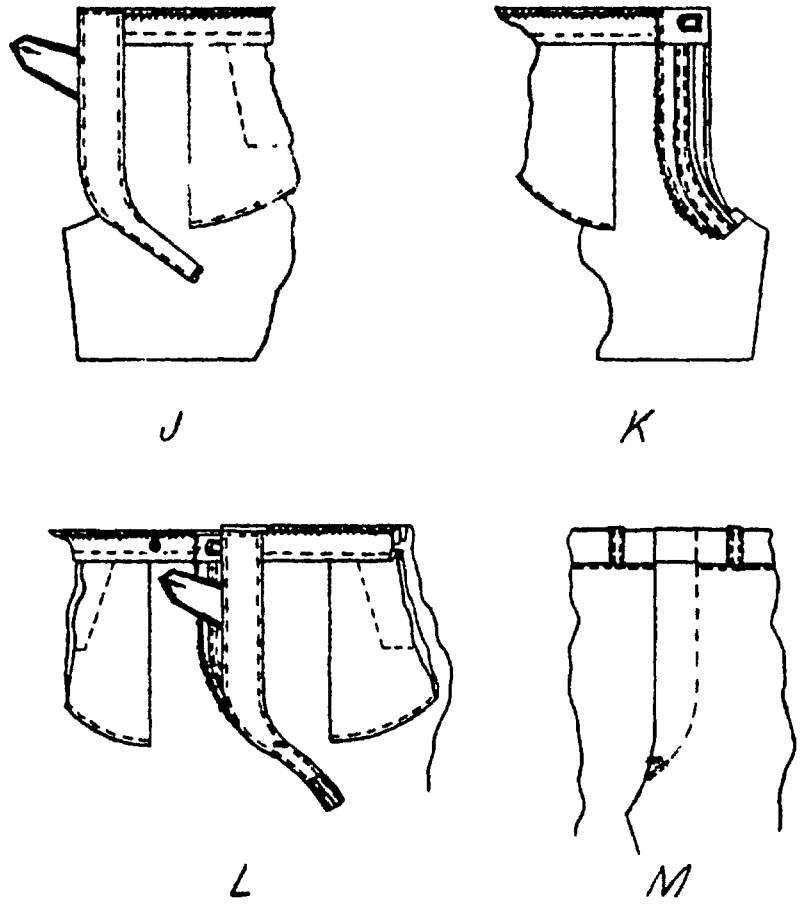


FIGURE 4 FLY

J - RAISE STITCH RIGHT FLY CATCHING LINING
K - RAISE STITCH BACK EDGE OF LEFT FLY THROUGH TROUSER
L - FINISH END OF RIGHT FLY LINING
M - BARTACK BASE OF FINISHED FLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

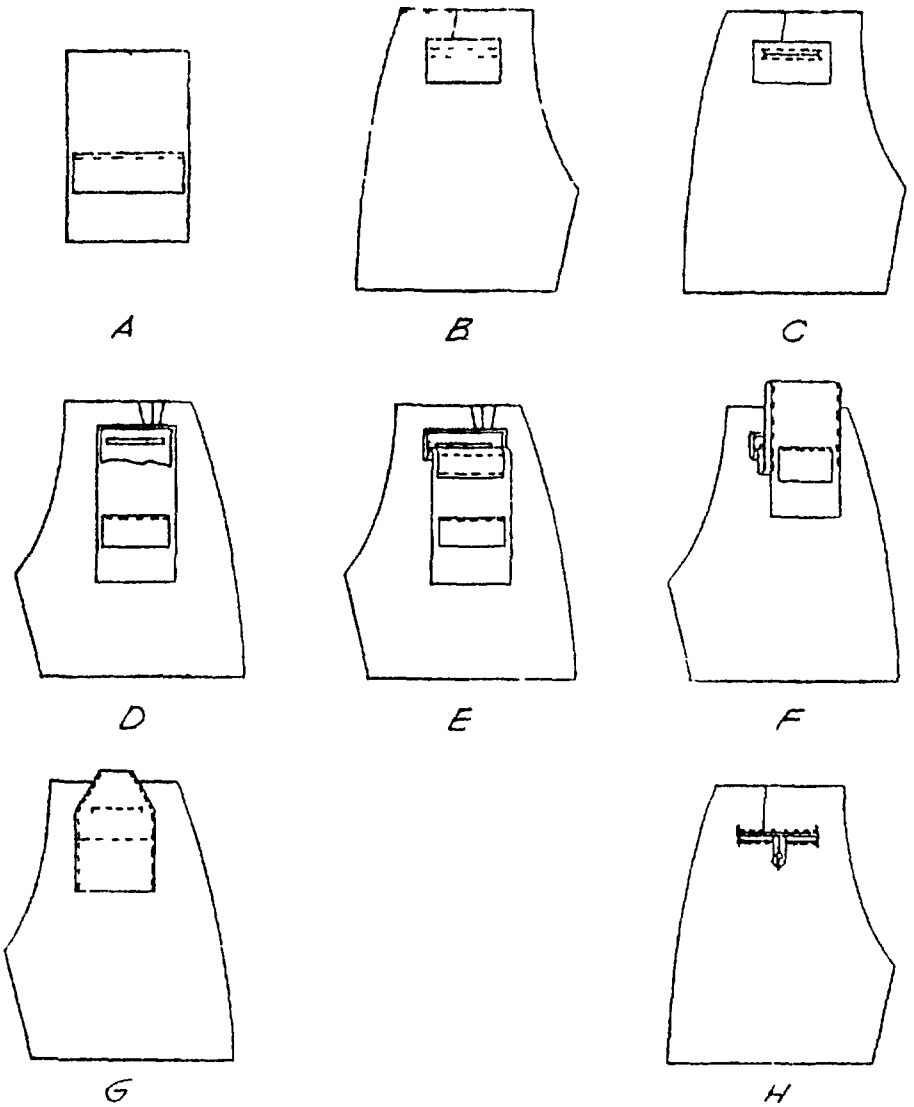


FIG. 5 HIP POCKET

A-BEARER ON POCKET
B-CORD FACING PIECE ON OUTSIDE OF TROUSERS
C-CUT THROUGH CORD PIECE AND NOTCH
D-CORD PIECE TURNED INSIDE
E-MAKE CORD
F-POCKET PULLED THROUGH AND CLOSED
G-POCKET PULLED THROUGH TO INSIDE & TOP STITCHED ON SIDES

H-TOP POCKET OPENING STITCHED THROUGH POCKET AND FACING PIECE WITH BUTTONHOLE TAB INSERTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in CHarge
Navy Clothing & Textile Research Facility
21 Strathmore Road (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-87047A	TROUSERS, MEN'S POLYESTER/WOOL SERGE (CG)

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4 TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording.

c Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26104:522
Check the source to verify that this is the current version before use.