|INCH-POUNDS|

MIL-T-87067C(NU)
7 September 1990
SUPERSEDING
MIL-T-87067B(NU)
27 September 1983

MILITARY SPECIFICATION

TROUSERS, MEN'S, (ENLISTED, WHITE)

This specification is approved for use by Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a white polyester trouser.

1.2 Classification. The trouser shall be of one type in the following class, sizes, and lengths (see 6.2):

1.2.1 Class. Class 2 - Polyester

1.2.2 Sizes. 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, and 46

1.2.3 Lengths. Short, Regular, Long, and Extra-Long

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-T-276	- Thread, Cotton
V-F-106	- Fasteners, Slide, Interlocking
V-T-280	- Thread, Gimp, Cotton, Buttonhole
V-T-295	- Thread, Nylon
*NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction, 2 Way and 4 Way (Partial)
CCC-C-438	- Cloth, Buckram, Woven and Nonwoven
DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use)

MILITARY

*MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-43718	- Cloth, Polyester; Polyester and Cotton, Polyester and Rayon, for Pockets
MIL-C-43920	- Cloth, Interlining, Cotton or Synthetic and Nylon
MIL-C-87052	- Cloth, Twill, Polyester, White
MIL-C-87059	- Cloth, Nylon Tricot

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

*MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
*MIL-STD-147	- Palletized Unit Loads
MIL-STD-1488	- Provisions for Evaluating Quality of Trousers
*MIL-STD-2073-1	- DoD Materials Procedures for Development and Application of Packaging Requirements
*MIL-STD-2073-2	- Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. POSTAL MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402-0001.)

2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Buttons
Department of Defense Standard Shades for Sewing Threads

(Application for copies of color cards should be addressed to the Color Association of the U.S., 343 Lexington Avenue, New York, NY 10016-0927).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material shall be polyester twill cloth conforming to MIL-C-87052. The color shall be White 3006.

3.3.2 Trouser lining material. The material for lining the trousers shall be nylon tricot warp knit, shade White 3006 conforming to MIL-C-87059.

3.3.3 Pocketing, left fly interlining (alternate), right fly lining, and waistband lining. The material for the pocketing, left fly interlining (alternate), right fly lining and waistband lining shall be a twill cloth conforming to class 1 of MIL-C-43718. The color shall be white.

3.3.4 Buckram. The material for the waistband interlining shall be bleached or unbleached cotton buckram conforming to type II, class 1 of CCC-C-438. As an alternate, the material for the waistband interlining may be of a non-woven material conforming to type IV, class 1 of CCC-C-438.

3.3.5 Waistband stabilizer. The material for the waistband stabilizer shall be interlining cloth conforming to type I of MIL-C-43920.

3.3.6 Label.

3.3.6.1 Combination label. The trousers shall have a combination identification and instruction label conforming to type VI, class 15 of DDD-L-20. The label shall show fastness to laundering. The inscription and format shall read as follows:

NAME:
SERVICE NO:
TROUSERS, MEN'S (ENLISTED, WHITE)
FIBER CONTENT: Outershell: 100% POLYESTER
Lining: 100% NYLON
CONTRACT NO: DLA 100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (If other than contractor)

Machine wash, Permanent Press Cycle, Hot wash. Do not mix colors. Fill machine with clothes to 2/3 capacity. Use heavy duty soap or detergent. Prespot stains with a laundry stain pretreatment. If needed use a non-chlorine bleach. Tumble dry using a warm setting or shape and hang dry. Remove at once from dryer. If touch-up ironing is needed, use warm iron. Press trousers inside out. Or follow NAVTRNG MANUAL 414-01-45-81 FORMULA II

DO NOT REMOVE THIS LABEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.3.6.2 Size label. The size label shall conform to type VI, class 2 of DDD-L-20. The inscription and format shall be as follows:

34R (EXAMPLE)
Stock No. 8405-00-000-0000 (EXAMPLE)

NOTE: The lengths (Short, Regular, Long, and Extra-Long) may be abbreviated as S, R, L, and X-L.

3.3.6.3 Removable size ticket. Each trouser shall have a commercial type size ticket attached to the outside of the waistband above the left back pocket. The ticket shall be 3 inches long and 1 inch high made of a suitable plain white cardboard. The corners of the ticket may be double perforated for ease in tacking. The size (38R - Example) shall be printed or stamped on the upper left hand corner in black or blue ink. The lettering for the size shall be 1/4 inch in height. Abbreviations for lengths shall be allowed in accordance with 3.3.6.2.

3.3.7 Covered polyester thread. The cotton or rayon covered polyester thread used for seaming and stitching the trousers shall conform to MIL-T-43548, in the following sizes:

Use	Ticket No.	Ply
Seaming and stitching	30, 50, 70	2 or 3
Bartacks and buttonholes	50	2 or 3
Button sewing	50	2 or 3

The color shall match Shade White AH, C.A. 66050, in accordance with Department of Defense Standard Shades for Sewing Threads. The use of polyester covered polyester thread is not allowed.

3.3.7.1 Automatic button sewing. If an automatic machine which sews and shanks (wraps) the buttons in one operation is used, the thread shall be waxed nylon monocord special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per pound of 2150 yards, and shall be tested for these requirements and for colorfastness (3.3.7.3) in accordance with test methods in V-T-295.

3.3.7.2 Automatic pocket machine. When the automatic pocket machine is used, the thread shall conform to type IC2, Ticket No. A, 3 ply of V-T-276. The color shall be as stated in 3.3.7.

3.3.7.3 Colorfastness. The thread shall show fastness to light, laundering, and wet dry-cleaning equal to or better than the standard sample. As a limit of acceptability, or when no standard sample is available, the thread shall show a minimum of "good" fastness to light, laundering, and wet dry-cleaning when tested as specified in MIL-T-43548, V-T-295, or V-T-276.

3.3.8 Gimp. The gimp for reinforcing buttonholes shall be cotton, No. 8 conforming to type I or II of V-T-280. The color shall match White AA, C.A. 66050, in accordance with the Department of Defense Standard Shades for Sewing Threads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.3.8.1 Colorfastness. The gimp shall show fastness to laundering and wet dry-cleaning equal to or better than the standard sample. As a limit of acceptability, or when no standard sample is available, the gimp shall show a minimum of "good" colorfastness to wet dry-cleaning and laundering when tested as specified in V-T-280.

3.3.9 Buttons. The buttons for the left hip pocket, and fly-tab closure shall be type II, class D, style 4, 22-line glossy finish conforming to V-B-871. The color of the buttons shall match Shade White BA, C.A. 62031, in accordance with the Department of Defense Standard Shades for Buttons.

3.3.10 Slide fastener. The slide fastener shall be type I, style 1, cam lock or semiautomatic pin lock, size LMS, short tab pull, brass conforming to V-F-106. All metal components of the slide fastener shall be brass except for the cover and spring on a semi-automatic pin lock, which shall be stainless steel. All component parts shall be from the same contractor (see 4.4.1). A staple bottom stop is required. The color of the tape shall match the basic fabric of the trousers. The tape shall show fastness to wet-dry cleaning and laundering equal to or better than the standard sample. When no standard sample is available, the tape shall show "good" colorfastness to wet-dry cleaning and laundering when tested as specified in V-F-106.

3.3.11 Hook and eye. The hook and eye shall be North and Judd (Hook Flex H-49, K-50, H-89, and E-90); Universal Button Co. (Talon #3, #7, and #8 hook with #8 eye or #85 eye); Akim Co. or Patwin, Inc., Junior Series, type JB; Stimpson (P-536, D-4086, D-4457); Patwin, Inc. (Slim-Slak with MB eye, and Slik-Slak) or equal (see 4.4.1 and 6.4). The finish shall be nickel plate.

3.4 Design. The trousers are dress type with a sewn-on waistband with hook and eye closure, a french fly with slide fastener, side seam pockets, and double welt hip pockets. The left hip pocket has a buttonhole tab and button. An outlet is provided at seat seam. The trousers shall have a lining extending from waistband to the bottom of the pockets. Trousers shall be pressed inside out with a side crease.

3.4.1 Figures. Figures are furnished for information only. To the extent of any inconsistencies between the written specification and the figures, the specification shall control.

* 3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). Except as allowed by footnotes to Table I, the working patterns shall be identical to the Government patterns, which shall not be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification. The patterns provide a 3/8 inch seam allowance for bagging pockets, 1/4 inch seam allowance for pocket facing and assembly, seat seam allowance of 1-1/4 inches at waist tapering to normal 3/8 inch at crotch and a 3/8 inch for all seams except as otherwise indicated in table of operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.5.1 Pattern parts. The component parts of the trousers shall be cut from materials as specified in accordance with the number of parts required as shown in Table I.

Table I - List of patterns parts

Material	Pattern nomenclature	Cut parts
Basic material (as specified)	Front	2
	Back	2
	Right fly	1
	Left fly facing	1
	Left fly interlining	1
	Right fly with integrated tab (optional)	1
	Side pocket bearer	2
	Side pocket facing	2
	Hip pocket bearer/facing	4
	Waistband (one right and one left)	2
	Waistband (left and right) for use with integrated tab (optional)	2
	Fly tab	2
Lining Material	Front	2
	Back	2
Twill cloth	Right fly lining 1/	1
	Right fly lining with integrated tab (optional) 1/	1
	Left fly interlining (alternate)	1
	Side pocket	2
	Hip pocket	2

NOTE: Patterns are not furnished for belt loops, buttonhole tab, waistband lining and waistband interlining (buckram). See Table II, operations 1 and 2 for their requirements.

1/ The right front end of the waistband lining may extend to the front opening. When this optional construction is used, the right fly lining shall be shortened at the top. The altered right fly lining must be sufficiently long to extend under the waistband lining and be caught by the waistband top stitching (see operations 19e, 21c, and 24a).

3.6 Construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.6.1 Stitches, seams, and stitchings. Stitch, seam and stitching types specified in Table II shall conform to FED-STD-751. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there will be no tight or loose tension. Where stitch type 401 is used, the looper (underthread), shall be on the inside of the trousers. The bight of the overedge stitching shall be 3/16 inch. The guide and knife shall be set to trimm only the ravelled ends of the fabric. The use of a trimming knife in the overedging of the right fly in operations 6d and 10b is prohibited. Buttonholes shall be clean cut and the stitching shall be securely caught in the fabric. The length of the bartacks shall be 1/4 to 3/8 inch in length and the width shall be 1/8 (± 1/32) inch.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

* 3.6.3 Thread breaks and ends of seam. The ends of all seams and stitching, when not caught in other seams and stitching, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 seaming (except seat seam) may be repaired using 301 stitch type. The seat seam must be completely resewn. Ends of overedge stitching, when not caught in other seams and stitchings shall be tacked or extend 1/4 to 3/8 inch.

3.6.4 Buttonholes. Buttonholes shall be the eyelet-end, taper bar, or eyelet-end, square-bar type, worked over gimp with the end securely tacked. The finished cut length shall be 5/8 inch. The eyelet-end, square-bar type shall be bartacked in a separate operation. The bar at end of the taper-bar type buttonhole shall have a minimum of four tacks not including the first cross-over stitch.

* 3.7 Manufacturing operations requirements. The trouser shall be manufactured in accordance with all operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations listed provided that the finished trouser is identical to that produced by following the sequence of operations listed in Table II. Any additional basting or holding stitching used to facilitate manufacturing is permissible provided that the thread is removed or does not show on the finished trousers. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification.

3.7.1 Pressing. Pressing as required in Table II shall be accomplished with a heated pressing iron or machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.8 Marking. The component parts shall be marked to insure a uniform shade and size throughout the trousers. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices
(b) Sew-on shade tickets
(c) Adhesive type tickets, which leave traces of paper or adhesive on material after removal of tickets

3.9 Abbreviations in Table of Operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
Btnhl	-	Buttonhole
incl	-	including
dbl	-	double
chnstch	-	chainstitch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cut trousers. a. Spread the material without tension in a suitable number of plies. The cut parts from the top and bottom ply shall match and correspond to the pattern. b. Cut trousers in accordance with patterns furnished which show directional lines, size, placement of pockets and notches for the proper assembly of all parts. Directional lines shall be placed in the warp direction. c. The directional lines on the fronts and backs may vary from the warp direction by not more than 1 inch. Measurements shall be taken at the top and bottom edges of the pattern from the directional line to the selvage edge of the fabric (evenside of lay) and the difference between the two measurements shall not exceed one inch. *d. Cut all parts of the trousers out of the same piece of material except side pockets facings, hip pocket bearer/facings, belt loops, fly tab pieces, right fly, left fly facing, and left fly interlining, which may be cut from ends. The parts cut from ends shall approximate the shade of the trousers. The side pocket facings and hip pocket bearer/facings may be cut using the selvage edge. e. Cut the stripping for belt loops and buttonhole tabs of sufficient width to comply with operation 7.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	f. The selvage shall not appear on the outside of trousers.				
2.	Cut linings and interlinings. a. Cut the right fly lining on the straight or on the bias.				
	b. Cut left fly interlining in the warp or filling direction.				
	c. Cut the waistband linings and the waistband interlinings on the bias of sufficient width to comply with operation 19.				
	d. Cut waistband stabilizer of sufficient length to comply with operation 19.				
	or				
	e. The waistband linings may be commercial type using the lining, interlining, and waistband stabilizer materials specified.				
	f. Cut the trouser lining parts out of the same piece of material according to marks on patterns.				
3.	Cut pockets. Cut pocketing in the warp or filling direction. Cut as many as possible in the warp direction.				
4.	Marking. (see 3.8) Mark or ticket all component parts of trousers, except parts cut from ends, to insure a correct size and uniform shade throughout the trousers. Parts cut from ends shall approximate the shade of the trousers.				
5.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1488 and section 5 shall be removed from production and replaced with non-defective and properly matched components.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
6	Overedge stitching.					
	a. Position front lining on fronts even with cut edges and overedge (within the seam allowance) the top edge, crotch seam, fly edge, inseam, outseam and bottom edges of the fronts.	502 or 503 or 504	EFd-1 and SSa-1	8-10	70	70
	b. Position the back lining on backs even with cut edges and overedge (within the seam allowance) the top edge, inseam, outseam, seat seam and bottom edge of backs. The back dart on lining and backs shall be stitched together and the lining slit after stitching (see operation 11).	502 or 503 or 504	FFd-1 and SSa-1	8-10	70	70
	c. The lining may be basted or pinned to their respective parts provided it is done in the seam allowance and does not show on the finished garment.					
	*d. Overedge the left end of the waistband and back edge of the right fly.	502 or 503 or 504	EFd-1	8-10	70	70
	or					
	The back edges of the right fly may be overedged to the slide fastener tape (see operation 10b). This operation is to be performed without the use of a trimming knife.					
	NOTE: When a knife is used on serging machine, the gage shall be set so that the raveled ends are trimmed but the edge of the fabric is not cut off.					
7	Make stripping (see 1e) for buttonhole tab and belt loops.					
	a. Fold stripping with the edges abutted at center and stitch with each row of stitching not less than 1/16 inch from edge and the covering stitch on the underside. The finished stripping shall measure 5/16 to 3/8 inch wide.	406	EFh-1	10-14	50	50
	or					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Fold striping with both edges turned in and the turned-in edges abutted at center and stitch with a covering stitch.	105	EFae-1	10-14	50	
	or					
	c. Seam stripping pieces, turn, smooth out and flatten. The seam shall not be exposed on the side edge of the formed loops.	301	EFu-1	10-14	50	50
8	Make hip pocket buttonhole tab.					
	a. Cut a piece of stripping (see operation 7) of sufficient length to comply with operation b. below and to measure 1-1/4 (+ 1/8) inches long when attached to the left hip pocket. Measurement shall be taken from bottom of top welt of pocket opening on outside to the tip of tab.					
	b. Fold the piece in half and abut the side edges forming a point. Bartack across the abutted edges at pointed end catching the base of the triangle. Place a second bartack across the abutted edges 5/8 (+ 1/16) inches from the first tack, forming slit buttonhole. The bartacks shall be 3/8 to 1/2 inch long, centered across the tab.					
9.	Make fly tab (applicable if separate tab piece is used).					
	a. Stitch the two fly tab pieces together along the sides and the pointed end, trim corners and point, turn, force out points and edges, and edgestitch 1/16 to 1/8 inch from edge.	301 or 401 and 301	SSe-2	10-14 10-14 10-14	50 50 50	50 70 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Make buttonhole at pointed end of tab as indicated by pattern, with the inside edge of the eyelet 5/8 to 3/4 inch from point. The purling shall face the wearer on the finished trousers. The eyelet end squarebar type buttonhole shall be bartacked with 21 stitches per bar.	Button-hole		52-54 per button-hole includ-ing tack	50	50
10.	Make flies.					
	a. Overedge the back edge of the left fly facing and left fly interlining together.	503 or 504	SSa-1	8-10	70 70	70 70
	b. Stitch back edge of fastener tape to left fly assembly with two rows of stitching. The end of the scoops shall be 1/4 to 3/8 inch above the fly notch when fasteners are cut and scoops removed. When the trousers are finished the edge of the chain shall be 1/2 to 5/8 inch from front edge at top, tapering to 1/4 to 3/8 inch at bottom. (Ill. A, Fig. 3).	301 or 401	LSbj-2	10-14	50 50	50 70
	*c. After fastener is cut and the scoops removed, stitch the fastener tape to back edge of right fly with bottom end of scoops 1/4 to 3/8 inch above the fly notch (Ill. B, Fig 3). As an alternate it may be overedged (see 6d). This operation is to be performed without the use of a trimming knife.	301 or 503 or 504	SSa-1	10-14	50 70 70	50 70 70
	d. [(Applicable if separate tab pieces are used) - with the fly tab positioned 3/8 to 3/4 inch from the top raw edge of right fly] Seam the right fly lining to the front edge of the right fly to within 1 (+ 1/4) inches from top of fly enclosing the fly tab between the two plies. On the finished trousers, the fly, fly tab, and waistband shall lie smooth and flat when fly tab is buttoned.	301 or 401	SSe-2(a)	10-14	50 50	50 70
	e. If option to use front fly with integrated fly tab is exercised, seam right fly lining to the front edge of right fly to within 1 (± 1/4) inches from top of fly.	301 or 401	SSe-2(a)	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
11.	Seam darts in back. a. Fold the backs matching the edges of waist darts. Seam lengthwise along the entire length of the dart (including lining), starting 3/8 inch from cut edges of the basic material at the top end and tapering to a point at the lower end as indicated by marks on patterns.	301	SSa-1	10-14	50	50
	b. Slit the dart in the lining open. Spread open and press darts smooth and flat with heated pressing iron or pressing machine.					
12.	Make hip pockets and attach label(s). Finished appearance - the pockets shall be in alignment, uniform in width and depth and shall finish 5-3/4 to 6-1/4 inches deep. There shall be no raw edges or pleats at the end of the openings. The pocket opening shall finish 5-1/4 (± 1/8) inches long.					
	NOTE: The hip pocket bearer/facing pattern pieces are used in two locations in the construction of the pocket: 1) to act as bearer, and 2) to simultaneously act as facing while forming the pocket welts.					
	a. Position the combination personal/ identification/instruction label approximately 1/2 inch from the bottom and right edge of the right hip pocketing (the label shall face the wearer on the finished trousers). Stitch on all four sides (the bottom and right side of labels may be caught in the pocket edge stitching). Stitching shall not be through the printing.					
	b. Turn in lower raw edge of hip pocket bearer and seam to pocket at notches. When the bearer piece is cut on the selvage, the edge need not be turned in (Ill. A, Fig. 5).	301	LSd-1	10-14	50	50
	c. Position hip pocket facing on outside of trousers as indicated on pattern with the pocketing placed on the underside (as indicated by solid line on pattern) and stitch to trousers through pocketing with two rows of stitching (Ill. B, Fig. 5).	301	SSv-2	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Cut opening between the rows of stitching through all plies, turn lower part of hip pocket facing through the cut opening and raise stitch forming a 1/8 to 3/16 inch welt (Ill. C, D, and E, Fig. 5).	301	-	10-14	50	50
	e. Turn in raw edges of hip pocket facing and seam to pocketing. When facing piece is cut on the selvage, the edge need not be turned in (Ill. E, Fig. 5).	301 or 401	LSd-1	10-14	50 50	50 70
	f. Fold pocketing, seam the sides and turn to finished position (Ill. F, Fig. 5).	301 or 401	SSae-2(a)	10-14	50 50	50 70
	g. Smooth out pocketing and topstitch 1/4 to 3/8 inch from edge. The stitching may extend across the bottom folded edge. The ends of the bearer and facing pieces shall be caught by the topstitching only (Ill. G, Fig. 5).	301	SSae-2(b) and OSF-1	10-14	50	50
	or					
	Fold pocketing with side raw edges turned to the inside 3/8 (+ 1/16) inch and stitch down sides and across bottom 1/8 (+ 1/16) inch from pocket edges.	301	SSc-1 and OSf-1	10-14 10-14	50 50	50 50
	h. Using the facing, form a 1/8 to 3/16 inch welt on the upper edge of pocket opening, inserting buttonhole tab at center (1/4 inch off center tolerance) on left hip pocket. Raise stitch the seam through the trousers, facing piece, bearer and pocketing, closing the top of pocket (Ill. H, Fig. 5).	301		10-14	50	50
	i. Tack ends of pocket opening 1/4 to 3/8 inch through welt, bearer and pocketing.	301		10-14	50	50
	or					
	j. Operation c and d above may be accomplished with a double welt pocket machine which stitches, cuts and turns welt edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine and the machine manufacturer's recommended pocket-stay material may be used.	101 or 301	-	10-14	A 50	 50
	and					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	Raise stitch the joining seam of lower welt piece through back of trousers and welt pieces only; raise stitch the joining seam of the top welt piece through all plies, closing the top of pocket. The ends of the pocket openings shall be securely tacked.	301	-	10-14	50	50
*13.	Make side pockets.					
	a. Place facing on step side of pocket, with top of facing at base of cut out (see Ill. A, fig. 2) and even with edge of pocket. Turn inside raw edge under 1/4 inch and stitch 1/16 inch from the folded edge. Leave bottom raw edge flat and stitch across. A selvage edge need not be turned in.	301	LSd-1 and LSbj-1	10-14	50	50
*	b. Place bearer on curved side, 3/8 inch from edge of pocket. Turn inside raw edge under 1/4 inch and stitch 1/16 inch from the folded edge. Leave bottom raw edge flat and stitch across. A selvage edge need not be turned in.	301	LSd-1 and LSbj-1	10-14	50	50
*14.	Attach side pockets. Finished appearance - The edges of the pocket openings shall not be distorted. The openings shall be aligned, uniform in length, and shall measure 6-1/4 (+ 1/4) inches between tacks. Avoid notching the pocket on underside beyond the width of the side seam allowance.					
*	a. Seam side pocket assembly to front, as indicated by marks on pattern. Notch for pocket opening, turn pocket to finished position and stitch 3/16 to 1/4 inch from edge (Ill. B and C, Fig. 2).	301	SSbe-2	10-14	50	50
	b. Fold pocket right-side-out and stitch raw edges from step to folded edge of pocketing, closing pocket bag. Notch pocket and facing at top of step and turn pocket (Ill. D and E, Fig. 2).	301 or 401	SSae-2(a)	10-14	50 50	50 70
	c. Tack ends of the opening to the bearer with a 1/4 to 3/8 inch tack. The right and left pocket opening shall not be out of alignment by more than 1/2 inch (Ill. F, Fig. 2).	304	-	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
15.	Sew on flies. Finished appearance - The ends of the flies shall be even where they join the crotch seam. The fly shall lie flat without twists or puckers when fastener is closed.					
	a. Sew on right fly (slide fastener and fly tab when applicable attached) with notches matched (Ill. F, fig. 3).	301	SSa-1	10-14	50	50
	b. Sew on left fly (slide fastener attached) with notches matched. Turn fly to inside with the seam 1/16 to 1/8 inch back of folded edge and press front edge without damage to the fastener (Ill. G. and H, fig. 3).	301	SSa-1	10-14	50	50
16.	Join outseams.					
	a. Join outseams with the notches matched.	301 or 401	SSa-1	10-14	50 50	50 70
	b. Press outseams open and flat from bottom to top of trousers.					
	c. The lining shall be smooth and flat without pleats or twisting.					
*17.	Finish side pockets.					
	a. Turn in back edge of pocket and stitch to seam allowance of back parts and continue stitching around pocket to folded edge at bottom of pocket 3/16 to 1/4 inch from edge.	301	SSc-1 and SSae-2(b)	10-14	50	50
	b. Upper portion of pocket shall extend into the waistband, finish smooth, flat, and be sewn to the seam allowance of waistband and trousers.					
18.	Attach waistband. Finished appearance - The finished waistband shall measure 1-1/2 (± 1/8) inches wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	a. Stitch right and left waistbands to trousers.	301 or 401	SSa-1	10-14	50 50	50 70
	b. Press waistband seam open and flat.					
NOTE:	The waistband lining may be attached to the waistband (operation 19) prior to setting to trousers.					
19.	Make and join waistband linings. Finished appearance - The waistband linings shall measure 1-7/8 to 2 inches wide in the finished trousers. The waistband linings may be pieced providing the seam is flat and there is not more than one piecing on each trouser. The waistband stabilizer may be 1 inch shorter than the waistband lining at seat seam.					
	a. Overlap the lining on the interlining 1 inch (see operation 2c) and stitch 1/8 to 3/16 inch from edge of lining. Position waistband stabilizer to opposite remaining edge of interlining and stitch 1/2 inch from edge. Fold lining over interlining and press.	101 or 301 or 401	LSa-1	8-10 10-14 10-14	50 50 50	 50 70
	b. A commercial waistband conforming to specified requirements may be used (see operation 2e).					
	or					
	c. The waistband stabilizer may be inserted during the joining of the waistband and waistband lining (operation 19d).					
	d. Turn under top edge of waistband lining and stitch to top edge of waistband catching interlining stabilizer.	304 or 401 or 404 or Hand		10-14 10-14 10-14 6-8	50 50 50 50	50 70 70 -
	e. (Applicable to trousers when option to extend waistband lining to right end of waistband is exercised). Turn right end of waistband lining to the outside and stitch to front edge of waistband catching the top of the fly lining in the stitching.	301 or 401	SSe-2(a)	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. Fold waistband lining to the inside and baste or press top edge. The lining shall not be exposed beyond the top of waistband.					
20.	Attach hooks and eyes.					
	a. Position the hook through left waistband at center (1/4 inch off center tolerance), with the rolled edge of the hook aligned with the slide fastener scoops. Attach through a suitable reinforcement.					
	b. Position the eye through right waistband at center, aligned with the slide fastener scoops, to correspond to the hook on left waistband. Attach through a suitable reinforcement.					
	NOTE: When the hook and eye is engaged on the finished trousers, the closure shall not bulge, pucker, or twist.					
21.	Finish right and left flies.					
	Finished appearance - The top corners of the right (when applicable) and left flies shall be completely forced out and shall not be bulky. The stitching of the left fly shall be uniformly spaced from edge of fly. The seam joining the left fly to the forepart shall not be exposed on outside of trousers, when fastener is closed. The right fly lining shall not be exposed on outside. The flies shall be smooth without twists or puckers or excessive fullness.					
	a. Continue the stitching of the right fly lining to the top of waistband.	301 or 401	SSe-2(a)	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Turn right fly lining to the inside and stitch 1/16 to 1/8 inch from front edge. Turn in fly lining at top of waistband and continue the stitching across top; turn in raw edge of fly lining and raise stitch the fly joining seam catching the fly lining in the stitching (Ill. D, Fig. 3, and Ill. J, Fig. 4). The edge stitching along front edge of fly may be accomplished in a separate operation.	301	SSe-2(b) and SSc-1 and LSq-2(b)	10-14	50	50
	or					
	c. (Applicable to trousers when option to extend waistband lining to right end of waistband is exercised.) Turn right fly lining to the inside and stitch 1/16 to 1/8 inch from front edge; continue the stitching along front end of waistband, across top of waistband and down to meet back of right fly; turn in raw edge of fly lining and raise stitch the fly joining seam catching the fly lining in the stitching.	301	SSe-2(b) and LSq-2(b)	10-14	50	50
	d. Turn back end of waistband in line with the front folded edge of left fly and stitch across top of waistband the width of the fly. Trim, turn, and work out corner (Ill. K, Fig. 4).	301	SSa-1	10-14	50	50
	e. Stitch down left fly with waistband lining smoothly inserted between fly and trousers. The "J" stitching shall be 1-3/8 (+ 1/8) inches from front edge of fly, extend from top of waistband, and curve to fly notch (Ill. K, Fig 4).	301		10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
22	Join inseams. a. Join inseams. The seam shall start and finish evenly and the notches shall match.	301 or 401	SSa-1	10-14	50 50	50 70
	b. Press inseams open and flat.					
	c. The lining shall be smooth and flat without pleats or twisting.					
23	Join crotch/seat seam. Finished appearance - The crotch/seat seam shall be joined with stitch tension of sufficient elasticity to meet strain encountered in sitting or stooping. The waist shall be measured before the crotch/seat seam is joined to assure correct waist size. In the joining of the crotch/seat seam, the inseams shall finish no more than 3/8 inch off center and the right and left waistband joining seams shall be aligned. The base of the left fly shall cover the right fly on outside of the finished trousers.					
	a. Join crotch/seat seam from base of fly to end of waistband lining with a double needle seat seamer with the rows of stitching 1/64 to 1/32 inch apart. The seam from the waistband joining seam to the end of the waistband lining shall be perpendicular (90 degree angle) to the waistband joining seam. Broken crotch/seat seam must be completely resewn.	401	SSa-2	8-10 each needle	50	70
	b. Press crotch and seat seam open and flat. The crotch and seat seam shall be pressed and handled in such a manner that the seams remain open after pressing.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. The lining shall be smooth and flat without pleats or twisting.					
24.	Finish waistband and attach size label.					
	a. Top stitch the waistband seam 1/16 inch below the joining seam on the trouser side, simultaneously catching the waistband lining (with the ends at center back folded in) and the tops of the pockets. The stitching shall not extend across the fly except when option to extend waistband lining to right end of waistband is exercised. Pockets may be stitched or basted to waistband seam allowance prior to topstitching.	301	LSq-2 (shows finish seam)	10-14	50	50
	b. Stitch the top edge of the size label to the lower edge of waistband lining above the right hip pocket. The end of the stitching need not be tacked providing the stitching extends at least 1/2 inch beyond each end of the label. The stitching shall not be through the printing.	301	LSbj-1	10-14	50	50
25.	*Assemble fasteners. Attach slider and, with the ends of the chain even, staple the fastener together at the bottom with the staple overlapping the scoops. The stop shall be positioned no more than 3/8 inch above the bottom of the "J" stitching. The end of the tape shall extend at least 1/8 inch below the notch.					
26.	Attach belt loops. There shall be seven loops for sizes up to and including 37 and eight loops for size 38 and up. The loops shall be positioned as follows:					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	One loop centered (± 1/4) inch on each front part.					
	One at each outseam on back.					
	One centered (± 1/4) inch between outseam and seat seam.					
	One on seat seam.					
	(Size 38 and above) - One extra loop on right front 1-1/4 to 1-3/4 inches from right fly joining seam.					
	a. Position raw edge of the top end of belt loop on the waistband, face to face, with the remainder of belt loop extending past the top of waistband. Bartack 1/16 to 1/8 inch from top of waistband through single ply of belt loop and waistband.	bar-tack or auto-matic loop tacker		21-28 per bartack 24-28 per tack	50	50
	b. Fold belt loop down in alignment with top edge of waistband. Turn under bottom end of belt loop with raw edge of belt loop even with bottom edge of waistband. The bottom folded edge of the belt loop shall be 5/16 to 7/16 inch below waistband joining seam. Bartack through all plies of belt loop and trouser, 1/8 inch from bottom folded edge of belt loop. The belt loops shall measure 1-3/4 (± 1/8) inches from bartack at bottom of loop to the top folded edge.	bar-tack or auto-matic loop tacker		21-28 per bartack 24-28 per tack	50	50
27	Make buttonhole (applicable to fly with integrated fly tabs. Make buttonhole at pointed end of tab, as indicated by pattern, with the inside edge of eyelet 1/2 inch from point. The purling shall face the wearer on the finished trousers. The eyelet-end, square-bar type buttonhole shall be bartacked with 21 stitches per bar.	Button-hole		52-54 button-hole including tack	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
28.	Mark and sew buttons. Finished appearance - The buttons shall be securely sewn and properly aligned with buttonholes. Hand sewn buttons shall be shank wrapped three times and the ends of the thread shall be securely tacked with not less than two stitches. Machine sewn buttons which are automatically shanked shall have a minimum of ten wraps with three locking stitches.	301 or	-	14-16 per button	50	50
		101 or	-	14-16 per button	50	-
		Hand or		4 double per button not including shank wrapping	50	16 or 50
		205		7 (min) deep set per button not including shank wrapping	5	
	a. Sew a 22-line button on the left waistband lining to correspond with the fly buttonhole. The stitching shall not be visible on the outside of the trousers.					
NOTE:	The button shall be correctly aligned so that no distortion is noted on the outside of trousers.					
	b. Sew a 22-line button on left hip pocket through pocket and facing to correspond to buttonhole tab.					
	*Bartacking. Finished appearance - The bartacks shall be well made and correctly placed to reinforce points of strain as specified.	Bartack		21-28 per bartack	50	50
	a. Bartack back pockets perpendicular to end of pocket opening. The bartack shall be positioned at the end of the opening.					
	b. The bartack for the front pockets shall be horizontal and parallel to waistband. The bartack shall be at ends of pocket opening. The bartacks shall extend beyond the outseams 1/16 to 1/8 inch.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF TROUSERS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	c. Place a bartack at base of fly at the junction of the crotch seam and on "J" stitching line. The bartack shall not extend beyond the crotch seam (Ill. M, Fig. 4).				
	d. Bartack the lower corner of the right fly to the left fly facing. Position the bartack to relieve the tension placed upon the bottom stop (approximately 3/4 inch from base of the fly bartack at 45 degrees from the horizontal).				
30.	Cleaning. a. Trim all ends of stitching to within 1/4 inch and remove loose threads inside and outside.				
NOTE:	Caution shall be made so not to harm the material when trimming.				
	b. Remove all spots, stains, and marking tickets.				
	c. Attach removable size ticket to outside of waistband above the left back pocket.	Hand Machine	2-4 stitches per tack 6-8 stitches per tack		
31.	Pressing. a. Press top of trousers including fly and pockets neatly. The trousers and lining shall be smooth and flat without pleats or twisting.				
	b. Close slide fastener, fasten waistband, and button hip pocket.				
	c. Turn trousers inside out. Press one leg at a time with fronts on top of backs keeping inseam and outseam allowances open and flat. Crease along back edge of the outseam allowance, keeping the creases (outseam and inseam) on the backs. The inseam and outseam shall be pressed and handled in such a manner that the seams remain open after pressing.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

* 3.9 Measurements. The finished trousers shall conform to the measurements shown in Table III.

Table III - Measurements in inches

Size	Waist (A)	Seat (B)	Knee (C)	Bottom (D)	Inseam Length Unhemmed (E) Short	Regular	Long	X-Long
26	26	34	17-5/8	20-7/8	32-1/2	34-1/2	36-1/2	39-1/2
27	27	35	17-5/8	20-7/8	32-1/2	34-1/2	36-1/2	39-1/2
28	28	36	18-1/4	21-1/2	32-1/2	34-1/2	36-1/2	39-1/2
29	29	37	18-1/4	21-1/2	32-1/2	34-1/2	36-1/2	39-1/2
30	30	38	18-7/8	22-1/8	32-1/2	34-1/2	36-1/2	39-1/2
31	31	39	18-7/8	22-1/8	32-1/2	34-1/2	36-1/2	39-1/2
32	32	40	19-1/2	22-3/4	32-1/2	34-1/2	39-1/2	39-1/2
33	33	41	19-1/2	22-3/4	32-1/2	34-1/2	36-1/2	39-1/2
34	34	42	20-1/8	23-3/8	32-1/2	34-1/2	36-1/2	39-1/2
35	35	43	20-1/8	23-3/8	32-1/2	34-1/2	36-1/2	39-1/2
36	36	44	20-5/8	23-7/8	32-1/2	34-1/2	36-1/2	39-1/2
37	37	45	20-5/8	23-7/8	32-1/2	34-1/2	36-1/2	39-1/2
38	38	46	21-1/8	24-3/8	32-1/2	34-1/2	36-1/2	39-1/2
39	39	47	21-1/8	24-3/8	32-1/2	34-1/2	36-1/2	39-1/2
40	40	48	21-5/8	24-7/8	32-1/2	34-1/2	36-1/2	39-1/2
41	41	49	21-5/8	24-7/8	32-1/2	34-1/2	36-1/2	39-1/2
42	42	50	22-1/8	25-3/8	32-1/2	34-1/2	36-1/2	39-1/2
43	43	51	22-1/8	25-3/8	32-1/2	34-1/2	36-1/2	39-1/2
44	44	52	22-5/8	25-7/8	32-1/2	34-1/2	36-1/2	39-1/2
45	45	53	22-5/8	25-7/8	32-1/2	34-1/2	36-1/2	39-1/2
46	46	54	23-1/8	26-3/8	32-1/2	34-1/2	36-1/2	39-1/2
Tolerance:	+ 3/4 -1/2	+ 3/4 -1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2	± 1/2

NOTE: Measurements for waist and seat shall be taken with slide fastener and waistband closed.

A. Waist - Twice the measurement taken along top edge of waistband from folded edge to folded edge.

B. Seat - Twice the measurement taken across trousers, one inch above fly bartack, from folded edge to folded edge.

C. Knee - The location of knee measurements shall be from bottom of trousers within 18-7/8 to 19-3/8 inches for Shorts, 19-7/8 to 20-3/8 inches for Regulars, 20-7/8 to 21-3/8 inches for Longs, and 21-7/8 to 22-3/8 inches for X-Longs. Twice the measurement taken from folded edge to edge.

D. Bottom - Twice the measurement taken along (unhemmed) bottom edge of leg from folded edge to folded edge.

E. Inseam - Measure along inseam from crotch seam to unhemmed bottom edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. The finished trousers shall conform to the quality and grade of product established by this specification. As a final step in the contractors product control plan before formation of a lot, each dress trouser shall be examined after pressing and prior to folding for packaging, and a trouser containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1488 indicated by an asterisk(*). The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents. In addition, the contractor shall furnish a certificate of compliance stating that the hooks and eyes are one of the specified types required in 3.3.11. A certificate of compliance will also be accepted for the slide fastener requirements stating that all metal components are brass (when applicable) and furnished by the same contractor (see 3.3.10).

4.4.2 Examination of the end item. Sampling and examination of the end item shall be performed in accordance with the provisions of MIL-STD-1488 and the following defects listed. The trousers shall be classified as dress (D) trousers.

Defects	Point Value
Pressing	
Inseams and outseams not pressed open and flat -	
More than 1 inch up to and including 5 inches	1
More than 5 inches	2
Fly Tab (Both)	
Buttonhole not positioned as specified	1
Button not positioned as specified causing distortion on front when buttoned	2
Waistband	
Waistband not uniformly stitched to top of trousers causing waviness of waistband	2
Pockets	
Pocket facing too tight or loose causing puckering on front of pocket edge	1
Pocket facing not stitched 1/8 inch from pocket edge (varies more than 1/16 inch)	1
Pocket facing not stitched flat and smooth, i.e., having pleats or folds	1
Label	
Removable size ticket missing, incorrect, or illegible	3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

4.4.3 Packaging inspection. Packaging inspection shall be in accordance with MIL-STD-1488.

4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of trousers, turned inside out, shall be folded in half lengthwise with the inseams and outseams meeting and fly folded inside. The dimension of the folded trousers shall approximate 11-1/2 by 15-1/4 inches and shall be folded so that the combination label on the right hip pocket is visible. The trousers shall be individually packaged in a close-fitting, flat style, clear polyethylene film bag of 0.00125 inch thickness (± 20 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape.

5.1.2 Level C. Trousers shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Twelve (12) trousers of one class, size and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class weather-resistant, grade V15c, variety DW, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A folded trousers shall be packed flat, one in width, two in length, and six in height, alternated end for end, within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

* 5.2.2 Level B. Twelve (12) trousers of one class, size, and length only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety DW, grade 200, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A folded trousers shall be packed in flat, one in width, two in length and six in depth, alternated end for end, within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

5.4 Palletization. When specified (see 6.2) item packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or Film bonding F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood group I, II, III or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from wood groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

5.5 MIL-STD-2073. When specified (see 6.2), Preservation and Packaging shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended uses. The trousers are for wear by male personnel of the Navy.

6.2 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number, and date of this specification
(b) Class, lengths, and sizes required (see 1.2).
* (c) Issue of DoDISS to be cited in the solication, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
(d) When first article inspection is required, the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval of the first article.
* (e) When palletization is required (see 5.4)
* (f) When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2.

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1).

6.4 Equal item. Prior to use of an "equal" item, the contractor shall submit the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible Military Agency.

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.6 Subject term (key word) listing.
Cloth, twill, polyester
Pants, dress
Pants, men's
Pants, polyester
Uniform, man's

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8405-N110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.


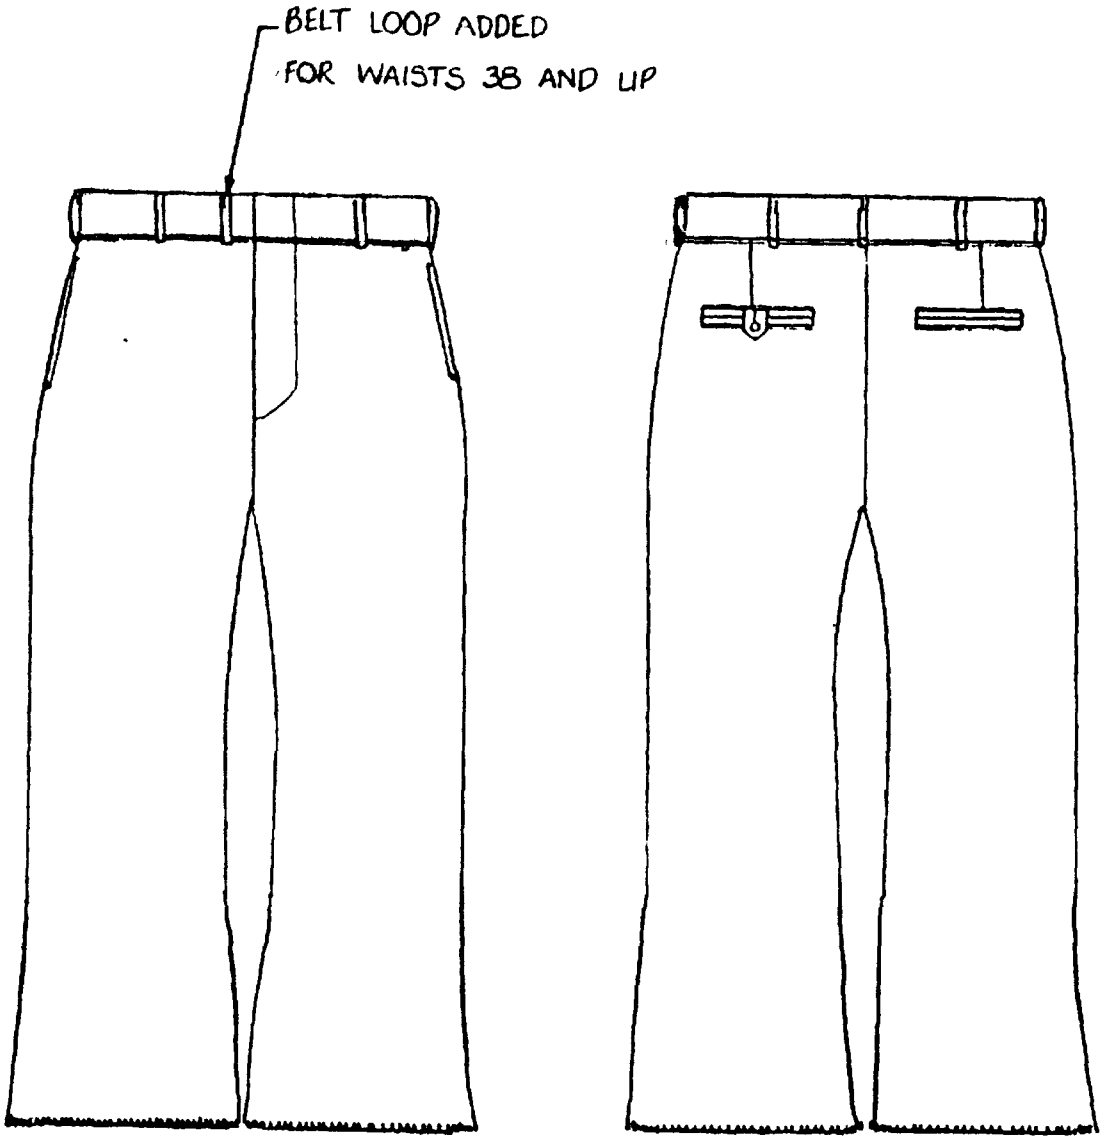


FIGURE 1 -

TROUSERS, MEN'S (ENLISTED WHITE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

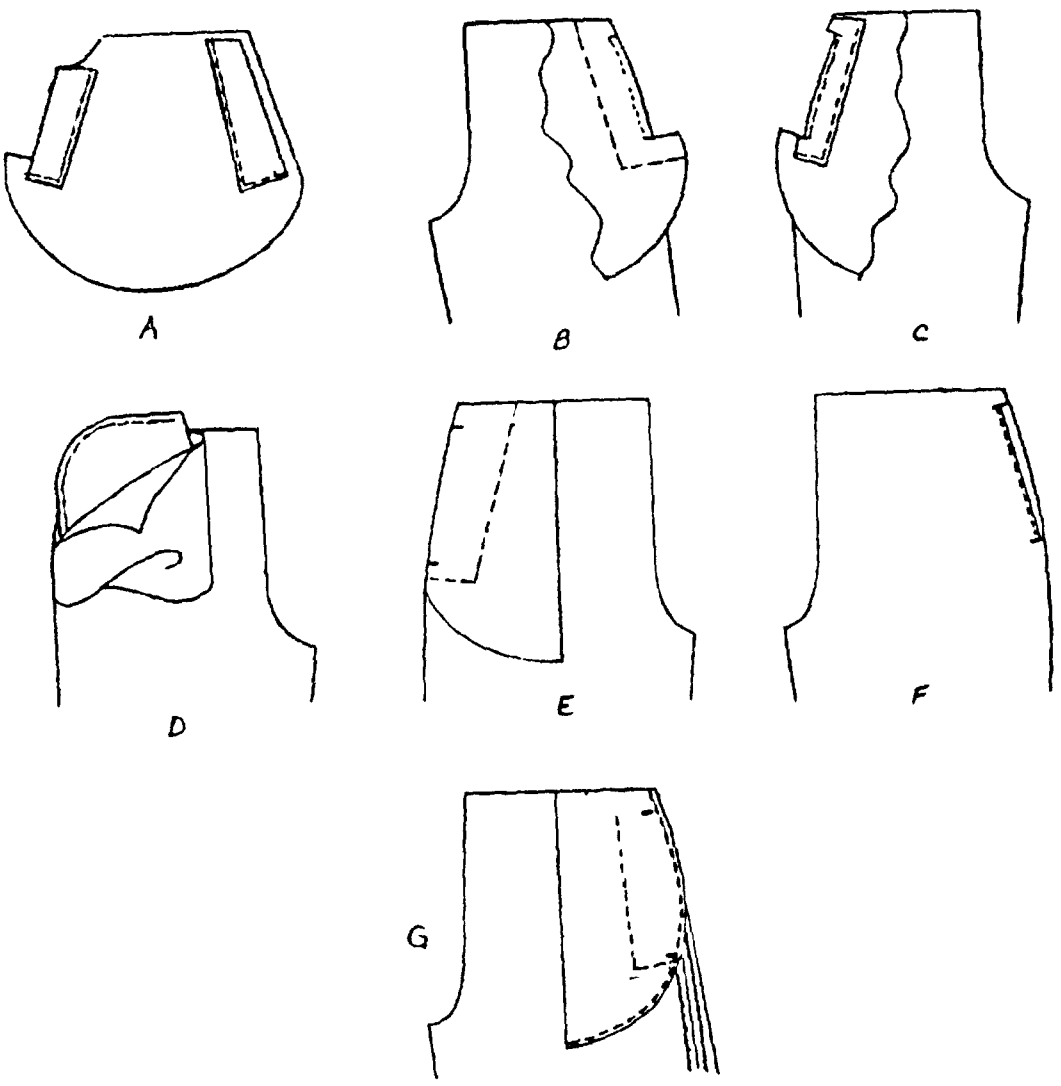


SIDE POCKET

A - STITCH FACING AND BEARER TO POCKET
B - STITCH POCKET TO FRONT
C - TURN POCKET AND TOPSTITCH
D&E - SEAM AND TURN
F - TACK POCKET OPENING TO BEARER
G - FINISHED POCKET

FIGURE 2 - TROUSERS, MEN'S (ENLISTED WHITE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

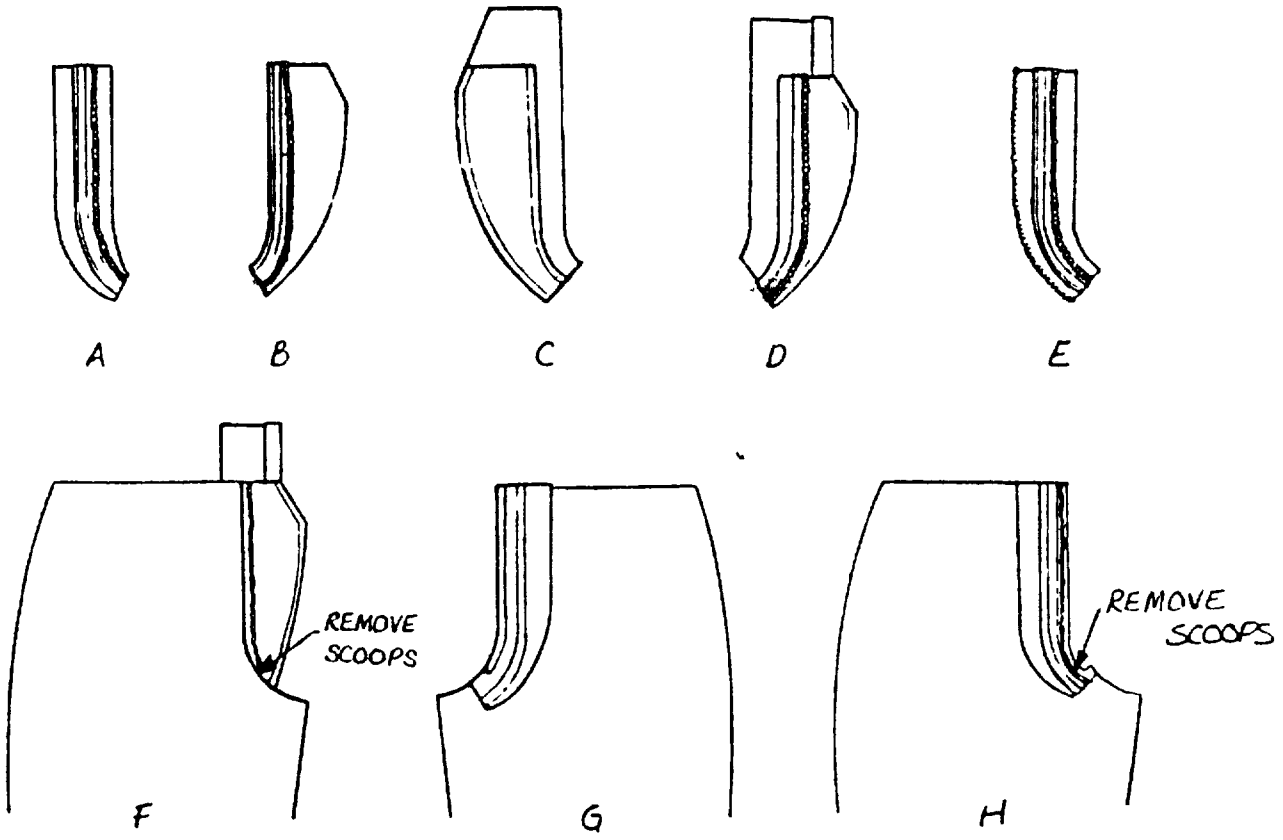


FLY

A - DOUBLE STITCH FASTENER TAPE TO LEFT FLY THROUGH LINING
B - STITCH FASTENER TAPE TO RIGHT FLY
C & D - STITCH LINING TO RIGHT FLY, TURN AND RAISESTITCH
E - OVEREDGE LEFT FLY
F - JOIN RIGHT FLY TO TROUSERS
G & H - JOIN LEFT FLY TO TROUSERS, TURN AND PRESS

FIGURE 3 - TROUSERS, MEN'S (ENLISTED WHITE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

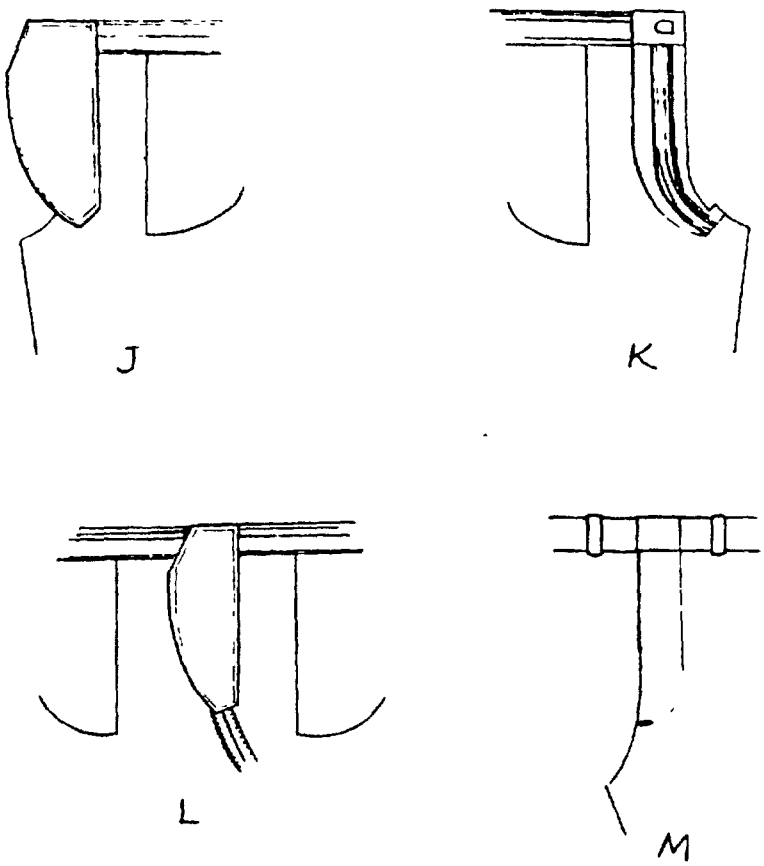


FLY (CONT'D)

J- RAISESTITCH RIGHT FLY CATCHING LINING
K- RAISESTITCH BACK EDGE OF LEFT FLY THROUGH TROUSER
L- FINISH END OF RIGHT FLY LINING
N- BARTACK BASE OF FINISHED FLY

FIGURE 4 - TROUSERS, MEN'S (ENLISTED WHITE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

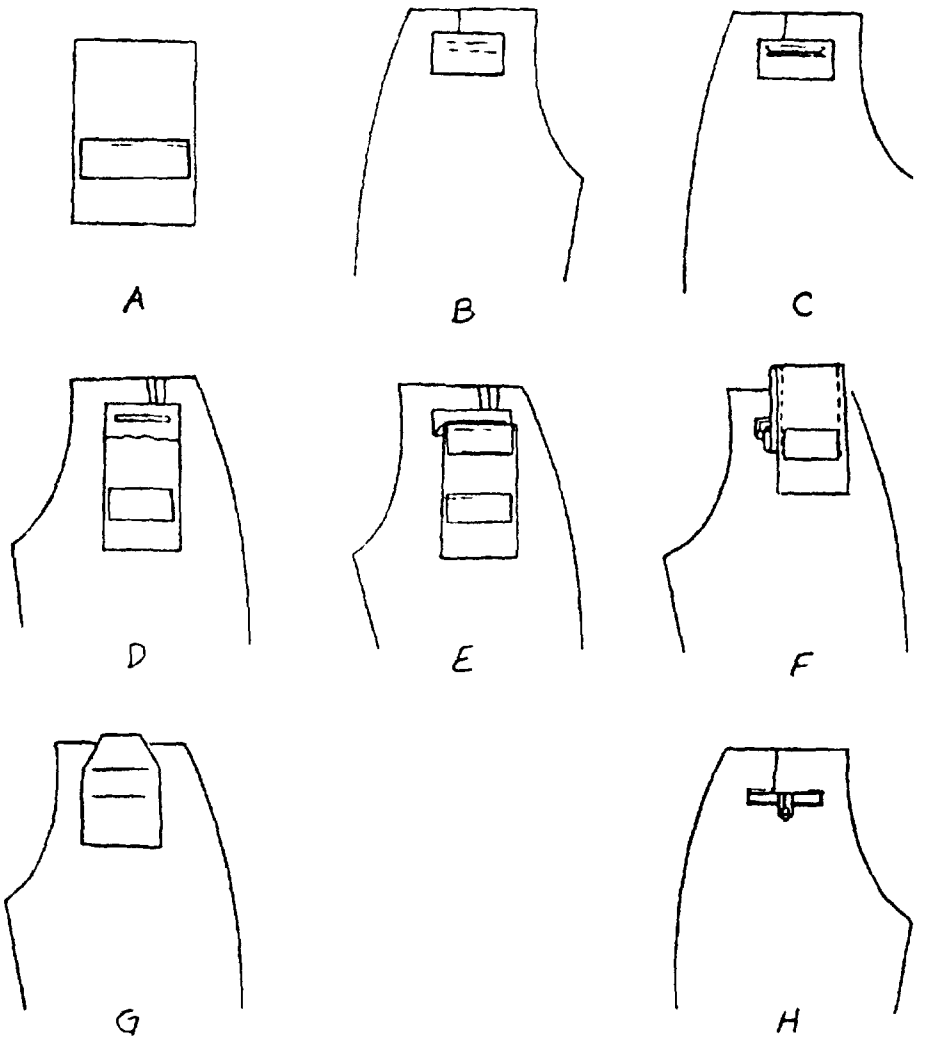

HIP POCKET

A BEARER ON POCKET
B- FACING PIECE ON OUTSIDE OF TROUSERS
C- CUT THROUGH FACING AND NOTCH
D- FACING PIECE TURNED INSIDE
E - MAKE WELT
F- POCKET PULLED THROUGH AND CLOSED
G - POCKET PULLED THROUGH TO INSIDE & TOPSTITCHED ON SIDES
H - TOP POCKET OPENING STITCHED THROUGH POCKET AND FACING PIECE WITH BUTTONHOLE TAB INSERTED

FIGURE 5 - TROUSERS, MEN'S (ENLISTED WHITE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing and Textile Research Facility
P.O. Box 59
Natick, MA 01760-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-87067C(NU)	TROUSERS, MEN'S (ENLISTED, WHITE)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:53Z
Check the source to verify that this is the current version before use.