MIL-U-87048A
30 April 1979
SUPERSEDING
MIL-U-87048
21 April 1978

MILITARY SPECIFICATION

UNIFORM, PANTS-SUIT, WOMAN'S, WHITE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers the requirements for a 100% polyester, double knit uniform consisting of a tunic and pants.

* 1.2 Classification.- The pants-suit shall be of one type and in the following sizes:

Schedule of sizes

Petite	5, 7, 9, 11, 13 and 15
Short	6, 8, 10, 12, 14, 16, 18 and 20
Regular	6, 8, 10, 12, 14, 16, 18, 20 and 22
Long	8, 10, 12, 14, 16, 18, 20 and 22

2. APPLICABLE DOCUMENTS

* 2.1 Issues of documents.- The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-F-106 - Fasteners, Slide, Interlocking
DDD-L-20 - Label; For Clothing Equipage, and Tentage (General Use)

MILITARY

MIL-B-17757 - Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-43594 - Cloth, Interlining, Polyester
MIL-C-87044 - Cloth, Polyester, Double Knit, LaCoste
MIL-T-43548 - Thread, Polyester, Cotton-Covered

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1491 - Glossary of Knitting Imperfections

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

2.2 Other publications.- The following documents form a part of this specification to the extend specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC, ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Traffic Department, 1616 P. Street, N. W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample.- Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.2). Variation from this specification may appear in the sample, in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.2 First article.- When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3).

3.3 Materials.-

3.3.1 Basic material.- The material for the tunic and pants shall be 100% polyester double knit, color white 3006 oconforming to MIL-C-87044.

* 3.3.2 Interlining.- The material for interlining the collar shall be polyester fiber cloth conforming to MIL-C-43594.

3.3.3 Elastic, webbing.- The elastic for the pants' waist shall be white, no roll, 1 inch in width, fabricated from regular rubber and nylon. The webbing shall conform to United Elastic Company, No. 3-7312D-1 or an equal item. Prior to the use of the "or equal" item, the contractor shall submit the item to the contracting officer with the supporting data for approval (see 4.4.1).

3.3.4 Slide fastener.- The slide fastener shall conform to either 3.3.3.1 or 3.3.3.2.

* 3.3.4.1 Slide fastener, metal.- The slide fastener shall be type I, style 3, short tab pull, size LS, conforming to V-F-106, except that the salt spray test shall not be required. Slide fasteners shall be furnished with bottom staple and top stops. All the metal components of the slide fasteners shall be brass and shall be from the same supplier (see 4.4.1). The tape shall be cotton or synthetic or a combination. The tape and slide fastener shall match the shade of the basic material. The length of the slide fastener shall be 20 (± 1/8) inches for all sizes and lengths.

3.3.4.2 Plastic coil slide fastener.- The slide fastener shall be manufactured of polyester or nylon consisting of a pin or cam lock and shall be equal to commercial size No. 2. The tape shall be a blend of nylon and cotton or polyester and cotton, and shall have a minimum width (one side) of 7/16 to 1/2 inch The color of the tape and coil shall match the basic material. The completed slide fastener shall not shrink more than 2 percent when tested as specified in V-F-106. The length of the slide fastener shall be 20 (± 1/8) inches for all sizes and lengths.

3.3.5 Thread, polyester, cotton covered.- The thread for seaming and stitching shall be a cotton covered polyester conforming to MIL-T-43548, sizes 50 and 70, 2 or 3 ply. The color of the thread shall be white AH, CA 66050.

3.3.6 Labels.-

3.3.6.1 Size ticket.- Each tunic and pants shall have a size ticket conforming to type I, class 2 of DDD-L-20. The inscription shall be as follows:

SIZE - 12R (Example)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

3.3.6.2 Combination label.- Each tunic shall have a combination identification, size and instruction label conforming to type I, class 14 of DDD-L-20. The label inscription shall show colorfastness to laundering. The combination label shall bear the following inscription:

UNIFORM, PANTS SUIT, WOMAN'S, WHITE
100% POLYESTER
CONTRACT No. DLA-100-00-0-0000 (Example)
STOCK No: 8410-00-000-0000 (Example)
SIZE: 12R (Example)
NAME OF SUPPLIER:

LAUNDERING INSTRUCTIONS

Machine Wash
Use warm water and detergent
DO NOT USE Chlorine bleach or starch.
Drip dry or tumble dry at medium heat.
Remove immediately.

3.3.7 Adhesive shade or size tickets.- Adhesive tickets, when used for shade or size marking, shall be of paper with a thermo-activated or pressure sensitive adhesive applied on one side that will withstand steam pressing operations. The adhesive shall not discolor the material and the adhesive mass shall not adhere to the material upon removal of the tickets.

3.4 Design.- The tunic shall have a three-piece front designed with princess lines, notches lapels, two-piece collar, side seam pockets, short sleeves and two-piece back with a long center back slide fastener closure. The pants shall have an elasticized waist and straight legs with a slight bell bottom.

3.4.1 Figures.- Figures 1 and 2 are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

* 3.5 Patterns.- Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The patterns allow 1/4 inch for all joining seams, except as otherwise indicated in Tables I and II. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

* 3.5.1 List of pattern parts.- The component parts of the pantsuit shall be cut from the material as specified and in accordance with the pattern parts indicated:

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the currentversion before use.

Material	Pattern nomenclature	Cut parts
	Pants	
100% polyester double knit	front	2
	back	2
	Tunic	
	Center back	2
	side back	2
	center front	1
	side front	2
	sleeve	2
	undercollar	2
	topcollar	2
	left front yoke	1
	left front facing	1
	right front facing	1
	pocket	4
Polyester interlining	Interlining (collar)	2

3.6 Stitches, seams, and stitchings.- Stitch, seam and stitching types, as specified herein, shall conform to FED-STD-751. Whenever two or more methods for stitches or seams are given for the same part of the operations, either one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the garment.

3.6.1 Thread breaks and ends of seams.- The ends of seams and stitching produced with a 301 stitch type, when not caught in other seams and stitching shall be bartacked not less than 3/8 inch Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 seaming may be repaired using 301 stitch type. When stitch type 401 is permitted as an option, it shall not be used unless the ends are caught in other seams and stitching.

3.6.2 Stitches per inch.- The minimum and maximum number of stitches per inch shall be as specified in Tables I and II.

3.7 Manufacturing operations requirements.- The pantsuit shall be manufactured in accordance with the operation requirements specified in Tables I and II. The contractor is not required to follow the exact sequence of operations listed provided that the finished pants-suit is identical to that produced by following the sequence of operations as listed in Tables I and II.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:52Z
Check the source to verify that this is the currentversion before use.

3.7.1 Shade and size marking.- All component parts of the basic material shall be marked or ticketed to insure a uniform shade and proper assembly throughout, except the component parts which may be cut from ends. The use of metal fastening devices or sewn-on tickets for shade marking is prohibited. Adhesive type shade or size tickets, when used, shall conform to the requirements as specified in 3.3.7. The use of ink pad numbering machine, rubber stap or pencil is allowed, provided the numbering does not show on the outside of the garment and wherever possible is covered by the seam allowance.

3.7.2 Pressing.- Pressing as required in Tables I and II shall be done with a heated pressing iron or steam pressing machine set at a suitable temperature for synthetics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of pants

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting.- a. Cut the pants in strict accordance with patterns furnished, which show size, placement of notches, directional lines for cutting and instructions for the proper assembly of all component parts. b. Cut all component parts of the pants and tunic out of one piece of material. c. The directional lines on the fronts and backs may vary from the warp direction by not more than 1 inch.					
2.	Replacement of defective components.- During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in section 4 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking (see 3.7.1).- All parts shall be marked, ticketed or bundled to insure a uniform shade, size and proper assembly throughout the garment.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of Pants (cont'd)

Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
				Needle	Bobbin or Looper
Join outseams Safety stitch outseams face to face, with notches matching, 1/4 inch from the raw edge.	515 or 516 or 519	SSa-2	8-10	50 (Chain) 70 (overedge	70 70
Join inseams Safety stitch inseams face to face with notches matching, 1/4 inch from the raw edge.	515 or 516 or 519	SSa-2	8-10	50 (Chain) 70 (overedge	70 70
Join seat and front seams Safety stitch seat and front seams, face to face, with notches matching, 1/4 inch from the raw edge	515 or 516 or 519	SSa-2	8-10	50 (Chain) 70 (overedge	70 70
Hem bottoms Turn and blind stitch inner edge of hem at bottoms of legs so that the hem finishes 1 to 1 1/4 inches.	314	EFa-1	6-8	70	70
Make elastic waistband Cut waist elastic waistband for the following sizes as follows: Size 6 - 22 inches Size 8 - 23 inches Size 10 - 24 inches Size 12 - 25 1/2 inches Size 14 - 27 inches Size 16 - 28 1/2 inches Size 18 - 30 1/2 inches Size 20 - 32 1/2 inches Size 5 - 21 1/2 Size 7 - 22 1/2 Size 9 - 23 1/2 Size 11- 24 3/4 Size 13 - 26 1/4 Size 15 - 27 3/4					

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T04:52Z
Check the source to verify that this is the current version before use.

Table I - Construction of Pants (cont'd)

Loc.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8d.	Make elastic waistband.- (cont'd)					
	b. Overlap ends of elastic webbing 1 ± 1/4 inch and stitch with 4 to 5 lines of stitching 1/4 inch from each raw edge across width of webbing	301	LSa-4-5	8-10	50	50
	c. Overedge stitch the top edge of pants	503 or 504 or 602	EFd-1	10-12	50	70
	d. With pants turned inside out, turn over top edge, back to back, with elastic sandwiched between. Stretch out elastic and stitch the waistband 1/16 to 1/8 inch from the overedged edge catching the top edge of a size label at center back. Care shall be taken so as not to catch any of the elastic webbing in the stitching.	301	EFa-1	10-14	50	50
	e. Finished waistband shall measure 1 1/4 to 1 3/8 inches wide.					
9.	Clean Pants.-					
	a. Trim and remove all ends of stitching and loose threads.					
	b. Remove all spots and stains.					
	c. Remove all shade and size tickets.					
10.	Pressing.-					
	The legs shall be pressed smooth and creased in the center with the seams matching at bottom and in crotch; or the inseams in the crotch may be slightly back of the outseam.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table II - Construction of Tunic

	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting.- See Table I operation 1.					
2.	Replacement of defective components.- See Table I operation 2.					
3.	Shade and size marking (See 3.7.1).- See Table I operation 3.					
4.	Join backs to side backs.- Safety stitch the back to the side backs, face to face, with notches matching, 1/4 inch from the raw edge.	515 or 516 or 519	SSa-2	8-10	50 (Chain) 70 (Overedge)	70 70
5.	Join backs.- a. Stitch, face to face, 5/8 inch from the raw edge, the left and right backs together from bottom raw edge to slide fastener notch, face to face. b. Press seams open and flat.	401	SSa-1	10-14	50	70
6.	Attach slide fastener.- a. Turn in each side of back opening 5/8 inch and stitch slide fastener 1/4 inch from turned edge along each side and across bottom 1/4 to 3/8 inch below slide fastener bottom stop. The outer edge of chain shall be even with turned edge.	301	SSs-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table II - Construction of Tunic (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread: Needle	Thread: Bobbin or Looper
[illegible]	Attach slide fastener (cont'd).- b. Finished appearance - The stops at the top of the slide fastener shall be not more than 1/2 inch below finished collar joining seam. The welt edges shall cover the slide fastener.					
[illegible]	Join front to right side front.- Safety stitch the front and right side front together face to face, matching notches, 1/4 inch from the raw edge.	515 or 516 or 519	SSa-2	8-10	50 (Chain) 70 (Overedge)	70 70
[illegible]	Join shoulders.- Safety stitch the fronts to back at shoulders, face to face, matching notches, 1/4 inch from the raw edge.	515 or 516 or 519	SSa-1	8-10	50 (Chain) 70 (Overedge)	50 70
*9.	Attach lapel facings.- a. Join right front and facing, face to face, 1/4 to 3/8 inch from the raw edge matching notches. Stitching shall start at lower lapel notch and shall finish at collar notch.	301 or 401	SSa-1	10-14	50 50	50 70
	b. Join left front yoke and facing, face to face, 1/4 to 3/8 inch from the raw edge. Stitching shall finish at the collar notch.	301 or 401	SSa-1	10-14	50 50	50 70
*10.	Make collars.- a. Stitch the collar interlining to topcollar and undercollar around the outer edges 1/4 to 3/8 inch from the raw edge. b. Trim corners and turn to finished position.	301 or 401	SSa-1	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table II - Construction of Tunic (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
11	Attach collars.-					
	a. Position collars, face to face, between fronts and lapel facings in accordance with lapel notches.					
	b. Stitch collars to fronts and facings from lapel notch to shoulder notch through all plies, 3/8 to 1/2 inch. Continue stitching undercollar to back neckline with shoulder seam turned towards the back.	301 or 401	SSa-1 and LScg-2(a)	10-14	50 50	50 70
	c. Turn under bottom edge of topcollar and interlining and topstitch 1/16 inch from the turned edge catching the top edge of a size label midway between shoulder seam and slide fastener on left hand side of tunic.	301	LScg-2(b)	10-14	50	50
	d. Stitch back edge of lapel facings to shoulder seam outlet.	301	10-14	50	50	
	e. Turn lapels to finished position.					
12	Join front to left side front.-					
	a. Lap right side of front over left front yoke with bottom points superimposed, face to face.					
	b. Stitch bottom points from notch downwards for 1 1/2 (1 1/4) inches.	301 or 401	SSa-1	10-14	50 50	50 70
	c. Safety stitch the right side of front and left side front, face to face, matching notches, 1/4 inch from the raw edges.	515 or 516 or 519	SSa-2	8-10	50 (chain) 70 (Overedge)	70 70

MIL-C-87043A

Amdt 1, 15 Sep 1987

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table II - Construction of Tunic (Cont'd)

Seq.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Make lapels.- a. ld over left front yoke at notch forming left lapel.					
	b. With left lapel and collar in finished folded position, (right lapel flap opened) stitch inner front edge of left front yoke to right lapel through all plies 3/8 to 1/2 inch from the raw edge. Stitching shall follow inner front edge of left front yoke from bottom of right front facing to folded edge of left lapel.	301	LSbj-1	10-14	50	50
14.	Make sleeve and cuffed hem.- a. Fold bottom of sleeve opening inwards twice in accordance with notches and stitch 1/4 (± 1/16) inch from bottom folded edge.	301	EFb-1	10-14	50	50
	b. Turn cuffed hem to finished position and press. Finished hem shall measure 1 1/2 (± 1/8 inches in width.					
	c. Safety stitch the underarm sleeve, face to face, 1/4 inch from the raw edge.	515 or 516 or 519	SSa-2	8-10	50 (Chain) 70 (Overedge)	70 70
	d. Stitch a 3/8 inch bartack at the end of each sleeve. Bartack shall be parallel to the joining seam and shall secure the seam allowance.	Bartack	-	21 per Bartack (Min.)	50	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table II - Construction of Tunic (cont'd)

Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
				Needle	Bobbin or Looper
Attach label Position and stitch 1/8 inch from the edge a label to the outside ply of pocket (side against wearer). Label shall be centered horizontally and shall be 1 to 1 1/2 inches up from the bottom of finished pocket.	301	LSbj-1	10-14	50	50
Make and attach pockets a. Superimpose pocket plies, face to face. Safety stitch over periphery 1/4 inch from raw edge.	515 or 516 or 519	SSa-2	8-10	50 (Chain) 70 (Overedge)	70 70
b. Safety stitch the inside ply of pocket (side against tunic front) to the side front seam allowance face to face, between notches, 1/4 inch from raw edge.	515 or 516 or 519	LSq2(a)	8-10	50 (Chain) 70 (overedge)	70 70
c. Raise stitch, 1/16 inch from turned edge the inside ply of pocket to side front seam allowance	301 or 401	LSq-2(b)	10-14	50 50	50 70
Join side seam a. Safety stitch the side seam, face to face, 1/4 inch from raw edge, catching only the outside ply of pocket (side against wearer) and the back side seam allowance between pocket notches.	515 or 516 or 519	SSa-2	8-10	50 (Chain) 70 (Overedge)	70 70
Attach sleeves Safety stitch sleeves to armhole, face to face, matching notches and sleeve inseam with side seam, 1/4 inch from the raw edge. Note: Side seam and underarm seam may be closed in one operation after sleeves have been attached.	515 or 516 or 519	SSa-1	10-14	50 (Chain) 70 (Overedge)	70 70

MIL-C-S70[illegible]A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table II - Construction of Tunic (Cont'd)

Op.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
19.	Tack collar.- a. Turn down back collar at center back so that top edge of collar is aligned with bottom edge. b. Tack to undercollar only 1/4 inch up from turned edge and 1/4 inch in from back opening.	301	tack	4-6 per tack	50	50
20.	Hem bottoms.- Turn and blind stitch inner edge of hem at bottom so that the hem finishes 1 1/4 to 1 1/2 inches wide.	314	EFa-1	6-8	70	70
21.	Clean tunic.- a. Trim and remove all ends of stitching and loose threads. b. Remove all spots and stains. c. Remove all shade and size tickets.					
22.	Pressing.- Neatly press collar and lapels.					

MIL-U-87048A

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. The sizes and measurements for the finished pants and tunic shall be as shown in Table III and IV. All measurements are expressed in inches.

Table III - Measurements of Pants

SIZES	(A) HIPS	(B) INSEAMS S	R	L
6	37	27 3/8	28 3/8	-
8	38	27 1/2	28 1/2	30
10	39	27 5/8	28 5/8	30 1/8
12	40	27 3/4	28 3/4	30 1/4
14	41 1/2	27 7/8	28 7/8	30 3/8
16	43	28	29	30 1/2
18	45	28 1/8	29 1/8	30 5/8
20	47	28 1/4	29 1/4	30 3/4
22	49	-	29 3/8	30 7/8
Tolerance	± 1/2	± 1/4	± 1/4	± 1/4

Table IIIA - Measurements of Pants (Petite Sizes)

SIZES	(A) HIPS	(B) INSEAM
5	36	27 1/2
7	37	27 5/8
9	38	27 3/4
11	39 1/2	27 7/8
13	41	28
15	42 1/2	28 1/8
Tolerance	± 1/2	± 1/4

A. Hips.- Twice the measurement taken from folded edge to folded edge 9 inches below top of waistband.

B. Inseams.- Length measurement taken along inseam from the crotch seam to the hemmed bottom of the leg.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Table IV - Measurements of Tunic

SIZES	A BUST	LENGTH (B) S	LENGTH (B) R	LENGTH (B) L	SLEEVE INSEAM (C) S	SLEEVE INSEAM (C) R	SLEEVE INSEAM (C) L
6	34	26 1/2	27 3/4	-	2 7/8	3 3/8	-
8	35	26 3/4	28	29 1/4	2 7/8	3 3/8	3 7/8
10	36	27	28 1/4	29 1/2	3 1/8	3 5/8	4 1/8
12	37	27 1/4	28 1/2	29 3/4	3 1/8	3 5/8	4 1/8
14	38 1/2	27 1/2	28 3/4	30	3 3/8	3 7/8	4 3/8
16	40	27 3/4	29	30 1/4	3 3/8	3 7/8	4 3/8
18	42	28	29 1/4	30 1/2	3 5/8	4 1/8	4 5/8
20	44	28 1/4	29 1/2	30 3/4	3 5/8	4 1/8	4 5/8
22	46	-	29 3/4	31	-	4 3/8	4 7/8
Tolerance	± 1/2	± 1/4	± 1/4	± 1/4	± 1/4	± 1/4	± 1/4

Table IVA - Measurements of Tunic (Petite Sizes)

SIZES	(A) BUST	(B) LENGTH	(C) SLEEVE INSEAM
5	33	26 3/4	2 1/8
7	34	27	2 1/8
9	35	27 1/4	2 3/8
11	36 1/2	27 1/2	2 3/8
13	38	27 3/4	2 5/8
15	39 1/2	28	2 5/8
Tolerance	± 1/2	± 1/4	± 1/4

NOTE: MEASUREMENTS shall be taken with the slide fastener closed, laid flat and smooth.

A. Bust.- twice the measurement taken across the front at the base of armholes from folded edge to folded edge.

B. Back Length.- Measurement taken from the base of undercollar, down center back to bottom of tunic.

C. Sleeve inseam.- Measurement taken from the base of armhole, along inseam to bottom of sleeve opening.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

3.9 Workmanship.- The finished uniform shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Governmnet reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance.- Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection.- The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection.- The first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection.- Inspection shall be performed in accordance with MIL-STD-105, except when otherwise indicated.

4.4.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, the contractor shall furnish a certificate of compliance stating that the elastic webbing is United Elastic Company No. 3-7312D-1 or if an "or equal" elastic webbing is used that it conforms in all respects to that approved by the contracting officer as required in 3.3.3 and also that all metal components of the slide fastener are brass and furnished by the same supplier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.2 Examination of the end item.- The defects found during the examination of the end item shall be classifed in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The lot size shall be expressed in units of pant suits. The sample unit shall be one finished pant suit.

4.4.2.1 Visual examination.- The finished pant suits shall be examined for defects listed below:

Defect	Classification Major	Minor
MATERIAL DEFECTS AND DAMAGES		
a. Any hole, cut, tear, run or dropped stitch 1/	X	
b. Any needle line, snag, thin place, mend or burn 1/	X	
c. Barre, uneven, ridgy or cockled cloth 1/		X
d. Permanent crease in fabric 1/	X	
e. Any slub (more than three times normal diameter of of yarn clearly visible on outside of pants suit)		X
1/ For knitted fabrics imperfections definitions see MIL-STD-1491		
SHAPED PARTS		
a. Outside parts shaded	X	
b. Variation in shade within an outside part	X	
CLEANNESS		
A. Spot or stain on outside (except undercollar and underply of lapel)		
1. Grease, ink or oil with dirt	X	
2. All other spots and stains		X
CLEANNESS (cont'd)		
b. Two or more shade or size tickets not removed		X
c. Any shade or size marking visible on outside	X	
d. Three or more thread ends not trimmed to 1/4 inch or more		X
COMPONENTS AND ASSEMBLY		
a. Any component part or operation omitted (unless otherwise classified herein)	X	
b. Any component not as specified (type, size, color, etc.)	X	
c. Any component part tight, twisted, distorted, pleated or full, affecting appearance (unless otherwise classified herein)		X
d. Any operation not as specified (unless otherwise classified herein)		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
CUTTING		
Any component part not cut in conformance with specification requirements	X	
PRESSING		
Pressing omitted or pantsuit poorly pressed		X
SEAMS AND STITCHING		
a. Accuracy of seaming:		
1. Seam badly puckered (score only when on major portion of seam)	X	
2. Seam badly twisted, irregular, pleated or wavy	X	
3. Part of pants suit caught in any unrelated operation or stitching	X	
4. End of stitching when not caught in another seam or stitching backtacked less than 3/8 inch		X
5. Ends of a continuous line of stitching overlapped less than 1/2 inch		X
6. Thread breaks secured by stitching back of the break less than 1/2 inch		X
7. Any turned seam not properly forced out (unless otherwise classified herein)		X
b. Gauge of stitching and seam allowance:		
1. Irregular or not within range specified (score only when condition exists on major portion of seam or stitching)		X
2. Seam allowance not as specified		X
3. Edge or top stitching too close to edge resulting in damage to cloth	X	
c. Open seams:		
1. All seams:		
(a) -up to 1/4 inch inclusive		X
(b) -more than 1/4 inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
d. Runoff, broken or skipped stitches:		
1. On joining seam, score as open seam		
2. Edge or raised stitching (when not resulting in an open seam):		
(a) -up to 1 inch inclusive		X
(b) -more than 1 inch	X	
3. On overedge stitching, more than 1 inch		X
e. Raw edge:		
1. On outside:		
(a) -up to 1/2 inch inclusive		X
(b) -more than 1/2 inch	X	
f. Seam and stitch type:		
1. Not specified seam or stitch type		X
2. Any required line of stitching omitted		X
3. Any line of stitching not beginning or ending where specified		X
4. Looper thread of 401 stitch type finishing on outside	X	
g. Stitch tension:		
1. Loose tension resulting in a loose seam	X	
2. Loose tension on top or edge stitching resulting in exposed loose thread		X
3. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)		X
h. Stitches per inch (score only when condition exists on more than half in the length of seam or stitching):		
1. One stitch less than the minimum or any number in excess of the maximum specified		X
2. Two or more stitches less than the minimum specified	X	
3. Label stitching		
-one or more stitches less than the minimum specified		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
PANTS		
* a. Waistband		
-Width less than 1 3/8 inch or more than 1 1/2 inch		X
b. Inseams		
-Ends of inseams staggered at crotch more than 1/4 inch		X
c. Seat and front seams		
-Front and seat seams not joined in one continuous operation		X
d. Leg bottom		
1. Not finished as specified	X	
2. Hem width less than 1 inch or more than 1 1/4 inches		X
e. Label		
1. Missing, incorrect or illegible	X	
2. Not attached as specified, misplaced or stitching through the printing		X
TUNIC		
a. Collars and lapels		
1. Misshapen or distorted	X	
2. Not uniform in size or shape in any point by more than 1/4 inch with corresponding point	X	
3. Twisted, short, tight or long, i.e. causing curled edges, puckering, fullness or pleats on one or more collar or lapel parts or in seam-line joining pants	X	
4. Gap between top edge of lapel and bottom edge of collar not uniform by 1/4 inch or more		X
5. Collar points not tucked down at back opening		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor
* b. Sleeves and cuffs		
1. Reversed, i.e., right sleeve in left armhole; left sleeve in right armhole	X	
2. Sleeve tight at armhole, causing pleats or excessive puckers on front, back or sleeve	X	
3. Hem twisted, puckered, or pleated	X	
4. Hem less than 1 3/8 inch or more than 1 5/8 inch in width		X
5. Seam allowance of hem not stitched down as specified		X
c. Pockets		
1. Pockets not finished to lay against front of tunic		X
2. Tacking omitted at top or bottom of pocket opening		X
3. Inside ply of pocket not stitched to front side seam allowance as specified		X
d. Slide fastener		
1. Top slide fastener stops more than 1/2 inch below collar joining seam.		X
2. Welt not completely covering slide fastener when closed		X
e. Bottom Hem		
1. Not finished as specified		X
2. Hem width less than 1 1/4 inches or more than 1 1/2 inches		X
f. Label		
1. Missing, incorrect or illegible		X
2. Not attached as specified, misplaced or stitching through the printing		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

4.4.2.2 Dimensional examination.- The pant-suits shall be examined for defects in dimensions in accordance with the following:

a. Any measurement deviating from nominal dimensions and tolerances specified in Tables III and IV shall be scored as a size measurement defect.

b. Pant inseam length uneven by more than 1/2 inch shall be scored as a size measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels.- The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units for visual and dimensional examinations shall be as follows:

	AQL's	Inspection level
For defects applicable in 4.4.2.1:		
Major	4.0	II
Total (Major and Minor combined)	25.0	II
For defects applicable to 4.4.2.2:		
One class	4.0	S-3

4.4.3 Packaging inspection.- An examination shall be made to determine that preservation-packaging, packing and marking comply with Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Examination for closure defects listed below shall be made on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, improper taping, loose strapping or inadequate stapling . Incorrectly fabricated bag, alternative closure of the polyethylene bag not provided with tuck or reversed flap. Omissions of vent hole in polyethylene bag. Bulging or distorted containers.
Content	Number of pants-suit per container is more or less than required. Size shown on one or more pants-suits not as specified on shipping container. 1/

1/ For these defects, two shipping containers in the sample shall be examined.

5. PACKAGING

5.1 Preservation - packaging.- Preservation-packaging shall be level A or C (see 6.2).

5.1.1 Level A Packaging.-

5.1.1.1 Folding of pants.- Each pair of pants with inseams meeting, shall be twice folded from the leg bottom up toward the waistband to an overall length of approximately 11 inches. The width shall measure approximately 14 inches.

5.1.1.2 Folding of tunic.- Each tunic shall be laid out flat, front up with rear slide fastener closed. The sleeves and side edges shall be folded inwards so that the sleeve ends meet at center of tunic. Turn upwards bottom of tunic approximately 8 inches and then fold in half laying bottom of tunic over the collar. The completely folded tunic shall measure approximately 14 by 11 inches.

5.1.1.3 Pantsuit.- A pants-suit consisting of a tunic and pants of one size only shall be packaged as follows: The tunic folded as specified in 5.1.1.2 shall be placed on top of the pants folded as specified in 5.1.1.1. Each folded pant suit, measuring approximately 11 by 14 inches, shall be inserted into a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (±25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow [illegible] air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap in which a heat seal closure and corner hole are not required.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the currentversion before use.

5.1.2 Level C Packaging.- Pants-suits shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.- Six (6) pants-suits of one size only, preserved-packaged as specified in 5.1 shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to class weather-resistant, grade V2S, size 2, type SF of MIL-B-17757. Place two stacks of 3 pant-suits each flat in the container with the long dimension of the poly bags parallel to the end panels of the container. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed in the same container.

5.2.2 Level B.- Six (6) pants-suits of one size only, preserved-packaged as specified in 5.1 shall be packed in a fiberboard shipping container, assembled, closed and reinforced conforming to class domestic, grade 275, size 2, type CF of MIL-B-17757. Place two stacks of 3 pantsuits each flat in the container with the long dimension of the poly bags parallel to the end panels of the container. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed in the same container.

5.2.2.1 Weather resistant fiberboard containers.- When specified (see 6.2), the shipping container shall be grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification.

5.2.3 Level C Packing.- Pants-suits preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification Rules or US Postal Service Manual, as applicable.

5.3 Marking.- In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bags.- The polyethylene bags, as specified in 5.1.1, shall have the stock number of the item and size, legibly printed or stamped in black block letters directly on the bag across the center face or on a white paper label which shall be inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes.- Each shipping container, packed with mixed sizes, shall have securely attached to the end and sides, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use.- The pants-suits are intended for optional use by female personnel in the Medical Department of the Department of Defense.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Size required (see 1.2).
c. When first article is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Sample and patterns.- For access to samples and patterns, address the procuring activity issuing the invitation for bids.

* 6.4 Changes from pewcioua issue. The margins of this specification are marked with an asterisk to indicate where (additions, modification, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Navy - NU
Army - GL
Air Force - 11

Review activities:
Navy - MS
Army - MD
Air Force - 99
DSA - CT

Preparing activity:
Navy - NU

Project No. 8410-0462

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.


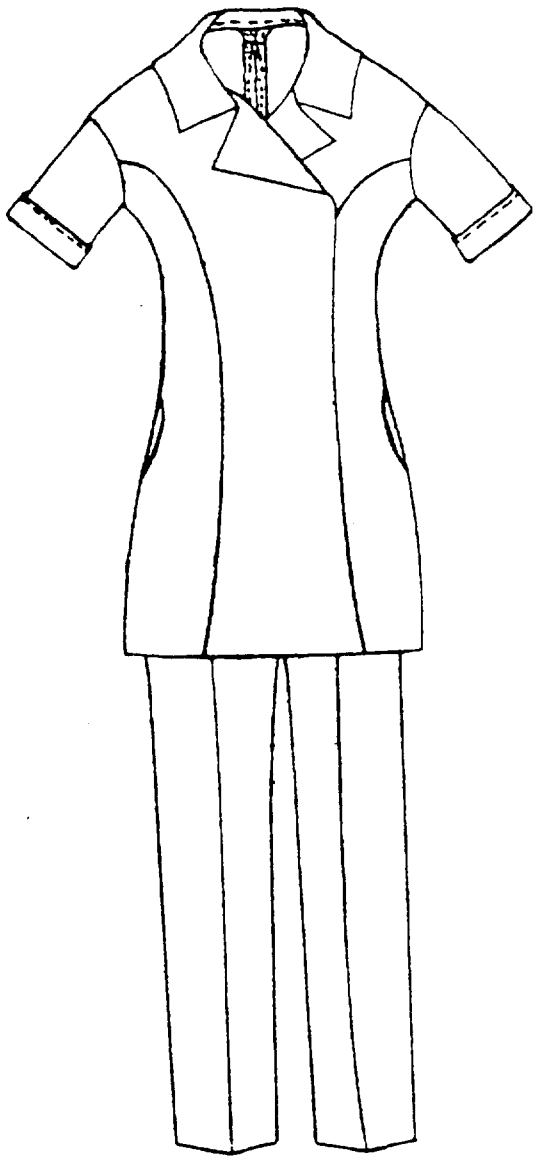



FIGURE 1

UNIFORM, PANTS SUIT, WOMAN'S, WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.

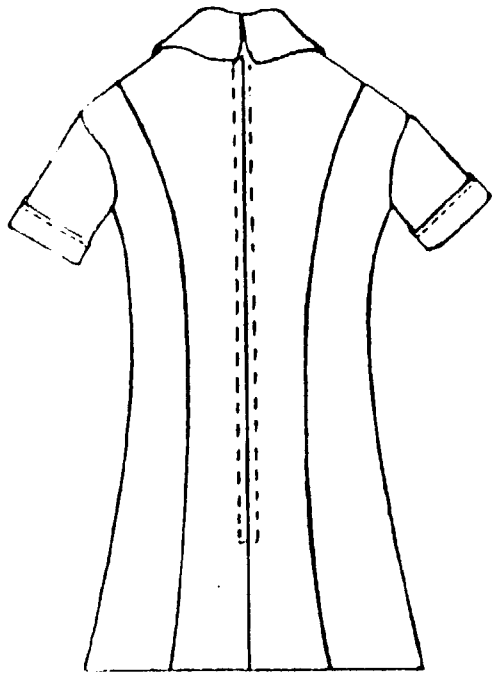

BACKVIEW OF BLOUSE

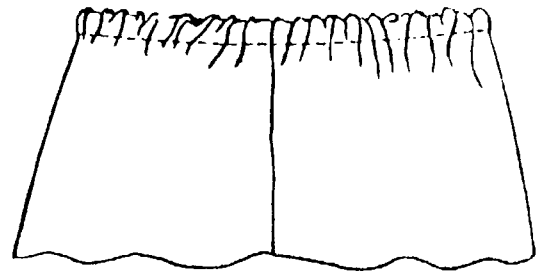

VIEW OF TOP OF PANTS

FIGURE 2

UNIFORM, PANTS SUIT, WOMAN'S, WHITE

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T04:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE. This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-U-87048A UNIFORM, PANS-SUIT, WOMAN'S, WHITE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO.

DATE

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:52Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S. MAIL

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:52Z
Check the source to verify that this is the current version before use.