[INCH-POUND]
A-A-424A
August 26, 1991
SUPERSEDING
A-A-424
May 28, 1980

COMMERCIAL ITEM DESCRIPTION

PITCHER, WATER

The General Services Administration has authorized the use this commercial item description as a replacement for RR-P-386 which has been cancelled.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This commercial item description covers corrosion-resisting steel water pitchers.

1.2 Classification. The water pitchers shall be of the following sizes and styles.

Size 1 - 1 quart capacity

Style A - Without cover
Style B - With hinged cover and iceguard

Size 2 - 2 quart capacity

Style A - Without cover
Style B - With hinged cover and iceguard

Size 3 - 3 quart capacity

Style A - Without cover

Size 4 - 5 quart capacity

Style A - Without cover

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor Street, Fort Worth, TX 76102.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The documents referenced in this commercial item description shall be the issues in effect on the date of issuance of the invitation for bids or request for proposal unless otherwise specified. These documents form a part of this commercial item description to the extent specified. In the event of a conflict between this commercial item description and a document referenced herein, this commercial item description shall take precedence.

Federal Standard:

FED-STD-376 - Preferred Metric Units For General Use By The Federal Government.

Copies of Federal standards are available from the General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

Copies of military standards may be obtained from Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

ASTM Standard:

E 29 - Standard Practice For Using Digits In Test Data To Determine Conformance With Specifications.

Application for copies of ASTM standards should be addressed to ASTM, 1916 Race Street, Philadelphia, PA 19103.

American Iron and Steel Institute:

Handbook - Finishes for Stainless Steel

Application for copies of American Iron and Steel Institute handbooks should be addressed to the Committee of Stainless Steel Producers, American Iron and Steel Institute, 1000 16th Street, N.W., Washington, DC 20036.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

National Sanitation Foundation (NSF):

Standard No. 2 - Food Service Equipment.

Annual Listing - Food Service Equipment and Related Products, Components and Materials.

Application for NSF documents should be addressed to the National Sanitation Foundation, 3475 Plymouth Road, P.O. Box 1468, Ann Arbor, MI 48106.

3. SALIENT CHARACTERISTICS

3.1 Design and construction. The pitcher shall be constructed from a type 300 stainless steel. The body of the pitcher shall be formed without seams from a single piece of corrosion-resisting steel. The pitcher shall consist of a body with a pouring lip or spout, handle, and, if required, a cover. The pitcher shall be designed to hold the capacities listed in table I. The material thickness shall be as specified in table I. The thickness tolerance shall be minus 5 percent, plus 25 percent. Style A pitchers shall be provided without a cover. Style B pitchers shall be provided with a hinged cover and iceguard. The iceguard shall be a perforated section of the pitcher body in the spout area or a separate piece of corrosion-resisting steel positioned across the spout opening to restrict the flow of ice.

3.1.1 Handle. The pitcher shall be fitted with a curved handle formed from a single piece of corrosion-resisting steel. The handle shall be a minimum of 3 inches high with a minimum clearance space of 1 inch between the body and the handle. The handle shall be positioned directly opposite the pouring spout. The top and bottom of the handle shall be firmly welded with corrosion resistant material to the pitcher body. The weld joint (if spot welded) shall be completely sealed with non-toxic solder to prevent food accumulation.

TABLE I - Dimensions

Size	Capacity (quarts)	Body bottom thickness (inch)
1	1	0.021
2	2	0.021
3	3	0.021
4	5	0.034

Note: Capacity tolerance shall be plus 10 percent, minus 0 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

3.2 Finish. The pitcher shall be finished to the equivalent of a No. 2BA, Bright Annealed, or better as defined in the American Iron and Steel Institute's handbook, Finishes for Stainless Steel, on all visible surfaces.

3.3 Marking. The pitcher shall be marked with the manufacturer's name, trade name, or trademark of such known character that the source of the pitcher may be readily determined.

3.4 Workmanship. The water pitchers shall be clean and free from any burrs, slivers, scratches, rough die or gouge marks, pits, rust or scale. The pitchers shall not be fractured, buckled, bent, punctured, malformed, or damaged.

3.5 National Sanitation Foundation (NSF) compliance. Prior to approval of first shipment, the contractor shall submit to the contracting officer or his authorized representative satisfactory evidence that the items offered meet the applicable requirements of NSF Standard No. 2. Satisfactory evidence of this compliance may be any of the following:

(1) A listing in the current edition of the NSF "Listing of Food Service Equipment" and display of the NSF seal on the finished item, or

(2) A certification issued by NSF under this special one-time contract evaluation/certification service, or

(3) A certified test report from a recognized independent testing laboratory acceptable to the contracting officer or authorized representative of the service for which the items are being procured, indicating that the item has been tested and conforms to NSF Standard No. 2.

3.6 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

3.7 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch/pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

3.8 Commercial item. The use of the term "commercial item description" in this document does not imply that an y item or items offered are not required to conform with all requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:08Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling. The levels of inspection and acceptable quality levels (AQL's) shall be in accordance with MIL-STD-105.

4.3 Lot formation. All pitchers from the same manufacturer of the same size and style offered for delivery at one time shall be considered a lot for purposes of inspection.

4.4 Sampling for visual and dimensional examination. A random sample of pitchers shall be selected from each lot in accordance with inspection level S-4, AQL 4.0 expressed in terms of defects per hundred units. The sample unit shall be one pitcher. The sample pitchers shall be visually and dimensionally examined to verify compliance with table II and the remainder of this commercial item description. All dimensions are absolute as defined in ASTM E 29.

TABLE II. Classification of defects

Examine	Defect
Finish	Area of corrosion, stain or discoloration
	Not as specified
Construction and Workmanship	Scratch or tool mark 1/
	Any sharp edge, sliver, rough tool or die mark, or burr
	Any component fractured, split, bent, buckled, punctured or otherwise impaired
	Handles not securely attached
	Any dimension not as specified
	Cover not hinged
Marking	Missing or illegible

1/ - An unacceptable scratch is one that will catch a fingernail when run across it.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

4.5 Examination for preparation for delivery. A random sample of shipping containers shall be selected from each lot for examination of the unit, intermediate and shipping containers (as applicable) for conformance with the preservation, packaging, packing, labeling, and marking required in the contract or order. Samples shall be selected in accordance with inspection level S-2, AQL 6.5, expressed in terms of defects per hundred units.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking. The packaging, packing, and marking shall be as specified in the contract or order.

6. NOTES


6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this commercial item description.
b. Size and style required.
c. The packaging, packing, and marking required.

6.2 CID based part identification numbers. Water pitchers conforming with this commercial item description shall be identified by a part identification number configuration consisting of identification of a portion of the specification number, size, and style. An example of the part identification number configuration is shown below. This part identification numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. Part identification numbers are not required to be placed on the product or container.

Part Identification Numbering System for Commercial Item Description A-A-424

Example: AA424-1B (AA424-1B) Example - Size 1, style B

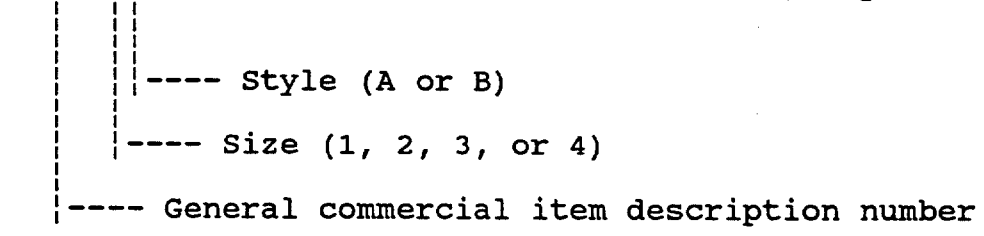

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

6.3 National Stock Numbers (NSNs): The following is a list of NSNs assigned which correspond to this CID. The list may not be indicative of all possible NSNs associated with this CID.

NSN	Size	Style	P/N
7350-00-735-2465	1	A	AA424-1A
7350-00-687-9106	1	B	AA424-1B
7350-00-249-5165	2	A	AA424-2A
7350-00-205-3214	2	B	AA424-2B
7350-00-787-9945	3	A	AA424-3A
7350-00-170-8333	4	A	AA424-4A

MILITARY INTERESTS:

Military Coordinating Activity:

Army - GL

Custodians:

Army - GL
Navy - SA
Air Force - 99

Civil Agency Coordinating Activities:

VA - OSS
HHS - NIH

Review Activities:

Army - MD, TS
Air Force - 84, 50

Preparing Activity:

GSA - FSS

(DoD Project 7350-0255)

User Activity:

Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.