This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


User activities: Army - Navy - Air Force -

Review activities: Army - Navy - Air Force - 99

(b)(c) STUD, THD 1/2-20 UNF-2, 2 REQD
NUT, HEX, BRASS, TIN OR SILVER PLATED, 4 REQD
WASHER, PLAIN, BRASS, TIN OR SILVER PLATED, 4 REQD
WASHER, AN935B816, 2 REQD

(b)(c) STUD THD NO 6-32 NC-2, 2 REQD
NUT, AN341-6, 4 REQD
WASHER, AN936A6B OR AN935B6, 2 REQD
WASHER, AN961-6, 4 REQD

17/64 DIA 2 HOLES FOR MOUNTING

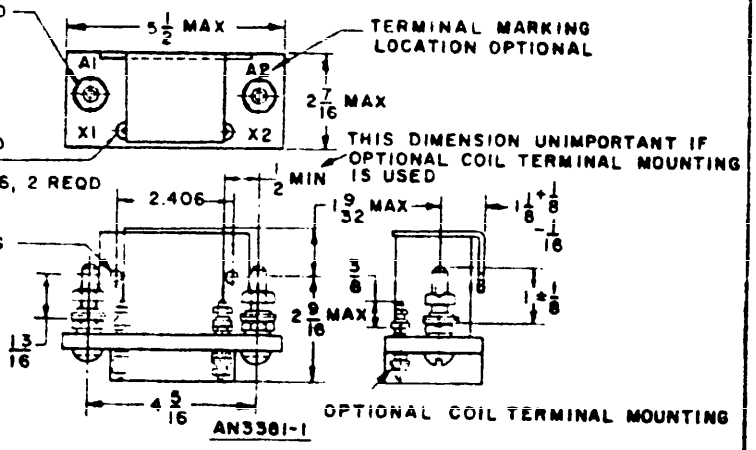


AN3381-1 OPTIONAL COIL TERMINAL MOUNTING


(b)(c) STUD, THD 1/2-20 UNF-2, 2 REQD
NUT, HEX, BRASS, TIN OR SILVER PLATED, 2 REQUIRED
WASHER, AN935B816, 2 REQD
WASHER, PLAIN, BRASS, TIN OR SILVER PLATED, 2 REQD

(b)(c) STUD THD NO 6-32 NC-2, 2 REQD
NUT, AN341-6, 2 REQD
WASHER, AN935B6 OR AN936A6B, 2 REQD
WASHER, AN961-6, 2 REQD

METHOD OF STUD ATTACHMENT OPTIONAL, BUT SUITABLE BEARING SURFACE SHALL BE PROVIDED

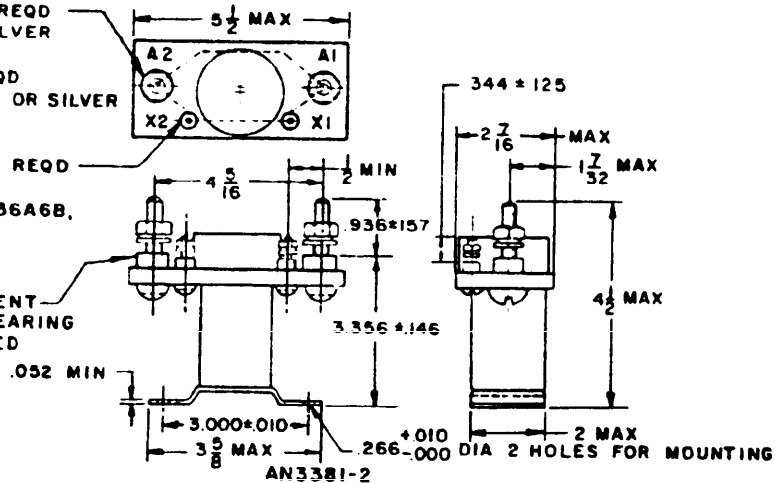

AN3381-2



CIRCUIT

AN PART NO.
(a) AN3381-1
AN3381-2

(9)

DETAIL REQUIREMENTS

(A)	Maximum operating voltage	29 volts
(B)	Pickup voltage	7.5 volts
(C)	Dropout voltage	3 volts +0, -2.5
(D)	Rated load	
	Resistive (28 volts dc)	400 amperes
	Inductive (28 volts dc)	100 amperes
	Motor (28 volts dc)	400 amperes
(E)	Coil current	5.5 amperes
(F)	Minimum operating period	3 minutes
(G)	Minimum operating cycles	50,000
(H)	Maximum weight	2.6 pounds
(I)	Rated duty	Intermittent
(J)	Nominal coil voltage	28 volts

(9) NOTES:
(a) Part number AN3381-1 inactive for design after 18 July 1947.
Part numbers AN3381-1 and AN3381-2 are completely interchangeable functionally, but differ in mounting methods shown.
(b) Material: Terminal studs, A1 and A2-brass or copper, X1 and X2-brass
(c) Finish: Terminal studs shall be tin or silver plated.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances: fractions ±1/16, decimals .xx±.
3. For definition and application of drawing status notes, see ANA Bulletin No. 347

INACTIVE FOR DESIGN AFTER 26 SEPTEMBER 1957
USE STANDARD MS24179

APPROVED 5 APRIL 1945 - REVISED (9) - 25 July 1974

P.A USAF-85 Other Cust	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3381
Procurement Specification MIL-R-6106	RELAY, 400 AMP, 1PST, INTERMITTENT UNSEALED, CLASS O Supercedes: USAF SPEC NO. 32489	

5945-0419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.