

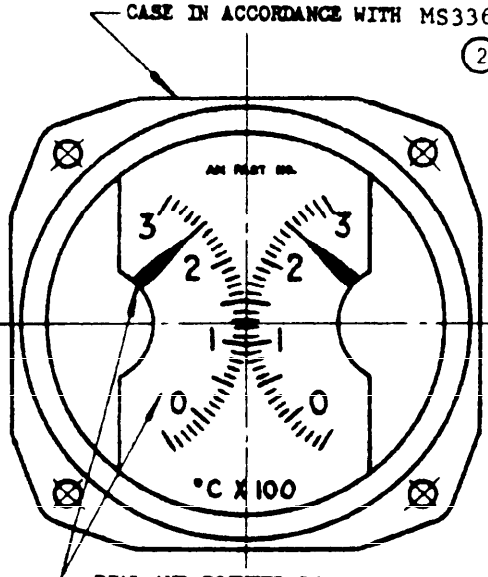


DIAL AND POINTER SHOWN FOR REF ONLY. SEE PROCUREMENT SPEC FOR DETAIL REQUIREMENTS

AN5792-2

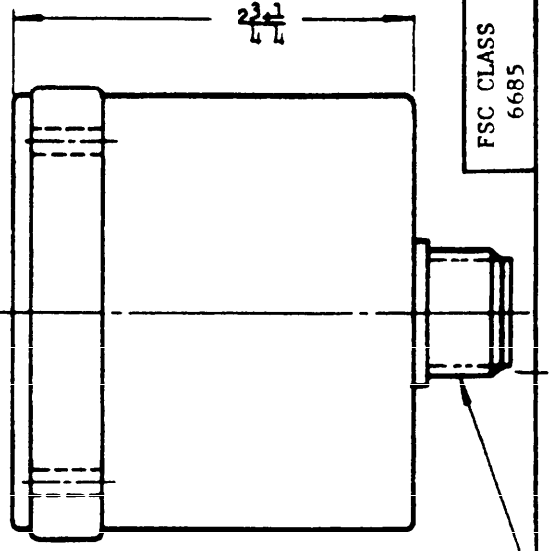


(2) ELECTRICAL RECEPTACLE IN ACCORDANCE WITH MS33678-1108-2P. LOCATE ON VERTICAL AND HORIZONTAL CENTERLINE. POLARIZING PIN SHALL BE LOCATED AT TOP CENTER OF RECEPTACLE

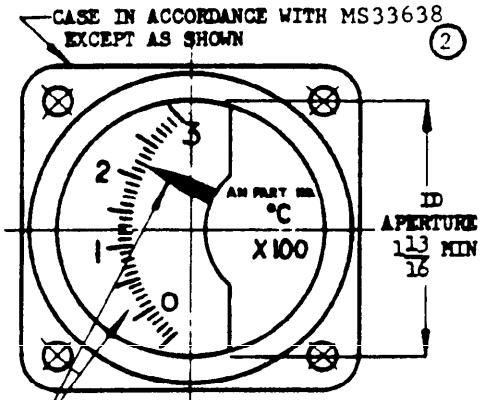

DIAL AND POINTER SHOWN FOR REF ONLY. SEE PROCUREMENT SPEC FOR DETAIL REQUIREMENT

AN5792-1

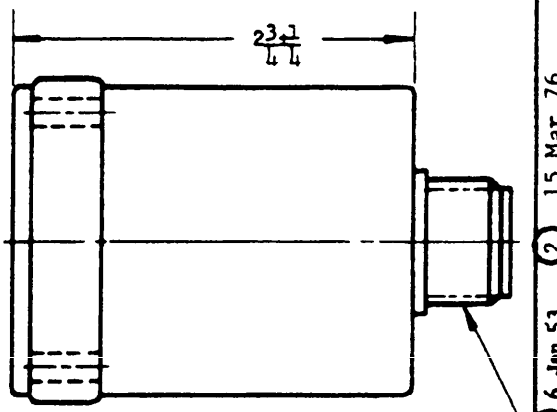

(2) ELECTRICAL RECEPTACLE IN ACCORDANCE WITH MS33678-1081-3P. LOCATE ON VERTICAL AND HORIZONTAL CENTERLINE. POLARIZING PIN SHALL BE LOCATED AT TOP CENTER OF RECEPTACLE

(2) Superseded reference documents only.

(a)

AN PART NO.	TYPE
~~AN5792-1~~	~~DUAL~~
AN5792-2	DUAL

(1) (a) PART NO. AN5792-1 INACTIVE FOR DESIGN AFTER 6 JANUARY 1953 . SEE DRAWING MS28004-1.
(1) FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.
PART NUMBER SHOWN IS FOR INSTRUMENT WITH ATTACHED INSERT NUTS.
ADD "T" BEFORE DASH NUMBER FOR INSTRUMENT WITH REMOVABLE SPRING NUTS.
EXAMPLES OF PART NUMBERS: AN5792-1 = INDICATOR SUPPLIED WITH ATTACHED INSERT NUTS.
AN5792T1 = INDICATOR SUPPLIED WITH REMOVABLE SPRING NUTS.

DIMENSIONS IN INCHES.

FSC CLASS 6685

APPROVED 30 Nov 48 REVISED (1) 6 Jun 53 (2) 15 Mar 76

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN5792
MIL-I-8505	INDICATOR - TEMPERATURE, ELECTRICAL-RESISTANCE, -50° TO +300°C	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:21Z
Check the source to verify that this is the current version before use.