NAVAER 1660D

FED SUP CLASS
1660

(2) FITTING END IN ACCORDANCE WITH AND10089, SIZE 3, STYLE C THREE ENDS

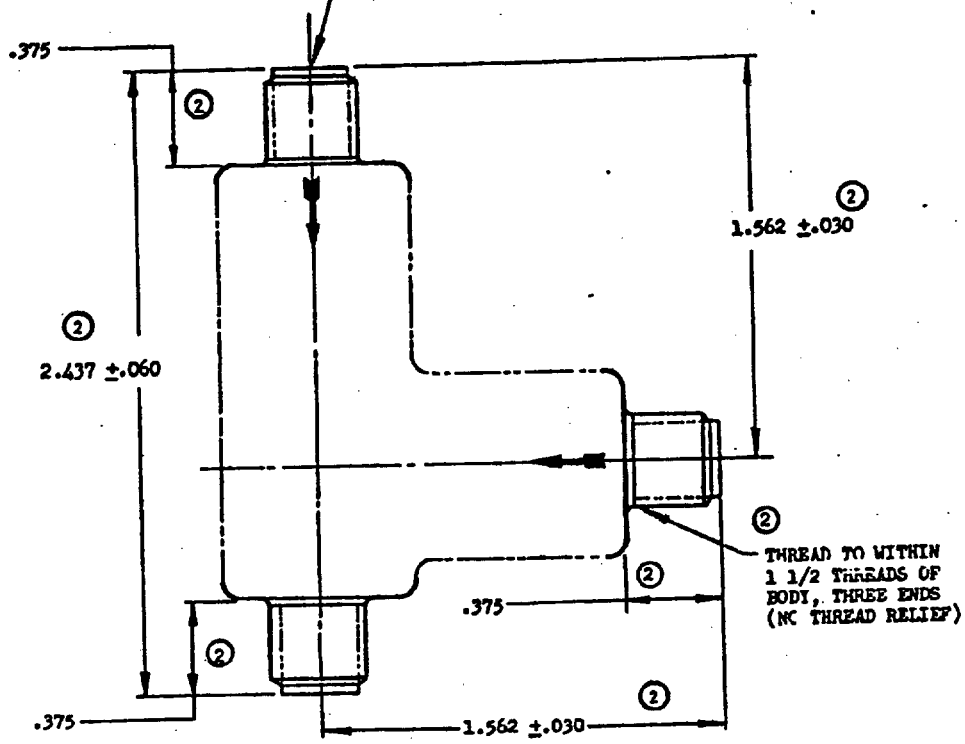

AN PART NO.
AN6017-1

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015. ANGLES ± 1/2°.

(2) NOTES:
1. THE DIRECTION OF FLOW SHALL BE PERMANENTLY AND LEGIBLY MARKED WITH ARROWS.

APPROVED 20 Oct 42 REVISED (1) 15 Nov 49 (2) 14 Jan 72

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN6017
MIL-V-5027	VALVE - HIGH PRESSURE OXYGEN CHECK, STYLE D	

14-166/7036

S. GOVERN

NOTES TO PRINTER

REDUCE BORDER FROM ORIGINAL 8½ x 13 TO 8⅛ x 9¾. PRINT LEFT BORDER LINE ONE INCH FROM LEFT EDGE OF 8 x 10½ SHEET. PRINT BOTTOM BORDER LINE ⅜ INCH FROM BOTTOM EDGE OF 8 x 10½ SHEET. SIGNATURE FORM NOT TO BE PRINTED ON STANDARD BOOK SHEET

DRAWN BY _____ Date _____

TYPED BY MB _____

CD BY MB _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:21Z
Check the source to verify that this is the current version before use.