(H) FED. SUP CLASS 4820

DRILL F DIA DEPTH G, TAP DRILL DEPTH J, THREAD NO. 10-32 UNF-2 DEPTH L, MIN OF 8-1/2 PERFECT THREADS, CSK OR CBORE TO ROOT DIA

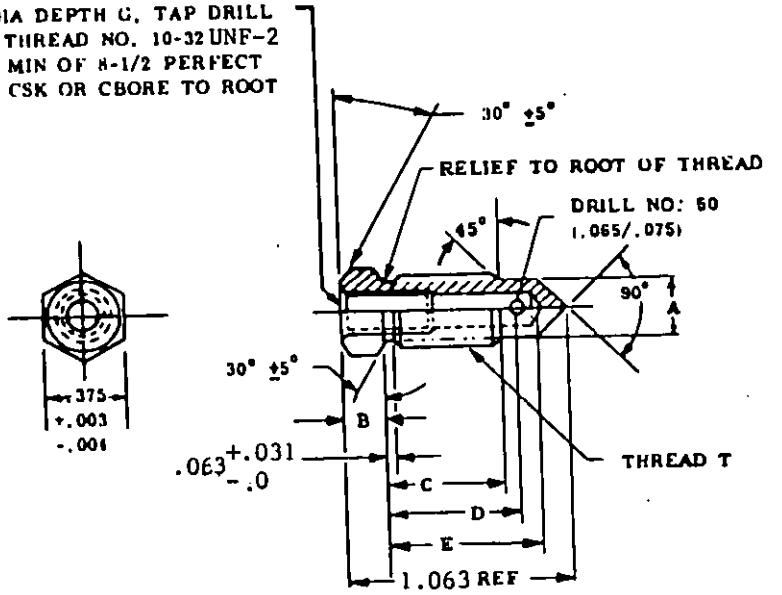

AMSC N/A

(H)

AN PART NO.	THREAD T	A DIA	B ± .016	C ± .016	D ± .016	E ± .016	F DIA	G ± .016	J ± .016	L ± .016	WEIGHT MAX
AN6204-1	.375-24 UNF-2	.278	.188	.563	.656	.734	.159	.906	---	---	
AN6204-2	.250-28 UNF-2	.190 +.000 -.005	.43	.406	.453	.531	.0781	.922 +.000 -.010	.344	.313	

(H) 1. ~~INACTIVE FOR NEW DESIGN AFTER 1 APRIL 1979.~~ REINSTATED JUL 79

2. MATERIAL: STEEL, SPECIFICATION ~~MIL-S-6050,~~ MIL-S-5626 HEAT TREATED TO 155,000 PSI TENSILE STRENGTH, SEE PROCUREMENT SPECIFICATION.

3. FINISH: SEE PROCUREMENT SPECIFICATION.

4. STRENGTH: THE VALVE SHALL WITHSTAND AND SEAL 2,250 PSI MINIMUM PRESSURE.

5. BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

(H) 6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ~~FRACTIONS ±1/64,~~ DECIMALS ±0.005, ANGLES ±1/2°.

7. EXTERNAL THREADS SHALL BE CONCENTRIC WITH AXIS OF CONE POINT WITHIN 0.005 FULL INDICATOR READING.

(H) ALL FRACTIONS CHANGED TO DECIMALS

APPROVED 22 JUL 43 REVISED (C) 13 APR 51 (D) 1 JUN 54 (E) 1 JUN 56 (F) 30 MAR 78 (G) 11 JUL 79 (H) 22 FEB 88

P.A. 70 Other Cust AIR FORCE 99 ARMY AV NAVY AS	TITLE VALVE, HYDRAULIC BLEEDER	AIR FORCE – NAVY AERONAUTICAL STANDARD AN 6204
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES.	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) EDITION OF 1 SEP 57 MAY BE USED.

REVIEWER ACTIVITIES

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use within the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.