INCH-POUND

AN6204K
25 January 2006
SUPERSEDING
AN6204J
10 November 1999

DETAIL SPECIFICATION SHEET

VALVE, HYDRAULIC BLEEDER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

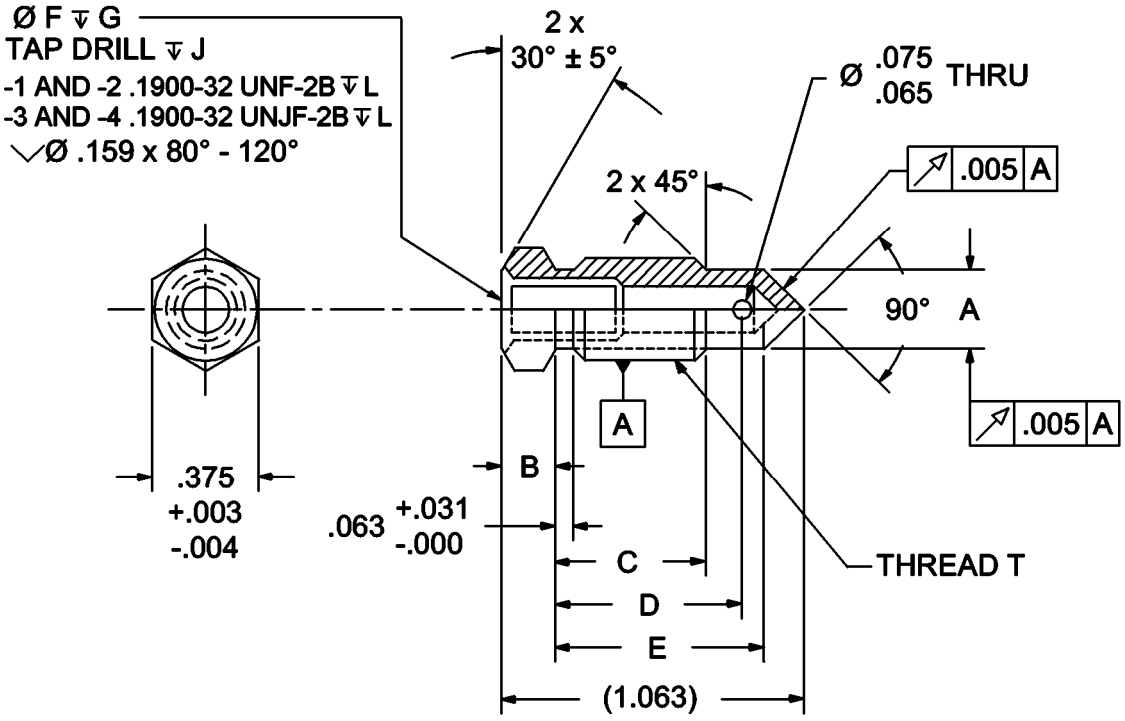

FIGURE 1. Valve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN)	Thread T	A Dia	B ±.016	C ±.016	D ±.016	E ±.016	F	G ±.016	J ±.016	L ±.016
AN6204-1 1/	.3750-24 UNF-2A 2/	.278	.188	.563	.656	.734	.159	.906	---	---
AN6204-2 1/	.2500-28 UNF-2A 2/	+.000 .190 -.005	.430	.406	.453	.531	.0781	+.000 .922 -.010	.344	.313
AN6204-3 3/	.3750-24 UNJF-2A 4/	.278	.188	.563	.656	.734	.159	.906	---	---
AN6204-4 3/	.2500-28 UNJF-2A 4/	+.000 .190 -.005	.430	.406	.453	.531	.0781	+.000 .922 -.010	.344	.313

1/ Inactive for new design.
2/ Thread right hand in accordance with ASME-B1.1.
3/ Recommended for new design.
4/ Thread right hand in accordance with SAE-AS8879.

Inches	mm	Inches	mm
.003	0.08	.2500	6.350
.004	0.10	.278	7.06
.005	0.13	.313	7.95
.010	0.25	.344	8.74
.016	0.41	.375	9.53
.031	0.79	.3750	9.525
.063	1.60	.406	10.31
.065	1.65	.430	10.92
.075	1.91	.531	13.49
.0781	1.984	.563	14.30
.159	4.04	.734	18.64
.188	4.78	.906	23.01
.190	4.83	.922	23.42
		1.063	27.00

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for information only.
3. Unless otherwise specified, tolerances ± .005 (0.13 mm), angles ± .5°.
4. Dimensioning and tolerancing in accordance with ASME-Y14.5.
5. Break edges .003 inch to .015 inch (0.08 to 0.38 mm) unless otherwise specified. Remove all hanging burrs and slivers.
6. Surface texture shall be 250 μin R_a for unmachined surfaces, except forging parting lines and 500 μin R_a for forging parting planes in accordance with ASME-B46.1.

FIGURE 1. Valve - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Materials:

Steel alloy 4140 in accordance with SAE-AMS6349 or SAE-AMS6382.
Stainless steel in accordance with one of the following:

Alloy 321 in accordance with SAE-AMS-5645.
Alloy 15-5 PH in accordance with SAE-AMS-5659, SAE-AMS-5862, ASTM-A504/A504A, ASTM A693, ASTM-A705/A705M, or UNS S15500.

Heat treat to 155,000 PSI (1068.68 megapascal) tensile strength.

Finish:

Steel - Cadmium in accordance with SAE-AMS-QQ-P-416, type II, class 2, dyed black.
Stainless steel - No finish.

Operating characteristics.

The valve shall be able to withstand and seal 2,250 PSI (15.51 megapascal) minimum pressure.

PIN:

AN	6204	-	01	A
AN prefix	Basic specification number		Dash number from figure 1	Material designator

Material designators:

A - Steel alloy 4140 with cadmium finish.
B - Stainless steel no finish.

Guidance on use of alternative parts with less hazardous or non-hazardous materials. This specification provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.

Referenced documents:

ASME-B1.1	SAE-AMS-5645
ASME-B46.1	SAE-AMS-5659
ASME-Y14.5.	SAE AMS-5862
ASTM-A504/A504M	SAE-AMS-6349
ASTM-A693	SAE-AMS-6382
ASTM-A705/A705M	SAE-AMS-QQ-P-416
SAE-AS8879	UNS S15500

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4820-0929-000)

Review activities:
Army - MI
Navy - CG, MC, SA, SH
Air Force - 11, 70, 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.