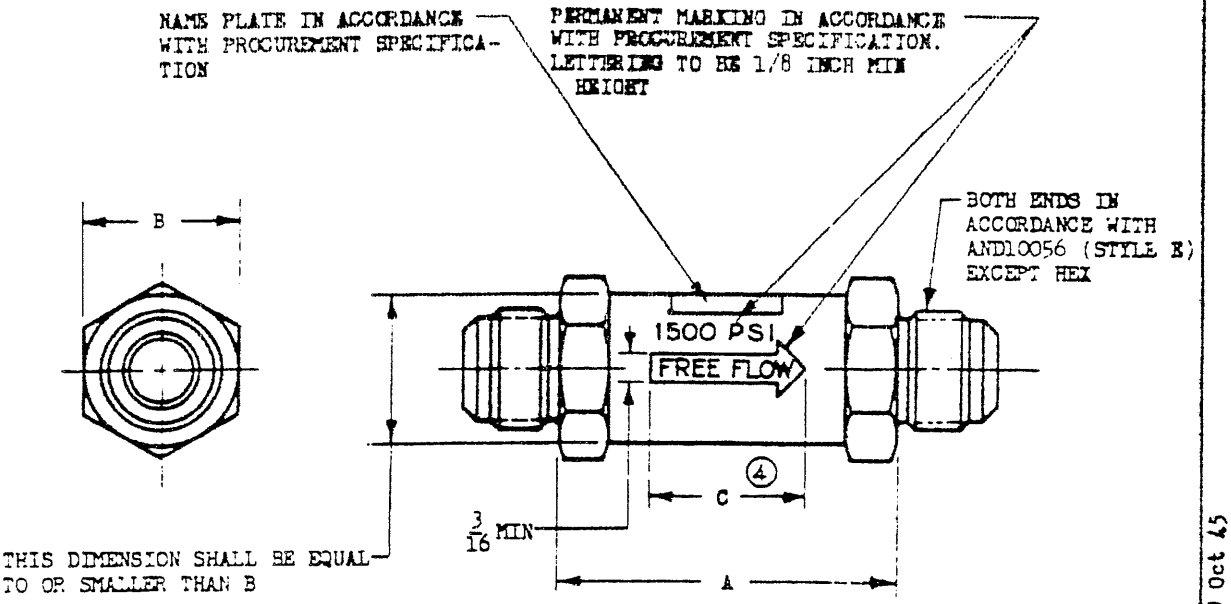


AN PART NO.	TUBING OD	RATED FLOW CAPACITY GPM	A ±1/32	(a) B	C MIN
AN6207-4	1/4	1.2	1-17/32	.688 +.003 -.006	7/8
AN6207-5	5/16	2.3	1-3/4	.813 +.003 -.006	1
AN6207-6	3/8	3.5	1-3/4	.813 +.003 -.006	1
AN6207-8	1/2	6.0	2-7/32	1.063 +.003 -.006	1
AN6207-10	5/8	10.5	2-13/32	1.125 +.003 -.006	1
AN6207-12	3/4	16.0	2-3/4	1.438 +.003 -.006	1
AN6207-16	1	29.0	3-5/16	1.688 +.008 -.016	1

(4)

(4) (a) AT OPTION OF THE MANUFACTURER, DIMENSION "B" MAY BE MADE TO CONFORM TO DIMENSION "E" OF DRAWING AND10056.

DIMENSIONS IN INCHES.

(4) FOR ACCEPTABLE PRODUCTS SEE ANA BULLETIN NO. 153.

APPROVED 11 Jul 42 REVISED (1) 16 Sep 42 (2) 28 Dec 43 (3) 8 Sep 44 (4) 29 Oct 45

AR-V-5	ARMY-NAVY AERONAUTICAL STANDARD VALVE - 1500 PSI HYDRAULIC CHECK	AN6207

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:22Z
Check the source to verify that this is the current version before use.