
MILITARY SPECIFICATION SHEET

ARRESTER, LIGHTNING (AIRCRAFT)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(A)

The complete requirements for procuring the Lightning Arrester described herein shall consist of this document and MIL-A-9094C, 3 September 1958.

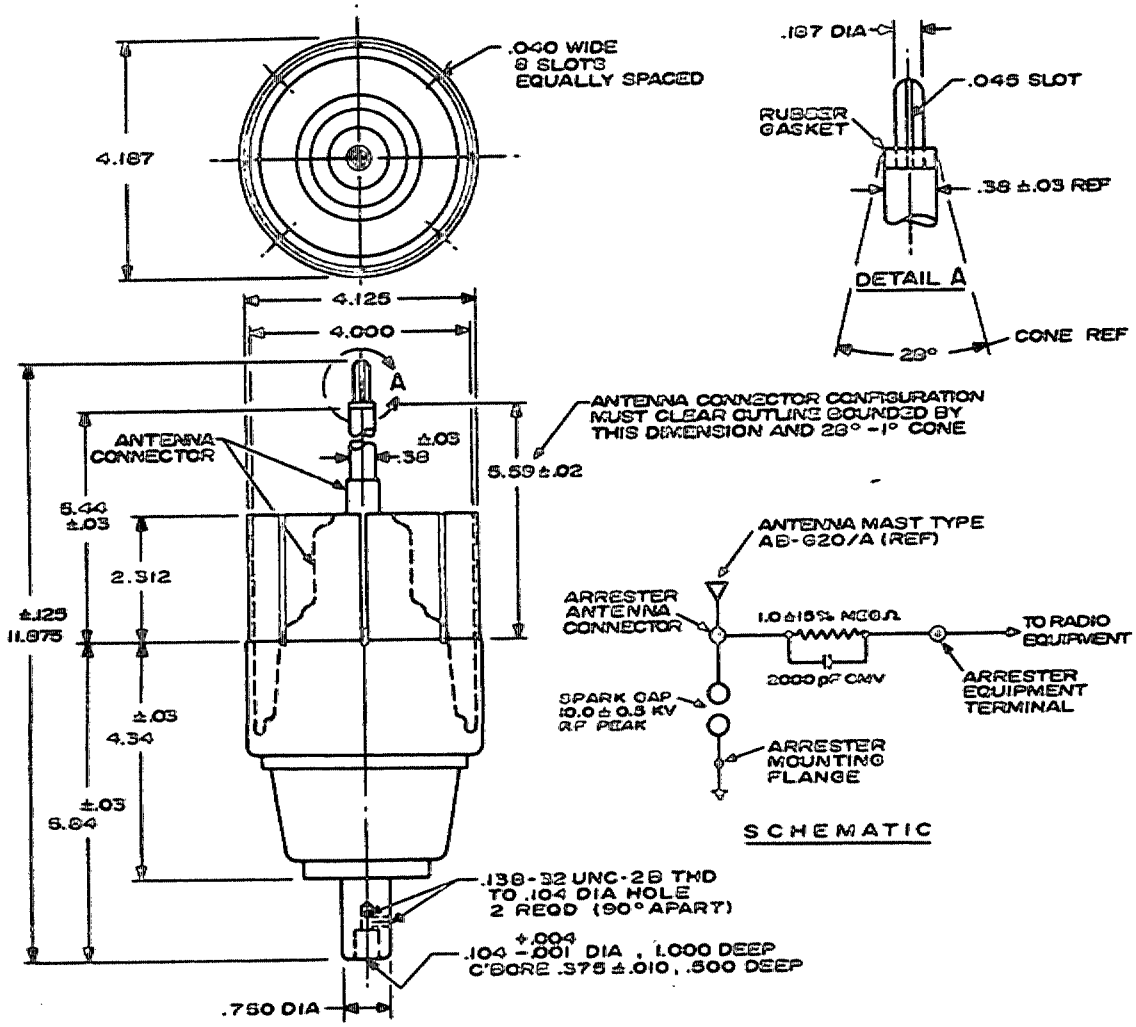

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerance ± .015
2. Caution: Not to be used for solid state circuit protection. The equipment connected to this arrester must have a DC path to ground.

(A) Denotes changes

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and Construction:

Design, construction, and performance shall be compatible for use with antenna mast Type AB620A covered by Air Force Drawing 60D93026 (see figure).

Maximum Weight - 4 1/2 pounds.

Connectors - The arrester equipment connector shall be compatible for use with and provide positive locking means for the antenna mast equipment cable plug as shown in Detail A of figure.

Lightning Stroke Indication - Not required.

Altitude Range - 0 - 30,000 ft.

Temperature Operating Range - -55° C to 71° C.

Mounting Attitude - Vertical.

Electrical:

Spark Gap Breakdown Voltage - 10.0 ± 0.5 KV RF peak at 2MHz.

Series Capacitor Value - 2000 pF G.M.V., 26 kV dc test.

Bleeder Resistor - 1.0 megohm ± 15%.

Shunt Capacitance - No greater than 18 pF.

Radio Frequency Range - 2 - 36 MHz.

Radio Frequency Current - 10.0 amperes rms maximum at 2 MHz.

Lightning Stroke - Per MIL-A-9094 the lightning arrester shall effecively bypass the full charge for each of 12 lightning strokes.

Environmental:

The arresters shall be capable of meeting the requirements of this specification subsequent to subjection to the following environmental tests.

Sand and Dust - The arresters shall be subjected to sand and dust tests in accordance with MIL-STD-202, Method 110, Test Condition A.

Salt Spray - The arresters shall be subjected to salt spray tests in accordance with MIL-STD-202, Method 101, Test Condition B utilizing a 5 percent salt solution.

Vibration - The arresters shall be subjected to vibration tests in accordance with MIL-STD-202, Test Method 204, Test Condition A.

Thermal Shock - The arresters shall be subjected to thermal shock tests in accordance with MIL-STD-202, Test Method 107, Test Condition A except Step 3 shall be +71 ± 3° C. No physical damage shall result from this test.

Shock (specified pulse) - The arresters shall be subjected to shock tests in accordance with MIL-STD-202, Method 213, Test Condition G, for a total of 18 shocks.

Seal - The arresters shall be subjected to seal tests in accordance with MIL-STD-202, Method 112, Test Condition C, Procedure 1.

Humidity - The arresters shall be subjected to humidity tests in accordance with MIL-STD-202, Method 103, Test Condition A.

Resistance to Solvents - The arresters shall be subjected to resistance to solvents tests in accordance with MIL-STD-202, Method 215. No deterioration of markings or finishers or electrical or mechanical damage is permissible.

Barometric Pressure (reduced altitude) - The arresters shall be tested in accordance with MIL-STD-202, Method 105, Test Condition A. No physical damage shall result.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:56Z
Check the source to verify that this is the current version before use.

General Note - Under all of the Environmental Tests, if there are any exceptions to the test called out in MIL-STD-202, they shall be listed following the requirement. This specification is for procurements only of existing design, which has not been updated. Not recommended for new design or application.

Part No. M9094/2-001

Cross Reference Data (A)

MIL Part No	FSCM (74999)	FSCM (91637)
M9094/2-001	P/N AD969DWA	P/N AMC-127

Custodians:
Air Force - 85
Navy - AS
Army - EL

Review Activity:
Air Force - 11, 80

Preparing Activity:
Air Force - 85

(Project No. 5920-0353-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-A-9094/2A Arrester, Lightning (Aircraft)

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

C16061

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:56Z
Check the source to verify that this is the current version before use.

FOLD

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S.MAIL

AFIC/MMGE/Standardization
Wright-Patterson AFB OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:56Z
Check the source to verify that this is the current version before use.