INCH–POUND

MIL–D–9049D
3 November 1990
SUPERSEDING
MIL–W–9049C
17 February 1984

**MILITARY SPECIFICATION**

# WEBBING, TEXTILE, NYLON, LOCKING LOOP

**This specification is approved for use by all Departments and Agencies of the Department of Defense.**

## 1. SCOPE

1.1 Scope. This specification covers one type of nylon webbing furnished in cut pieces with integrally woven loops.

1.2 Classification. The webbing furnished in cut pieces shall be of the following classes, as specified (see 6.2):

a. Class 1 – 2–3/4 ± 1/8 inch between outside loop ends (see figure 1)

b. Class 2 – 3–3/4 ± 1/8 inch between outside loop ends (see figure 1)

c. Class 3 – 6 ± 3/16 inch between outside loop ends (see figure 1)

## 2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation. (see 6.2)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENES, Wright–Patterson AFB OH 45433–6503 by using the self–addressed Standardization Document Improvement Proposal

AMSC N/A FSC 1670

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| PPP–B–566 | Boxes, Folding, Paperboard |
| PPP–B–601 | Boxes, Wood, Cleated–Plywood |
| PPP–B–636 | Boxes, Fiberboard |

STANDARDS

FEDERAL

| | |
|---|---|
| FED–STD–191 | Textile Test Methods |

MILITARY

| | |
|---|---|
| MIL–STD–105 | Sampling Procedures and Tables for Inspection by Attributes |
| MIL–STD–129 | Marking for Shipment and Storage |
| MIL–STD–1186 | Cushioning, Anchoring, Bracing, and Waterproofing; with Appropriate Test |

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111–5094.)

2.2 Non–Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adapted are those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

TEXTILE FIBER PRODUCTS IDENTIFICATION ACT

Rule and Regulations Under the Textile Fiber Products Identification Act

(Copies may be obtained without charge from the Federal Trade Commission, Washington, DC 20580).

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies of the above publication should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago IL 60606.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

(Non–Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulation unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Design and construction

3.1.1 Physical properties. The finished webbing shall conform to table I and 3.1 through 3.6.

TABLE I. Physical properties of the finished webbing.

| Characteristic | Requirement |
|---|---|
| Yarn ply | 1 |
| Warp, (min) | 2 |
| Filling, (min) | |
| Yarn twist, turns per inch | |
| Warp, (min) | 4–Z |
| Filling, (min) | 2.5–S |
| Breaking strength, lb. (min) | 400 |
| Elongation, percent (min) | 20 |
| Picks per inch, (min) | 60 |
| Lengths of loop (inches) | 1/4 ± 1/16 |
| Loop strength, lb. (min) 1/ | 185 |
| Warp ends, total (min) | 1‘80 |
| Weight, oz. per linear yd,(max) | 0.22 |
| Width, inches | 1/4 ± 1/16 |

1/ No break on any one specimen shall be lower than the minimum specified.

3.1.2 Yarn. The yarn shall be a bright, high tenacity, light and heat resistant polyamide (see 3.2.1) prepared from hexamethylene diamine and adipic acid or its derivates. It shall have a minimum melting point of 472°F (244.4°C). The yarn shall not be bleached in any manner or in any subsequent process.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

3.1.3 Weave. The weave shall be 2/2 twill for the body between the loops and 1/1 for the loop sections as shown on figure 1.

3.1.3.1 Spacing of loops. For all classes the loops, in pairs, shall be as shown on figure 2.

3.1.3.2 Formation of loops. By adjustment of the weaving mechanism, the loops shall be formed by reversal of the filling yarns at the center of the webbing in order to enclose each half of the total warp ends to form the sides of the loop.

3.2 Functional characteristics. The webbing shall meet the requirements of table I when tested as specified in section 4.

3.2.1 Resistance to light and heat. The webbing shall lose no more than 25 percent of its original breaking strength when tested, as specified in section 4, for resistance to heat and to light.

3.2.2 Nonfibrous materials. Residual size, finish oils, or other nonfibrous materials shall not exceed 2 percent.

3.2.3 Acidity. The finished webbing shall have a pH value of 5.0 to 9.0.

3.2.4 Finishing agent. Dyestuffs, detergents, or other chemicals or finishing agents used in the manufacture of the webbing shall not cause deterioration under normal warehouse storage conditions, nor cause dermatitis on prolonged intimate skin contact, nor increase the flamability of the webbing.

3.3 Color. Unless otherwise specified (see 6.2) the webbing shall be furnished in the natural color.

3.3.1 Dyeing. When colored webbing is specified, the webbing shall be dyed with acetate or acid–type dyes. Metallized or chrome dyes shall not be used.

3.4 Put–up. The webbing shall be furnished in cut pieces, the dimensions of which shall be specified by class number (see 1.2).

3.4.1 Cutting of pieces for put–up. Each piece shall be prepared by cutting the solid weave webbing with a very hot knife or wire. The seared tail end shall not exceed the thickness of the webbing by more than 0.010 inch. The fused portion measured along the length of the tail shall be no greater than 1/32 inch.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.


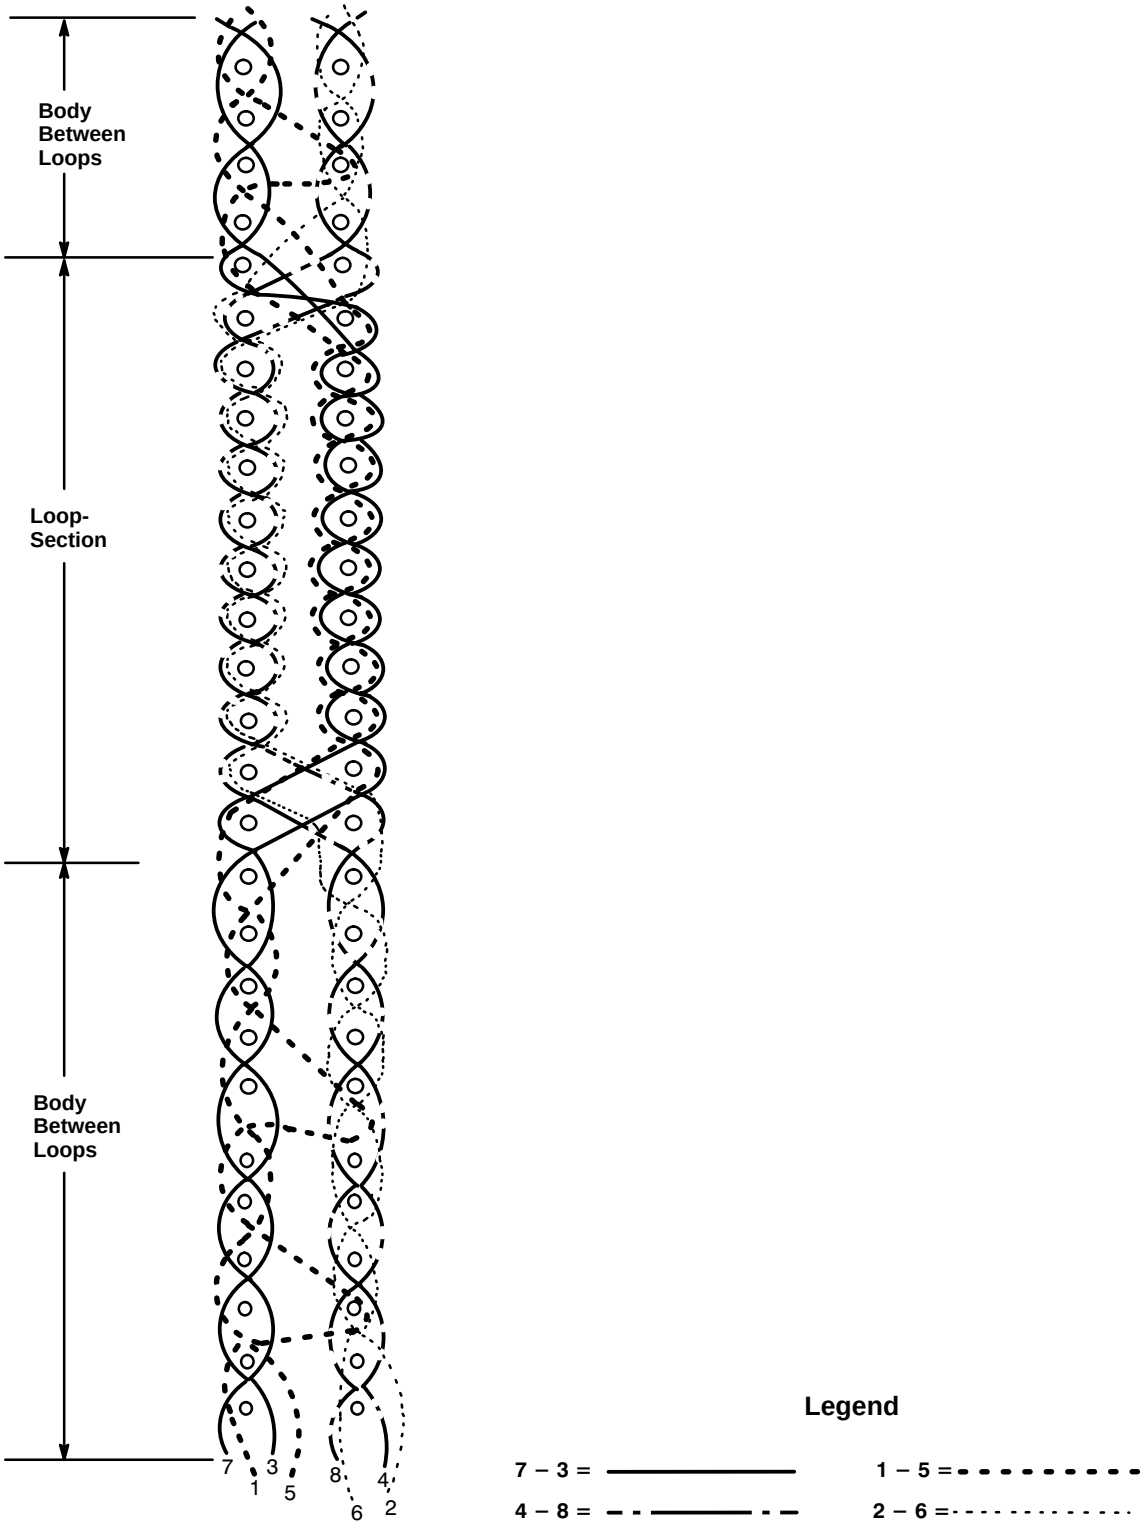



FIGURE 1. Weave diagram



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

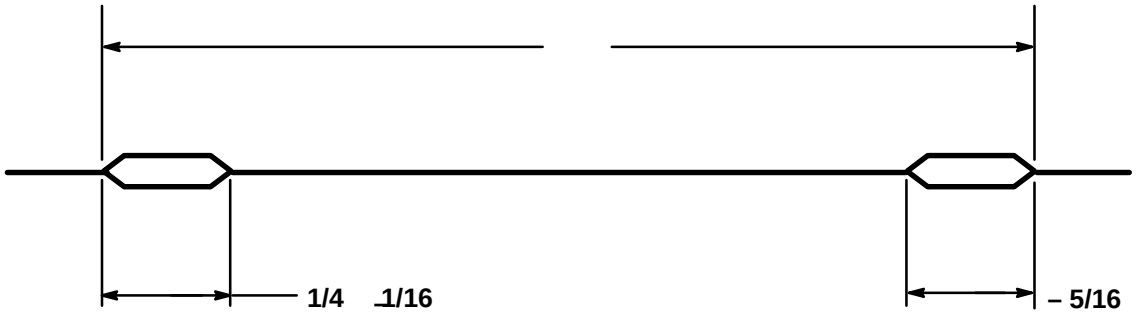


| CLASS | A |
|---|---|
| 1 | 2–3/4 ± 1/8 |
| 2 | 3–3/4 ±1/8 |
| 3 | 6 ±3/16 |

**DIMENSIONS SHOWN ARE WITH LOOPS FLAT.**

**DIMENSIONS ARE IN INCHES.**

FIGURE 2. Spacing of loops



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

3.5 Identification of product

3.5.1 Identification label. Each box shall have a label or tag marked with the following information and attached in such a manner as to remain in place until all the cut pieces have been removed. The color of the label shall be light in intensity to permit easy reading of printed, stamped, or typed markings. The use of handwritten entries is prohibited. The label shall be legibly printed with water–insoluble ink with the following information:

a. Stock number
b. Nomenclature
c. Specification MIL–W–9049D
d. Color
e. Actual pieces
f. Contract number and date of manufacture (month and year)
g. Supplier's name
h. Name of contracting agency

3.5.2 Fiber identification. Each box of webbing shall be labeled, ticketed, or invoiced for fiber content in accordance with the Textile Fiber Products Identification Act.

3.6 Workmanship. The finished webbing shall be clean, evenly woven, and shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use their own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure that the supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements; however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection**.** The inspection requirements specified herein are as classifed in qualify conformance inspection (4.4)

4.3 Inspection conditions. Unless otherwise specified, all tests shall be performed under standard conditions. Except for loop strength, the physical and chemical values specified in section 3 apply to the average of the determinations made on the sample for test purposes as specified in the applicable test methods of table II. For loop strength, the lots shall be rejected if any single determination is lower than the required minimum.

4.4 Quality conformance inspection. The quality conformance inspection shall consist of sampling plans A, B, C and D.

4.4.1 Sampling plan A (by yard). Sample size shall be 10 yards taken from each 3000 yards, or fraction thereof. A minimum of three samples (30 yards) shall be taken from lots containing 6000 yards, or fraction thereof. Each sample shall be subjected to the following tests: acidity, breaking strength and elongation, melting point of nylon, nonfibrous materials, picks per inch, total ends, weight and width as specified in table II.

4.4.2 Sampling plan B (by pieces). Sample size for the cut webbing shall be one box taken from each 250 boxes, or fraction thereof, of each class of cut pieces. Ten pieces shall be withdrawn at random from each box: five pieces shall be subjected to the loop strength test and five pieces to the cut piece dimension test which includes thickness so seared ends.

4.4.3 Sampling plan C (piece–by–piece examination). The sample unit for this examination shall be one piece. The sample shall be in accordance with MIL–STD–105, level III. The lot size shall be expressed in units of pieces. An approximately equal number of pieces shall be examined from each box selected for sampling. The number of sample boxes shall be computed as follows:

$$\text{Number of boxes} = \frac{\text{Pieces in sample}}{50}$$

The required number of pieces shall be inspected and visual end item defects classified as listed in table III. All defects found shall be counted regardless of their proximity of each other, except where two or more defects represent a single local condition in the piece, in which case only the more serious defect shall be counted.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

TABLE II. Quality conformance tests

| Characteristic | Requirement paragraph | FED–STD–191 test method | Test paragraph |
|---|---|---|---|
| Warp and filling yarn | 3.1.1, 3.1.2 | 1530 1 | |
| Nylon identification | 3.1.1 | 1/ | |
| Tenacity | 3.1.1 | 1/ | |
| Luster | 3.1.1 | 1/ | |
| Melting point | 3.1.1 | 1534 | |
| Twist, turns per inch | Table I | 4052 or 4054 1/ | |
| Ply | Table I | Visual 2/ | |
| Webbing end item | | | |
| Breaking strength and Elongation | Table I | 4108 | |
| Loop strength | Table I | 4.4.1 | |
| Picks per inch | Table I | 5050 | |
| Warp ends, total | Table I | 5050 | |
| Weight | Table I | 5041 | |
| Width | Table I | 5020 | |
| Weave | 3.1.3 | Visual 2/ | |
| Dye identification | 3.3.1 | 1/ | |
| Nonfibrous material | 3.2.2 | 2611 3/ | |
| Finishing agent | 3.2.4 | 1/ | |
| Acidity | 3.2.3 | 2810 | |
| Cut piece dimensions | 3.4 & 3.4.1 | | 4.4.4 |
| Resistance: | | | |
| Heat | 3.2.1 | | 4.4.2 |
| Light | 3.2.1 | 5804 & | 4.4.3 |

1/ The supplier's certificate of compliance will be accepted for this characteristic

2/ One determination per sample unit and results reported as "pass" or "fail".

3/ Extractable matter and size content, percent = $\frac{C + W}{O} \times 100$

Where:

C represents the weight of chloroform extract

W represents the weight of water extract

O represents the dry weight of the original material.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

TABLE III. End item defects classification

| Defect | Description | Classification Critical | Major | Minor |
|---|---|---|---|---|
| Abrasion marks | Resulting in rupture of yarns, or in nap sufficient to obscure the identify of any yarn, exceeding 100% of width or 1 inch in length | X | | |
| Broken or missing end | Two or more regardless of length or a single end exceeding 6 inches in length | X | | |
| | Single end under 6 inches exceeding 1/4 inches | | | X |
| Broken or missing pick | Two or more regardless of extent | X | | |
| Coarse or light filling bar | Resulting in noticeable 1/ difference in stiffness of webbing and extending for more than 1/4 inch in the length direction | | X | |
| | Resulting in noticeable difference in stiffness or thickness of webbing for 1/4 inch or less in the length direction | | | X |
| Crease or wrinkle | Twisted or distorted. Will not lay flat upon application of manual pressure | | | X |
| Cut, hole or tear | Any cut, hole, or tear | | X | |
| Drop–ply | Clearly noticeable on more 1/ than 2 ends within the same length and extending over 9 linear inches or more | X | | |
| | Clearly noticeable on 1 or 2 ends within same length and extending over 9 linear inches or more | | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

TABLE III. End item defects classification – Continued

| Defect | Description | Classification Critical | Major | Minor |
|---|---|---|---|---|
| Edge beaded or corded | Noticeable increase in edge thickness or misformed edge | | | X |
| Edge folded or rolled | (See crease or wrinkle defect) | | | X |
| Edge loopy | Forming clearly noticeable filling loops, or edge tied loosely to body of webbing for 2 linear inches or more | X | | |
| Edge loose (slack) | Resulting in waviness, distortion in orientation of filling, or looseness along | X | | |
| Edge–nicks or bumps | Any pick or bump falling outside the width tolerance as specified or exceeding 1/4 inch of length | | X | |
| Edge cut, torn or frayed | Any cut, torn, or frayed edge, clearly noticeable rupture of yarn along edge | X | | |
| Edge tight | Resulting in noticeable tension along edge, or pucker, waviness, bagginess, or slackness that cannot be flattened by manual pressure | X | | |
| Edge scalloped | Any noticeable indentation of edge | | X | |
| Fine or light filling bar, light place | Clearly noticeable | | X | |
| Floats or skips | Multiple, 1/2 inch or more in combined warp and filling directions or single float or skip over more than 1 inch | X | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

TABLE III. End item defects classification – Continued

| Defect | Description | Classification Critical | Major | Minor |
|---|---|---|---|---|
| | Multiple, less than 1/2 inch in combined warp or filling directions or single float or skip over more than 1/2 inch but not exceeding 1 inch, if in warp, or more than 1/4 inch, of the width but not exceeding inch, if in filling | | | X |
| Hitchback crack | Clearly noticeable opening between adjoining picks, or warp–wise tension area over part of the width resulting in noticeable light and heavy places | | X | |
| Jerked–in filling, slough–off, slug | More than twice the thickness of the normal yarn | | | X |
| Kinks | More than three in any 9 linear inches | | X | |
| Knots | More than two knots in any 9 linear inches | | X | |
| | Single knot with untrimmed ends extending more than 1/16 inch from surface | | | X |
| Mispic, double pick | Two or more across the full width | | X | |
| | Single across the full width | | | X |
| Slack end | Two or more in the same length jerked in between picks, or forming clearly noticeable loops on the surface | | X | |
| | Single, jerked in between picks, or forming clearly noticeable loops on the surface | | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

TABLE III. End item defects classification – Continued

| Defect | Description | Classification Critical | Major | Minor |
|---|---|---|---|---|
| Seared edge exceeds width of tail | Clearly noticeable | | X | |
| Seared portion measured along length of webbing | Greater than 1/32 inch | | X | |
| Seared tail end not completely fused across width of webbing | Clearly noticeable | | X | |
| Slub or slug, gout | More than twice the thickness of the yarn (or ply, if plied) | | | X |
| Smash | Any smash | X | | |
| Spot, stain or streak | Any clearly noticeable dirt, rust, grease, oil spot stain or streak | | | X |
| Tight end | Clearly noticeable | | X | |
| Tight pick or tight filling(also see | Resulting in rolling or webbing X “edge tight” defect) | | | |
| Wrong draw | Extending for more than 9 inches | | X | |

1/ The term “clearly noticeable” contained in end item defect descriptions shall be interpreted to mean clearly visible at normal inspection distance (approximately 3 feet).

4.4.3.1 Acceptable quality level. The acceptable quality level (AQL) shall be 0.40 major and 1.5 total (major and minor combined) defects per 100 units (pieces), and the lot shall be unacceptable if one or more critical defects appear in the sample.

4.4.4 Sampling plan D (put–up examination). The examination for put–up shall be in accordance with inspection level S–4 and acceptable quality level (AQL) 4.0 of MIL–STD–105. The lot size shall be expressed in units of one box each and the unit of product shall be one box. The boxes examined may be from those boxes drawn from the piece–by–piece examination.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

4.4.4.1 Individual box. The pieces contained in each box in the sample shall be counted. A defect shall be considered to exist if the total quantity in the box is less than 98 pieces.

4.4.4.2 Total pieces in sample. The lot shall be unacceptable if the total of the pieces in the sample is less than the total number of pieces required in the boxes comprising the sample.

4.5 Methods of inspection

4.5.1 Loop strength. The test shall be made on a test apparatus that is described in method 4108 of FED–STD–191. The procedure shall be as follows: a. Prepare the specimen by cutting the solid weave webbing to produce tail length meeting dimensional requirement shown in figure 2. This can best be done by cutting the webbing with a hot knife or wire. b. Remove the front jaw clamps from the upper and lower jaws of the testing apparatus. c. Insert the specimen between the holding pin holes of the upper and lower front jaws. d. Insert through these holes and through the locking loop of the webbing a 1/8– by 3–inch steel pin (see figure 3). e. Test for loop strength with jaw separation speed of 12 inches per minute.

4.5.2 Resistant to heat. Five replicated tests shall be conducted from a 5–yard sample unit of the webbing. The test specimen shall be suspended in a circulating air oven at a temperature of 365°F (180°C $\pm$ 3°C) for 1 hour. After removal from the oven, the specimens shall be brought to equilibrium under standard conditions. They shall then be tested for breaking strength as specified in table III and the percent of breaking strength (B.S.) loss shall be calculated as follows:

$$\frac{\text{Original B.S} - \text{B.S after aging}}{\text{Original B.S.}} \times 100 = \text{percent of B.S. loss}$$

4.5.3 Resistant to light. Five replicated tests shall be conducted from a 5–yard sample unit of the webbing. The test specimen shall be exposed in the accelerated weathering unit as specified in method 5804 of FED–STD–191. The specimens shall be placed side by side on the rack in such a manner that only the center portion of each specimen is exposed. Corex D filters and sunshine carbons shall be used. The exposure time shall be 50 hours. The spray heads shall be shut off during the entire exposure period. At the end of the exposure period, the specimens shall be brought to equilibrium under standard conditions. They shall then be tested for breaking strength as specified in table II and the percent of breaking strength (B.S) loss shall be calculated as follows:

$$\frac{\text{Original B.S} - \text{B.S after aging}}{\text{Original B.S.}} \times 100 = \text{percent of B.S. loss}$$



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

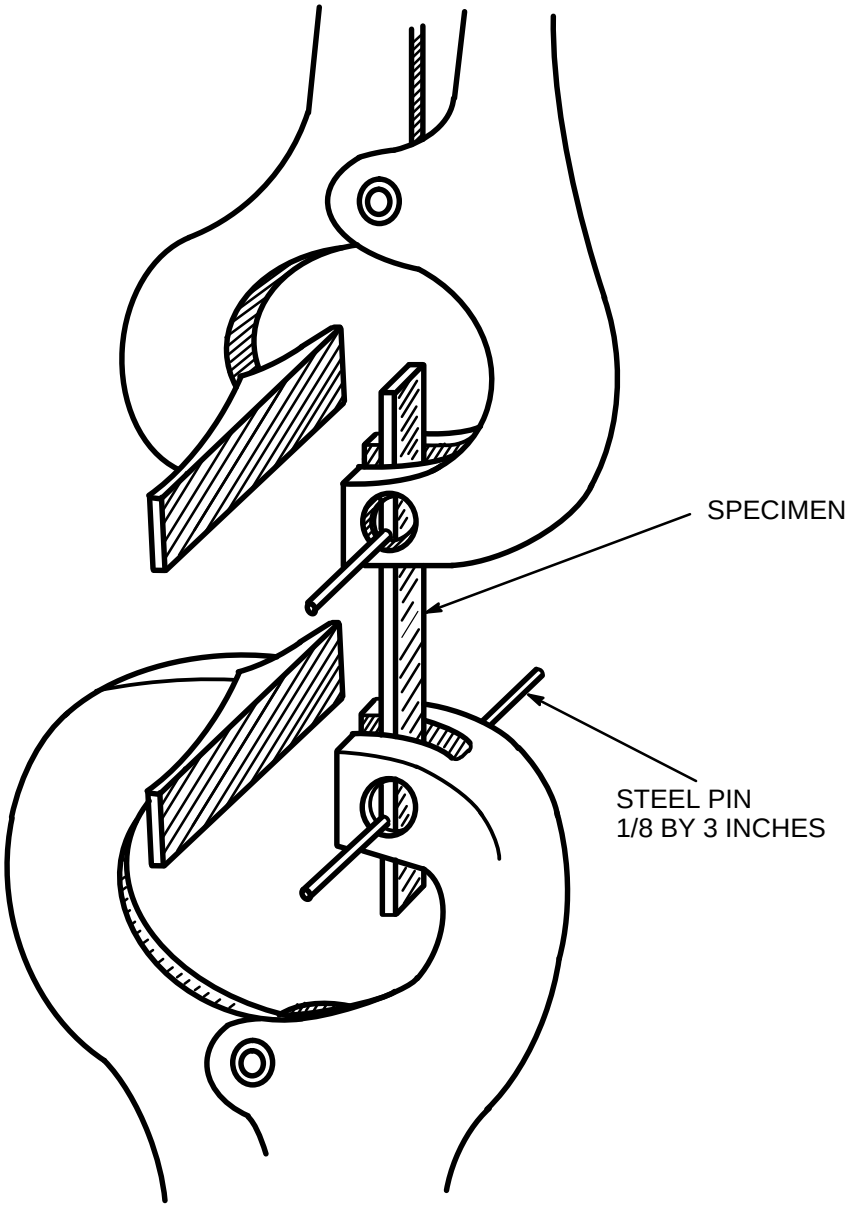



FIGURE 3. A sketch of loop strength test



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

4.5.4 Measurement for cut piece dimension. The procedure for measuring the dimensions specified under class number shall be as follows: a. The cut pieces shall be conditioned at standard conditions for 24 hours prior to testing, with the cut pieces laying flat. b. The tail length and loop length shall be measured to the nearest 1/16 inch by use of a steel rule. Measurement for the distance between the outside edges of the webbing loops in the cut pieces shall be made by inserting a 1/8 inch diameter pin into each loop and applying a 5–pound load in the loops. Measurement shall be made within 30 seconds after the 5–pound load was applied. c. The results shall be reported as the average of 5 determinations to the nearest 1/16 inch.

4.5.5 Packing inspection. The preservation, packing and marking shall be inspected to verify conformance to the requirements in section 5.

5. PACKAGING

5.1 Preservation. Preservation shall be level A, B, or C as specified (See 6.2).

5.1.1 Webbing. Webbing, put up as specified (see 3.5.1), shall be packaged in boxes conforming to PPP–B–566. Each box shall contain 100 pieces.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Webbing preserved as specified (see 5.1.1) shall be packed in weather–resistant shipping containers conforming to PPP–B–636. Shipments that exceed the weight limitations of this specifications shall be packed in overseas type containers conforming to PPP–B–601. The gross weight of each container shall not exceed 200 pounds. Closure and strapping shall be in accordance with the appendix of PPP–B–636 or PPP–B–601, as applicable. Weatherproofing shall be in accordance with MIL–STD–1186.

5.2.2 Level B. Webbing preserved as specified (see 5.1.1) shall be packed in domestic shipping containers conforming to PPP–B–636. The gross weight of each shipping container shall not exceed the weight limitations of this specification. Closure and strapping shall be in accordance with the appendix of PPP–B–636.

5.2.3 Level C. Preservation that require over–packing for acceptance by the carrier shall be placed in exterior type shipping containers in a manner that will insure safe transportation at lowest rate to the point of delivery. Containers shall comply with Uniform Freight Classification Rules or regulations of other carriers as applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by contract or order (see 6.2), unit packages and shipping containers shall be marked in accordance with MIL–STD–129.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

5.4 Palletization. Palletization when specified (See 6.2) webbing packed as specified in 5.2.1, and 5.2.2, shall be palletized on a 4–way entry pallet in accordance with load type 1a of MIL–STD–147. Pallet types shall be type I (4–way entry), type IV, or type V in accordance with MIL–STD–147. Pallets shall be fabricated from wood groups I, II, III, IV of MIL–STD–731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding methods C and D or film bonding method F or G of MIL–STD–147. Pallet pattern shall be in accordance with the appendix of MIL–STD–147. Interlocking of loads shall be effected by reversing the pattern of each course.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The webbing is intended for use in parachute construction.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Class number (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specified issue of individual documents reference (see 2.1.1 and 2.2)
d. Color required (see 3.3)
e. Selection of applicable levels of packaging and packing (see 5.1 & 5.2)
f. Special marking (see 5.3)
g. When palletization is required (see 5.4)

6.3 In order to satisfactorily manufacture webbing when dyeing is required, it may be necessary to yarn dye the material. Manufacturers are urged to make experimental dyed webbings before making commitments to produce such materials in volume.

6.4 Subject term (key word) listing.

Finished webbing
Loops
Nylon webbing
Parachute loops
Yarn



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.

6.5 Change from previous issue. Marginal notations not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Navy – AS
Air Force – ll

Preparing activity:

Air Force – ll
(Project 9l50–1049)

Review activities:

Navy – AS
Air Force – 99
DLA – CT



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:54Z
Check the source to verify that this is the current version before use.