INCH-POUND

A-A-52040
January 6, 1992

COMMERCIAL ITEM DESCRIPTION

STEREOSCOPES, LENS, AERIAL PHOTOGRAPH INTERPRETATION (POCKET)

The General Services Administration has authorized use of this Commercial Item Description in preference to Military Specification MIL-S-3629F.

This description covers two-power and four-power magnifying-lens pocket stereoscopes.

Salient characteristics:

Design. The stereoscopes shall consist of two lenses mounted in a frame supported by folding legs.

Classification. The stereoscopes shall be of the following types, as specified:

Type I - 2 power.
Type II - 4 power.

Frame. The frame shall be of aluminum, zinc or magnesium alloy. Frame material shall be suitably treated to ensure free functioning of all parts for the normal life of the stereoscope. No part of the stereoscope shall extend above the frame except for the upper edge of the lens barrels. When folded, the overall dimensions of the assembled stereoscope shall be not more than 5.75 inches long by 3 inches wide by 1 inch thick.

Interpupillary adjustment. The interpupillary distance of the stereoscope shall be adjustable between 51 and 72 millimeters (mm). The interpupillary adjustment shall have index marks at 1-mm intervals to facilitate presetting the instrument. The method of adjustment shall be positive, simple and easy to perform. A positive means shall be provided for locking the interpupillary distance in any position.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: Commander, US Army Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606.

AMSC N/A FSC 6675

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.

Legs. The legs shall support the stereoscope at the optimum viewing distance. The base of the legs which will contact the photographs or other documents shall be rounded, beveled or otherwise formed so as to preclude tearing, scratching, or otherwise damaging the surface on which it rests. A positive means shall be provided for holding the legs in both the open and the closed positions. When set up for viewing at any interpupillary setting, the stereoscope shall stand firm without wobbling.

Lenses. The lenses shall be precision ground and all spherical and chromatic aberrations shall be corrected. The lenses shall be free of striae, bubbles, scratches, or other imperfections and shall display no perceptible distortion throughout their respective fields. The focal lengths of the lenses shall not exceed 1 percent of each other. The left and right lenses shall be replaceable and interchangeable. The lenses shall not be cemented, spun, or burnished into the frame.

Type I, two-power. The lenses shall be two-element achromatic. Each lens shall cover a flat surface not less than 90 mm in diameter and shall resolve not less than 16 lines per millimeter at the center of the field of view and not less than 10 lines per millimeter at the edge. Each lens shall provide a magnification of between 1.9 and 2.1 diameters. The lenses shall be held in place by spring clamp rings or threaded cells.

Type II, four-power. The lenses shall be two-element achromatic or three-element apochromatic, at the contractor's option. Each lens shall cover a flat surface of not less than 50 mm in diameter and shall resolve not less than 20 lines per mm at the center of the field of view and not less than 12 lines per mm at the edge. Each lens shall provide a magnification of between 3.8 and 4.2 diameters. The lenses shall be mounted by spring clamp rings or threaded cells. If threaded cells are used, the cells shall be threaded to provide a vertical adjustment of not less than 2.50 mm above and below the focal point.

Workmanship. All surfaces of the assembled stereoscope shall be smooth and free from warp, bow, twist, pits, scales, or any other defect that may affect appearance or serviceability.

Certification of commercial item. The contractor shall certify that the product offered to the Government meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product as the manufacturer's current product offered by the contractor in the commercial marketplace for at least one year preceding the solicitation. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Commercial Item Description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.


Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing the contractor's employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling and marking. Preservation, packaging, packing, labeling and marking shall be as specified in the contract or order.

Quality assurance. The stereoscope shall be examined for the following defects. Presence of one or more defects shall be cause for rejection.

1. Design not as specified.
2. Type not as specified.
3. Frame not as specified.
4. Interpupillary adjustment not as specified.
5. Legs not as specified.
6. Lenses not as specified.
7. Workmanship not as specified.

Part or identifying number. The part or identifying number for stereoscope, lens, aerial photograph interpretation (pocket) shall be as follows:

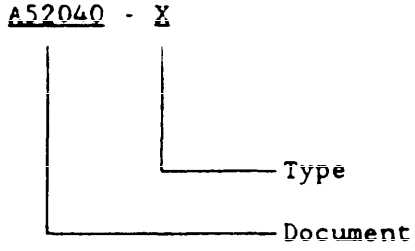

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.

Notes. The procuring agency should specify the preferred options permitted herein and include the following information in procurement documents:

1. Title, number, and date of this item description.
2. The ordering activity shall specify the type required.
3. When this commercial item description is used for procurement, the commercial item certification and the small business clauses must appear in the solicitation.

FED-STD-376 can be obtained from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

The following are suggested sources of supply for this item description (competition is not limited to these sources):

a. Alan Gordon Enterprises, Inc., 1430 Cahuenga Blvd., Hollywood CA 90078.

The preparing activity for this item description is the U.S. Army Belvoir Research, Development, and Engineering Center, ATTN: STRBE-TSE, Ft. Belvoir, VA 22060-5606.

MILITARY INTEREST:

Custodian:
Army - ME

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS-FCGC

PREPARING ACTIVITY
Army - ME

Project 6675-0967

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:05Z
Check the source to verify that this is the current version before use.